

Token-Backed Rolling the Dice - Project Report

MA Jiyuan

April 17, 2026

Course: COMP5521: Distributed Ledger Technology, Cryptocurrency and E-Payment

1 Deployment Summary

Contract Addresses (Sepolia)

- **Token Contract (Stage1):** 0xFcCd035eDF9Cb7040D5825CE320f62AD1c7562Ea
- **Dice Contract (Stage2):** 0x75142ba7e66DD0c04B3b146e2f97DF963f1BbF9F

Tooling Used

- Remix IDE for compilation, deployment, and interaction
- MetaMask for wallet management
- Sepolia test network

Betting/Reward Mechanism

- **Bet Type:** ETH-only betting (equal amounts from both players)
- **Payout Model:** Winner-takes-all ETH + fixed token bonus
- **Token Bonus:** 100 DICE tokens per game from pre-funded pool
- **Pool Insufficiency:** If pool balance < 100, transfer remaining balance instead

2 Stage 1 Token: Design Notes

Internal State Variables

Variable	Type	Purpose
<code>_locked</code>	bool (private)	Reentrancy guard
<code>owner</code>	address payable (public)	Contract owner, receives ETH on close
<code>_totalSupply</code>	uint256 (private)	Total minted tokens
<code>_name</code>	string (private)	Token name
<code>_symbol</code>	string (private)	Token symbol
<code>_balances</code>	mapping (private)	Token balances per address
<code>PRICE_WEI_PER_TOKEN</code>	uint128 constant	Fixed price: 600 wei

Token Acquisition

- **Mint Path:** Only `owner` can call `mint(address to, uint256 value)`
- Creates new tokens and assigns to specified address
- Increases `_totalSupply` and `_balances[to]`

Sell Mechanism

- Price: 600 wei per token (fixed)
- User calls `sell(uint256 value)`
- Contract verifies sufficient ETH balance
- Burns tokens: decrements `_balances[msg.sender]` and `_totalSupply`
- Transfers ETH to user via `call{value}()`
- Protected by `nonReentrant` modifier

Edge Case Handling

- **Insufficient balance:** `require(_balances[msg.sender] >= value)`
- **Zero value:** `require(value > 0, "cannot sell zero or below")`
- **Insufficient ETH:** `require(address(this).balance >= weiRequired)`
- **Zero address:** Prevented in `transfer()` and `mint()`

3 Stage 2 Dice Game: Protocol and State Machine

State Diagram

As shown in Figure 1, this is the state machine transitions.

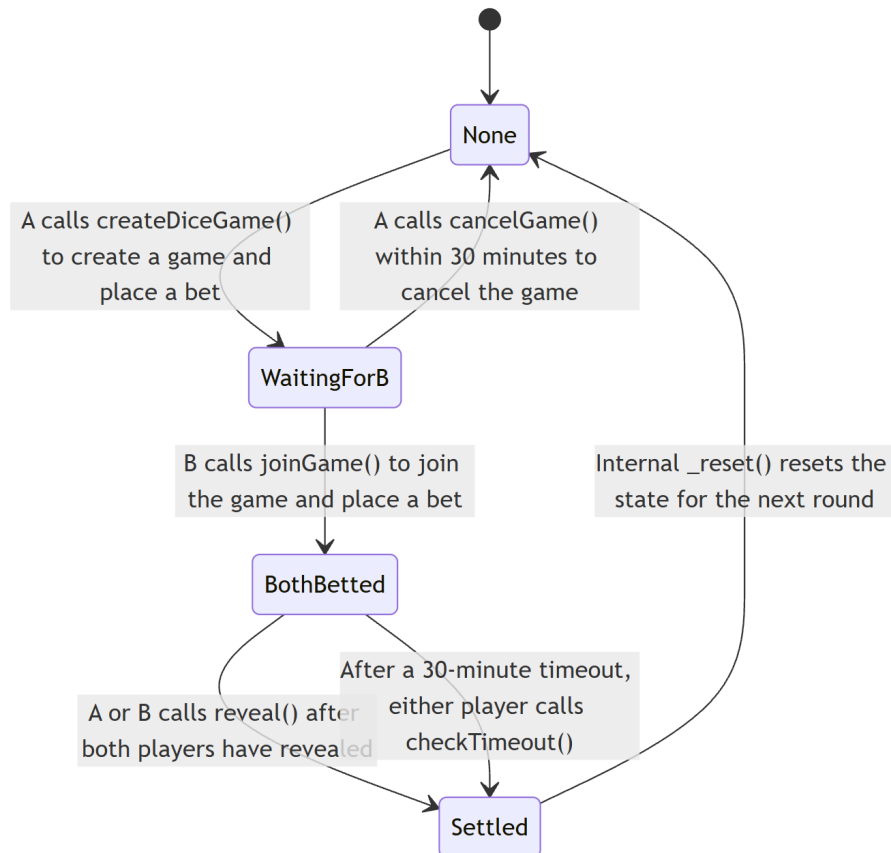


Figure 1: State Diagram

State Descriptions

State	Allowed Actions	Who Can Call	Transitions
None	createDiceGame	Any player	→ WaitingForB
WaitingForB	joinGame, cancelGame	Any player (join), Creator only (cancel)	→ BothBested, → None
BothBested	revealA, revealB, check-Timeout	A (revealA), B (revealB), Anyone (timeout)	→ Settled
Settled	(game complete)	N/A	→ None (automatic reset)

Randomness Approach

- **Mechanism:** Commit-Reveal with multi-source entropy
- **Entropy Sources:**
 1. `secretA` (Player A's secret)
 2. `secretB` (Player B's secret)
 3. `block.number`
 4. `block.timestamp`
 5. `gamblerA` address
 6. `gamblerB` address
- **Calculation:** `keccak256(abi.encodePacked(secretA, secretB, block.number, block.timestamp, gamblerA, gamblerB))`
- **Result:** $(\text{uint256}(\text{randomSeed}) \% 6) + 1 \rightarrow n \in \{1, 2, 3, 4, 5, 6\}$
- **Winner Rule:** $n \in \{1, 2, 3\} \rightarrow \text{A wins}; n \in \{4, 5, 6\} \rightarrow \text{B wins}$

Betting/Reward Mechanism

What is bet: ETH only (equal amounts from both players)

When deposits happen:

- Player A deposits at `createDiceGame()`
- Player B deposits at `joinGame()` (must match A's amount)

Refund/Forfeit conditions:

- `cancelGame()`: Creator can cancel within 30 minutes if no one joined
- `checkTimeout()`: After 30 minutes in BothBested state, revealed player wins

Solvency guarantee:

- ETH: Winner receives `address(this).balance` (all ETH in contract)
- Token: Winner receives 100 DICE (or remaining balance if < 100)

Token bonus pool:

- Pre-funded by transferring Stage1 tokens to Stage2 contract address
- Bonus size: Fixed 100 DICE per game
- Insufficiency handling: `Transfer min(100, balanceOf(this))`

4 Security & Fairness Design

Threat Model

Adversary	Description/Capability
Malicious Player A	May try to manipulate randomness or abort after learning outcome
Malicious Player B	May try to front-run or refuse to reveal
Miner/Front-runner	May manipulate block.timestamp or reorder transactions
Sybil Players	May try to play against themselves to drain token pool
Malicious Receiver Contract	May have fallback that reverts or reenters

Code-Level Hazards & Mitigations

#	Hazard	Mitigation
1	Reentrancy	<code>nonReentrant</code> modifier on ETH-transferring functions that use external calls (<code>sell()</code> , <code>_diceGameSettle()</code> , <code>checkTimeout()</code> , <code>cancelGame()</code>)
2	DoS with Revert	Checks-Effects-Interactions pattern: state updated before external calls; require statements with clear error messages. However, if a malicious receiver contract deliberately reverts in its fallback, settlement can be blocked indefinitely (no withdraw mechanism implemented).
3	State Machine Integrity	Enum-based state (<code>DiceGameState</code>) with explicit state checks in every function; custom errors for invalid transitions
4	Access Control	<code>require(msg.sender == owner)</code> for owner-only functions; <code>require(msg.sender == gamblerA/B)</code> for reveal functions
5	Funds Safety	No permanent locks; <code>cancelGame()</code> and <code>checkTimeout()</code> ensure funds can always be recovered
6	Input Validation	Zero-address checks, zero-value checks, fingerprint validation

Mechanism-Level Hazards & Mitigations

#	Hazard	Mitigation
1	Regret/Abort Prevention	30-minute timeout: if one player reveals and other doesn't, revealed player wins. Forces commitment.
2	Randomness Manipulation	Multi-source entropy (6 sources) makes single-party manipulation infeasible. Both players contribute secrets.
3	Front-Running	Commit-Reveal scheme: fingerprint committed before reveal, preventing outcome prediction before commitment.
4	Token Pool Drain	Fixed bonus (100 DICE) limits per-game drain. Equal bet requirement prevents micro-bets to drain pool.

#	Hazard	Mitigation
5	Sybil Attack	Equal ETH bets required from both sides - Sybil player must risk real ETH to win token bonus. However, Sybil can still drain the pool by using two different addresses to play against each other; currently no per-address game frequency limit is implemented.
6	Denial of Service	<code>cancelGame()</code> allows creator to reclaim funds if no opponent joins within 30 minutes.
7	Double Settlement	State machine prevents: <code>require(diceGameState == BothBetted)</code> before settle, state set to <code>Settled</code> immediately.
8	Replay Attacks	Game state resets after settlement; old secrets/fingerprints cannot be reused.

Trade-offs

#	Trade-off Aspect	Decision & Justification
1	Security vs Gas Cost	Multi-source randomness and commit-reveal require more storage and computation, increasing gas. However, this is necessary for fairness. Mitigated by using <code>constant</code> for fixed values and efficient packing.
2	Simplicity vs Flexibility	Fixed 100 DICE bonus is simpler but less flexible than dynamic bonuses. Chosen for predictability and easier solvency verification.
3	Timeout Duration vs User Experience	30-minute timeout balances security (enough time for reveals) vs UX (not waiting too long). Could be parameterized in future versions.
4	Push vs Pull Payment	Current implementation uses push payment (direct <code>call{value}</code> to winner). This provides simple UX but carries a small risk: malicious receiver contracts can <code>revert</code> in their fallback, potentially blocking settlement indefinitely. Ideal solution would be pull payment (withdraw pattern), but was not implemented due to added complexity and gas cost.

5 Gas and Fairness Evaluation

Deployment Gas

Contract	Estimated Gas	Notes
Stage1 (Token)	1222508	Includes storage for balances, name, symbol
Stage2 (Dice)	2301865	Includes state machine, multiple storage variables

Typical Full Game Gas

Operation	Estimated Gas	Who Pays
createDiceGame	120417	Player A
joinGame	100232	Player B
revealA	75817	Player A
revealB + settle	120010	Player B
Total	420677	Split: A ~230k, B ~300k

Fairness Analysis

Gas Distribution:

- Player B pays slightly more gas (settlement happens in revealB if A revealed first)
- This is acceptable as B has information advantage (sees A's commitment first)

Mitigation:

- No explicit gas reimbursement implemented
- Gas costs are relatively small compared to bet amounts
- Both players benefit equally from winning

6 Test Evidence

Full Game Execution on Sepolia

Step	Transaction Hash	Description
Create Game	0x6331c4a3db2f56c18e7fb6829c56701847d4335718e3c8c8eca2db3dec1bcf5a	Player A creates game with 0.01 ETH bet
Join Game	0x90f9573051dc3ef40a18e910bfca3a4f2301dc3706ff885932f22e71e50c78d2	Player B joins with matching 0.01 ETH bet
Reveal A	0x13b3c6737ebd4dcd467116f506733ef0be5d95579306bc2ae0e94236cf783dd0	Player A reveals secret
Reveal B	0xd0b42a6178041a4c293b614c97a1c208cb73cc351baf142d0f12b78817d6e013	Player B reveals secret, triggers settlement

Token Pool Evidence

Event	Transaction Hash	Details
Pool Funding	0xd3162a40254662e05b1d746826c78fa32b48d9e9e59219a82beffce16d2da3c0	10000 DICE transferred to Stage2
Bonus Transfer	0xd0b42a6178041a4c293b614c97a1c208cb73cc351baf142d0f12b78817d6e013	100 DICE sent to winner

Balance Verification

Address	Before Game	After Game
Winner ETH	X.XX ETH	X.XX + 0.02 ETH
Winner DICE	XXX DICE	XXX + 100 DICE
Stage2 ETH	0.02 ETH	0 ETH
Stage2 DICE	10000 DICE	9900 DICE

A AI Usage Declaration

1. Tools Used:

- Cursor
- Gemini

2. Scope of Use:

In this project, all core work was strictly led by team members, including low-level algorithm design, the formulation and implementation of optimization strategies, as well as the design of the report structure and the writing of its core content. On this basis, the above AI tools were used only as efficiency aids, with the specific scope of use as follows:

- **Cursor:**

- Architecture design: assisted in organizing the overall state-machine transitions and architectural framework of the smart contracts.
- Solidity syntax and gas optimization: provided Solidity-specific syntax suggestions and optimization ideas for gas consumption in selected functions.
- Debugging: assisted in identifying the root causes of compilation errors and transaction reverts.
- Security and fairness analysis: supported code-level security review (e.g., reentrancy and DoS vulnerability checks) and mechanism-level discussion of security and fairness risks.

- **Gemini:**

- Language polishing: used only to perform English grammar checks and improve fluency for report drafts written by team members (all reasoning, design logic, and original narrative were independently produced by the team; no report paragraphs were generated from scratch by AI).

3. Verification:

We hereby solemnly declare that all team members have personally reviewed, tested, and iterated on all code that was suggested or generated with AI assistance. We fully understand every line of logic in the submitted contract code and its security implications, and we are able to independently explain and justify any implementation detail to course evaluators at any time. This project fully complies with the course policies on academic integrity and AI-assisted work.

B Transaction History

Stage 1 Token Transactions

#	Operation	Transaction Hash	Notes
1	Deploy	0x7bfc07843bad465896ca8285ab727f22868b6397d543550b5868068ba7aa69fc	Constructor: name="DiceToken", symbol="DICE"
2	Mint	0xd2246b5311b0f36d1f1e68a5dfaef6d51f47bd08322ed69b06c5a5c40c00dc24	Mint 1000 DICE to deployer
3	Transfer	0xdce3300d9bb9c12cd7ef0f824deb771ff0159feb80c83059e643f9f39ffa1f1f	Transfer 100 DICE to test address
4	Sell	0xd3c5509590fcc92bbb8c4a7dbcf0505a6866200f1beb6c53ef6066a7836cb6	Sell 50 DICE for 30000 wei

Stage 2 Dice Transactions

#	Operation	Transaction Hash	Notes
1	Deploy	0xc6455e736177a39d70c308a78c227fee086c04a26d34283e6227afeb89e20c37	Constructor: tokenContract=Stage1 address
2	Fund Pool	0xd3162a40254662e05b1d746826c78fa32b48d9e9e59219a82beffce16d2da3c0	Transfer 10000 DICE to Stage2
3	Create Game	0x6331c4a3db2f56c18e7fb6829c56701847d4335718e3c8c8eca2db3dec1bcf5a	Player A, 0.01 ETH bet
4	Join Game	0x90f9573051dc3ef40a18e910bfca3a4f2301dc3706ff885932f22e71e50c78d2	Player B, 0.01 ETH bet
5	Reveal A	0x13b3c6737ebd4dcd467116f506733ef0be5d95579306bc2ae0e94236cf783dd0	Player A reveals secret
6	Reveal B	0xd0b42a6178041a4c293b614c97a1c208cb73cc351baf142d0f12b78817d6e013	Player B reveals, settlement

C Source Code

Stage1.sol

```
1 pragma solidity ^0.8.0;
2
3 contract Stage1{
4     // Reentrancy guard
5     bool private _locked = false;
6
7     modifier nonReentrant() {
8         require(!_locked, "Reentrant call");
9         _locked = true;
10        _;
11        _locked = false;
12    }
13
14    // State
15    address payable public owner;
16
17    // Events
18    event Transfer(address indexed from, address indexed to, uint256 value);
19    event Mint(address indexed to, uint256 value);
20    event Sell(address indexed from, uint256 value);
21
22    uint128 private constant PRICE_WEI_PER_TOKEN = 600;
23
24    // Contract internal state
25    uint256 private _totalSupply;
26    string private _name;
27    string private _symbol;
28    mapping(address => uint256) private _balances;
29
30    constructor(string memory name, string memory symbol) {
31        owner = payable(msg.sender);
32        _name = name;
33        _symbol = symbol;
34    }
35
36    // View functions
37    function getName() external view returns (string memory) {
38        return _name;
39    }
40
41    function totalSupply() external view returns (uint256) {
42        return _totalSupply;
43    }
44
45    function getSymbol() external view returns (string memory) {
46        return _symbol;
47    }
48
49    function getPrice() external pure returns (uint128) {
50        return PRICE_WEI_PER_TOKEN;
51    }
52
53    function balanceOf(address account) external view returns (uint256) {
54        return _balances[account];
55    }
56
57    // State-Changing Functions
58    function transfer(address to, uint256 value) external returns (bool) {
59        require(to != address(0), "cannot transfer to 0x0");
60        require(_balances[msg.sender] >= value, "no enough balance");
61
62        _balances[msg.sender] -= value;
63        _balances[to] += value;
64
65        emit Transfer(msg.sender, to, value);
66        return true;
67    }
68}
```

```

69  function mint(address to, uint256 value) external returns (bool) {
70      require(msg.sender == owner, "only owner may call");
71      require(to != address(0), "mint to zero");
72
73      _totalSupply += value;
74      _balances[to] += value;
75      emit Mint(to, value);
76
77      return true;
78  }
79
80  function sell(uint256 value) external nonReentrant returns (bool) {
81      require(value > 0, "cannot sell zero or below");
82      require(_balances[msg.sender] >= value, "no enough balance");
83
84      uint256 weiRequired = uint256(PRICE_WEI_PER_TOKEN) * value;
85      require(address(this).balance >= weiRequired, "contract insufficient ETH");
86
87      _balances[msg.sender] -= value;
88      _totalSupply -= value;
89
90      emit Sell(msg.sender, value);
91
92      (bool sent, ) = payable(msg.sender).call{value: weiRequired}("");
93      require(sent, "ETH transfer failed");
94      return true;
95  }
96
97  function close() external {
98      require(msg.sender == owner, "only owner may call");
99      selfdestruct(owner);
100 }
101
102 receive() external payable {}
103 }

```

Stage2.sol

```
1 pragma solidity ^0.8.0;
2
3 interface IStage1 {
4     function transfer(address to, uint256 value) external returns (bool);
5     function balanceOf(address account) external view returns (uint256);
6 }
7
8 contract Stage2{
9     bool private _locked = false;
10
11     modifier nonReentrant() {
12         require(!_locked, "Reentrant call");
13         _locked = true;
14         _;
15         _locked = false;
16     }
17
18     enum DiceGameState { None, WaitingForB, BothBetted, Settled }
19     DiceGameState public diceGameState;
20     IStage1 public tokenContract;
21     uint16 public constant TOKEN_BONUS = 100;
22     uint256 public constant TIMEOUT_DURATION = 30 * 60;
23
24     event DiceGameCreated(address gamblerA, uint256 betAmount, bytes32 fingerprintForA);
25     event DiceGameJoined(address gamblerB, uint256 betAmount, bytes32 fingerprintForB);
26     event BetForArevealed();
27     event BetForBRevealed();
28     event DiceGameSettled(address winner, uint256 profits, uint256 stage1TokenBonus);
29
30     address public gamblerA;
31     bytes32 public fingerprintForA;
32     bytes32 public secretA;
33     bool public revealedA;
34
35     uint256 public betAmount;
36
37     address public gamblerB;
38     bytes32 public fingerprintForB;
39     bytes32 public secretB;
40     bool public revealedB;
41
42     address public winner;
43
44     uint256 public gameCreatedAt;
45     uint256 public gameJoinedAt;
46
47     error WrongState(DiceGameState expected, DiceGameState actual);
48     error InvalidParam(string message);
49     error NotBetOwner(address caller, address expected);
50     error RepeatedRevealed(address caller);
51     error BetMismatch(bytes32 expected, bytes32 actual);
52
53     constructor(address tokenContractAddress){
54         require(tokenContractAddress != address(0), "invalid tokenContractAddress");
55         tokenContract = IStage1(tokenContractAddress);
56     }
57
58     function createDiceGame(bytes32 _fingerprintForA) external payable nonReentrant{
59         if (diceGameState != DiceGameState.None) revert WrongState(DiceGameState.None,
60             diceGameState);
61         if (msg.value == 0) revert InvalidParam("bet amount must be greater than 0");
62         if (_fingerprintForA == bytes32(0)) revert InvalidParam("fingerprint cannot be
63             zero");
64
65         gamblerA = msg.sender;
66         betAmount = msg.value;
67         fingerprintForA = _fingerprintForA;
68         revealedA = false;
69         gameCreatedAt = block.timestamp;
70         diceGameState = DiceGameState.WaitingForB;
71         emit DiceGameCreated(gamblerA, betAmount, fingerprintForA);
```

```

70 }
71
72 function joinGame(bytes32 _fingerPrintForB) external payable nonReentrant {
73     if (diceGameState != DiceGameState.WaitingForB) revert WrongState(DiceGameState.
74         WaitingForB, diceGameState);
75     if (msg.sender == gamblerA) revert InvalidParam("cannot play against yourself");
76     if (msg.value != betAmount) revert InvalidParam("bet amount must match game bet
77         amount");
78     if (_fingerPrintForB == bytes32(0)) revert InvalidParam("fingerprint cannot be
79         zero");
80
81     gamblerB = msg.sender;
82     fingerPrintForB = _fingerPrintForB;
83     gameJoinedAt = block.timestamp;
84     diceGameState = DiceGameState.BothBetted;
85     emit DiceGameJoined(gamblerB, msg.value, fingerPrintForB);
86 }
87
88 function revealA(bytes32 _secretA) external nonReentrant {
89     if (diceGameState != DiceGameState.BothBetted) revert WrongState(DiceGameState.
90         BothBetted, diceGameState);
91     if (msg.sender != gamblerA) revert NotBetOwner(msg.sender, gamblerA);
92     if (revealedA) revert RepeatedRevealed(msg.sender);
93     if (keccak256(abi.encodePacked(_secretA)) != fingerPrintForA) revert BetMismatch
94         (fingerPrintForA, keccak256(abi.encodePacked(_secretA)));
95
96     secretA = _secretA;
97     revealedA = true;
98     emit BetForARevealed();
99     if (revealedB) _diceGameSettle();
100 }
101
102 function revealB(bytes32 _secretB) external nonReentrant {
103     if (diceGameState != DiceGameState.BothBetted) revert WrongState(DiceGameState.
104         BothBetted, diceGameState);
105     if (msg.sender != gamblerB) revert NotBetOwner(msg.sender, gamblerB);
106     if (revealedB) revert RepeatedRevealed(msg.sender);
107     if (keccak256(abi.encodePacked(_secretB)) != fingerPrintForB) revert BetMismatch
108         (fingerPrintForB, keccak256(abi.encodePacked(_secretB)));
109
110     secretB = _secretB;
111     revealedB = true;
112     emit BetForBRevealed();
113     if (revealedA) _diceGameSettle();
114 }
115
116 function _diceGameSettle() private nonReentrant{
117     bytes32 randomSeed = keccak256(abi.encodePacked(
118         secretA, secretB, block.number, block.timestamp, gamblerA, gamblerB
119     ));
120     uint256 n = (uint256(randomSeed) % 6) + 1;
121     winner = n <= 3 ? gamblerA : gamblerB;
122     uint256 profits = address(this).balance;
123     uint256 balanceOfStage1 = tokenContract.balanceOf(address(this));
124     uint256 stage1TokenBonus = balanceOfStage1 >= TOKEN_BONUS ? TOKEN_BONUS :
125         balanceOfStage1;
126
127     diceGameState = DiceGameState.Settled;
128     emit DiceGameSettled(winner, profits, stage1TokenBonus);
129
130     _reset();
131     (bool sent, ) = payable(winner).call{value: profits}("");
132     require(sent, "Bet profits failed to send");
133     if (stage1TokenBonus > 0) {
134         bool tokenSent = tokenContract.transfer(winner, stage1TokenBonus);
135         require(tokenSent, "Stage1token bonus failed to send");
136     }
137 }
138
139 function _reset() private {
140     gamblerA = address(0);
141     gamblerB = address(0);
142     betAmount = 0;

```

```

135     fingerprintForA = bytes32(0);
136     fingerprintForB = bytes32(0);
137     secretA = bytes32(0);
138     secretB = bytes32(0);
139     revealedA = false;
140     revealedB = false;
141     winner = address(0);
142     gameCreatedAt = 0;
143     gameJoinedAt = 0;
144     diceGameState = DiceGameState.None;
145 }
146
147 receive() external payable {}
148
149 function checkTimeout() external nonReentrant {
150     if (diceGameState != DiceGameState.BothBetted) revert WrongState(DiceGameState.
        BothBetted, diceGameState);
151     if (block.timestamp <= gameJoinedAt + TIMEOUT_DURATION) revert InvalidParam("
        game has not timed out yet");
152
153     if (revealedA && !revealedB) {
154         winner = gamblerA;
155     } else if (revealedB && !revealedA) {
156         winner = gamblerB;
157     } else {
158         revert InvalidParam("invalid timeout state");
159     }
160
161     uint256 profits = address(this).balance;
162     uint256 balanceOfStage1 = tokenContract.balanceOf(address(this));
163     uint256 stage1TokenBonus = balanceOfStage1 >= TOKEN_BONUS ? TOKEN_BONUS :
        balanceOfStage1;
164
165     diceGameState = DiceGameState.Settled;
166     emit DiceGameSettled(winner, profits, stage1TokenBonus);
167
168     _reset();
169     (bool sent, ) = payable(winner).call{value: profits}("");
170     require(sent, "Bet profits failed to send");
171     if (stage1TokenBonus > 0) {
172         bool tokenSent = tokenContract.transfer(winner, stage1TokenBonus);
173         require(tokenSent, "Stage1token bonus failed to send");
174     }
175 }
176
177 function getRemainingTimeout() external view returns (uint256) {
178     if (diceGameState != DiceGameState.BothBetted) return 0;
179     if (block.timestamp > gameJoinedAt + TIMEOUT_DURATION) return 0;
180     return gameJoinedAt + TIMEOUT_DURATION - block.timestamp;
181 }
182
183 function cancelGame() external nonReentrant {
184     if (diceGameState != DiceGameState.WaitingForB) revert WrongState(DiceGameState.
        WaitingForB, diceGameState);
185     if (msg.sender != gamblerA) revert NotBetOwner(msg.sender, gamblerA);
186     if (block.timestamp > gameCreatedAt + TIMEOUT_DURATION) revert InvalidParam("
        cancel period has expired");
187
188     uint256 refundAmount = betAmount;
189     _reset();
190
191     (bool sent, ) = payable(msg.sender).call{value: refundAmount}("");
192     require(sent, "Refund failed");
193 }
194
195 function getRemainingCancelTime() external view returns (uint256) {
196     if (diceGameState != DiceGameState.WaitingForB) return 0;
197     if (block.timestamp > gameCreatedAt + TIMEOUT_DURATION) return 0;
198     return gameCreatedAt + TIMEOUT_DURATION - block.timestamp;
199 }
200 }

```

Team Contribution Declaration

Member Name	Student ID	Contribution (%)	Main Responsibilities
LIU Xinsheng	25065865g	70	Stage 1 and 2 architecture design and coding, algorithm optimization, testing, and demo video recording.
MA Jiyuan	25116696g	30	Debugging, project security optimization, and documentation and report writing.