



Censys - Google SecOps SOAR Integration

User Guide

Version: 5.0

Table of Contents

Table of Contents	2
Overview	4
Censys Platform	4
Google SecOps	4
Google SecOps Integration for Censys	4
Release Notes	5
App Installation & Configuration	6
Pre-Requisites	6
Google SecOps	6
Censys	6
Installing the Integration	7
Configuration	9
Actions	14
Invoking Actions	16
Invoke Action Manually (from Case)	16
Invoke Action Automatically (from Playbook/Block)	16
Playbooks	18
Adding the Playbook & Blocks	18
Dashboards	22
Import Censys Dashboards into Goo SecOps	22
Available Dashboard Panels	24
Filters Description	24
Total Playbook Runs	24
Total Action Runs	25
Playbook Distribution	25
Most Popular Actions & Playbooks	26
Limitations	28
Known Behaviors	29
Troubleshooting	30
Case 1: PythonProcess Has timed out.	30

Overview

Censys Platform

Censys is an internet intelligence and attack surface management platform that continuously scans and maps the public internet to discover, monitor, and contextualize internet-facing infrastructure. Its core value is giving security teams complete visibility into exposed assets — including hosts, services, certificates, and cloud resources — so they can identify unknown exposure, track changes over time, and prioritize real risk. By providing a continuously updated, searchable map of the internet with rich historical and contextual data, Censys helps teams understand what is exposed, how it's configured, and how adversaries may interact with it.

Google SecOps

Google SecOps is a modern, cloud-native SecOps platform that empowers security teams to better defend against today's and tomorrow's threats. By combining Google's hyper-scale infrastructure, unparalleled visibility, and understanding of cyber adversaries, Google SecOps provides curated outcomes that proactively uncover the latest threats in near real-time, and enable security teams to detect, investigate and respond with speed and precision.

Google SecOps Integration for Censys

Censys for Google SecOps SOAR delivers comprehensive internet intelligence and attack surface visibility directly into your security orchestration workflows. Automatically enrich alerts with detailed asset data, discover hidden exposures, track infrastructure changes, and identify related attack surfaces using Censys's continuously-updated internet map. With 8 core actions and pre-built playbooks, security teams can accelerate threat investigation, prioritize vulnerabilities, and respond faster to critical exposures across their external attack surface.

Release Notes

V5.0

- NEW! **Enrich Host - Get Host Enrichment API** action — a second, purpose-built way to enrich multiple host (IP addresses), returning a curated set of fields designed for high-volume, automated SOC lookups (GreyNoise classification, third-party threat-actor signals, and network/privacy risk flags), in addition to the standard host data.
- RENAMED: Enrich IPs → **Enrich Host - Get Host API**. No functional change — same endpoint, same parameters, same output. Only the display name changed, to distinguish it from the new action above.
- NEW! Instance-level configuration toggle: **Enable Get Host Enrichment API**.
- NEW! **Censys - Host Enrichment Block** — a reusable block that now handles host enrichment for both the **Censys - Entity Enrichment** and **Censys - Rescan** playbooks.

V3.0

- Initial release of Censys integration for Google SecOps SOAR
- 10 core actions for asset intelligence and enrichment:
 - Test Connectivity (Ping)
 - Enrich IPs
 - Enrich Web Properties
 - Enrich Certificates
 - Initiate Rescan
 - Get Rescan Status
 - Get Host History
 - Create Related Infrastructure Job
 - Get Related Infrastructure Job Status
 - Get Related Infrastructure Job Results
- Entity enrichment with comprehensive Censys intelligence data
- 4 Sample Playbooks
 - Censys - Entity Enrichment

- Censys - Rescan
 - Censys - Host History
 - Censys - Related Infrastructure
- Pre-build Dashboard to get statistics about Censys actions and playbooks.

App Installation & Configuration

Pre-Requisites

Google SecOps


- A Google SecOps SOAR Instance with an Admin role user.
- Google SecOps SOAR Version: 6.3.75.0 or higher

Censys


- Censys Platform API Key
- Censys Organization ID with Threat Hunting Module

Installing the Integration


1. Log in to the Google SecOps SOAR Platform.
2. From the Sidebar, click on the **Content Hub** section

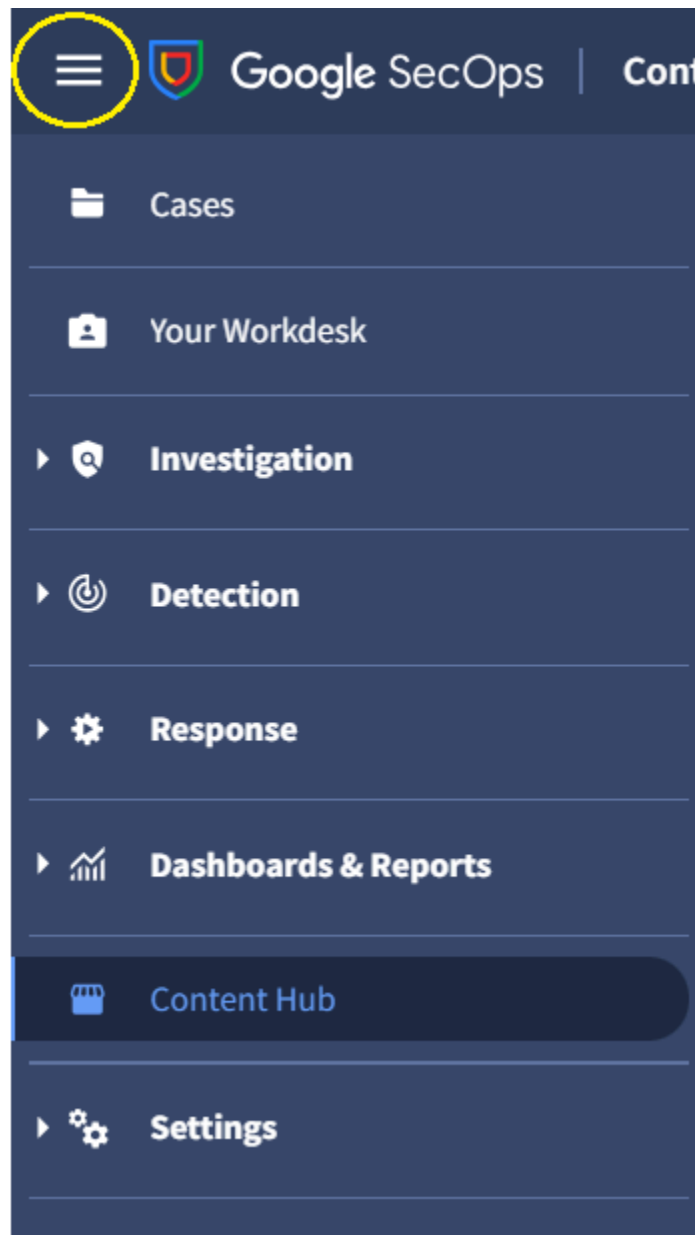

3. In the **Content Hub**, click on the **Response Integrations** tab.

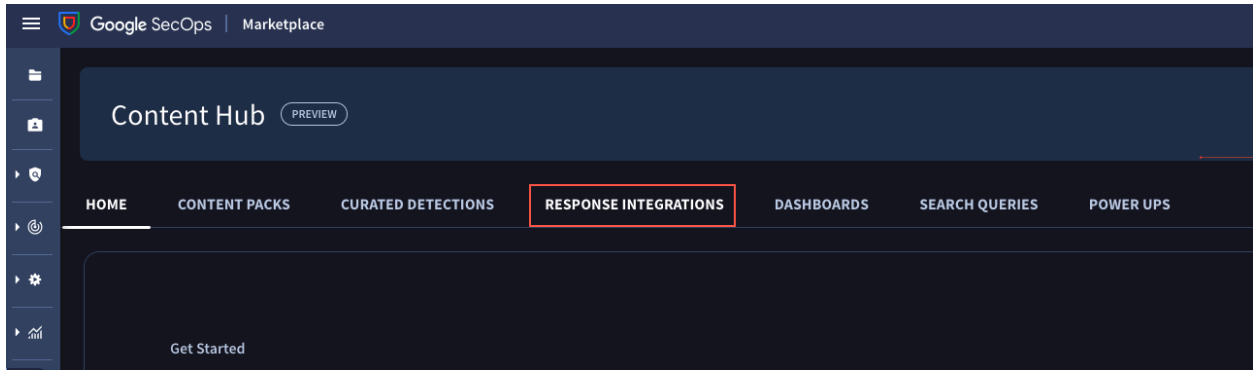


4. From the **Response Integrations** tab, search for **Censys**.

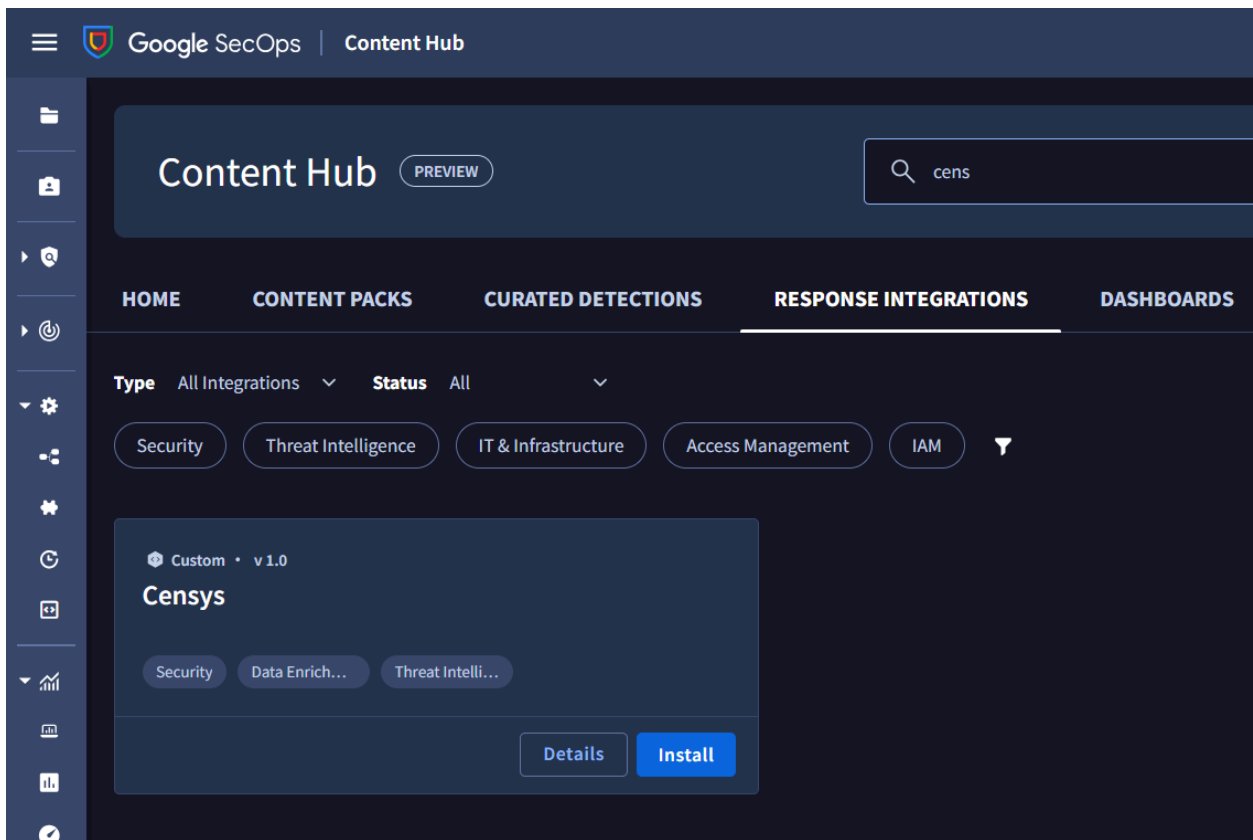

5. Click the **Install** button to install the integration.


Configuration

1. Once the integration has been installed successfully, the user needs to configure it to use the actions provided by the integration. These actions can be run manually from a case or can be used in playbooks.
2. To configure the integration, users can navigate to **Response > Integrations Setup**.

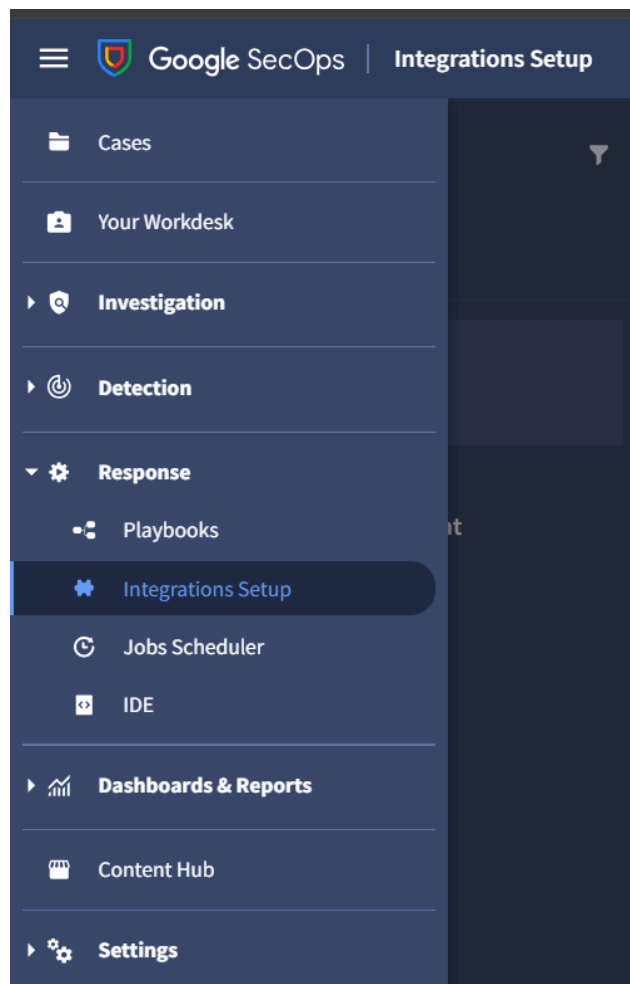

3. The integration can be configured in any of the desired environments. The integration actions can be used for playbooks and cases belonging to the environment in which the integration is configured.

- Click on the **Plus (+)** button to configure the integration for the desired environment.

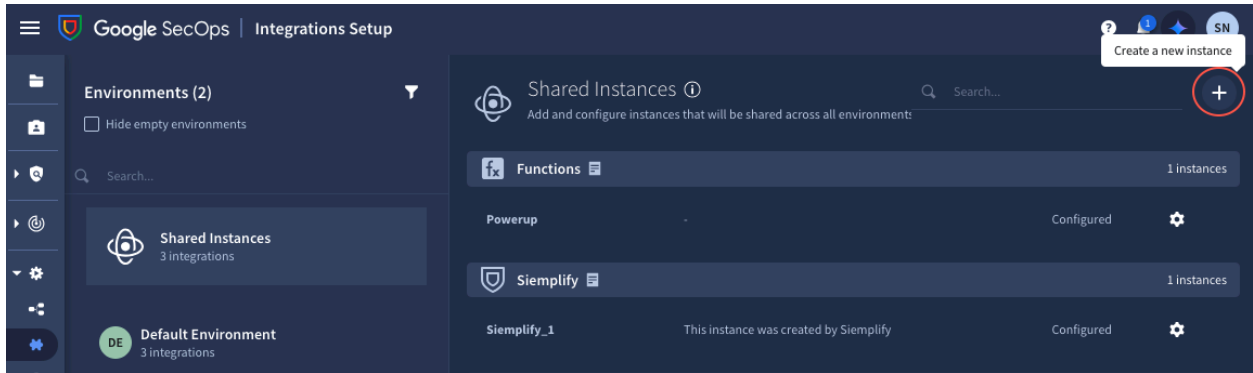

- Search for Censys integration and select it. Click **Save**.
- The instance of integration will be saved. However, in the next pop-up, users must add the necessary configuration parameters to use the actions.

Censys - Configure Instance

×

Configure all the necessary fields and parameters for this instance

Instance Name

Censys_1

Description

Parameters

For more information on configuration and integration details, [click here](#)

API Key *

.....

Organization Id *

e48bb962-9a41-4a49-9912-55205baecd12

Verify SSL

☒

Enable Get Host Enrichment API

☒

Remote Agent

Test

Cancel

Save

Field name	Description	Default value	Required	Type
API Key	Censys API Key	-	True	Password
Organization Id	Censys Organization ID	-	True	String
Enable Get Host Enrichment API	Enables the Censys get host enrichment API for this instance. When enabled, Enrich Host - Get Host	False	False	Boolean

	Enrichment API calls the new API. When disabled, the action completes immediately with a false result so playbooks can fall back to Enrich Host - Get Host API.			
--	---	--	--	--

7. After adding the valid configuration parameters, click on the **Save** button to save the configurations. This is required to access the Censys APIs used in the actions.
8. After saving the configurations, the user can validate them using the **Test** button
 1. A green tick mark appears if the credentials provided are valid.



2. If invalid credentials are provided or any internal issue is faced, a red cross mark on the right side of the Test button will appear. The full error message can be displayed by clicking the red cross button.



```
----- Main - Param Init -----
-- Reading configuration from Server
Reading configuration from Server
Reading configuration from Server -----
----- Main - Started -----
Connection to API failed, performing
action Censys - Ping An error occurred:
404 Client Error: for url:
http://103.108.207.59:10114/api/test/v3/a
ccounts/organizations/e48bb962-9a41-
4a49-9912-55205baecd12?
organization_id=e48bb962-9a41-4a49-
9912-55205baecd12 -
b'{"statusCode":404,"message":"The
Endpoint not exist :
v3/accounts/organizations/e48bb962-
```

Note:

- After making any changes in the configuration parameters, the user needs to save them before testing again using the Test button.
 - When updating the credentials, the user must delete the entire Password from the input first before adding the updated Password.
- More information about configuring integrations in Google SecOps can be found [here](#).

Actions

This integration implements investigative and enrichment actions for the Censys platform on the Google SecOps SOAR Platform. It enables end-users to implement comprehensive attack surface management and threat intelligence use cases on the Censys Platform through the below available actions.

- 1. Test Connectivity (Ping):** Tests the connectivity of the Google SecOps SOAR server to the Censys platform by validating the provided Censys API credentials and Organization ID.
- 2. Enrich Host - Get Host API (renamed from Enrich IPs):** Retrieves comprehensive information about multiple hosts (IP addresses) using the Censys Platform API. Provides detailed intelligence about internet-facing infrastructure including services, ports, protocols, certificates, vulnerabilities, and location data.
- 3. Enrich Web Properties:** Retrieves comprehensive information about web properties (domain/hostname with port) using the Censys Platform API. Provides detailed intelligence about web-facing assets including HTTP/HTTPS services, certificates, technologies, and security configurations.
- 4. Enrich Certificates:** Retrieves comprehensive information about SSL/TLS certificates using the Censys Platform API. A certificate is identified by its SHA-256 fingerprint and provides detailed certificate intelligence including issuer, subject, validity periods, and associated hosts.
- 5. Initiate Rescan:** Initiates a live rescan for a known host service at a specific IP and port or hostname and port. Returns a scan ID that can be used to monitor the scan's status.
- 6. Get Rescan Status:** Retrieves the current status of a scan by its ID asynchronously. Allows users to monitor the progress of previously initiated scans and determine when scan results are available.

- 7. Get Host History:** Retrieves the event history for a host (IP address). Allows users to view historical scan data, track infrastructure changes over time, and identify when services were added, removed, or modified.
- 8. Create Related Infrastructure Job:** Initiates a CensEye (Related Infrastructure) job for a target host, web property, or certificate. The action returns a job ID that can be used to monitor the job's status and retrieve results once the analysis is complete.
- 9. Get Related Infrastructure Job Status:** Retrieves the current status of a CensEye job by its ID asynchronously. It allows users to monitor the progress of previously initiated related infrastructure analysis jobs and determine when results are available for retrieval.
- 10. Get Related Infrastructure Job Results:** Retrieves the detailed pivot results from a completed CensEye job. It fetches all related infrastructure findings, formats them into a readable table with search URLs, and provides comprehensive JSON output for further analysis.
- 11. Enrich Host - Get Host Enrichment API:** Retrieves focused enrichment data for multiple hosts (IP addresses) using the Censys get host enrichment API a purpose-built endpoint designed to help security teams operationalize external internet data and assess risk for an IP with a curated, fixed subset of host data, optimized for high-volume, automated lookups.
Note: Action will only enrich the host IP addresses if the selected instance has "Enable Get Host Enrichment API" checkbox enabled.


Note (Entity Enrichment):

Each enrichment action removes only the data that it previously added by replacing it with - (hyphen) before inserting the new information. Data added by other enrichment actions is not affected. This ensures that only the current action's results are displayed, preventing outdated fields specific to this action from persisting if they are not returned in the current API response.

Invoking Actions

Invoke Action Manually (from Case)

1. Navigate to the Case **Overview** tab of the case on which the action needs to be performed.
2. In the selected case, click Manual Action ('gear' icon) located on the right side under the Case Top Bar. The Manual Action dialog box appears.

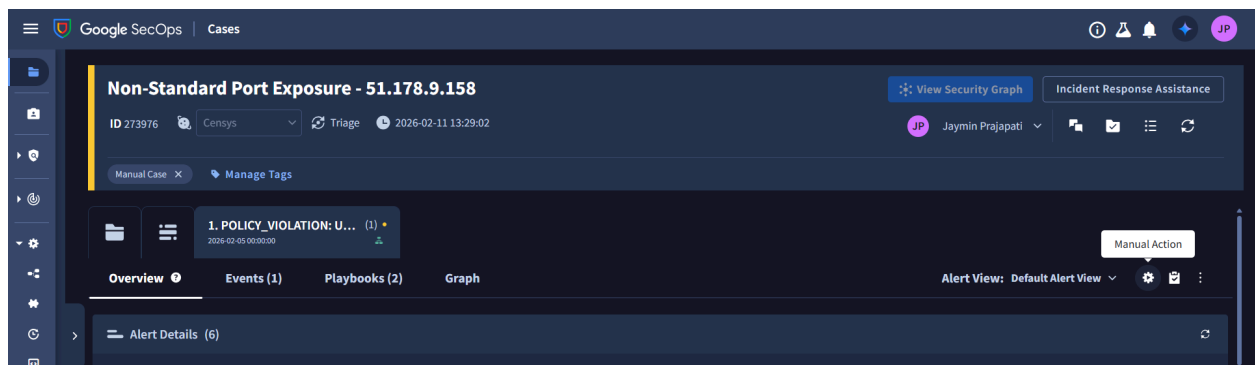

3. Select the required action: **Censys** > [Action Name]. Make sure to fill in the required information.
4. Once the information is added, click on the **Execute** button.
5. Once the action is successfully executed, the result (success or failure) will be displayed on the Case wall.
6. The result contains different JSON output and insights based on different actions.

Invoke Action Automatically (from Playbook/Block)

Actions can be added as a step in a playbook. This action will be run when the playbook is executed. Playbooks, in turn, can be triggered on cases and alerts based on the conditions determined by the user.

To add an action as a part of the playbook, follow these steps:

1. Navigate to **Response > Playbooks**
2. Select any existing playbook or create a new one.
3. Click on the **+ Open Step Selection** button, and navigate to the Actions tab.
4. Under Censys integration, all the actions available in the integration would be visible. Simply, drag and drop the action required to the playbook step.
5. The action should now be added to the playbook. Make sure to configure the input parameters (if applicable) for the action.

Playbooks


As part of the Censys Integration, we created **Four** playbooks & a reusable block to help the user get started. Users can use and refer to the sample playbooks provided.

The Playbooks & Blocks included are:


1. Censys - Entity Enrichment
2. Censys - Rescan
3. Censys - Host History
4. Censys - Related Infrastructure
5. Censys - Host Enrichment Block

Adding the Playbook & Blocks


- Log in to the Google SecOps SOAR Platform.
- From the Sidebar, click on the **Content Hub** section

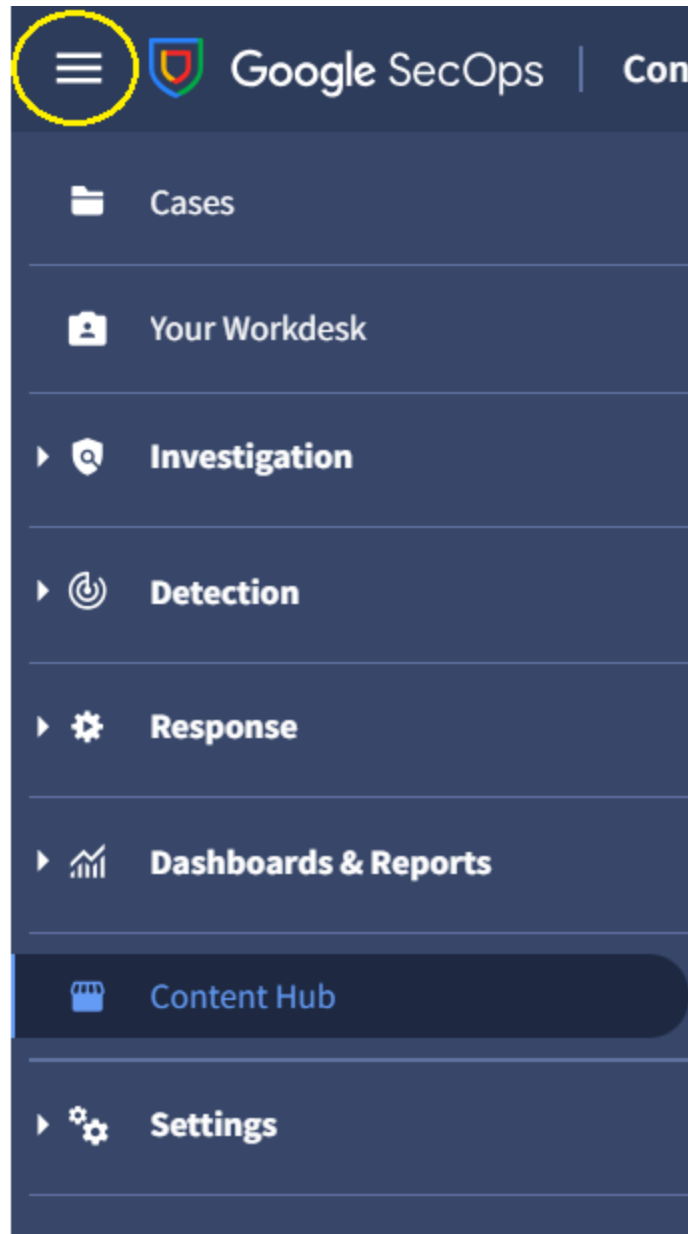


- In the Content Hub, click on the **Playbooks & Blocks** tab.
- From the **Playbooks & Blocks** tab, Search for **Censys**

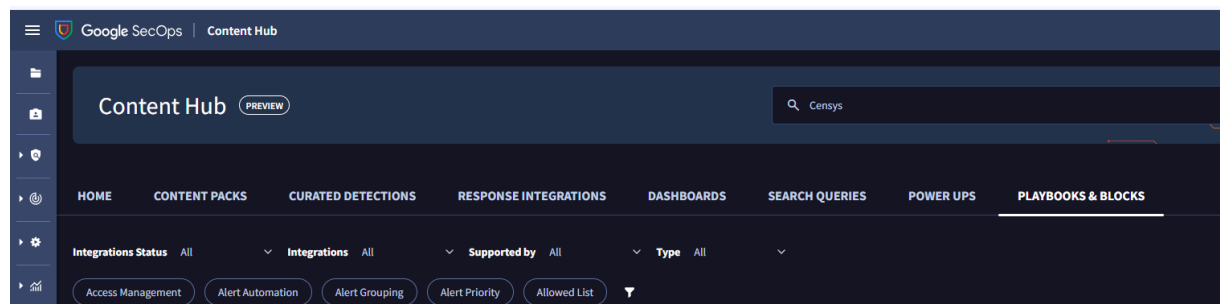

- Click on the **Add** button. A Popup will appear.

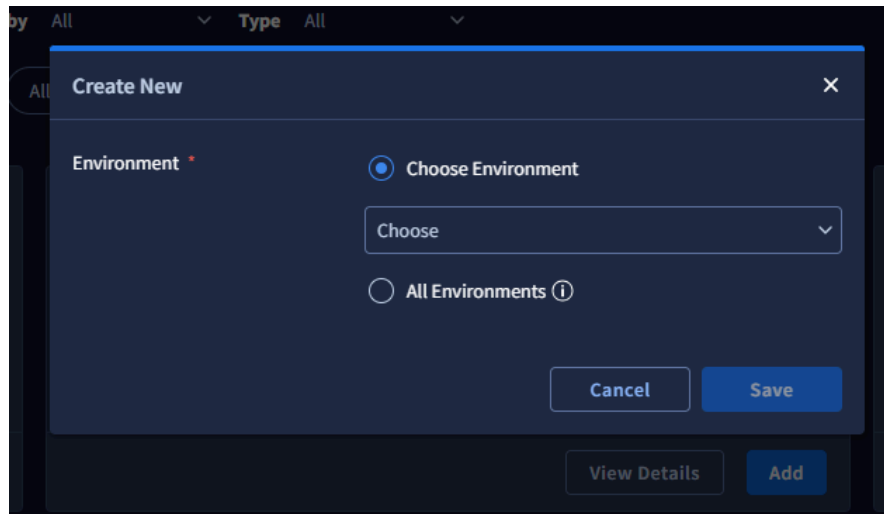

- Select the required Environment and click **Save**.
- The Playbook will be available in the **Content Hub Playbooks** folder.

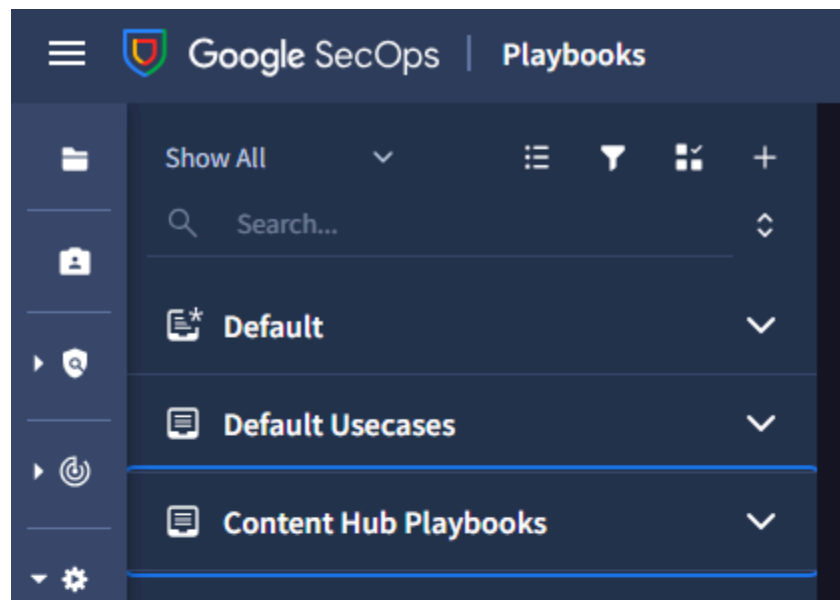

Notes:

- Each playbook requires a trigger, which decides when the playbook would be run. Users can update the Trigger conditions based on the requirements.
- As the trigger of every playbook is set to run on all ingested alerts into SecOps instance, the added playbooks are disabled by default. Added Playbooks and a block can be found in the **Content Hub Playbooks** folder.

These playbooks and blocks can be moved to any other folder of User's choice. Users can easily enable any playbook by simply clicking on the toggle button beside the playbook name. ([Reference](#))

Note: *Before using any playbook with an alert, review its default settings (triggers, action parameters, etc.) to ensure they align with your needs*


Dashboards

As part of the Censys Integration, pre-built dashboards are provided to help security teams monitor and measure the value delivered by Censys actions and playbooks. These dashboards provide visibility into integration usage, entity enrichment volumes, and playbook effectiveness. Users can download the Dashboard.json from this [Github repo](#).


Import Censys Dashboards into Goo SecOps

Complete the following steps to import a dashboard:

1. [Log in](#) to your Google SecOps instance.
2. In the navigation bar, click **Dashboards & Reports > Dashboards**.

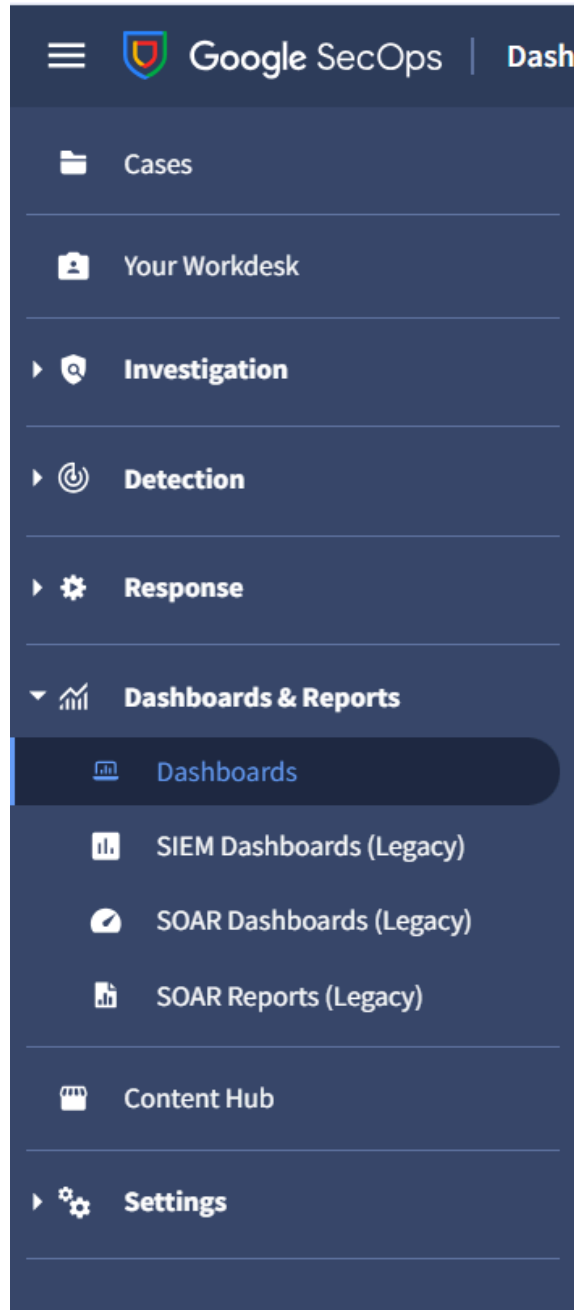

3. Click **New dashboard** and then select **Import from JSON**. The **Import dashboard** confirmation dialog appears.
4. Click the **Upload dashboard files** button. The **Select file** dialog appears. Select the dashboard json file. The selected dashboard file will appear in the table.

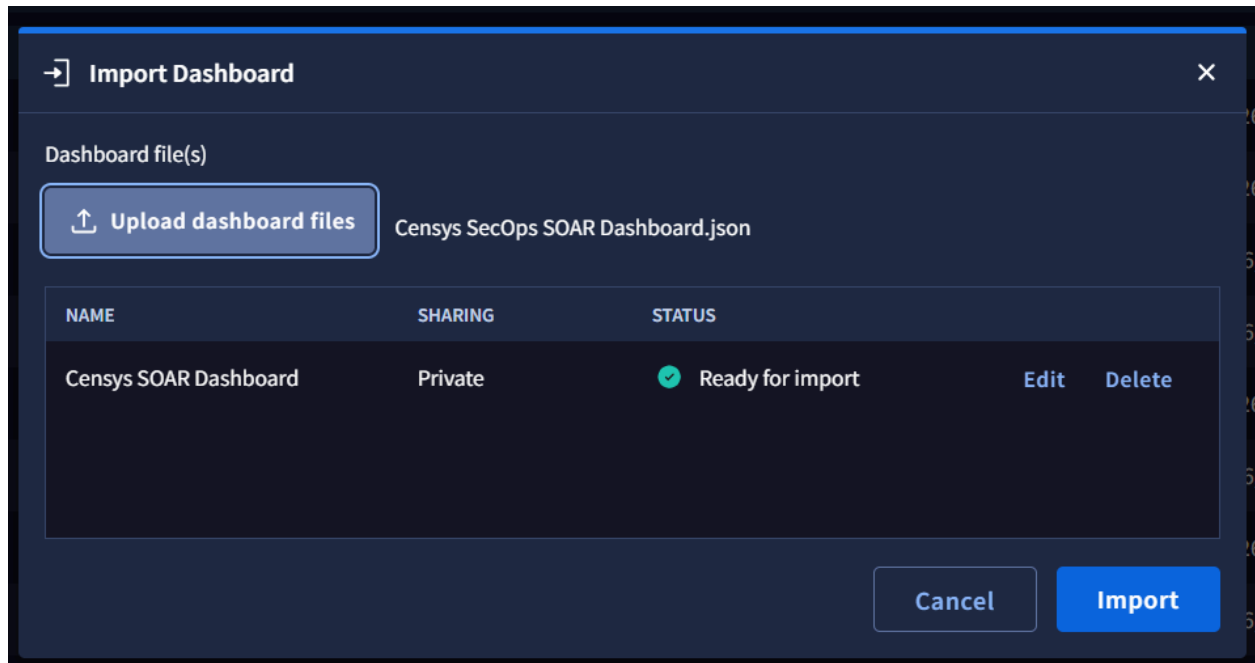

Available Dashboard Panels

Filters Description


- **Time Filter:** This filter updates all dashboard panels based on the selected time range, showing only actions and playbooks executed during that period.
Default: Last 7 days.

Total Playbook Runs

Description: Displays the total count of unique successful playbook executions that included Censys Actions.

Metric Type: Counter

Note: Re-run playbook will not be counted in this panel.

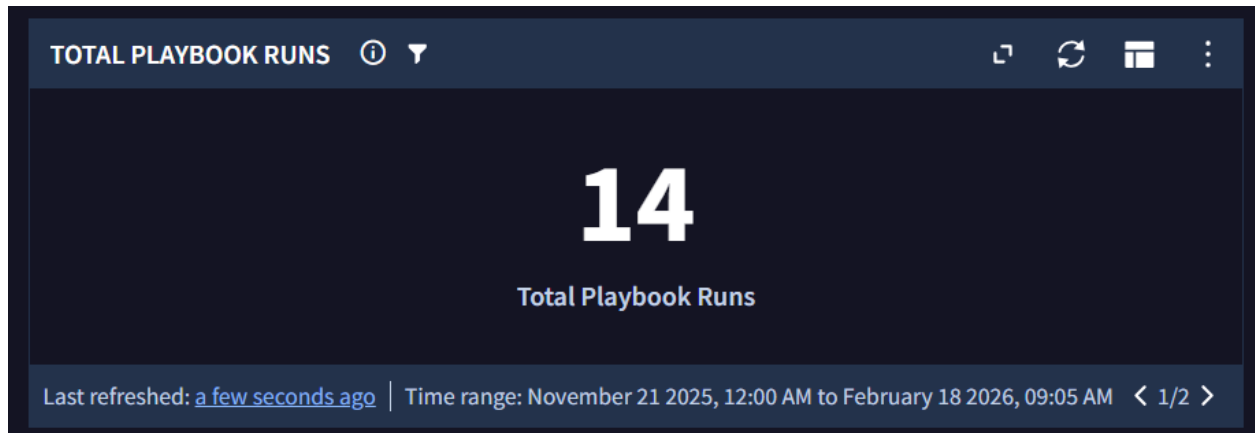


Total Action Runs

Description: Shows the total count of Censys Actions executed via playbooks only. Manual action executions are not included in this metric.

Metric Type: Counter


Note: This panel specifically tracks automated action runs within playbook executions. Manual action invocations from cases are excluded from this count.

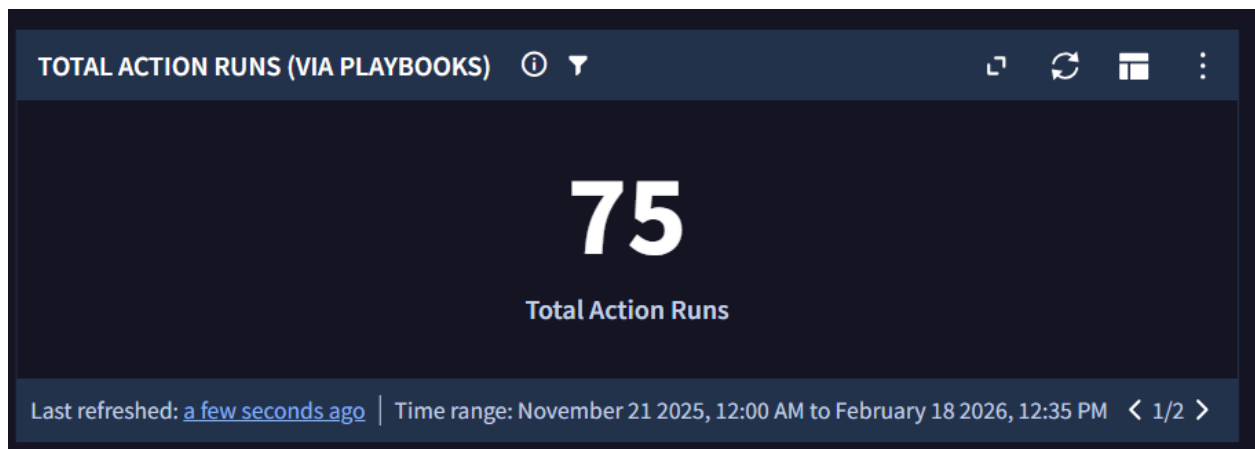

Playbook Distribution

Description: A pie chart visualization showing the distribution of different playbooks utilizing the Censys Integration.

Visualization: Pie Chart

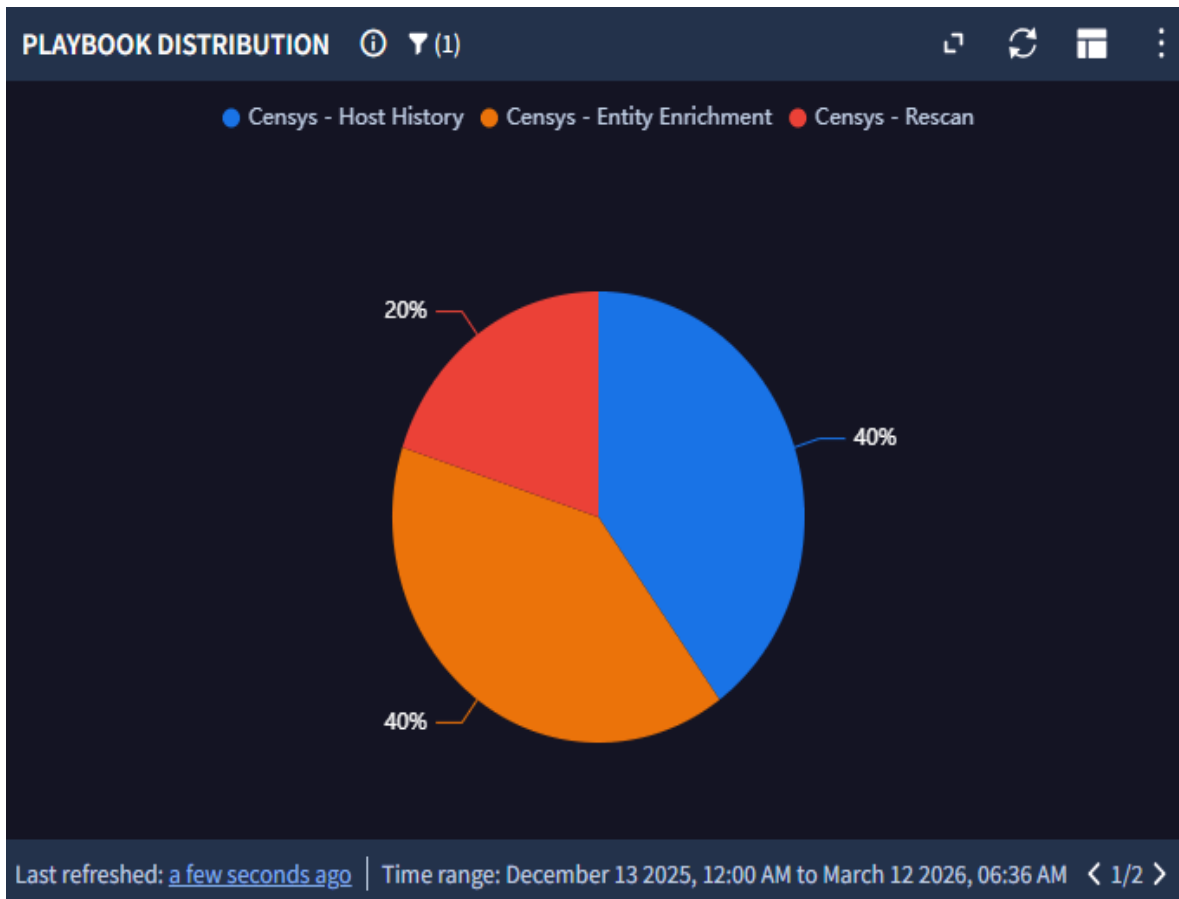

Most Popular Actions & Playbooks

Description: A table listing which Censys integration actions are used most frequently and in which specific SOC playbooks.

Table Columns:

- **Action Name:** Name of the Censys action
- **Playbook Name:** Name of the playbook(s) using this action
- **Total Action Executions:** Number of times the action has been executed

Visualization: Table

MOST POPULAR ACTIONS & PLAYBOOKS ⓘ ⚙ (1)

Censys Actions	Playbook Name	Total Action Executions
Censys_Enrich Certificates	Censys - Entity Enrichment	4
Censys_Initiate Rescan	Censys - Rescan	3
Censys_Get Rescan Status	Censys - Rescan	3
Censys_Enrich IPs	Censys - Entity Enrichment	3
Censys_Get Host History	Censys - Host History	2
Censys_Enrich IPs	Censys - Rescan	2
Censys_Enrich Web Properties	Censys - Entity Enrichment	2

Last refreshed: [a few seconds ago](#)

Time range: December 13 2025, 12:00 AM to March 12 2026, 06:36 AM

Showing results based on 7 rows

Limitations

- The SecOps JSON output payload size limit is 28 MB. Payloads larger than this may cause unexpected UI issues in IDE. We also observed that in IDE running **Get Host History** action becomes unresponsive due to larger payload. This occurs for a payload size of around ~10 MB.


Known Behaviors

- The script timeout might not work as expected. It has been observed that when specifying the timeout to 10 seconds, the action script would timeout after around 39 seconds. The platform adds ~29 seconds of timeout. This behavior differs for every SecOps SOAR instance.

Reference: [Solved: Facing inconsistencies in Script Timeout for Actio... - Google Cloud Community](#).

Troubleshooting


Case 1: PythonProcess Has timed out.

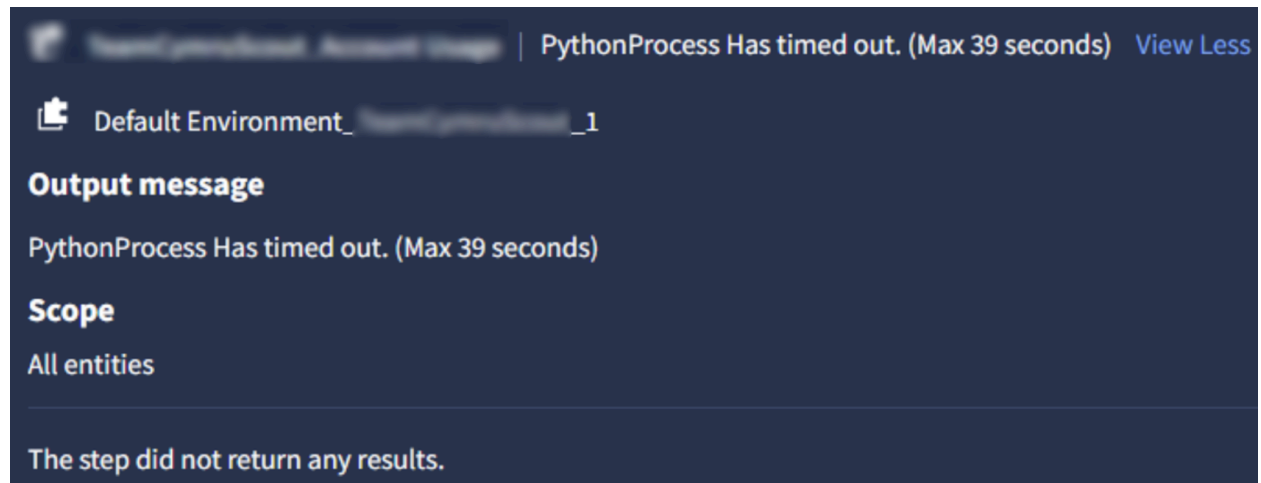


Solution :

1. Increase the script timeout from the Timeout Configuration of an action

1. From the Sidebar, navigate to **Response > IDE**

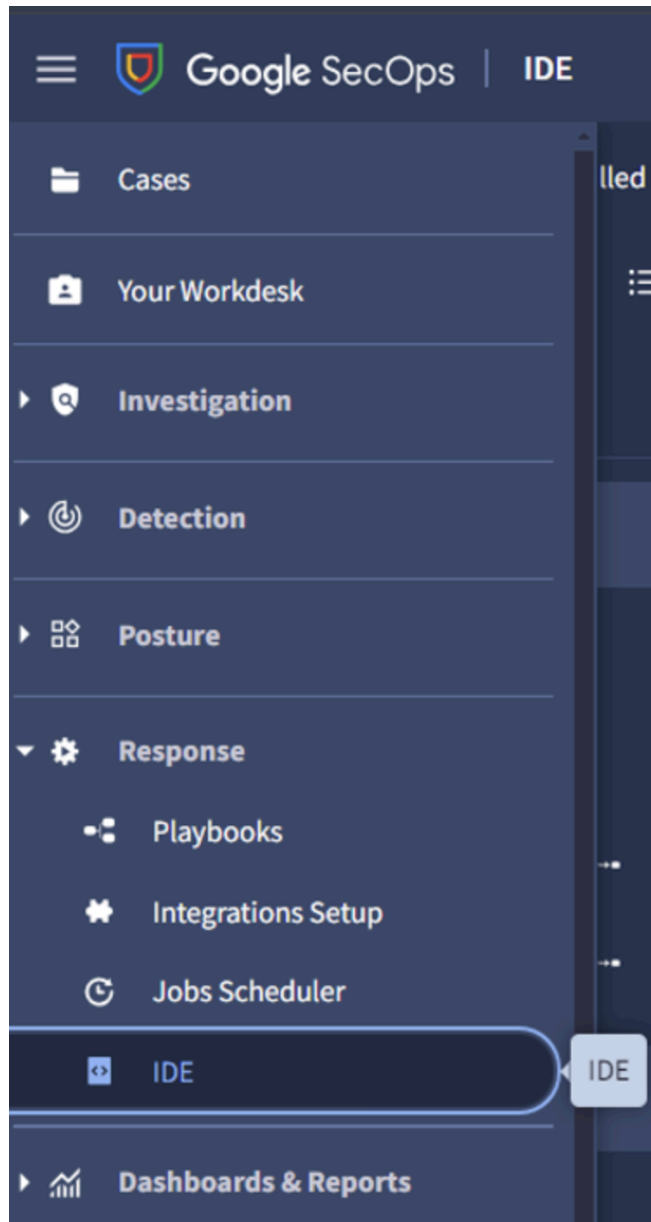


2. Search for the action script and select it. You will be able to see the codebase of the action, and on the right side, there should be an input field named Timeout Configuration under the details tab. Update the value of Script Timeout based on your requirement, and Save the action.

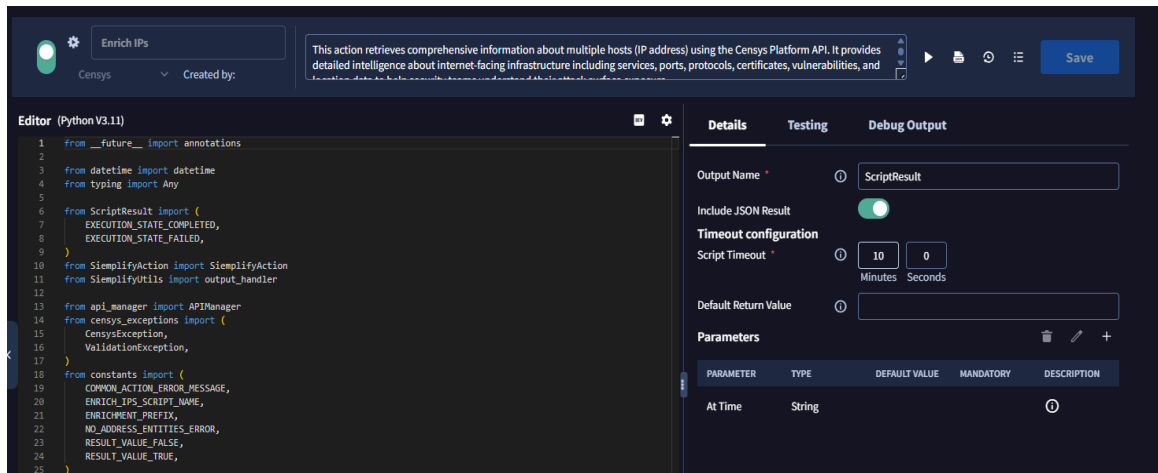

- Another way to increase the execution speed of the action is to tweak the query parameters of the API call by reducing the time frame to search and retrieve only filtered subsets instead of all results

Case 2: Unknown error running Action.

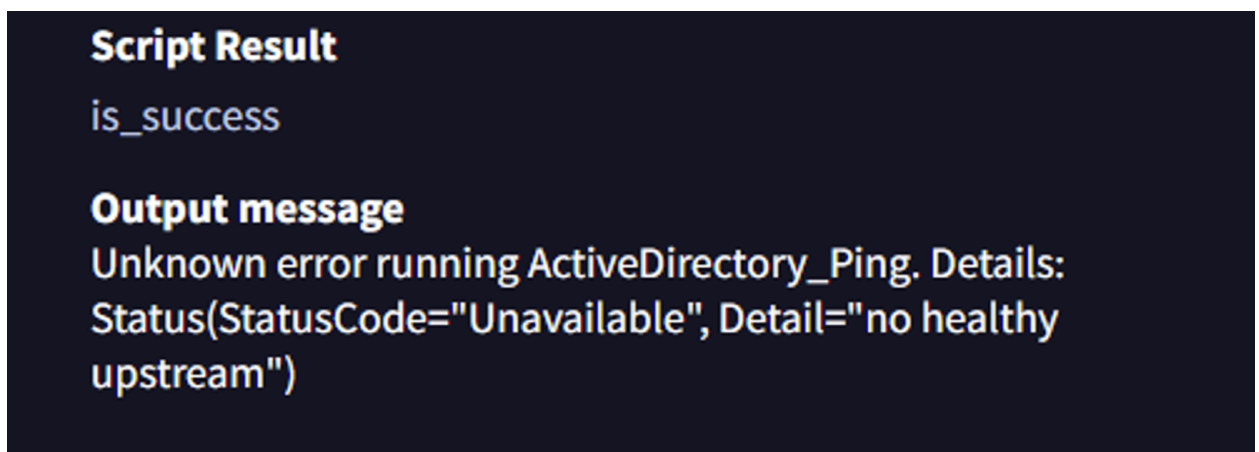

Solution:

The "no healthy upstream" error indicates an internal system issue. The most common cause is that all backend servers are currently unavailable or unresponsive. To resolve this problem, you should contact your system administrator for assistance.

