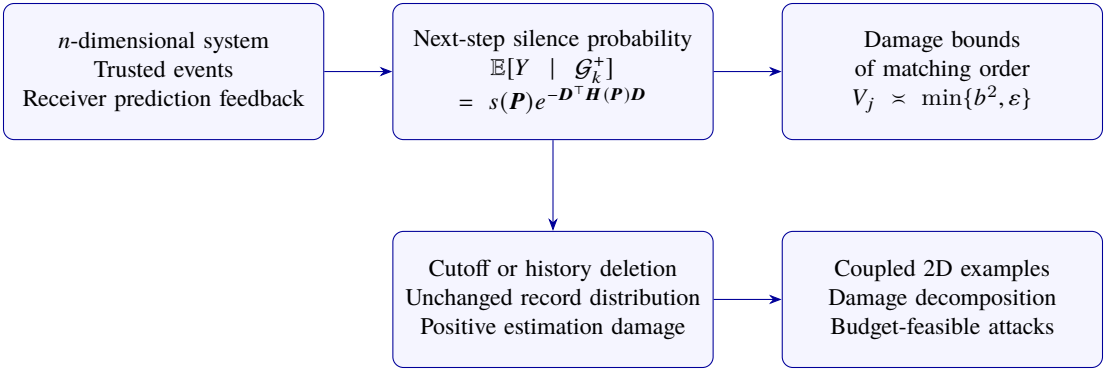
n-dimensional system
Trusted events
Receiver prediction feedback
Next-step silence probability
$\mathbb{E}[Y \mid \mathcal{G}_k^+]$
$= s(\boldsymbol{P})e^{-\boldsymbol{D}^\top \boldsymbol{H}(\boldsymbol{P})\boldsymbol{D}}$
Damage bounds
of matching order
$V_j \asymp \min\{b^2, \varepsilon\}$
Cutoff or history deletion
Unchanged record distribution
Positive estimation damage
Coupled 2D examples
Damage decomposition
Budget-feasible attacks