

©Copyright 2022

Cesar Zaragoza Cortes

Resources Estimation for Shor's Semiprime Integer Factorization Algorithm in Multiple Physical Platforms

Cesar Zaragoza Cortes

A dissertation
submitted in partial fulfillment of the
requirements for the degree of

Master of Science

University of Washington

2022

Reading Committee:

Boris Blinov, Chair

Anna Goussiou

Program Authorized to Offer Degree:

Physics

University of Washington

Abstract

Resources Estimation for Shor’s Semiprime Integer Factorization Algorithm in Multiple Physical Platforms

Cesar Zaragoza Cortes

Chair of the Supervisory Committee:
Associate Professor Boris Blinov
Department of Physics

An important task in the development of quantum computing technologies is to determine the resources needed to execute a particular algorithm in a device with certain characteristics. Resources estimation allows not only to determine whether it is possible to execute an algorithm in a current Noisy Intermediate-Scale Quantum (NISQ) device, but also to experiment with the parameters of quantum hardware to find out how much it would have to scale to achieve quantum advantage. For this thesis, we use the Q# quantum programming language to implement Shor’s semiprime integer factorization algorithm, leverage the infrastructure built around Q# to estimate the resources required to run the algorithm on trapped-ion and superconducting quantum hardware platforms, and do a comparison between the two physical platforms based on the results.

TABLE OF CONTENTS

	Page
Chapter 1: Introduction	1
1.1 The Purpose of This Thesis	1
Chapter 2: Basics of Quantum Computing	2
2.1 Dirac Notation	2
2.2 Quantum Systems	3
2.3 Qubits	4
2.4 Multi-Qubit Systems	5
2.5 Superposition	5
2.6 Quantum Logic Gates	5
2.7 Single-Qubit Gates	6
2.8 Multi-Qubit Gates	6
2.9 Entanglement	7
2.10 Interference	7
2.11 Measurement	7
2.12 Quantum Advantage	7
Chapter 3: Basics of Quantum Error Correction	8
3.1 Noise and Error Correction	8
3.2 Bit Flip Code	9
3.3 Phase Flip Code	9
3.4 Shor Code	9
3.5 Fault-Tolerant Quantum Computation	9
3.6 Threshold Theorem	9
Chapter 4: Shor's Semiprime Integer Factorization Algorithm	10
4.1 Algorithm	10

Chapter 5:	Analysis Framework	12
5.1	Quantum Computing Architecture	13
5.2	Q# and the Quantum Development Kit (QDK)	13
Chapter 6:	Shor's Algorithm Logical Analysis	14
6.1	Q# Implementation	14
6.2	Quantum Subroutine	15
Chapter 7:	Trapped-Ions Physical Platform	18
7.1	Platform Characteristics	18
7.2	Native Gates	19
7.3	Resources Estimation Analysis	21
7.4	Analysis of Execution in NISQ Devices	21
7.5	Analysis of Execution of Algorithm for Input of Specific Size	21
Chapter 8:	Superconducting Physical Platform	22
8.1	Native Gates and Platform Characteristics	22
8.2	Resources Estimation Analysis	22
8.3	Analysis of Execution in NISQ Devices	22
8.4	Analysis of Execution of Algorithm for Input of Specific Size	22
Chapter 9:	Physical Platforms Comparison	23
Bibliography	24
Appendix A:	Implementation of Generic Physical Resources Estimation Framework .	26

Chapter 1

INTRODUCTION

Algorithms designed for quantum computers have the potential to solve some problems that cannot be efficiently solved by algorithms designed for classical computers. However, estimating how much resources are needed to execute a quantum algorithm that outperforms a classical one is a difficult task. There are many quantum programming languages and tools built around them such as Q#[10], Qiskit[11] and Cirq[6] that allow execution of quantum algorithms on simulators but out-of-the-box options to estimate resources are limited to the logical level or not existent.

1.1 The Purpose of This Thesis

This thesis aims to estimate the resources required at the physical level to run Shor's semiprime integer factorization algorithm for trapped-ion and superconducting quantum hardware platforms. To do this, we will extend the simulators infrastructure built around Q# to calculate the maximum number of physical qubits, the total number of physical gates, and the maximum runtime required to execute a particular quantum algorithm.

Furthermore, we will also analyze the effects of errors introduced by the physical gates, analyze the feasibility of obtaining reliable results without implementing fault-tolerance, and estimate the cost of running the algorithm using error-corrected qubits and fault-tolerant gates.

In order to make this thesis more accesible to people from different backgrounds, we dedicate the next few chapters to provide a brief overview of the basics of quantum computing, quantum error correction, and Shor's semiprime integer factorization algorithm.

Chapter 2

BASICS OF QUANTUM COMPUTING

2.1 Dirac Notation

Also known as bra-ket notation, Dirac notation provides a convenient way of expressing the vectors used in quantum mechanics.

Dirac notation defines two elements:

- The *ket* ($|\psi\rangle$), which denotes a column vector in a complex vector space that represents a quantum state.

$$|\psi\rangle = \begin{bmatrix} \psi_1 \\ \psi_2 \\ \dots \\ \psi_n \end{bmatrix}$$

- The *bra* ($\langle\psi|$), which denotes a row vector that is the conjugate transpose, or adjoint, of a corresponding *ket* ($|v\rangle$).

$$\langle\psi| = \begin{bmatrix} \psi_1^* & \psi_2^* & \dots & \psi_n^* \end{bmatrix} = \begin{bmatrix} \psi_1 \\ \psi_2 \\ \dots \\ \psi_n \end{bmatrix}^\dagger$$

An *operator* \mathbf{A} , represented by a $n \times n$ matrix, acting on a *ket* $|\psi\rangle$ produces another *ket* $|\psi'\rangle$ such that the produced *ket* can be computed by matrix multiplication:

$$|\psi'\rangle = \mathbf{A} |\psi\rangle = \begin{bmatrix} A_{11} & A_{12} \\ A_{21} & A_{22} \end{bmatrix} \begin{bmatrix} \psi_1 \\ \psi_2 \end{bmatrix} = \begin{bmatrix} A_{11}\psi_1 + A_{12}\psi_2 \\ A_{21}\psi_1 + A_{22}\psi_2 \end{bmatrix}$$

The *inner product* is denoted as a bra-ket pair $\langle\phi|\psi\rangle$ and represents the probability amplitude that a quantum state ψ would be subsequently found in state ϕ :

$$\langle\phi|\psi\rangle = \begin{bmatrix} \phi_1^* & \phi_2^* \end{bmatrix} \begin{bmatrix} \psi_1 \\ \psi_2 \end{bmatrix} = \phi_1^* \psi_1 + \phi_2^* \psi_2$$

This notation also provides a way to describe the state vector of n uncorrelated quantum states, the *tensor product*:

$$|\phi\rangle \otimes |\psi\rangle = |\phi\rangle |\psi\rangle = |\phi\psi\rangle = \begin{bmatrix} \phi_1 \\ \phi_2 \end{bmatrix} \otimes \begin{bmatrix} \psi_1 \\ \psi_2 \end{bmatrix} = \begin{bmatrix} \phi_1\psi_1 \\ \phi_1\psi_2 \\ \phi_2\psi_1 \\ \phi_2\psi_2 \end{bmatrix}$$

Note that $|\psi\rangle^{\otimes n}$ represents the tensor product of n $|\psi\rangle$ quantum states:

$$|\psi\rangle^{\otimes n} = |\psi\rangle \otimes \cdots \otimes |\psi\rangle = |\psi\rangle \cdots |\psi\rangle = |\psi \cdots \psi\rangle = \begin{bmatrix} \psi_1 \\ \psi_2 \end{bmatrix} \otimes \cdots \otimes \begin{bmatrix} \psi_1 \\ \psi_2 \end{bmatrix}$$

2.2 Quantum Systems

*ToDo: Explain the Schrodinger equation, describe what a quantum system is and mention basic postulates of quantum mechanics (similar to what Nielsen and Chuang explain).

*ToDo: Add an introduction before explaining the postulates of quantum mechanics and extend the description of the postulates.

*ToDo: Reference Nielsen & Chuang's book since this section comes from that book.

Postulate 1: The state of an isolated physical system is fully described by a unit vector $|\psi\rangle$ in Hilbert space.

Postulate 2: The evolution of a closed quantum system is described by a unitary transformation. This means that the state $|\psi\rangle$ at time t_1 is related to the state $|\psi'\rangle$ at time t_2 by a unitary operator U which depends only on the times t_1 and t_2 :

$$|\psi'\rangle = U(t_1, t_2) |\psi\rangle$$

*ToDo: Include Schrodinger's equation here (Postulate 2').

Postulate 3: The state space of a composite physical system is the tensor product of the state spaces of the component physical systems.

Postulate 4: Quantum measurements are described by a collection of M_m of measurement operators.

*ToDo: This is a good place to introduce the concept of coherence.

2.3 Qubits

In classical information theory and classical computing, a bit is the fundamental building block. Analogously, in quantum information theory and quantum computing, a quantum bit or qubit is the fundamental building block.

Physically, a qubit is a two-level quantum-mechanical system. The polarization of a single photon and the spin of the electron are examples of such systems.

Mathematically, a qubit is a linear combination of states $|\psi\rangle = \alpha|0\rangle + \beta|1\rangle$ where α and β are complex numbers known as amplitudes, and $|0\rangle$ and $|1\rangle$ are the computational basis states.

When a qubit is measured, the result is either $|0\rangle$ with probability $|\alpha|^2$ or $|1\rangle$ with probability $|\beta|^2$. Since the probabilities must sum to one, the qubit's state is normalized:

$$|\alpha|^2 + |\beta|^2 = 1$$

The computational basis states, which are analogous to the two values (0 and 1) that a classical bit may take, form an orthonormal basis represented by the following vectors:

$$|0\rangle = \begin{bmatrix} 1 \\ 0 \end{bmatrix}$$

$$|1\rangle = \begin{bmatrix} 0 \\ 1 \end{bmatrix}$$

Using the previous definitions, we can see a qubit as a unit vector in two-dimensional complex vector space:

$$|\psi\rangle = \begin{bmatrix} \alpha \\ \beta \end{bmatrix}$$

2.4 Multi-Qubit Systems

*ToDo: Explain how multi-qubit systems are represented. Describe what a state vector is.

2.5 Superposition

The principle of quantum superposition states that the most general state of a quantum-mechanical system is a linear combination of all distinct valid quantum states. A qubit is an example of a quantum superposition of the basis states $|0\rangle$ and $|1\rangle$.

A concrete example of a qubit in superposition that has the same probability of being measured as $|0\rangle$ or $|1\rangle$ is the following:

$$|\psi\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle)$$

*ToDo: Expand this section to show multi-qubit superposition.

2.6 Quantum Logic Gates

In classical digital circuits, logic gates are the building blocks. Analogously, in the quantum circuit model of computation, quantum logic gates are the building blocks of quantum algorithms. Quantum gates act on qubits, transform them in different ways, and can be applied sequentially to perform complex quantum computations.

Quantum gates are unitary operators represented as $2^n \times 2^n$ unitary matrices where n is the number of qubits the gate operates on. Unitary matrices are complex square matrices \mathbf{U} which have the property that its conjugate transpose or adjoint \mathbf{U}^\dagger is also its inverse \mathbf{U}^{-1} :

$$\mathbf{U}^\dagger \mathbf{U} = \mathbf{U} \mathbf{U}^\dagger = \mathbf{U} \mathbf{U}^{-1} = \mathbf{I}$$

A quantum gate is applied to a qubit system by multiplying the gate's matrix representation by the qubits' state vector. This operation transforms the qubit system:

$$|\psi_1\rangle = \mathbf{U} |\psi_0\rangle$$

Applying a sequence of quantum gates is equivalent to performing a series of these multiplications. For example, applying gate \mathbf{U}_a followed by a gate \mathbf{U}_b to a state vector $|\psi\rangle$ is represented by the following expression where the gates closest to the state vector are applied first:

$$\mathbf{U}_b \mathbf{U}_a |\psi\rangle$$

Since matrix multiplication is associative, multiplying \mathbf{U}_a by \mathbf{U}_b produces a compound gate $\mathbf{U}_b \mathbf{U}_a$ that is equivalent to applying \mathbf{U}_a followed by \mathbf{U}_b :

$$\mathbf{U}_b \mathbf{U}_a |\psi\rangle = \mathbf{U}_b (\mathbf{U}_a |\psi\rangle) = (\mathbf{U}_b \mathbf{U}_a) |\psi\rangle$$

Note that all quantum gates are reversible since they are represented by unitary matrices. This means that for any gate, another gate exists that reverts the gate's transformation on a state vector:

$$|\psi\rangle = \mathbf{U}^\dagger (\mathbf{U} |\psi\rangle) = \mathbf{U}^\dagger \mathbf{U} |\psi\rangle = \mathbf{I} |\psi\rangle$$

*ToDo: Describe and show how gates are represented in graphical circuits.

2.7 Single-Qubit Gates

Single-qubit gates are represented by 2×2 matrices.

*ToDo: List the most commonly used single-qubit gates and show how they transform a qubit.

2.8 Multi-Qubit Gates

*ToDo: List the most commonly used multi-qubit gates and show how they transform the qubits they act upon.

2.9 *Entanglement*

*ToDo: Define what entanglement is, describe why it is important, and show how qubits are entangled.

2.10 *Interference*

*ToDo: Define what interference is, describe why it is important, and show an example of interference.

2.11 *Measurement*

*ToDo: Define what it means to measure a qubit or a qubit system and show examples of measurements using different basis.

2.12 *Quantum Advantage*

*ToDo: Explain how quantum computers can solve a problem that a classical computer can't efficiently by exploiting superposition, entanglement, and interference.

Chapter 3

BASICS OF QUANTUM ERROR CORRECTION

This chapter explains the basic concepts to understand how quantum computations can be performed reliably in the presence of noise. Given the fragility of coherent quantum systems, quantum error correction and fault-tolerant quantum computation are fundamental arbitrarily large quantum algorithms operating on many qubits.

3.1 Noise and Error Correction

Noise can introduce errors in data while it is being processed, sent through a channel and/or stored in a medium. A common error that can be introduced by noise is a bit flip (e.g. $0 \rightarrow 1$, $1 \rightarrow 0$). The task of error correction is to detect when an error has occurred and correct it.

In classical error correction, coding based on data-copying is extensively used. The key idea is to protect data against the effects of noise by adding redundancy. For example, a classical repetition code can encode a logical bit using three physical bits:

$$0 \rightarrow 000$$

$$1 \rightarrow 111$$

The problem is that classical error correction techniques cannot be directly applied to qubits because of the following reasons:

- It is impossible to create an independent and identical copy of a qubit in an arbitrary unknown state. This is known as the no-cloning theorem of quantum mechanics and it has the consequence that qubits cannot be protected from errors by simply making multiple copies. **ToDo: Find reference for the no-cloning theorem.*

- Measurement destroys quantum information, implying that we cannot measure a qubit to decide which correcting action to perform.
- In addition to bit flip errors ($|\psi\rangle = \alpha|0\rangle + \beta|1\rangle \rightarrow |\psi\rangle = \alpha|1\rangle + \beta|0\rangle$), qubits are also susceptible to phase flip errors ($|\psi\rangle = \alpha|0\rangle + \beta|1\rangle \rightarrow |\psi\rangle = \alpha|0\rangle - \beta|1\rangle$) that have no classical analogous. Therefore, quantum error correction must be able to simultaneously correct for both.
- Errors in quantum information are continuous. This means that qubits, in the presence of noise, experience angular shifts rather than full bit or phase flips.

3.2 Bit Flip Code

*ToDo: Describe and show how a bit flip code works.

3.3 Phase Flip Code

*ToDo: Describe and show how a phase flip code works.

3.4 Shor Code

*ToDo: Describe and show how the Shor code works and how it can completely correct a qubit from any type of errors.

3.5 Fault-Tolerant Quantum Computation

*ToDo: Describe the concept of fault-tolerant quantum computation and how fault-tolerant quantum gates are constructed.

3.6 Threshold Theorem

*ToDo: Explain the threshold theorem and why it is important.

Chapter 4

SHOR'S SEMIPRIME INTEGER FACTORIZATION ALGORITHM

Shor's algorithm is a polynomial-time quantum algorithm for semiprime integer factorization. In comparison, the time complexity of the most efficient known classical factoring algorithm is superpolynomial.

We chose Shor's algorithm because it is one of the most significant quantum algorithms due to its exponential improvement on efficiency compared to its classical counterparts, and because both the number of qubits and the number of quantum operations required to run it are proportional to the input size. The number of operations is particularly relevant since it makes the errors introduced by the physical gates an important consideration.

4.1 *Algorithm*

The problem that Shor's algorithm solves is the following: given a semiprime integer N , find its two prime factor p and q .

Shor's algorithm combines both classical and quantum computations, and the procedure to perform it is the following:

1. Pick a random integer $1 < a < N$.
2. Check whether a is a factor by determining whether a and N are coprime. If they are, we can compute the factors. Otherwise continue with the rest of the algorithm.
3. Use a period-finding quantum subroutine to find the period r of the function $f(x) = a^x \bmod N$.

4. If r is odd, then go back to step 1. If r is even, go to the next step.
5. If $a^{\frac{r}{2}} \equiv -1 \pmod{N}$, then go back to step 1.
6. Either $a^{\frac{r}{2}} - 1$ or $a^{\frac{r}{2}} + 1$ shares a factor with N .

*ToDo: Include circuit representation of the algorithm.

Chapter 5

ANALYSIS FRAMEWORK

The strategy we use to analyze Shor’s integer factorization algorithm is very similar to the one proposed by Soeken et al.[9]. The overview of the process is the following:

1. Implement the quantum algorithm using a high-level programming language.
2. Verify the correctness of the implementation by executing the algorithm in a full state simulator.
3. Use, extend and build tools that can use the high-level algorithm implementation to estimate the amount of logical resources the algorithm requires depending on its input size.
 - (a) As part of logical resources estimation, consider the effects of introducing error-corrected qubits and fault-tolerant quantum gates on the amount of required resources.
4. For each physical platform do the following:
 - (a) Create a tool that uses platform specific parameters to calculate the amount of physical qubits, physical gates, and runtime required to run the algorithm.
 - (b) Analyze the data produced by the tool to determine the following:
 - i. The maximum input size for the algorithm to run on a real NISQ device.
 - ii. The characteristics that a device should have to run the algorithm for a specific input size, and determine what would be the runtime.

5. Compare the results obtained for each physical platform.

5.1 *Quantum Computing Architecture*

*ToDo: Explain the layered architecture for quantum computing model

5.2 *Q# and the Quantum Development Kit (QDK)*

Microsoft's Quantum Development Kit (QDK) supports the implementation of custom simulators that can be used to run Q# programs. We leverage this capability and implement a simulator that calculates the resources a quantum algorithm would require to be executed in a hardware platform with specific characteristics.

*ToDo: Explain the following

- QDK Custom Simulators: Describe how custom simulators are implemented using diagrams and code snippets.
- Software Architecture of Physical Resources Estimator Simulator: Describe the software architecture using diagrams and code snippets.

Source code of a working version can be found in in GitHub.

Chapter 6

SHOR'S ALGORITHM LOGICAL ANALYSIS

6.1 Q# Implementation

In order to take advantage of the tools built around Q#, we use a modified implementation of Shor's algorithm found in Microsoft's quantum samples GitHub repository.

**ToDo: Add reference to Microsoft's quantum samples repository.*

**ToDo: Breakdown the implementation into different sections and describe each one (similar to what is done in the "Learn Quantum Computing with Python and Q#" book).*

The following Q# code presents a top-level implementation of Shor's algorithm.

```
@EntryPoint()
operation FactorSemiprimeInteger(N : Int) : (Int, Int) {

    // Check the most trivial case where N is pair.
    if (N % 2 == 0) {
        return (2, N / 2);
    }

    mutable factors = (1, 1);
    mutable foundFactors = false;
    repeat {

        // Start by guessing a coprime to N.
        let coprimeGuess = DrawRandomInt(1, N - 1);
```

```

// If the guess number is a coprime, use a quantum algorithm for period finding
// Otherwise, the GCD between N and the coprime guess number is one of the factors
if (IsCoprimeI(N, coprimeGuess)) {
    let period = EstimatePeriod(N, coprimeGuess);
    set (foundFactors, factors) = CalculateFactorsFromPeriod(N, coprimeGuess, period);
} else {
    let gcd = GreatestCommonDivisorI(N, coprimeGuess);
    set (foundFactors, factors) = (true, (gcd, N / gcd));
}
}
until foundFactors

return factors;
}

```

6.2 Quantum Subroutine

**ToDo: Show the circuit representation of the quantum subroutine.*

The following Q# code implements the period finding quantum subroutine:

```

@EntryPoint()
operation EstimatePeriodInstance(N : Int, a : Int) : (Bool, Int) {

    // Prepare eigenstate register.
    let bitSize = BitSizeI(N);
    use eigenstateRegister = Qubit[bitSize];
    let eigenstateRegisterLE = LittleEndian(eigenstateRegister);
    ApplyXorInPlace(1, eigenstateRegisterLE);
}

```

```

// Prepare phase register.
let bitsPrecision = 2 * bitSize + 1;
use phaseRegister = Qubit[bitsPrecision];
let phaseRegisterLE = LittleEndian(phaseRegister);

// Prepare oracle for quantum phase estimation.
let oracle = DiscreteOracle(ApplyOrderFindingOracle(N, a, -, -));

// Execute quantum phase estimation.
QuantumPhaseEstimation(oracle, eigenstateRegisterLE!, LittleEndianAsB

let phaseEstimate = MeasureInteger(phaseRegisterLE);

// Reset qubit registers
ResetAll(eigenstateRegister);

// Return period calculation based on estimated phase.
return CalculatePeriodFromPhaseEstimate(N, bitsPrecision, phaseEstimate
}

```

***ToDo:** Explain the following

- Resources Metrics: Describe the values obtained from the resources estimator (gate count, runtime, accumulated error), and how they are calculated.
- Gate Decomposition: Describe why logical-level gates have to be decomposed into physical-level gates.
- Limitations: Describe the limitations that this resources estimation has in regards to runtime (sum of the runtimes of individual gates rather than the critical path), and

types of computations (trouble with mixed states).

Chapter 7

TRAPPED-IONS PHYSICAL PLATFORM

Trapped ions is one of the most promising approaches to the physical implementation of a quantum computer[5]. The basic requirements for a universal quantum computer, as outlined by David DiVicenzo[7], have been demonstrated with trapped ions, and a few companies are using this approach to build their quantum computers (e.g. IonQ [3], Honeywell [2]).

7.1 Platform Characteristics

In this physical platform, qubits are ions confined and suspended in free space using electromagnetic fields, and its internal electronic states are used as qubit states $|0\rangle$ and $|1\rangle$. Initialization of the qubits is performed by laser manipulation. State $|0\rangle$ is a long-lived ground state and state $|1\rangle$ can be prepared by optically pumping the ion to an auxiliary state $|e\rangle_{SP}$ that rapidly decays into state $|1\rangle$ as shown in figure 7.1.

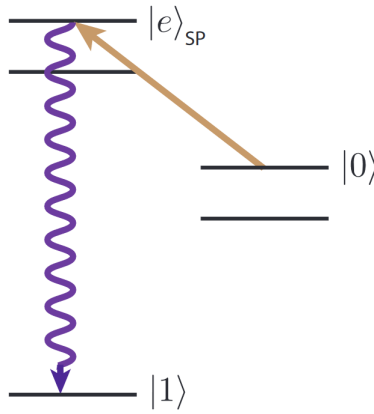


Figure 7.1: Qubit initialization [5]

As shown in figure 7.2, qubit readout is done by using a resonant laser that couples the $|1\rangle$ state to a $|e\rangle_R$ state which scatters many photons that can be collected by a detector. When the ion is in state $|0\rangle$, it does not interact with the laser so no photons are emitted and the image produced by the detector is dark.




Figure 7.2: Qubit readout [5]

A universal gate set is achieved by providing two qubit manipulation mechanisms:

- Arbitrary single qubit rotations: laser or microwave drives applied to the ions allow arbitrary and high fidelity single qubit rotations to be performed.
- An entangling operation: motional modes of two or more ions are used as a bus for transferring quantum information among ions.

Single qubit gate times are in the order of a few microseconds while two qubit gate times typically take between tens and hundreds of microseconds. Ion coherence times range from 0.2 seconds in optical qubits to up to 600 seconds for hyperfine qubits. Long coherence times relative to gate times fulfill the remaining criteria for a universal quantum computer.

7.2 Native Gates

The native single qubit gate[8] in this physical platform is defined as:

$$R(\theta, \phi) = \begin{bmatrix} \cos \frac{\theta}{2} & -ie^{-i\phi} \sin \frac{\theta}{2} \\ -ie^{-i\phi} \sin \frac{\theta}{2} & \cos \frac{\theta}{2} \end{bmatrix}$$

Rotations about the X-axis ($R_x(\theta)$) are achieved by setting $\phi = 0$. Rotations about the Y-axis ($R_y(\theta)$) are achieved by setting $\phi = \frac{\pi}{2}$. Rotations about the Z-axis ($R_z(\theta)$) are achieved by three rotations about axes in the XY plane as shown in figure 7.3:

$$\boxed{R_z(\theta)} = \boxed{R_y(\frac{\pi}{2})} \boxed{R_x(\theta)} \boxed{R_y(-\frac{\pi}{2})}$$

Figure 7.3: Rz gate [8] decomposition

Note that Pauli gates can be constructed from rotations around the X, Y and Z axis:

- $X = \imath R_x(\pi)$
- $Y = \imath R_y(\pi)$
- $Z = \imath R_z(\pi)$

Another widely used quantum gate is the Hadamard gate, which can be also be decomposed from rotations around the X and Y axis[1]:

$$H = R_x(\pi)R_y(\frac{\pi}{2})$$

The native two qubit entangling gate[8] in this physical platform is defined as:

$$XX(\chi) = \begin{bmatrix} \cos \chi & 0 & 0 & -\imath \sin \chi \\ 0 & \cos \chi & -\imath \sin \chi & 0 \\ 0 & -\imath \sin \chi & \cos \chi & 0 \\ -\imath \sin \chi & 0 & 0 & \cos \chi \end{bmatrix}$$

The CNOT gate, which is more commonly used as an entangling gate when describing quantum algorithms, can be constructed using the $XX(\chi)$ and $R(\theta, \phi)$ gates as shown in figure 7.4:

Using the results demonstrated by C. J. Ballance et al. [4], the gate times and fidelities in this physical platform are the following:

- Single qubit arbitrary rotation gate ($R(\theta, \phi)$):

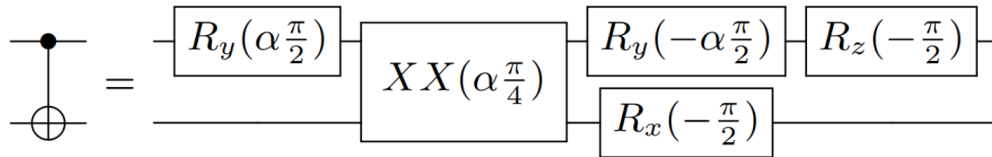


Figure 7.4: CNOT gate [8] decomposition where $\alpha = \text{sgn}(\chi)$

- Time: $7.5 \mu s$
- Fidelity: 0.99993
- Two qubit entangling gate ($XX(\chi)$): .
 - Time: $100 \mu s$
 - Fidelity: 0.999

7.3 Resources Estimation Analysis

*ToDo: Show (using tables and/or plots) how resources escalate as the size and pattern of the input changes.

7.4 Analysis of Execution in NISQ Devices

*ToDo: Analyze what would be the maximum input size that can be successfully run on a NISQ device based on this platform.

7.5 Analysis of Execution of Algorithm for Input of Specific Size

*ToDo: Use a resource estimator to determine the characteristics that a device should have to run the algorithm for a specific input size, and determine what would be the runtime.

Chapter 8

SUPERCONDUCTING PHYSICAL PLATFORM

*ToDo: Briefly describe this quantum computing platform.

8.1 *Native Gates and Platform Characteristics*

*ToDo: Enumerate the native gates that this platform implements, its characteristics (fidelity, gate time), and how logical gates are implemented (using circuits to illustrate them).

8.2 *Resources Estimation Analysis*

*ToDo: Show (using tables and/or plots) how resources escalate as the size and pattern of the input changes.

8.3 *Analysis of Execution in NISQ Devices*

*ToDo: Analyze what would be the maximum input size that can be successfully run on a NISQ device based on this platform.

8.4 *Analysis of Execution of Algorithm for Input of Specific Size*

*ToDo: Use a resource estimator to determine the characteristics that a device should have to run the algorithm for a specific input size, and determine what would be the runtime.

Chapter 9

PHYSICAL PLATFORMS COMPARISON

*ToDo: Compare the results obtained from both hardware platforms and comment on the insights obtained.

BIBLIOGRAPHY

- [1] Hadamard gate. <https://www.quantum-inspire.com/kbase/hadamard/>. Accessed: 2022-02-25.
- [2] Honeywell systemmodel h1. <https://www.honeywell.com/us/en/news/2020/10/get-to-know-honeywell-s-latest-quantum-computer-system-model-h1>. Accessed: 2022-02-25.
- [3] Ionq technology. <https://ionq.com/technology>. Accessed: 2022-02-25.
- [4] C. J. Ballance, T. P. Harty, N. M. Linke, M. A. Sepiol, and D. M. Lucas. High-fidelity quantum logic gates using trapped-ion hyperfine qubits. *Phys. Rev. Lett.*, 117:060504, Aug 2016.
- [5] Colin D. Bruzewicz, John Chiaverini, Robert McConnell, and Jeremy M. Sage. Trapped-ion quantum computing: Progress and challenges. *Applied Physics Reviews*, 6(2):021314, Jun 2019.
- [6] Cirq Developers. Cirq, May 2021. See full list of authors on Github: <https://github.com/quantumlib/Cirq/graphs/contributors>.
- [7] David P. DiVincenzo. The physical implementation of quantum computation. *Fortschritte der Physik*, 48(9–11):771–783, Sep 2000.
- [8] C. Figgatt, D. Maslov, K. A. Landsman, N. M. Linke, S. Debnath, and C. Monroe. Complete 3-qubit grover search on a programmable quantum computer. *Nature Communications*, 8(1), Dec 2017.
- [9] Mathias Soeken, Mariia Mykhailova, Vadym Kliuchnikov, Christopher Granade, and Alexander Vaschillo. A resource estimation and verification workflow in q#. *Design, Automation and Test in Europe Conference*, 2021.
- [10] Krysta Svore, Alan Geller, Matthias Troyer, John Azariah, Christopher Granade, Bettina Heim, Vadym Kliuchnikov, Mariia Mykhailova, Andres Paz, and Martin Roetteler. Q#: Enabling scalable quantum computing and development with a high-level dsl. In *Proceedings of the Real World Domain Specific Languages Workshop 2018*, RWDSL2018, New York, NY, USA, 2018. Association for Computing Machinery.

- [11] Matthew Treinish, Jay Gambetta, Paul Nation, Paul Kassebaum, qiskit bot, Diego M. Rodríguez, Salvador de la Puente González, Shaohan Hu, Kevin Krsulich, Laura Zdan-ski, Jessie Yu, David McKay, Juan Gomez, Lauren Capelluto, Travis-S-IBM, Julien Gacon, Ashish Panigrahi, lerongil, Rafey Iqbal Rahman, Steve Wood, Luciano Bello, Divyanshu Singh, Drew, Joachim Schwarm, MELVIN GEORGE, Manoel Marques, Omar Costa Hamido, RohitMidha23, Sean Dague, and Shelly Garion. Qiskit/qiskit: Qiskit 0.26.2, May 2021.

Appendix A

IMPLEMENTATION OF GENERIC PHYSICAL RESOURCES ESTIMATION FRAMEWORK

*ToDo: Add source code that implements the physical resources estimation framework.

Source code can also be found in GitHub.