

The CeTZ package

Johannes Wolf and fenjalien
<https://github.com/johannes-wolf/typst-canvas>

Contents

1. Introduction	3
2. Usage	3
2.1. Argument Types	3
2.2. Anchors	3
3. Draw Function Reference	4
3.1. Canvas	4
3.2. Styling	4
3.3. Elements	6
3.3.1. Line	6
3.3.2. Rectangle	6
3.3.3. Arc	7
3.3.4. Circle	7
3.3.5. Bezier	8
3.3.6. Content	8
3.3.7. Grid	9
3.3.8. Mark	9
3.4. Path Transformations	10
3.4.1. Merge-Path	10
3.5. Groups	10
3.5.1. Anchor	11
3.5.2. Copy-Anchors	11
3.6. Transformations	11
3.6.1. Translate	11
3.6.2. Set Origin	12
3.6.3. Set Viewport	12
3.6.4. Rotate	12
3.6.5. Scale	12
4. Coordinate Systems	13
4.1. XYZ	13
4.2. Previous	13
4.3. Relative	14
4.4. Polar	14
4.5. Barycentric	14
4.6. Anchor	16
4.7. Tangent	16
4.8. Perpendicular	17
4.9. Interpolation	17
4.10. Function	19
5. Utility	19
5.1. For-Each-Anchor	19
6. Libraries	20
6.1. Tree	20

6.1.1. Node	21
6.2. Plot	21
6.2.1. Plot	21
6.2.2. Plot-Add	22
6.3. Chart	23
6.3.1. Barchart	23
6.3.2. Examples	23
6.4. Palette	24

1. Introduction

This package provides a way to draw stuff using a similar API to [Processing](#) but with relative coordinates and anchors from [TikZ](#). You also won't have to worry about accidentally drawing over other content as the canvas will automatically resize. And remember: up is positive!

The name CeTZ is a recursive acronym for “CeTZ, ein Typst Zeichenpaket” (german for “CeTZ, a Typst drawing package”) and is pronounced like the word “Cats”.

2. Usage

This is the minimal starting point:

```
#import "@local/cetz:0.0.1"
#cetx.canvas({
  import cetx.draw: *
  ...
})
```

Note that draw functions are imported inside the scope of the canvas block. This is recommended as draw functions override Typst's functions such as `line`.

2.1. Argument Types


Argument types in this document are formatted in monospace and encased in angle brackets `<>`. Types such as `<integer>` and `<content>` are the same as Typst but additional are required:

<coordinate> Any coordinate system. See Section 4.
<number> `<integer>` or `<float>`

2.2. Anchors


Anchors are named positions relative to named elements.

To use an anchor of an element, you must give the element a name using the `name` argument.

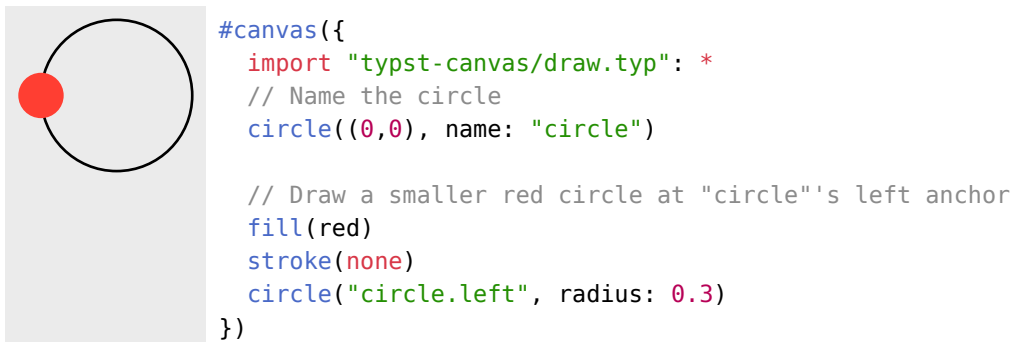

All elements will have default anchors based on their bounding box, they are: center, left, right, above/top and below/bottom, top-left, top-right, bottom-left, bottom-right. Some elements will have their own anchors.

Elements can be placed relative to their own anchors.

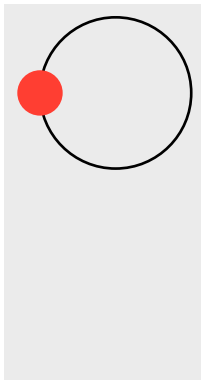

```
#canvas({
  import "typst-canvas/draw.typ": *
  // An element does not have to be named
  // in order to use its own anchors.
  circle((0,0), anchor: "left")

  // Draw a smaller red circle at the origin
  fill(red)
  stroke(none)
  circle((0,0), radius: 0.3)
})
```

3. Draw Function Reference

3.1. Canvas

`#canvas`(background: `none`, length: `1cm`, debug: `false`, body)

background <color> (default: none)

A color to be used for the background of the canvas.

length <length> (default: 1cm)

Used to specify what 1 coordinate unit is.

debug <bool> (default: false)

Shows the bounding boxes of each element when `true`.

body

A code block in which functions from `draw.typ` have been called.

3.2. Styling

You can style draw elements by passing the relevant named arguments to their draw functions. All elements have stroke and fill styling unless said otherwise.


fill <color> or <none> (default: none)

How to fill the draw element.

stroke <none> or <auto> or <length> (default: black + 1pt)


or <color> or <dictionary> or <stroke>

How to stroke the border or the path of the draw element. See Typst's line documentation for more details: <https://typst.app/docs/reference/visualize/line/#parameters-stroke>



```
#cetz.canvas({
  import cetz.draw: *
  // Draws a red circle with a blue border
  circle((0, 0), fill: red, stroke: blue)
  // Draws a green line
  line((0, 0), (1, 1), stroke: green)
})
```

Instead of having to specify the same styling for each time you want to draw an element, you can use the `set-style` function to change the style for all elements after it. You can still pass styling to a draw function to override what has been set with `set-style`. You can also use the `fill()` and `stroke()` functions as a shorthand to set the fill and stroke respectively.

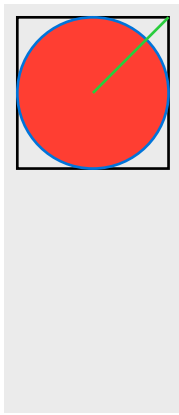


```
#cetz.canvas({
  import cetz.draw: *
  // Draws an empty square with a black border
  rect((-1, -1), (1, 1))

  // Sets the global style to have a fill of red and a stroke of blue
  set-style(stroke: blue, fill: red)
  circle((0,0))


  // Draws a green line despite the global stroke is blue
  line((0,0), (1,1), stroke: green)
})
```

When using a dictionary for a style, it is important to note that they update each other instead of overriding the entire option like a non-dictionary value would do. For example, if the stroke is set to (paint: red, thickness: 5pt) and you pass (paint: blue), the stroke would become (paint: blue, thickness: 5pt).



```
#canvas({
  import cetz.draw: *
  // Sets the stroke to red with a thickness of 5pt
  set-style(stroke: (paint: red, thickness: 5pt))
  // Draws a line with the global stroke
  line((0,0), (1,0))
  // Draws a blue line with a thickness of 5pt because dictionaries update the
  style
  line((0,0), (1,1), stroke: (paint: blue))
  // Draws a yellow line with a thickness of 1pt because other values override
  the style
  line((0,0), (0,1), stroke: yellow)
})
```

You can also specify styling for each type of element. Note that dictionary values will still update with its global value, the full hierarchy is function > element type > global. When the value of a style is auto, it will become exactly its parent style.

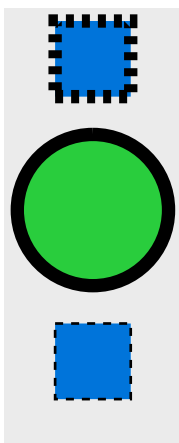

```
#canvas({
  import cetz.draw: *
  set-style(
    // Global fill and stroke
    fill: green,
    stroke: (thickness: 5pt),
    // Stroke and fill for only rectangles
    rect: (stroke: (dash: "dashed"), fill: blue),
  )
  rect((0,0), (1,1))
  circle((0.5, -1.5))
  rect((0,-3), (1, -4), stroke: (thickness: 1pt))
})
```



3.3. Elements

3.3.1. Line

Draws a line (a direct path between two points) to the canvas. If multiple coordinates are given, a line is drawn between each consecutive one.

```
#line(..pts, name: none, close: false, ..styling)
```

..pts <arguments of coordinates>

Coordinates to draw the lines between. A minimum of two must be given.


name <string>

Sets the name of element for use with anchors.

close <bool>

(default: **false**)

When true a straight line is drawn from the last coordinate to the first coordinate, essentially “closing” the shape.

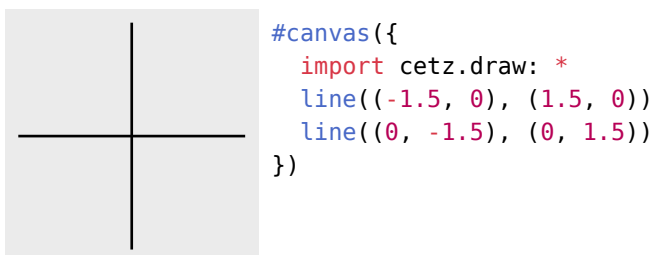

Styling

mark <dictionary> or <auto>

(default: **auto**)

The styling to apply to marks on the line, see Section 3.3.8.

3.3.2. Rectangle

Draws a rectangle to the canvas.


```
#rect(a, b, name: none, anchor: none, ..styling)
```

a <coordinate>

The top left coordinate of the rectangle.

b <coordinate>

The bottom right coordinate of the rectangle.

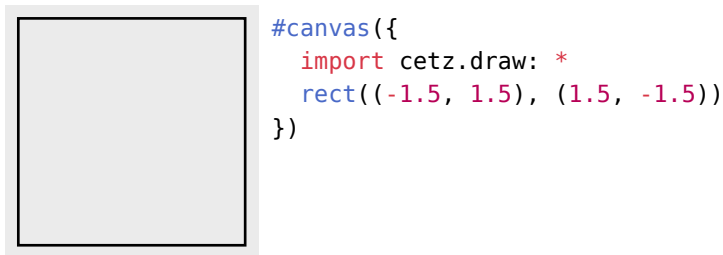

3.3.3. Arc

Draws an arc to the canvas. Exactly two of the three values `start`, `stop`, and `delta` should be defined. You can set the radius of the arc by setting the `radius` style option. You can also draw an elliptical arc by passing an array where the first number is the radius in the x direction and the second number is the radius in the y direction.

```
#arc(position, start: auto, stop: auto, delta: auto, name: none, anchor: none,)
```

position <coordinate>

The coordinate to start drawing the arc from.

start <angle>


The angle to start the arc.

stop <angle>

The angle to stop the arc.

delta <angle>

The angle that is added to start or removed from stop.

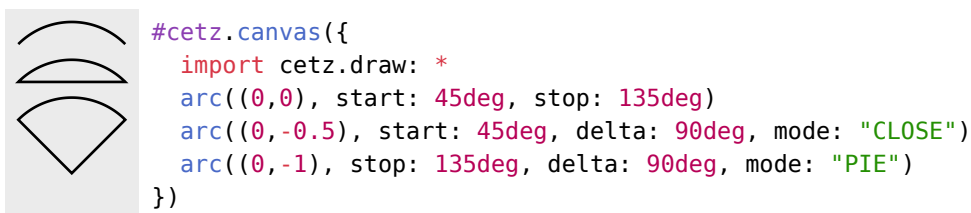

Styling

radius <number> or <array>

(default: 1)

The radius of the arc. This is also a global style shared with `circle`!

mode <string>

(default: "OPEN")

The options are "OPEN" (the default, just the arc), "CLOSE" (a circular segment) and "PIE" (a circular sector).


3.3.4. Circle

Draws a circle to the canvas. An ellipse can be drawn by passing an array of length two to the `radius` argument to specify its x and y radii.

```
#circle(center, name: none, anchor: none)
```

center <coordinate>

The coordinate of the circle's origin.



```
#cetz.canvas({
  import cetz.draw: *
  circle((0,0))
  // Draws an ellipse
  circle((0,-2), radius: (0.75, 0.5))
})
```

Styling

radius <number> or <length> or <array of <number> or <length>> (default: 1)

The circle's radius. If an array is given an ellipse will be drawn where the first item is the x radius and the second item is the y radius. This is also a global style shared with arc!

3.3.5. Bezier

Draws a bezier curve with 1 or 2 control points to the canvas.

```
#bezier(start, end, ..ctrl-style)
```

start <coordinate>


The coordinate to start drawing the bezier curve from.

end <coordinate>

The coordinate to draw the bezier curve to.

..ctrl-style <coordinates>

An argument sink for the control points and styles. Its positional part should be of one or two coordinates to specify the control points of the bezier curve.



```
#cetz.canvas({
  import cetz.draw: *
  bezier((0, 0), (2, 0), (1, 1))
  bezier((0, -1), (2, -1), (.5, -2), (1.5, 0))
})
```

3.3.6. Content

Draws a content block to the canvas.

```
#content(pt, ct, angle: 0deg, name: none, anchor: none)
```

pt <coordinate>

The coordinate of the center of the content block.

ct <content>


The content block.

angle <angle|coordinate>

The angle to rotate the content block by. Uses Typst's rotate function. If passed a coordinate, the angle between pt and angle is used.



```
#cetz.canvas({
  import cetz.draw: *
  content((0,0), [Hello World!])
})
```



```
#cetz.canvas({
  import cetz.draw: *
  let (a, b) = ((1,0), (3,1))

  line(a, b)
  content((a, .5, b), angle: b, [Text on a line], anchor: "bottom")
})
```

Styling

This draw element is not affected by fill or stroke styling.

padding <length> (default: 0pt)

3.3.7. Grid

Draws a grid to the canvas.

```
#grid(from, to, step: 1, help-lines: false, name: none)
```

from <coordinate>

Specifies the bottom left position of the grid.

to <coordinate>


Specifies the top right position of the grid.

step <number> or <length> or <array of <number> or <length>>

The stepping in both x and y directions. An array can be given to specify the stepping for each direction.

help-lines <bool> (default: false)

Styles the grid to look “subdued” by using thin gray lines (0.2pt + gray)




```
#cetz.canvas({
  import cetz.draw: *
  grid((0,0), (3,2), help-lines: true)
})
```

3.3.8. Mark

Draws a mark or “arrow head”, its styling influences marks being drawn on paths (e.g. lines).

```
#mark(from, to, ..style)
```

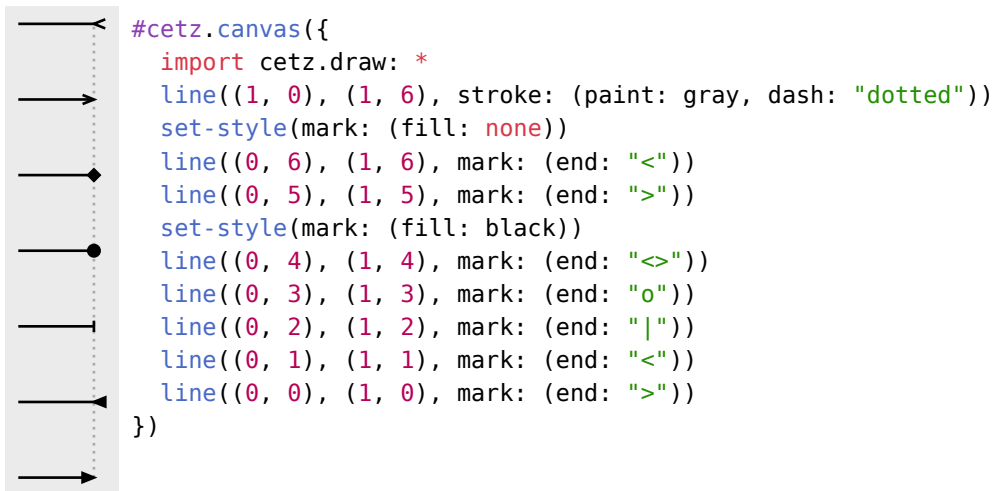

Styling

symbol <string> (default: >)

The type of mark to draw when using the mark function.

start <string>

The type of mark to draw at the start of a path.

end <string>

The type of mark to draw at the end of a path.

size <number>

(default: 0.15)

The size of the marks.

3.4. Path Transformations

3.4.1. Merge-Path

```
#merge-path(body, ..style, close: false, name: none)
```

body <objects>


Elements to merge as one path

close <bool>

Auto close the path using a straight line

name <string>


Element name

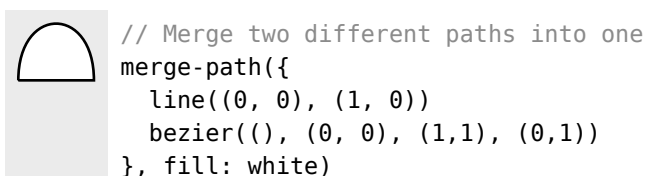

3.5. Groups

Groups allow scoping context changes such as setting stroke-style, fill and transformations.

```
#group(content, name: none)
```



```
// Create group
group({
  stroke(5pt)
  scale(.5); rotate(45deg)
  rect((-1,-1),(1,1))
})
rect((-1,-1),(1,1))
```

3.5.1. Anchor

Defines a new anchor inside a group.


`anchor(name, coordinate)`

name <string>

Name of the anchor

coordinate <coordinate>

Position



```
group(name: "g", {
  circle((0,0))
  anchor("x", (.4,.1))
})
circle("g.x", radius: .1)
```

3.5.2. Copy-Anchors

Copy all anchors of element into current group.


`copy-anchors(element, filter: none)`

element <string>

Target element name

filter <array|none>

List of anchor names to copy, all if empty



```
group(name: "g", {
  rotate(45deg)
  rect((0,0), (1,1), name: "r")
  copy-anchors("r")
})
circle("g.top", radius: .1)
```

3.6. Transformations

All transformation functions push a transformation matrix onto the current transform stack. To apply transformations scoped use a `group(...)` object.

Transformation matrices get multiplied in the following order:

$$M_{\text{world}} = M_{\text{world}} \cdot M_{\text{local}}$$

3.6.1. Translate


`#translate(coordinate, pre: true)`

coordinate <vector>

Coordinates to translate for


pre <bool>

Specify multiplication order. If `true`, translation is multiplied in the order $M_{\text{local}} \cdot M_{\text{world}}$, otherwise the order $M_{\text{world}} \cdot M_{\text{local}}$ is used.

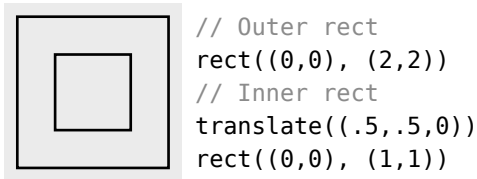

3.6.2. Set Origin

`set-origin(position)`

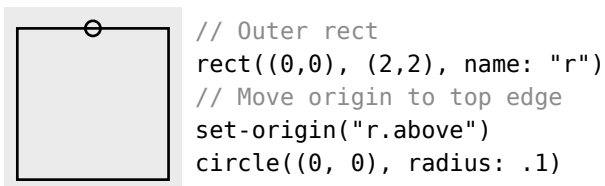

3.6.3. Set Viewport

`set-viewport(from, to, bounds: (1, 1, 1))`

from <coordinate>


First (bottom-right) coordinate of the viewport rect.

to <coordinate>

Second (top-left) coordinate of the viewport rect.

bounds <vector>


Viewport inner bounds. Negative bounds flip sides.

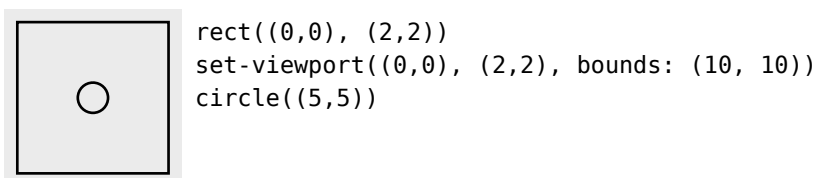

3.6.4. Rotate

`rotate(axis-dictionary)`


`rotate(z-angle)`

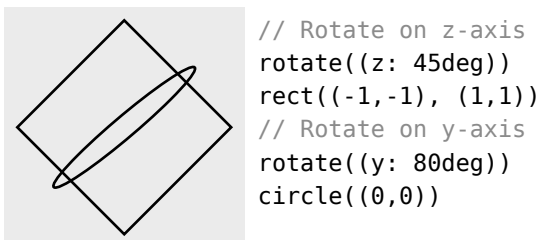

3.6.5. Scale

`#scale(axis-dictionary)`

`#scale(factor)`



```
// Scale x-axis
scale((x: 1.8))
circle((0,0))
```

4. Coordinate Systems

A *coordinate* is a position on the canvas on which the picture is drawn. They take the form of dictionaries and the following sub-sections define the key value pairs for each system. Some systems have a more implicit form as an array of values and CeTZ attempts to infer the system based on the element types.

4.1. XYZ

Defines a point x units right, y units upward, and z units away.

x <number> or <length> (default: 0)

The number of units in the x direction.

y <number> or <length> (default: 0)

The number of units in the y direction.

z <number> or <length> (default: 0)

The number of units in the z direction.

The implicit form can be given as an array of two or three <number> or <length>, as in (x,y) and (x,y,z).




```
#import "@local/cetz:0.0.1"
#cetiz.canvas({
  import cetiz.draw: *

  line((0,0), (x: 1))
  line((0,0), (y: 1))
  line((0,0), (z: 1))

  // Implicit form
  line((0, -2), (1, -2))
  line((0, -2), (0, -1, 0))
  line((0, -2), (0, -2, 1))
})
```

4.2. Previous

Use this to reference the position of the previous coordinate passed to a draw function. This will never reference the position of a coordinate used in to define another coordinate. It takes the form of an empty array (). The previous position initially will be (0, 0, 0).



```
#import "@local/cetz:0.0.1"
#cetiz.canvas({
  import cetiz.draw: *
  line((0,0), (1, 1))

  // Draws a circle at (1,1)
  circle(())
})
```

4.3. Relative

Places the given coordinate relative to the previous coordinate. Or in other words, for the given coordinate, the previous coordinate will be used as the origin. Another coordinate can be given to act as the previous coordinate instead.

rel <coordinate>

The coordinate to be place relative to the previous coordinate.

update <bool>

(default: **true**)


When false the previous position will not be updated.

to <coordinate>

(default: ())

The coordinate to treat as the previous coordinate.

In the example below, the red circle is placed one unit below the blue circle. If the blue circle was to be moved to a different position, the red circle will move with the blue circle to stay one unit below.

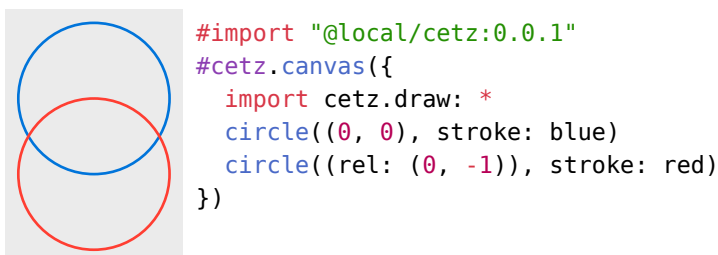

4.4. Polar


Defines a point a radius distance away from the origin at the given angle. An angle of zero degrees. An angle of zero degrees is to the right, a degree of 90 is upward.

angle <angle>


The angle of the coordinate.

radius <number> or <length> or <array of length or number>

The distance from the origin. An array can be given, in the form (x, y) to define the x and y radii of an ellipse instead of a circle.

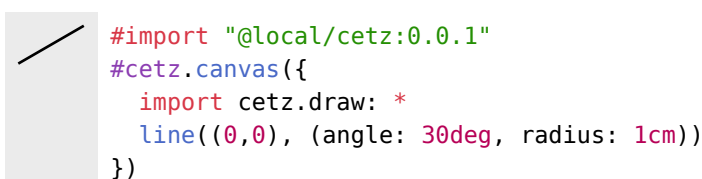

The implicit form is an array of the angle then the radius (angle, radius) or (angle, (x, y)).

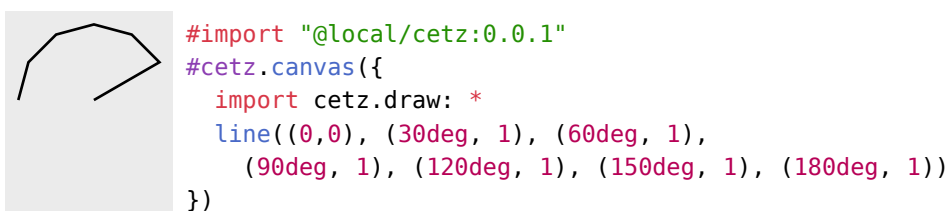


4.5. Barycentric

In the barycentric coordinate system a point is expressed as the linear combination of multiple vectors. The idea is that you specify vectors v_1, v_2, \dots, v_n and numbers $\alpha_1, \alpha_2, \dots, \alpha_n$. Then the barycentric coordinate specified by these vectors and numbers is

$$\frac{\alpha_1 v_1 + \alpha_2 v_1 + \cdots + \alpha_n v_n}{\alpha_1 + \alpha_2 + \cdots + \alpha_n}$$

bary <dictionary>

A dictionary where the key is a named element and the value is a <float>. The center anchor of the named element is used as v and the value is used as a .

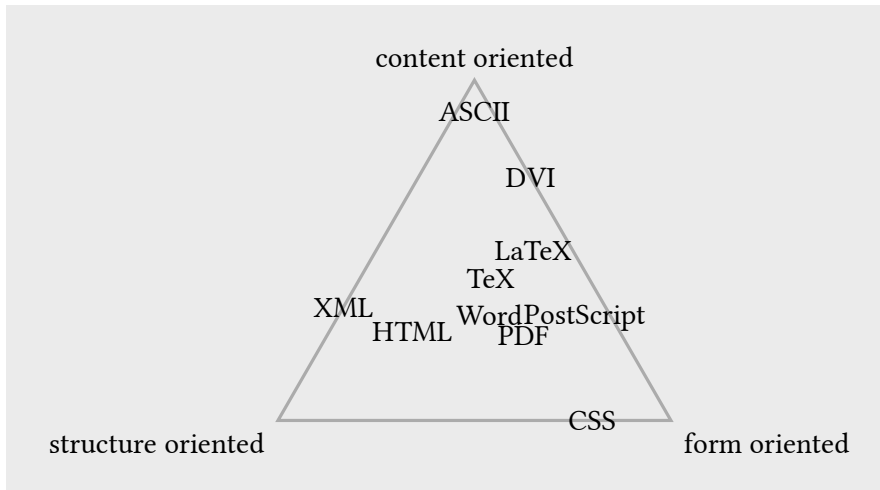

```
#import "@local/cetz:0.0.1"
#cetx.canvas({
  import cetx.draw: *
  circle((90deg, 3), radius: 0, name: "content")
  circle((210deg, 3), radius: 0, name: "structure")
  circle((-30deg, 3), radius: 0, name: "form")

  for (c, a) in (
    ("content", "bottom"),
    ("structure", "top-right"),
    ("form", "top-left")
  ) {
    content(c, box(c + " oriented", inset: 5pt), anchor: a)
  }

  stroke(gray + 1.2pt)
  line("content", "structure", "form", close: true)

  for (c, s, f, cont) in (
    (0.5, 0.1, 1, "PostScript"),
    (1, 0, 0.4, "DVI"),
    (0.5, 0.5, 1, "PDF"),
    (0, 0.25, 1, "CSS"),
    (0.5, 1, 0, "XML"),
    (0.5, 1, 0.4, "HTML"),
    (1, 0.2, 0.8, "LaTeX"),
    (1, 0.6, 0.8, "TeX"),
    (0.8, 0.8, 1, "Word"),
    (1, 0.05, 0.05, "ASCII")
  ) {
    content((bary: (content: c, structure: s, form: f)), cont)
  }
})
```

4.6. Anchor

Defines a point relative to a named element using anchors, see Section 2.2.


name <string>

The name of the element that you wish to use to specify a coordinate.

anchor <string>

An anchor of the element. If one is not given a default anchor will be used. On most elements this is center but it can be different.

You can also use implicit syntax of a dot separated string in the form "name.anchor".



```
#import "@local/cetz:0.0.1"
#cetz.canvas({
  import cetz.draw: *
  line((0,0), (3,2), name: "line")
  circle("line.end", name: "circle")
  rect("line.start", "circle.left")
})
```

4.7. Tangent

This system allows you to compute the point that lies tangent to a shape. In detail, consider an element and a point. Now draw a straight line from the point so that it “touches” the element (more formally, so that it is *tangent* to this element). The point where the line touches the shape is the point referred to by this coordinate system.

element <string>

The name of the element on whose border the tangent should lie.


point <coordinate>

The point through which the tangent should go.

solution <integer>

Which solution should be used if there are more than one.

A special algorithm is needed in order to compute the tangent for a given shape. Currently it does this by assuming the distance between the center and top anchor (See Section 2.2) is the radius of a circle.

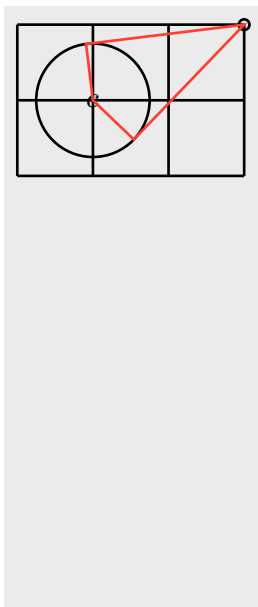

```
#import "@local/cetz:0.0.1"
#cetz.canvas({
  import cetz.draw: *
  grid((0,0), (3,2), help-lines: true)

  circle((3,2), name: "a", radius: 2pt)
  circle((1,1), name: "c", radius: 0.75)
  content("c", $ c $)

  stroke(red)
  line(
    "a",
    (element: "c", point: "a", solution: 1),
    "c",
    (node: "c", point: "a", solution: 2),
    close: true
  )
})
```


4.8. Perpendicular

Can be used to find the intersection of a vertical line going through a point p and a horizontal line going through some other point q .


horizontal <coordinate>

The coordinate through which the horizontal line passes.

vertical <coordinate>

The coordinate through which the vertical line passes.

You can use the implicit syntax of (horizontal, "-|", vertical) or (vertical, "|-", horizontal)

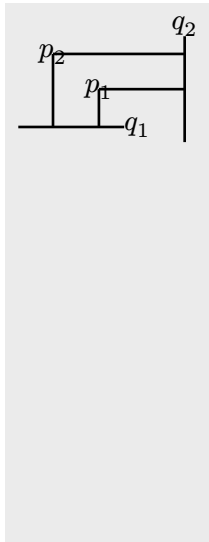

```
#import "@local/cetz:0.0.1"
#cetz.canvas({
  import cetz.draw: *
  content((30deg, 1), $ p_1 $, name: "p1")
  content((75deg, 1), $ p_2 $, name: "p2")

  line((-0.2, 0), (1.2, 0), name: "xline")
  content("xline.end", $ q_1 $, anchor: "left")
  line((2, -0.2), (2, 1.2), name: "yline")
  content("yline.end", $ q_2 $, anchor: "bottom")

  line("p1", (horizontal: ()), vertical: "xline")
  line("p2", (horizontal: ()), vertical: "xline")
  line("p1", (vertical: ()), horizontal: "yline")
  line("p2", (vertical: ()), horizontal: "yline")
})
```

4.9. Interpolation

Use this to linearly interpolate between two coordinates a and b with a given factor number. If number is a <length> the position will be at the given distance away from a towards b . An angle can also be given for the general meaning: “First consider the line from a to b . Then rotate this line by angle around point a . Then the two endpoints of this line will be a and some point c . Use this point c for the subsequent computation.”

a <coordinate>

The coordinate to interpolate from.

b <coordinate>

The coordinate to interpolate to.

number <number> or <length>

The factor to interpolate by or the distance away from a towards b .

angle <angle>


(default: 0deg)

abs <bool>

(default: false)

Interpret number as absolute distance, instead of a factor.


Can be used implicitly as an array in the form (a , number, b) or (a , number, angle, b).

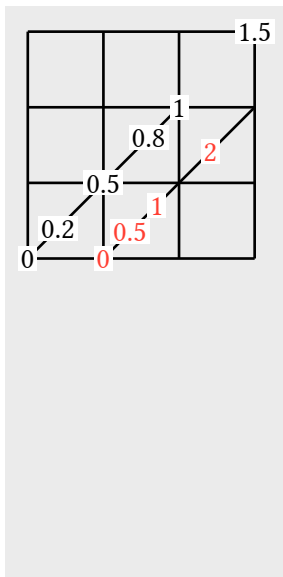


```
#import "@local/cetz:0.0.1"
#ceztz.canvas({
  import cetz.draw: *
  grid((0,0), (3,3), help-lines: true)

  line((0,0), (2,2))
  for i in (0, 0.2, 0.5, 0.8, 1, 1.5) { /* Relative distance */
    content(((0,0), i, (2,2)),
      box(fill: white, inset: 1pt, [#i]))
  }

  line((1,0), (3,2))
  for i in (0, 0.5, 1, 2) { /* Absolute distance */
    content((a: (1,0), number: i, abs: true, b: (3,2)),
      box(fill: white, inset: 1pt, text(red, [#i])))
  }
})
```




```
#import "@local/cetz:0.0.1"
#ceztz.canvas({
  import cetz.draw: *
  grid((0,0), (3,3), help-lines: true)
  line((1,0), (3,2))
  line((1,0), ((1, 0), 1, 10deg, (3,2)))
  fill(red)
  stroke(none)
  circle(((1, 0), 0.5, 10deg, (3, 2)), radius: 2pt))
})
```

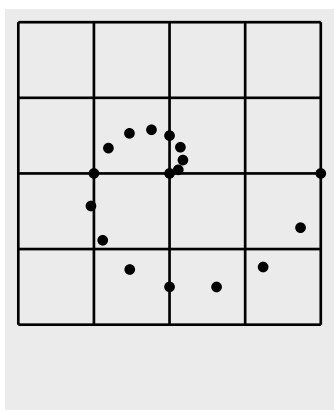


```
#import "@local/cetz:0.0.1"
#ceztz.canvas({
  import cetz.draw: *
  grid((0,0), (4,4), help-lines: true)

  fill(black)
  stroke(none)
  let n = 16
  for i in range(0, n+1) {
    circle(((2,2), i / 8, i * 22.5deg, (3,2)), radius: 2pt)
  }
})
```

You can even chain them together!

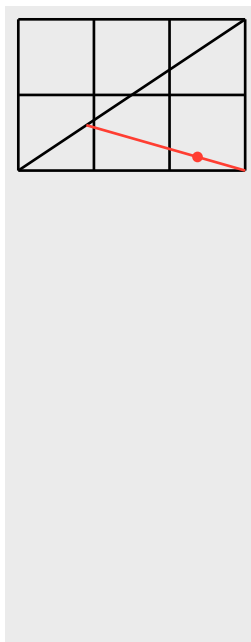

```
#import "@local/cetz:0.0.1"
#cetiz.canvas({
  import cetiz.draw: *
  grid((0,0), (3, 2), help-lines: true)
  line((0,0), (3,2))
  stroke(red)
  line(((0,0), 0.3, (3,2)), (3,0))
  fill(red)
  stroke(none)
  circle(
    (
      // a
      (((0, 0), 0.3, (3, 2))),
      0.7,
      (3,0)
    ),
    radius: 2pt
  )
})
```




```
#import "@local/cetz:0.0.1"
#cetiz.canvas({
  import cetiz.draw: *
  grid((0,0), (3, 2), help-lines: true)
  line((1,0), (3,2))
  for (l, c) in ((0cm, "0cm"), (1cm, "1cm"), (15mm, "15mm")) {
    content(((1,0), l, (3,2)), $ #c $)
  }
})
```

4.10. Function

An array where the first element is a function and the rest are coordinates will cause the function to be called with the resolved coordinates. The resolved coordinates have the same format as the implicit form of the 3-D XYZ coordinate system, Section 4.1.

The example below shows how to use this system to create an offset from an anchor, however this could easily be replaced with a relative coordinate with the `to` argument set, Section 4.3.



```
#import "@local/cetz:0.0.1"
#cetiz.canvas({
  import cetiz.draw: *
  circle((0, 0), name: "c")
  fill(red)
  circle((v => cetiz.vector.add(v, (0, -1)), "c.right"), radius: 0.3)
})
```

5. Utility

5.1. For-Each-Anchor


`#for-each-anchor`(node-name, callback)

node-name <string>

Target node name

callback <function>

Callback function acceptance the anchor name



```
// Label nodes anchors
rect((0, 0), (2,2), name: "my-rect")
for-each-anchor("my-rect", (name) => {
  if not name in ("above", "below", "default") {
    content((), box(inset: 1pt, fill: white, text(8pt, [#name])),
      angle: -45deg)
  }
})
```

6. Libraries

6.1. Tree

With the tree library, CeTZ provides a simple tree layout algorithm.

```
tree(root-node, draw-node: auto, draw-edge: auto,
  direction: "down", parent-position: "center", grow: 1,
  spread: 1, name: none, ..style)
```

root-node <node>

Tree root node, see Section 6.1.1

draw-node <function|none>

Node render callback (node, parent-name) => (draw, ..)

draw-edge <function|none>

Edge render callback (source-name, target-name, target-node) => (draw, ..)

direction <string>

Tree grow direction: "top", "bottom", "left" or "right"

parent-position <string>

Positioning of parent nodes: "begin", "center" or "end"

grow <float>

Direction grow factor

spread <float>


Sibling spread factor

name <string|none>

Object name


..style <style>

Draw style



```
import "tree.typ"

let data = ([Root], ([A], [AA], [AB]), ([B], [BA]))
tree.tree(data, content: (padding: .1), line: (stroke: blue))
```

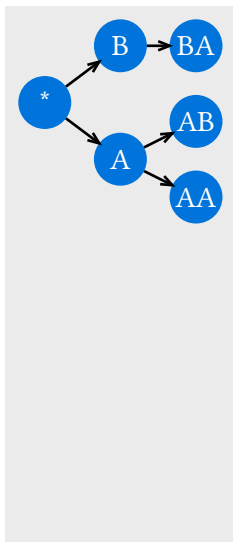

```
import "tree.typ"

let data = ([Root], ([\*], [AA], [AB]), ([B], [BA]))
tree.tree(data, content: (padding: .1), direction: "right",
  mark: (end: ">", fill: none),
  draw-node: (node, ..) => {
    circle(), radius: .35, fill: blue, stroke: none)
    content(), text(white, [#node.content])
  },
  draw-edge: (from, to, ..) => {
    let (a, b) = (from + ".center",
      to + ".center")

    draw.line((a: a, b: b, abs: true, number: .35),
      (a: b, b: a, abs: true, number: .35))
  })
```

6.1.1. Node

A tree node is an array of nodes. The first array item represents the current node, all following items are direct children of that node. The node itself can be of type content or dictionary with a key content.

6.2. Plot

The library plot of CeTZ allows plotting 2D data as linechart.

6.2.1. Plot

The plot function is an environment for plotting data.

```
plot(size: (width, height),
  axis-style: "scientific"
  ..options,
  body)
```

The ticks option dictionary supports the following keys:

size <array>

Size of the plot

axis-style <string|none>

Axis style, either “scientific” or “school-book”

..options <any>

Axis options in the form <axis-name>-<option>. The possible options are:

label The axis label

min Axis min. value

max Axis max. value

ticks List of tick values or value/label tuples

tick-step Tick step or none

minor-tick-step Minor tick step or none

decimals Number of tick label decimal digits

unit Tick label suffix

body <..>

Calls of `plot.add(..)`, see

6.2.2. Plot-Add

The `plot.add` function adds plotting data into a plot environment. It must be called from inside `plot({..})`.

If used with a callback, the domain must be specified!

```
add(domain: auto, hypograph: false, epigraph: false, fill: false,
    mark: none, mark-size: .2, mark-style: (:), samples: 100,
    style: (:), axes: ("x", "y"),
    data)
```

domain <array|auto>

Range of x for sampled data

hypograph <boolean>

Fill graph below function

epigraph <boolean>

Fill graph above function

fill <boolean>

Fill graph to zero

mark <string|none>

Mark symbol. Any of ("x", "o", "square", "triangle", "|", "-")

mark-size <float|none>

Size of mark symbol

mark-style <style|none>

Style used for drawing marks. Note that this inherits the plots style

style <style>

Style used for drawing the graph

samples <integer>


Number of samples to use (only if data is of type function)

axes <array>


Array of axis names to use

data <function|array>

Array of data points or function in the form $x \Rightarrow y$



```
plot.plot(size: (2,2), x-tick-step: 180, y-tick-step: 1,
    x-unit: $degree$, {
    plot.add(domain: (0, 360), x => calc.sin(x * 1deg))
})
```



```
plot.plot(size: (2,2), x-tick-step: 180, y-tick-step: 1,
          x-unit: $degree$, y-max: .5, {
  plot.add(domain: (0, 360), x => calc.sin(x * 1deg))
  plot.add(domain: (0, 360), x => calc.cos(x * 1deg),
           samples: 10, mark: "x", mark-style: (stroke: blue))
})
```

6.3. Chart

With the chart library it is easy to draw charts.

6.3.1. Barchart

`barchart`(size: (width, height))

data <array>

Data array of arrays or dictionaries

label-key <string|integer>

Data item key to access an items label

value-key <string|integer|array>

Data item key(s) to access an items value(s). For multi-value charts this must be an array of all keys, e.G. (`..range(1, 5)`)

mode <string>

Barchart mode, one of “basic”, “clustered” (bars next to each other), “stacked” (bar stacked) or “stacked100” (bars stacked but as percentage of their sum)

size <array>

The chart’s size. Height can be set to auto.

bar-width <float>

Width of a bar or cluster of bars, with 1 being leaving no gap between values.

bar-style <function|style>

Style of bars, accepts a function of the form `index => style`. You can use palettes from the `palette` library, see Section 6.4.

x-tick-step <float>

X axis tick step

x-ticks <array>

X axis ticks list, a list of tick values or value/label tuples

x-unit <content>

X axis tick label suffix

x-label <content|none>


X axis label

y-label <content|none>

Y axis label


6.3.2. Examples

6.3.2.1. Basic

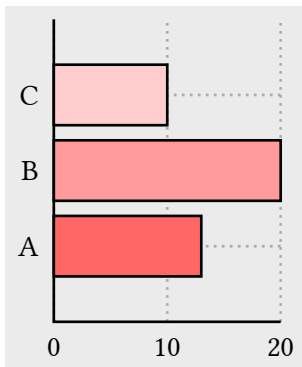


```
let data = (("A", 10), ("B", 20), ("C", 13))
chart.barchart(size: (3, auto), x-tick-step: 10, data)
```

6.3.2.2. Clustered

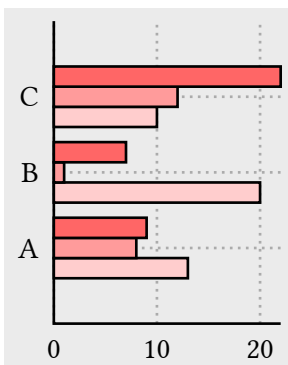

```
let data = (("A", 10, 12, 22), ("B", 20, 1, 7), ("C", 13, 8, 9))
chart.barchart(size: (3, auto), mode: "clustered",
  x-tick-step: 10, value-key: (..range(1, 4)), data)
```

6.3.2.3. Stacked

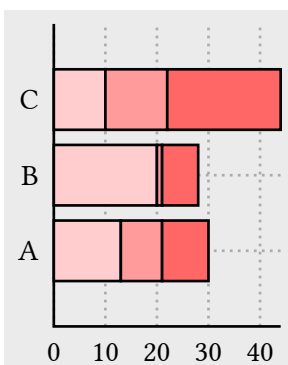

```
let data = (("A", 10, 12, 22), ("B", 20, 1, 7), ("C", 13, 8, 9))
chart.barchart(size: (3, auto), mode: "clustered",
  x-tick-step: 10, value-key: (..range(1, 4)), data)
```

6.4. Palette

A palette is a function that returns a style for an index. The palette library provides some predefined palettes.

The list of palettes:

- red
- blue
- rainbow