



# MANUAL FOR DATA\_MED TOOLS

Author : Clément Fontana

## Table of Contents


Introduction.....	1
General arborescence.....	1
Setup.....	2
Required Python toolbox.....	2
Environment variables.....	2
Create your own configuration file.....	2
Parameters description.....	3
Variable options description.....	4
Plot directory routines.....	4
RIVERS datasets routines.....	5
Create your own directory.....	6

## Introduction

This document presents the architecture and instructions to process oceanographic model outputs and data in the Mediterranean Sea using the MITgcm model.

Using other models remain possible through simple nomenclature/format conversion. Contact me for any questions.

## General arborescence

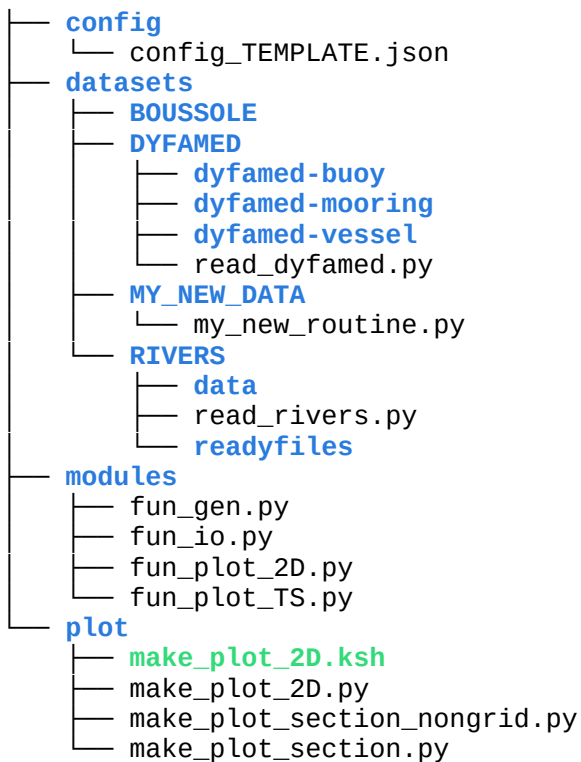

## Setup

git clone [git@github.com:cfontana/DATA\\_MED](https://github.com/cfontana/DATA_MED) \$DIR

## Required Python toolbox

numpy, scipy, copernicusmarine, cartopy, matplotlib, xarray

## Environment variables

\$ set \$DIR/modules to your PYTHONPATH in ~/.bashrc

\$ export env variable DATA\_MED\_DIR as /path/to/DATA\_MED

\$bash

## Create your own configuration file

\$ cd config

\$ cp config\_TEMPLATE.json config\_MYCONFIG.json

\$ cp variables\_mit\_TEMPLATE.dat variabonfig\_MYCONFIG.jsonles\_mit\_MYCONFYG.dat

(Tag MYCONFIG can be anything)

## Parameters description

Tune your config MYCONFIG.json file considering parameters below

"\_\_\_\_\_": "GENERAL PARAMETERS",

"date_ini": "2021-12-11",	# Initial date of model data
"date_end": "2021-12-12",	# Final date of model data
"outdir": "/home/fontana/MODEL/OUTPUTS",	# Directory containing outputs
"diagdir": "/home/fontana/MODEL/DIAGS",	# Directory to save diagnostics files
"river_ini": "2021-01-01",	# River initial date
"river_end": "2021-12-31",	# River final date

"\_\_\_\_\_": "RIVER PARAMETERS",

"french_list": ["Argens", "Var"],	# French river list (see README)
"italian_list": ["Arno", "Magra", "Ombrone", "Serchio"],	# Italian river list (see README)

"\_\_\_\_\_": "DYFAMED PARAMETERS",

"some_par": "some_par",	# To be defined
-------------------------	-----------------

"\_\_\_\_\_": "BOUSSOLE PARAMETERS",

"some_par": "some_par",	# To be defined
-------------------------	-----------------

"\_\_\_\_\_": "PLOT PARAMETERS",

"resol": "10m",	# Cartopy coast/land resolution
"fig_proj": "ccrs.PlateCarree()",	# Cartopy projection
"fig_sx": "8",	# Horizontal 2D figure size
"fig_sy": "8",	# Vertical 2D figure size
"fig_fmt": "jpg",	# Output figure format
"fig_res": "300",	# Output figure resolution
"tight": "False",	# Crop white space (time-consuming)
"fig_tck_size": "10",	# Figure tick size
"fig_tcklbl_size": "10",	# Figure tick label font size
"fig_lbl_size": "10",	# Figure label font size
"cb_fraction_2D": "0.02",	# Python colorbar fraction parameter

```

"cb_pad_2D":"0.12",          # Python colorbar padding parameter

"fig_secx":"8",              # Horizontal in-depth section figure size
"fig_secy":"4",              # Vertical in-depth section figure size
"sec_lon1":"8.5",            # Longitude starting point for section
"sec_lat1":"43.",            # Latitude starting point for section
"sec_lon2":"10.",            # Longitude ending point for section


"sec_dep":"600",             # Maximum depth for section
"sec_resH":"0.05",           # Horizontal resolution for interpolation
"sec_resV":"1",              # Vertical resolution for interpolation
"cb_fraction_sec":"0.025",   # Python colorbar fraction parameter for section plot
"cb_pad_sec":"0.06",         # Python colorbar fraction parameter for section plot


"_____":"OPTIONS",

"itp_meth":"nearest",        # Interpolation method, set nearest for tests or linear

```

## Variable options description

\$ cp variables\_mit\_TEMPLATE.dat variables\_mit\_MYCONFIG.dat

Description	Name	File tag	Colormap	Log plot	Limit mode	Plot min value	Plot max value	Label	Units
Options				True/ False	set/auto				
Example	Chl	PFTC	cmc.imola	True	Set	0.05	0.25	Chlorophyll	mg.m-3

## Plot directory routines

This directory contains routines to perform plots. Diagnostics arborescence is automatically created and name of file saved prompted.

=> Routine make\_plot\_2D.py :

**Description** : Plot 2D spatial maps on the domain

**Arguments** : configuration\_name variable\_name z-level

Bash utilization with make\_plot\_2D.ksh

=> Routine make\_plot\_section.py :

**Description** : Plot vertical section on the domain

**Arguments** : configuration\_name variable\_name direction coordinate\_value

direction argument can be horizontal or vertical

If direction is horizontal, routine plots the section from 'lon1' to 'lon2' at latitudinal 'coordinate\_value'

If direction is vertical, routine plots the section from 'lat1' to 'lat2' at longitudinal 'coordinate\_value'

Same possible bash utilization as make\_plot\_2D.py

## RIVERS datasets routines

This routines create river runoff input files at the MITgcm format

The data can be download from <https://www.hydro.eaufrance.fr/> for french river and <http://www.sir.toscana.it/consistenza-rete> for italian ones.

Get csv files from both sites and save them as river\_name.csv in the /datasets/RIVERS/data

\$ python3 read\_rivers.py

=> produce ready to read files in /datasets/RIVERS/readyfiles

The routine raises an error data are not continuous. In the case you must pre-process the data (*e.g.* interpolation/climatology) and save the processed file in `river_name_modif.csv`

The routine checks for existence of this file before reading the raw one.

## Create your own directory

You can easily access existing function and create your own directory to process data.

For an example of use :

```
$ cd ../datasets/MY_NEW_DATA
```

```
$ python3 my_new_routine.py MYCONFIG
```

The configuration is read dynamically and its variables are globals inside the system once loaded.