FORWARD NOISING PROCESS

The data is progressively corrupted by Gaussian noise until it becomes indistinguishable from pure noise.

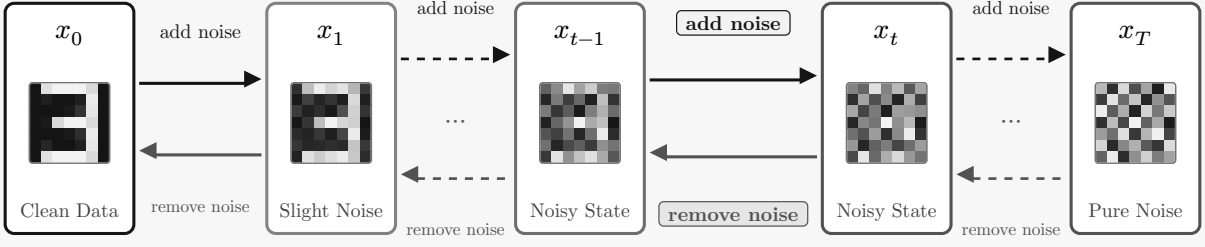

REVERSE DENOISING PROCESS

A U-Net removes the noise one step at a time, turning pure noise back into a sample.

U-Net predicts the noise

$\varepsilon_\theta(x_t, t)$