

THE CNLTX BUNDLE

Documentation for L^AT_EX 2_ε Packages or Classes

v0.7 2013/09/30

L^AT_EX tools and documenting facilities the CN way

Clemens NIEDERBERGER

<https://github.com/cgnieder/cnltx>

contact@mychemistry.eu

A versatile bundle of packages and classes for consistent formatting of control sequences, package options, source code examples, and writing a package manual (including an index containing the explained control sequences, options, ...).

The bundle also provides several other small ideas of mine such as a mechanism for providing abbreviations *etc.* Not at least it provides a number of programming tools.

Table of Contents

I. About The Bundle	3	5.2. Versioning Commands, Licensing and Related Stuff . . .	7
1. Background	3	5.3. Input Source Code Files	9
2. Bundled Packages, Classes and Files	3	6. Available Environments	10
3. License and Requirements	4	6.1. Description Environments . .	10
		6.2. Source Code Environments . .	10
		7. Usage of the Various Functions	11
II. Details of Available Commands, Environments and Options	5	7.1. Command Descriptions	11
		7.2. Option Descriptions	13
4. Options and Setup	5	7.3. Environment Descriptions . .	15
		7.4. Code Examples	15
5. Available Commands	6	7.5. Example File	18
5.1. Description of Macros, Environments and Options	6	7.6. Additional Functionality Provided by CNLTX-BASE	18
		7.6.1. Looking for Trailing Punctuation	18

7.6.2.	Counter Representation Commands	19	10.2.	listings	35
7.6.3.	Expandable Document Commands	21	10.2.1.	L ^A T _E X Sourcecode	35
7.7.	Additional Functionality Provided by CNLT_X-TOOLS	22	10.2.2.	B _B T _E X Entries	37
7.7.1.	Commands for Defining Different Document Macros	22	10.2.3.	makeindex Style Files	38
7.7.2.	Defining Abbreviations	23	11. PDF Strings and hyperref		38
7.7.3.	Predefined Abbreviations	24	12. Predefined Colors and Color Schemes		39
8. Formatting Possibilities		26	12.1. Explicitly Defined Colors		39
8.1.	Formatting by Redefining Hooks	26	12.2. Actual Used Color Names and Color Schemes		39
8.2.	Formatting by Setting Options	27	13. Language Support		41
9. Commands, Options and Further Settings Directly Related to the CNLT_X-DOC Class		28	III. Appendix		43
9.1.	Using Class Options	28	A. Internal Helper Commands		43
9.2.	Information on the Described Package or Class	29	A.1. Defined by CNLT_X-BASE		43
9.3.	Building of the Manuals Title Page	30	A.1.1. Related to the Bundle		43
9.4.	A Quotation Environment	30	A.1.2. Programming Tools		44
9.5.	Predefined Preamble	31	A.2. Defined by CNLT_X-DOC		45
9.6.	Predefined Indexing	33	A.3. Defined by CNLT_X-EXAMPLE		46
9.7.	Bibliography with bibl _{at} ex	34	A.4. Defined by CNLT_X-LISTINGS		47
9.7.1.	A Bibliography Entry Type package for bibl _{at} ex	34	A.5. Defined by CNLT_X-TOOLS		48
9.7.2.	Automatic Bibliography	35	B. List of Known L^AT_EX Control Sequences		48
10. Predefined listings and mdframed Styles		35	C. List of Known L^AT_EX Environments		54
10.1.	mdframed	35	D. List of Entries in cnltx.bib		54
			E. Bibliography		54
			F. Index		56

Part I.

About The Bundle

1. Background

The **CNLTX** bundle contains different packages and classes. I developed it as a successor of my class `cnpkgdoc` that I used for writing the documentation of my packages. The intention behind this is a cleaner interface and less unnecessary ballast, hence the separation into packages and classes. This is actually a bit of a contradiction: the document class loads all packages of the bundle which makes it more feature-rich than `cnpkgdoc`. The bundle provides source code environments that also print the output and defines quite a lot of macros for formatting of control sequence names, package names, package options and so on.

Part of the motivation is also that users have asked me how I created the manuals for my packages. Now I can refer to this bundle.

Another reason for the splitting into separate packages is – besides the advantage of easier maintenance – is that I may want to add programming tools that I often use into **CNLTX-BASE** which may allow me (and others) to use them for other packages, too, without having to define them each time. So it is quite likely that **CNLTX-BASE** will get extended in the future.

The best documentation for the bundle is as always the source code of the `sty` and `cls` files but I'm trying to provide a documentation as comprehensive as possible. This is one of the reasons why this documentation is noticeably longer than the one for `cnpkgdoc`.

The bundle reflects the fact that I haven't started using literate programming, yet. I don't use `docstrip` and don't write `dtx` files but always write the `sty` or `cls` files directly. I write the manual always at the same time but as a separate file. While I'm entirely aware of the advantages of literate programming I never could bring myself to start to use it myself. As a consequence I have no idea if this bundle can be used for it or not.

Source code formatting is done with the help of the powerful listings package [HM13] by Carsten Heinz and later Brooks Moses, now maintained by Jobst Hoffmann. The only real drawback I have found with it is recognizing starred and un-starred versions of an environment as different keywords. This does not seem to be possible which is why indexing of such environments will lead to wrong page numbers.

The fancy frames of the source code examples are realized with the `mdframed` package by Marco Daniel [Dan13], loaded with the option `framemethod = tikz`.

Besides all this I included some other ideas of mine in this bundle which are all provided by **CNLTX-TOOLS**. This includes a mechanism for defining clever abbreviations or macros that make it easy to index names the same way `biblatex` does.

2. Bundled Packages, Classes and Files

The **CNLTX** bundle currently bundles the following packages and classes:

- **CNLTX-BASE** – a package that defines base macros for error-messaging, expansion con-

3. License and Requirements

trol and tokenlist manipulation. It also provides color definitions and defines a few color schemes for the **CNLTX-DOC** class. All other packages and classes of the **CNLTX** bundle load this package. This package can be used stand-alone.

`\usepackage{cnltx-base}`

- **CNLTX-DOC** – a class for writing package manuals. Loads **CNLTX-EXAMPLE** and **CNLTX-TOOLS**.

`\documentclass{cnltx-doc}`

- **CNLTX-EXAMPLE** – a package that defines macros and environments for describing control sequences and options and for including source code. Loads **CNLTX-LISTINGS**. This package can be used stand-alone.

`\usepackage{cnltx-example}`

Introduced in
version 0.4

- **CNLTX-LISTINGS** – a package that defines the listings language ‘BibTeX’. Also defines a list of highlighted control sequence names and environment names, loaded by **CNLTX-EXAMPLE**. The additional control sequence and environment names used to be defined in **CNLTX-CSNAMES**. That package got removed and its contents are now provided by **CNLTX-LISTINGS**. This package can be used stand-alone.

`\usepackage{cnltx-listings}`

Introduced in
version 0.2

- **CNLTX-TOOLS** – a package that defines tools used by **CNLTX-DOC** that are unrelated to \LaTeX documentation *per se*. This package can be used stand-alone.

`\usepackage{cnltx-tools}`

- `cnltx.ist` – an index style file that is used when the option `add-index` is activated and the option `index-style` is not used.

Introduced in
version 0.4

- `cnltx.bib` – a bibliography file that contains a small but growing number of package entries.

Introduced in
version 0.4

- `cnltx.bbx`, `cnltx.cbx` and `cnltx.dbx` – files related to the biblatex style `cnltx`.

3. License and Requirements

Permission is granted to copy, distribute and/or modify this software under the terms of the \LaTeX Project Public License (LPPL), version 1.3 or later (<http://www.latex-project.org/lppl.txt>). The software has the status “maintained.”

The **CNLTX-BASE** package loads the following packages: `pgfopts`¹ [Wri11], `etoolbox`² [Leh11], `ltxcmds`³ [Obe11b], `trimspaces`⁴ [Rob09] and `xcolor`⁵ [Ker07].

1. on CTAN as `pgfopts`: <http://mirrors.ctan.org/macros/latex/contrib/pgfopts/>

2. on CTAN as `etoolbox`: <http://mirrors.ctan.org/macros/latex/contrib/etoolbox/>

3. on CTAN as `oberdiek`: <http://mirrors.ctan.org/macros/latex/contrib/oberdiek/>

4. on CTAN as `trimspaces`: <http://mirrors.ctan.org/macros/latex/contrib/trimspaces/>

5. on CTAN as `xcolor`: <http://mirrors.ctan.org/macros/latex/contrib/xcolor/>

The **CNLTX-DOC** class loads the packages **CNLTX-BASE**, **CNLTX-EXAMPLE**, **ulem**⁶ [Ars11], **translations** [Nie13c], **multicol**⁷ [Mit11], **ragged2e**⁸ [Scho9], **marginnote**⁹ [Koh12] and **hyperref**¹⁰ [OR12]. It is a wrapper class for the KOMA-Script class **scrartcl**¹¹ [KN12].

The **CNLTX-EXAMPLE** package loads the packages: **CNLTX-BASE**, **CNLTX-LISTINGS**, **CNLTX-TOOLS**, **translations**,¹² **mdframed**¹³ [Dan13] and **idxcmds**¹⁴ [Nie13b].

The **CNLTX-LISTINGS** package loads the packages **CNLTX-BASE**, **listings**¹⁵ [HM13] and **catchfile**¹⁶ [Obe11a].

The **CNLTX-TOOLS** package loads the packages **CNLTX-BASE** and **accsupp**¹⁷ [Obe10].

Like all of my packages **CNLTX** implicitly relies on an up to date T_EX distribution.

Part II.

Details of Available Commands, Environments and Options

4. Options and Setup

The **CNLTX** bundle has a number of options. The **CNLTX-DOC** class only knows a few options (described in section 9.1 on page 28) as *class* options. All other options regardless if they're defined by a package or a class can and should be set with the `setup` command:

```
\setcnltx{<options>}
```

Setup command for the **CNLTX** bundle. This command is provided by **CNLTX-BASE**.

The source code environments defined by the **CNLTX-EXAMPLE** package also have optional arguments that can be used to set the options for the environment locally.

6. on CTAN as **ulem**: <http://mirrors.ctan.org/macros/latex/contrib/ulem/>
7. on CTAN as **multicol**: <http://mirrors.ctan.org/macros/latex/required/tools/multicol/>
8. on CTAN as **ragged2e**: <http://mirrors.ctan.org/macros/latex/contrib/ms/ragged2e/>
9. on CTAN as **marginnote**: <http://mirrors.ctan.org/macros/latex/contrib/marginnote/>
10. on CTAN as **hyperref**: <http://mirrors.ctan.org/macros/latex/contrib/hyperref/>
11. on CTAN as **koma-script**: <http://mirrors.ctan.org/macros/latex/contrib/koma-script/>
12. on CTAN as **translations**: <http://mirrors.ctan.org/macros/latex/contrib/translations/>
13. on CTAN as **mdframed**: <http://mirrors.ctan.org/macros/latex/contrib/mdframed/>
14. on CTAN as **idxcmds**: <http://mirrors.ctan.org/macros/latex/contrib/idxcmds/>
15. on CTAN as **listings**: <http://mirrors.ctan.org/macros/latex/contrib/listings/>
16. on CTAN as **catchfile**: <http://mirrors.ctan.org/macros/latex/contrib/catchfile/>
17. on CTAN as **accsupp**: <http://mirrors.ctan.org/macros/latex/contrib/oberdiek/accsupp/>

5. Available Commands

5.1. Description of Macros, Environments and Options

provided by
CNLTX-**EXAM**-
PLE

The commands described in this section all are provided by the **CNLT**X-**EXAMPLE** package. They all are related to the typesetting of provided macros, options and the like.

\code{*arg*}

Formatting of source code. This is *no* verbatim command. Used internally in the following commands.

\verbcode*<char>**<code>**<char>*

Introduced in
version 0.2

A verbatim command that uses the same formatting as the source code example environments. This is a wrapper for **\lstinline** which loads the corresponding style.

\cs*{*name*}

Format the control sequence *<name>*, **\cs**{*name*}: **\name**. Adds a corresponding index entry. The starred form does not add an index entry.

\csidx{*name*}

Adds an index entry but does not typeset the control sequence *<name>*.

\env*{*name*}

Format the environment *<name>*, **\env**{*name*}: *name*. Adds a corresponding index entry with a hint that the entry refers to an environment. The starred form does not add an index entry.

\envidx{*name*}

Adds an index entry but does not typeset the environment *<name>*.

\meta{*meta*}

Description of an argument, **\meta**{*meta*}: *<meta>*.

\marg{*arg*}

A mandatory argument. *<arg>* is formatted with **\meta** if it is not blank, **\marg**{*arg*}: {*<arg>*}.

\Marg{*arg*}

Introduced in
version 0.2

A mandatory argument. *<arg>* is formatted with **\code** if it is not blank, **\Marg**{*arg*}: {*arg*}.

\oarg{*arg*}

An optional argument. *<arg>* is formatted with **\meta** if it is not blank, **\oarg**{*arg*}: [*<arg>*].

\Oarg{*arg*}

Introduced in
version 0.2

An optional argument. *<arg>* is formatted with **\code** if it is not blank, **\Oarg**{*arg*}: [*arg*].

\darg{*arg*}

An argument with parentheses as delimiters. *<arg>* is formatted with **\meta** if it is not blank, **\darg**{*arg*}: (*<arg>*).

5. Available Commands

Introduced in
version 0.2

`\Darg{⟨arg⟩}`

An argument with parentheses as delimiters. `⟨arg⟩` is formatted with `\code` if it is not blank, `\Darg{arg}`: (arg).

`\sarg`

An optional star argument, `\sarg: *`.

`\option*{⟨name⟩}`

An option `⟨name⟩`, `\option{name}`: `name`. Adds a corresponding index entry. The starred form does not add an index entry.

`\optionidx{⟨name⟩}`

Adds an index entry but does not typeset the option `⟨name⟩`.

`\module*{⟨name⟩}`

A module `⟨name⟩`, `\module{name}`: `name`. Adds a corresponding index entry. The starred form does not add an index entry. In some of my packages I like to organize options by grouping them in different classes that I call “modules”. This command refers to those modules.

`\moduleidx*{⟨name⟩}`

Adds an index entry but does not typeset the option `⟨name⟩`.

`\key*-{⟨name⟩}{⟨value⟩}`

A key `⟨name⟩` with value `⟨value⟩`, the optional star prevents an index entry, the optional - strips the braces around `⟨value⟩`; `\key{key}{value}`: `key = {⟨value⟩}`; `\key-{key}{value}`: `key = ⟨value⟩`

Introduced in
version 0.2

`\keyis*{⟨name⟩}{⟨value⟩}`

A key `⟨name⟩` set to value `⟨value⟩`, the optional star prevents an index entry, `\key{keyis}{value}`: `key = value`.

`\choices{⟨clist of choices⟩}`

A list of choices, `\choices{one, two, three}`: `one|two|three`

`\choicekey{⟨name⟩}{⟨clist of choices⟩}`

A key `⟨name⟩` with a list of possible values, `\choicekey{key}{one, two, three}`: `key = one|two|three`

`\boolkey{⟨name⟩}`

A boolean key `⟨name⟩` with choices true and false, `\boolkey{key}`: `key = true|false`

`\default{⟨value⟩}`

Markup for a default choice, `\choices{one, \default{two}, three}`: `one|two|three`

5.2. Versioning Commands, Licensing and Related Stuff

provided by
CNLTX-DOC

The commands described in this section are provided by the **CNLTX** class except where indicated differently. These commands are related to information about the legal stuff of a package and where to find it on the world wide web.

5. Available Commands

Introduced in version 0.0	<code>\sinceversion{<version>}</code>	Gives a sidenote like the one on the left.
Changed in version 0.0	<code>\changedversion{<version>}</code>	Gives a sidenote like the one on the left.
	<code>\newnote*{<cs>}[<num>]{<definition>}</code>	Defines a note like <code>\sinceversion</code> . The star makes the note macro short, <code><num></code> defines the number of mandatory arguments. Optional arguments are not possible. <code>\sinceversion</code> was defined as follows: <code>\newnote*\sinceversion[1]{Introduced in version~#1}</code>
	<code>\newpackagename{<cs>}{<name>}</code>	Define a comand <code><cs></code> that prints <code><name></code> formatted like <code>CNLTx</code> .
	<code>\lppl</code>	Typesets “LPPL” and adds a corresponding index entry.
	<code>\LPPL</code>	Typesets “L ^A T _E X Project Public License” and adds a the same index entry as <code>\lppl</code> .
Changed in version 0.2	<code>\license*[<maintenance status>]</code>	Default: maintained Typesets ‘Permission is granted to copy, distribute and/or modify this software under the terms of the L ^A T _E X Project Public License (LPPL), version 1.3 or later (http://www.latex-project.org/lppl.txt). The software has the status “maintained.”. The un-starred variant adds a <code>\par</code> .
	<code>\ctan</code>	Typesets “CTAN” and adds a corresponding index entry.
	<code>\CTAN</code>	Typesets “Comprehensive T _E X Archive Network” and adds the same index entry as <code>\ctan</code> .
provided by CNLTx-EXAM-PLÉ	<code>\pkg*{<package>}</code>	Format the package name <code><package></code> and add an index entry. The starred variant adds nothing to the index.
provided by CNLTx-EXAM-PLÉ	<code>\pkgidx{<package>}</code>	Add an index entry for the package <code><package></code> .
provided by CNLTx-EXAM-PLÉ	<code>\cls*{<class>}</code>	Format the class name <code><class></code> and add an index entry. The starred variant adds nothing to the index.
provided by CNLTx-EXAM-PLÉ	<code>\clsidx{<class>}</code>	Add an index entry for the class <code><class></code> .
	<code>\CTANurl[<directory>]{<name>}</code>	Writes a CTAN link like the ones in section 3 on page 4 in the footnotes. The predefined directory is <code>macros/latex/contrib</code> . The link address will be: <code>http://mirrors.ctan.org/<directory>/<name>/</code> .

5. Available Commands

Introduced in
version 0.2

`\needpackage[⟨directory⟩]{⟨name⟩}`

A wrapper for `\pkg{#2}\footnote{\CTANurl[#1]{#2}}`

Introduced in
version 0.2

`\needclass[⟨directory⟩]{⟨name⟩}`

A wrapper for `\cls{#2}\footnote{\CTANurl[#1]{#2}}`

```
1 \newpackagename{\foothree}{foo-3}%  
2 now \foothree\ looks like \cnltx.
```

now **FOO-3** looks like **CNLTX**.

5.3. Input Source Code Files

Similar to the environments described in section 6.2 on the following page **CNLTX-EXAMPLE** provides a few commands for inputting source code files, formatting and printing the source code and inputting the file directly.

`\inputexample[⟨options⟩]{⟨file name⟩}`

The equivalent of the example environment, see section 6.2 on the next page.

`\inputsidebyside[⟨options⟩]{⟨file name⟩}`

The equivalent of the sidebyside environment, see section 6.2 on the following page.

`\inputsourcecode[⟨options⟩]{⟨file name⟩}`

The equivalent of the sourcecode environment, see section 6.2 on the next page.

Introduced in
version 0.5

`\implementation[⟨options⟩]{⟨file name⟩}`

A wrapper for `\lstinputlisting[style=cnltx, #1]{#2}`

It is possible to define further commands like this:

`\newinputsourcefilecmd[⟨option⟩]{⟨control sequence⟩}`

Defines `⟨control sequence⟩` as a new source code input command where `⟨options⟩` are preset.

The existing commands have been defined like this:

```
1 \newinputsourcefilecmd\inputexample  
2 \newinputsourcefilecmd[side-by-side]\inputsidebyside  
3 \newinputsourcefilecmd[code-only]\inputsourcecode
```

6. Available Environments

6.1. Description Environments

CNLTX-DOC defines some description environments used to describe macros, environments or options.

\begin{commands}

A description-like environment for describing commands. While this environment is a list internally and thus recognizes **\item** own commands are used to describe macros. They are explained in section 7.1 on the following page.

\begin{options}

A description-like environment for describing options. While this environment is a list internally and thus recognizes **\item** own commands are used to describe options. They are explained in section 7.2 on page 13.

\begin{environments}

A description-like environment for describing environments. While this environment is a list internally and thus recognizes **\item** own commands are used to describe environments. They are explained in section 7.3 on page 15.

These environments are lists all using the same internal **\list**. The setup of this list can be changed via an option:

list-setup = {*<definitions>*}

Default: **\leftmargin=0pt \labelwidth=2em \labelsep=0pt \itemindent=-1em**

The setup of the **\list** used by the commands, options and environments environments.

6.2. Source Code Environments

CNLTX-EXAMPLE defines the following environments that are used to display source code and possibly the output of the source code, too.

\begin{example}[<options>]

This environment is a formatted verbatim environment that also inputs the output of the inputted code. This environment is described in section 7.4 on page 15.

\begin{sidebyside}[<options>]

This environment is a formatted verbatim environment that also inputs the output of the inputted code. Source and output are printed side-by-side. This environment is described in section 7.4 on page 15.

\begin{sourcecode}[<options>]

This environment is a formatted verbatim environment. This environment is described in section 7.4 on page 15.

7. Usage of the Various Functions

Introduced in
version 0.2

In each of these environments certain hooks are provided that can be used to add definitions you like:

`pre-code = {\definitions}`

`\definitions` are placed before the source code is inserted.

`after-code = {\definitions}`

`\definitions` are placed after the source code is inserted.

`pre-source = {\definitions}`

`\definitions` are placed before the output of the source code is inserted.

`after-source = {\definitions}`

`\definitions` are placed after the output of the source code is inserted.

It is possible to define further environments like this:

`\newsourcocodeenv[\option]{\name}`

Defines `\name` as a new source code environment where `\options` are preset.

The existing environments have been defined like this:

```
1 \newsourcocodeenv{example}
2 \newsourcocodeenv[side-by-side]{sidebyside}
3 \newsourcocodeenv[code-only]{sourcecode}
```

7. Usage of the Various Functions

7.1. Command Descriptions

Inside of the environment commands that was introduced in section 6.1 on the preceding page items are input via the following command:

`\command*{\name}[\stuff after]`

This macro formats a control sequence with `\cs` and puts a line break after it. The optional argument allows printing things directly after the command name and can thus be used for adding arguments. The star prevents the creation of an index entry.

`\Default*!{\code}`

This command can be placed after `\command` or `\opt` in order to give a default definition of a macro or a default value of an option. The definition will then be placed on the same line flush right. The star prevents the insertion of `\newline` after it. The optional bang adds the information that an option is mandatory, *i. e.* has to be set.

`\expandable`

Adds the symbol `*` to the left of a command in the margin to indicate that the command is expandable. This command should be used *immediately* before `\command`.

Changed in
version 0.3

Introduced in
version 0.5

7. Usage of the Various Functions

\unexpandable
 Introduced in version 0.5
 Adds the symbol * to the left of a command in the margin to indicate that the command is not expandable. This command should be used *immediately* before **\command**.

\expandablesign
 Introduced in version 0.5
 The macro that holds the sign used by **\expandable** and **\unexpandable**.
 Default: **\textasteriskcentered**

```

1 \begin{commands}
2   \command{cs}
3   This is about foo bar baz.
4   \command{cs}[\margin{arg}]
5   This one has an argument.
6   \command{cs}[\sarg\oarg{option}]
7   This has a star variant and an optional argument.
8   \command{cs}\Default{foo bar}
9   This one has the default replacement text \code{foo bar}
10  \expandable\command{cs}
11  This macro is expandable.
12 \end{commands}

```

\cs
 This is about foo bar baz.

\cs{⟨arg⟩}
 This one has an argument.

\cs*[⟨option⟩]
 This has a star variant and an optional argument.

\cs
 This one has the default replacement text foo bar
 Default: foo bar

* **\cs**
 This macro is expandable.

The **\expandablesign** can of course be redefined to something else you like better. For the sake of completeness there is an option that does exactly this:

expandable-sign = {⟨definition⟩}
 Introduced in version 0.5
 Redefines **\expandablesign** to **⟨definition⟩**.
 Default: **\textasteriskcentered**

7.2. Option Descriptions

The options environment knows a few more commands to meet all the different kinds of options.

`\opt*`

An option. The star prevents an index entry.

`\keyval* - {\langle key \rangle} {\langle value \rangle}`

A key/value option. The optional star prevents an index entry. The optional - strips the braces around `\langle value \rangle`, see the example below.

`\keychoice* {\langle key \rangle} {\langle list of choices \rangle}`

A key/value option where the value is one of a list of choices. The star prevents an index entry.

`\keybool* {\langle name \rangle}`

A boolean key, that is a choice key with choices true and false. The star prevents an index entry.

`\Default*! {\langle code \rangle}`

Changed in
version 0.3

This command can be placed after `\command` or `\opt` (or any of the other commands for adding an option to the options list) in order to give a default definition of a macro or a default value of an option. The definition will then be placed on the same line flush right. The star prevents the insertion of `\newline` after it. The optional bang adds the information that an option is mandatory, *i. e.*, it has to be set.

`\Module*! {\langle name \rangle}`

Introduced in
version 0.3

This command can be placed after `\option` but before `\Default` in order to determine the module the option belongs to. It will be written in the left margin next to the option name. The star prevents the insertion of `\newline` after it. The optional bang *adds* an index entry for the module. This is somehow inconsistent with many of the other commands where an optional star *prevents* an index entry but it fits to the functionality of `\Default` which is why this syntax was chosen.

The following demonstrates how the commands would be used to create option descriptions:

```

1 \begin{options}
2   \opt{foo}
3     This makes stuff. Let's add a few more words so that the line gets
4     filled and we can see how the output actually looks.
5   \opt*{foo}\Default{bar}
6     This makes stuff. Let's add a few more words so that the line gets
7     filled and we can see how the output actually looks.
8   \opt{foo}\Module{bar}
9     This option belongs to \module*{bar}. Let's add a few more words so
10    that the line gets filled and we can see how the output actually
11    looks.

```

7. Usage of the Various Functions

```
12 \opt{foo}\Module{bar}\Default{baz}
13   This option belongs to \module*{bar}. Let's add a few more words so
14   that the line gets filled and we can see how the output actually
15   looks.
16 \keyval{foo}{bar}\Default
17   This makes stuff. Let's add a few more words so that the line gets
18   filled and we can see how the output actually looks.
19 \keyval{foo}{bar}\Default!
20   This makes stuff. Let's add a few more words so that the line gets
21   filled and we can see how the output actually looks.
22 \keyval*{foo}{bar}
23   This makes stuff. Let's add a few more words so that the line gets
24   filled and we can see how the output actually looks.
25 \keyval-{foo}{bar}
26   This makes stuff. Let's add a few more words so that the line gets
27   filled and we can see how the output actually looks.
28 \keychoice{foo}{one,two,three}
29   This makes stuff. Let's add a few more words so that the line gets
30   filled and we can see how the output actually looks.
31 \keybool{foo}
32   This makes stuff. Let's add a few more words so that the line gets
33   filled and we can see how the output actually looks.
34 \end{options}
```

The code above gives the following output:

foo

This makes stuff. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

foo

Default: bar

This makes stuff. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

bar » foo

This option belongs to the module bar. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

bar » foo

Default: baz

This option belongs to the module bar. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

foo = {⟨bar⟩}

(initially empty)

This makes stuff. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

foo = {⟨bar⟩}

(required)

This makes stuff. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

7. Usage of the Various Functions

`foo = {\bar}`

This makes stuff. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

`foo = \bar`

This makes stuff. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

`foo = one|two|three`

This makes stuff. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

`foo = true|false`

This makes stuff. Let's add a few more words so that the line gets filled and we can see how the output actually looks.

7.3. Environment Descriptions

Environment descriptions are made – unsurprisingly – with the `environments` environment. It knows the command `\environment`:

`\environment*{\name}[\langle stuff after \rangle]`

This macro prints the environment name and puts a line break after it. The optional argument allows printing things directly after the environment name and can thus be used for adding arguments.

```
1 \begin{environments}
2   \environment*{foobar}[\oarg{options}]
3   This is environment \env*{foobar}. The star prevents it from being
4   added to the index.
5 \end{environments}
```

`\begin{foobar}[\langle options \rangle]`

This is environment foobar. The star prevents it from being added to the index.

7.4. Code Examples

Code examples can be included through the `example` environment or the `sourcecode` environment. The `sourcecode` only shows the piece of \LaTeX code while the `example` environment also shows the output of the \LaTeX code.

7. Usage of the Various Functions

```
1 \begin{example}  
2   a \LaTeX\ code example  
3 \end{example}
```

This example would give:

```
1 a \LaTeX\ code example
```

a \LaTeX code example

Both environments can be influenced by options:

`code-only` = `true`|`false`

Default: `false`

Only typeset the code as code but don't include it afterwards. The code box above is an example for the usage of this option. This option has no effect on the `sourcecode` environment: is already set for this environment.

`side-by-side` = `true`|`false`

Default: `false`

Typeset source and output side by side. The code is input on the left and the output on the right. Side by side examples are typeset in `minipage` environments with all consequences that come with them (think of `\parindent`, page breaks ...). This option has no effect on the `sourcecode` environment.

`code-left` = `true`|`false`

Default: `true`

If `true` and the option `side-by-side` is chosen the source code is printed on the right side else on the left. This option has no effect on the `sourcecode` environment.

`code-sep` = `{\definition}`

Default: `\hrulefill`

Code that is inserted between a source code and the corresponding output when printed below each other. This option has no effect on the `sourcecode` environment.

The same example again, this time using `side-by-side` (which is the same as using the `sidebyside` environment):

```
1 a \LaTeX\ code example
```

a \LaTeX code example

`side-by-side` and `code-left` = `false`:

a \LaTeX code example

```
1 a \LaTeX\ code example
```

The frame around the examples is done by the `mdframed` package [Dan13]. It is of course possible to customize it:

7. Usage of the Various Functions

`add-frame-options = {⟨mdframed options⟩}` (initially empty)

Add options to the predefined settings.

`frame-options = {⟨mdframed options⟩}`

Default: `backgroundcolor=cnltxbg,linecolor=cnltx,roundcorner=5pt`

Overwrite the settings with new ones.

The source code is formatted using the great listings package [HM13] by Carsten Heinz, Brooks Moses, and Jobst Hoffmann. Similar options exist to adapt listings' options that are used for formatting the source code. The predefined style has many options that will not be mentioned here. If you're interested you can find them in `cnltx-example.sty` or in section 10.2.1 on page 35.

`gobble = ⟨integer⟩`

Default: 2

The number of initial characters that is gobbled from each line.

`add-cmds = {⟨list of csnames⟩}`

(initially empty)

A list of control sequence names that should be recognized as a command sequence in the source code examples and should be formatted accordingly. The control sequence names in this list will also get an index entry when they're used in the source example. This is done internally via `\csidx`. The option should be used to add the new commands that are defined by the package for which you are writing the manual for.

`add-silent-cmds = {⟨list of csnames⟩}`

A list of control sequence names that should be recognized as a command sequence in the source code examples and should be formatted accordingly. The control sequence names in this list will *not* get an index entry when they're used in the source example. There already is quite a large but far from comprehensive list of silent commands but many are still missing. This option allows you to extend the list on a per document basis.

`add-listings-options = {⟨listings options⟩}`

(initially empty)

Additional options for the listings [HM13] environments. *This redefines the `cnltx listings` style which will affect all sourcecode environments!*

`listings-options = {⟨listings options⟩}`

Overwrite existing options with new ones. This can be used to build an own style from scratch. *This redefines the `cnltx listings` style which will affect all sourcecode environments!*

`sourcecode-options = {⟨listings options⟩}`

These options are added to the listings options of the source code environments without redefining the main style. Hence it can be used to locally add options to a source code environment.

Introduced in
version 0.4

`add-envs = {⟨list of environment names⟩}`

(initially empty)

Like `add-cmds` but for environment names.

`add-silent-envs = {⟨list of environment names⟩}`

Like `add-silent-cmds` but for environment names.

7.5. Example File

Let's say you're documenting a package called `mypackage` that provides the command `\mycommand` and the environment `myenv`. The basic manual setup could then look something like this:

```

1 \documentclass[load-preamble]{cnltx-doc}
2 \usepackage[T1]{fontenc}
3 \usepackage[utf8]{inputenc}
4 \setcnltx{
5   package = mypackage ,
6   authors  = John Doe ,
7   email    = john@doe.com ,
8   add-cmds = {mycommand} ,
9   add-envs = {myenv}
10 }
11 \begin{document}
12   ...
13 \end{document}

```

7.6. Additional Functionality Provided by **CNLTX-BASE**

The **CNLTX-BASE** package's main purpose is to provide programming facilities. Most of its macros are listed in section A.1. However, I like to explain some of its features in a bit more detail.

7.6.1. Looking for Trailing Punctuation

The command `\cnltx@ifpunctuation` is a conditional that detects if a punctuation mark follows and acts depending on it. What counts as a punctuation mark can be set by the user.

`\cnltx@ifpunctuation*[\langle punctuation marks \rangle]{\langle true \rangle}{\langle false \rangle}\langle trailing punctuation \rangle`

The starred version does not gobble the trailing punctuation while the unstarred does. That's why in the unstarred version you can also use `\cnltx@trailpunct` to access the gobbled punctuation mark. The optional argument sets the punctuation marks that should be considered for this use only.

`set-trail-punct = {\langle punctuation marks \rangle}`

Default: `,.!?;:`

Sets the default list of punctuation marks that should be checked if the optional argument of `\cnltx@ifpunctuation` is not used.

The usage is probably self-explaining:

```

1 \makeatletter
2 \cnltx@ifpunctuation{(test\cnltx@trailpunct)}{(test)}!\par
3 \cnltx@ifpunctuation[.]{(test\cnltx@trailpunct)}{(test)}!\par
4 a punctuation mark \cnltx@ifpunctuation*{follows}{doesn't follow}!\par

```

7. Usage of the Various Functions

```
5 a full stop \cnltx@ifpunctuation*[{.}{follows}]{doesn't follow}!
```

```
(test!)
(test)!
a punctuation mark follows!
a full stop doesn't follow!
```

If the non-starred variant has gobbled a `\par` the `\par` is placed back:

```
1 \makeatletter
2 \def\test{\cnltx@ifpunctuation{(test\cnltx@trailpunct)}{(test)}}%
3 \makeatother
4 \test
5
6 \test.
7
8 \test{} .
```

```
(test)
(test.)
(test) .
```

7.6.2. Counter Representation Commands

Background

A counter representation command like `\arabic{section}` always is a command that calls an associated internal command (`\@arrabic` in the case of our example) that acts on the count associated with the counter:

```
1 \def\arabic#1{\expandafter\@arabic\csname c@#1\endcsname}
2 \def\@arabic#1{\number #1}
```

The command `\arabic{<counter>}` builds a command sequence `\c@<counter>` from its argument `<counter>`. It then calls the internal command `\@arabic` that takes this command sequence as an argument. The command sequence `\c@<counter>` is the count (in the \TeX sense) that is associated with the counter `<counter>`, i. e., it holds the actual number. The command `\@arabic` now simply typesets the integer value of the count.

The same holds for every counter representation command. The principle always is as follows:

7. Usage of the Various Functions

```
1 \def\foo#1{\expandafter\@foo\csname c@#1\endcsname}  
2 \def\@foo#1{do something with #1 (where #1 is a count)}
```

This means in order to get a new counter representation command you actually need to define two macros.

CNLTX-BASE defines an interface that allows to define both commands at once without having to think about `\expandafter`, associated counts, internal command names and so on. The only thing left to do is choosing a name for the counter representation and providing a valid definition of what should happen with the (integer) value of the counter.

New Commands

\DeclareCounterRepresentation{*<command>*}{*<definition>*}

Declares a new counter representation command and its internal equivalent. In the *<definition>* *#1* is used to refer to the counter *number*, that is, the value of `\c@<counter>`. This command will silently overwrite any existing definition.

\newcounterrepresentation{*<command>*}{*<definition>*}

Defines a new counter representation command and its internal equivalent. In the *<definition>* *#1* is used to refer to the counter *number*, that is, the value of `\c@<counter>`. This command will issue an error if either the user command or the internal command (cf. `\arabic` and `\@arabic`) already exist.

\providecounterrepresentation{*<command>*}{*<definition>*}

Provides a new counter representation command and its internal equivalent. In the *<definition>* *#1* is used to refer to the counter *number*, that is, the value of `\c@<counter>`. This command will define the commands only if neither the user command nor the internal command (cf. `\arabic` and `\@arabic`) already exist and will do nothing if either of them exist.

\renewcounterrepresentation{*<command>*}{*<definition>*}

Redefines an existing counter representation command and its internal equivalent. In the *<definition>* *#1* is used to refer to the counter *number*, that is, the value of `\c@<counter>`. This command will issue an error if either the user command or the internal command (cf. `\arabic` and `\@arabic`) or both already exist.

Let's take a look at what is actually defined by these commands:

```
1 \makeatletter\ttfamily  
2 before:\par  
3 \meaning\arabic\par  
4 \meaning\@arabic  
5  
6 \renewcounterrepresentation\arabic{\the\numexpr#1\relax}%  
7 after:\par  
8 \meaning\arabic\par  
9 \meaning\@arabic
```

```

before:
macro:#1->\expandafter \@arabic \csname c@#1\endcsname
macro:#1->\number #1
after:
macro:#1->\expandafter \@arabic \csname c@#1\endcsname
macro:#1->\the \numexpr #1\relax

```

As you can see nothing bad happens. The commands are only a convenient interface. Let's take a look at some more realistic examples. The above redefinition was only a demonstration. For example you may want to have a representation which calculates the displayed value from the counter value?

```

1 \newcounterrepresentation\minusone{\the\numexpr#1-1\relax}%
2 \newcounterrepresentation\multoffourrm{\romannumeral\numexpr(4*#1)-4\relax}%
3 % \newrobustcmd is provided by the 'etoolbox' package
4 \newrobustcmd*\circlednumber[1]{%
5   \tikz[baseline]\node[anchor=base,draw,shape=circle]{\number#1};}%
6 \newcounterrepresentation\circled{\circlednumber{#1}}%
7 \makeatletter
8 \newcounterrepresentation\twodigits{\two@digits{#1}}%
9 \makeatother
10 \newcounter{test}%
11 \setcounter{test}{9}
12
13 \minusone{test}\par
14 \multoffourrm{test}\par
15 \circled{test}\par
16 \twodigits{test}

```

```

8
xxxii
9
09

```

7.6.3. Expandable Document Commands

The commands presented in this section are highly experimental. *Use them only if you really have to!*

`\newexpandablecmd*{<cs>}[<num args>][<default opt>]{<definition>}`

Introduced in
version 0.7

This command has the same syntax as `\newcommand`. The difference is that if `<cs>` is defined with an optional argument it is still fully expandable. This comes with a cost: in order to still being able to check for the optional argument it needs to see a following token as argument. If

7. Usage of the Various Functions

it is used without optional argument and has no mandatory arguments it may be necessary to add a trailing `\empty`. If you define a command *without* optional argument this command falls back to `\newcommand`.

Introduced in
version 0.7

`\renewexpandablecmd*{<cs>}[<num args>][<default opt>]{<definition>}`

The equivalent of `\renewcommand`. See description of `\newexpandablecmd` for further details. is to `\newcommand`.

Introduced in
version 0.7

`\provideexpandablecmd*{<cs>}[<num args>][<default opt>]{<definition>}`

The equivalent of `\providecommand`. See description of `\newexpandablecmd` for further details.

7.7. Additional Functionality Provided by **CNLTX-TOOLS**

7.7.1. Commands for Defining Different Document Macros

The **CNLTX-TOOLS** package defines some additional macros which provide useful functionality also in contexts *not* documenting a L^AT_EX package.

`\newname{<cs>}{<first name>}{<second name>}`

Defines `<cs>` to write out the full name and add an index entry sorted by the last name. Also defines a starred variant of `<cs>` that only writes the last name but still adds the full index entry.

`\cnltxacronym{<pdf and sort string>}{<acronym>}`

Typesets `<acronym>` with small caps and uses `<pdf and sort string>` as PDF string and for sorting the index entry that is added. This command was used to define `\lppl` and `\ctan`. *This is not intended as a replacement for packages like `acro` [Nie13a] or `glossaries` [Tal13]!* In fact it is a “poor man’s” solution that allows me not to require one of those packages.

`\newabbr*{<control sequence>}{<definition>}`

Defines the abbreviation `<control sequence>` with the definition `<definition>`. The star argument prevents that a dot is added at the end of the definition. An error is raised if `<control sequence>` already exists.

`\renewabbr*{<control sequence>}{<definition>}`

Redefines the abbreviation `<control sequence>` with the definition `<definition>`. The star argument prevents that a dot is added at the end of the definition. An error is raised if `<control sequence>` does not exist already.

`\defabbr*{<control sequence>}{<definition>}`

Defines or overwrites the abbreviation `<control sequence>` with the definition `<definition>`. The star argument prevents that a dot is added at the end of the definition.

`\cnltxtimeformat{<abbreviation>}`

Default: `\textsc{\,#1}`

Used in some predefined abbreviations.

`\cnltxlatin{<abbreviation>}`

Default: `\textit{\,#1}`

Used in some localization strings.

7. Usage of the Various Functions

`acronym-format = {\definition}`

Default: `\scshape`

Formatting of the acronyms as typeset with `\cnltxacronym`.

A short example of the usage of `\newname` and `\cnltxacronym`:

```
1 \newname\carlisle{David}{Carlisle}%  
2 \carlisle\ is a well-known member of the \LaTeX\ community. \carlisle* is  
3 the author of many packages such as \pkg*[longtable]. Take a look in the  
4 index where you'll find \carlisle* mentioned.  
5  
6 \lppl\ is defined as \cnltxacronym{LPPL}{\lppl}.
```

David Carlisle is a well-known member of the \LaTeX community. Carlisle is the author of many packages such as longtable. Take a look in the index where you'll find Carlisle mentioned.

LPPL is defined as LPPL.

7.7.2. Defining Abbreviations

In section 7.7.1 when describing `\newabbr` and similar commands I said “The star argument prevents that a dot is added at the end of the definition”. We should clarify what that means. Many abbreviations end with a dot. Some don't which explains the starred form of the commands. But why add a dot automatically in the first place? The reasoning is two-fold:

- Suppose you add the dot explicitly in the definition but forget one or two times that you did – you'll end up with abbreviations followed by *two* dots! Macros defined with `CNLTTX-TOOLS` recognize a following dot and will not print a second one in those cases.
- In a document where `\nonfrenchspacing` is active the space after a dot in the middle of a sentence should be shorter than the one after the full stop ending a sentence. \TeX automatically interprets a dot following a small letter as the end of a sentence and a dot after a capital letter as a dot after an abbreviation inside of a sentence. Usually you solve this by adding `\@` in the appropriate places: e.\,g.\@ for an intra-sentence space and NASA \@. for an inter-sentence space. The dot added by `CNLTTX-TOOLS` always will be followed by an intra-sentence space. If you add a dot explicitly it will be your responsibility. Per default it will then act like a dot after a small letter.

Let's see some example:

7. Usage of the Various Functions

```
1 \ttfamily% <= this will amplify the visual effect of \nonfrenchspacing
2 \newabbr\ab{a.b}%
3 \newabbr\AB{A.B}%
4 \newabbr*\cd{c.d.}%
5 \ab\ and some words\par
6 \ab. and some words\par
7 \AB\ and some words\par
8 \AB. and some words\par
9 \cd\ and some words
```

a.b. and some words
a.b. and some words
A.B. and some words
A.B. and some words
c.d. and some words

Beware: **CNLTX-TOOLS** will only leave the dot out if one follows directly in the input! That means that spaces are not ignored. However, of course \TeX ignores spaces after macro names so usually this won't be an issue. If you define an abbreviation with a macro name consisting of one non-letter where spaces are not ignored you have to keep this fact in mind, though.

7.7.3. Predefined Abbreviations

CNLTX-TOOLS already provides a bunch of abbreviations defined with its **\newabbr** command.

Abbreviations that allow Localization

CNLTX-TOOLS defines a few abbreviations that are sensitive to babel settings. Currently only translations for English and German are provided and the definition falls back to the English version if you're using a language other than those. It is possible to add further localization strings quite easily, see section 13.

\ie

Prints “i. e.” or “d. h.”

\eg

Prints “e. g.” or “z. B.”

\etc

Prints “etc.” or “etc.”

\cf

Prints “cf.” or “vgl.”

All of these macros add a final dot followed by **\@** *except* if a dot *directly* follows the macro.

```
1 \eg\ and some following text\par
2 \eg, and some following text\par
3 \eg. and some following text\par
4 \selectlanguage{ngerman}
5 \eg\ and some following text\par
6 \eg, and some following text\par
7 \eg. and some following text
```

e. g. and some following text
e. g., and some following text
e. g. and some following text
z. B. and some following text
z. B., and some following text
z. B. and some following text

7. Usage of the Various Functions

German Abbreviations

The following abbreviations are not sensitive to localization and only of use in a German text. Although they're defined: *please* do not use abbreviations at the start of a sentence!

`\dsh`

Prints "d. h."

`\Dsh`

Prints "D. h."

`\usf`

Prints "usf."

`\usw`

Prints "usw."

`\uswusf`

Prints "usw. usf."

`\zB`

Prints "z. B."

`\ZB`

Prints "Z. B."

`\vgl`

Prints "vgl."

`\Vgl`

Prints "Vgl."

These macros behave the same as the ones described in section 7.7.3 on the preceding page.

1 <code>\dsh\</code> und weiterer Text <code>\par</code>	d. h. und weiterer Text
2 <code>\dsh.</code> und weiterer Text <code>\par</code>	d. h. und weiterer Text
3 <code>\usw\</code> und weiterer Text <code>\par</code>	usw. und weiterer Text
4 <code>\usw.</code> und weiterer Text <code>\par</code>	usw. und weiterer Text
5 <code>\usf\</code> und weiterer Text <code>\par</code>	usf. und weiterer Text
6 <code>\usf.</code> und weiterer Text <code>\par</code>	usf. und weiterer Text
7 <code>\zB\</code> und weiterer Text <code>\par</code>	z. B. und weiterer Text
8 <code>\zB.</code> und weiterer Text	z. B. und weiterer Text

Time related Abbreviations

The abbreviations presented in this section differ from the others in that they're formatted by the command `\csltxtimeformat{}`, see section 7.7.1 on page 22.

`\AM`

Prints "A.M."

8. Formatting Possibilities

`\PM`

Prints “P.M.”

`\AD`

Prints “A.D.”

`\BC`

Prints “B.C.”

In their current definition these abbreviations are meant to be used *directly* after the time of day or the date, respectively.

1 She left for work before 6\AM, but
2 did not arrive until 12\PM. The
3 interval 5\BC--5\AD\ is one year
4 shorter than the interval
5 95\AD--105\AD.

She left for work before 6 A.M., but did
not arrive until 12 P.M. The interval
5 B.C.–5 A.D. is one year shorter than the
interval 95 A.D.–105 A.D.

8. Formatting Possibilities

One of the goals I wanted to achieve with this package is a consistent look and an easy interface for customization. No font choice and no color choice is fixed. In this section ways to change the formatting are shown.

The formatting of the different commands provided by `CNLTX` and various other properties can be changed in two ways: either by redefining the internal commands that are used for the formatting or by setting a corresponding option. Both variants are described in the next subsections.

How the colors should be changed is described in section 12 on page 39.

8.1. Formatting by Redefining Hooks

You can change the formatting by redefining the following commands. They’re all defined by the `CNLTX-EXAMPLE` package except where indicated differently.

`\codefont`

Default: `\ttfamily`

This command is used for all formatting of source code.

`\sourceformat`

Default: `\codefont\small`

Formatting of the listings.

`\exampleformat`

(initially empty)

Special formatting of the output of a listing.

`\versionnoteformat`

Default: `\footnotesize\sffamily\RaggedRight`

Formatting of the notes introduced in section 5.2 on page 7.

8. Formatting Possibilities

<code>\packageformat</code>	Default: <code>\sffamily</code>
The formatting of package names.	
<code>\classformat</code>	Default: <code>\sffamily</code>
The formatting of class names.	
<code>\argumentformat</code>	Default: <code>\normalfont\itshape</code>
The formatting of <code>\meta{⟨meta⟩}</code> .	

```
1 \renewcommand*\codefont{\sffamily\bfseries}
2 \code{foo} and \cs*{bar}, option \option{baz}
```

foo and **\bar**, option **baz**

8.2. Formatting by Setting Options

You can change the formatting of by setting the following options. They're all defined by the **CNLTX-EXAMPLE** package except where indicated differently.

Introduced in version 0.2	<code>title-format = {⟨definition⟩}</code>	Default: <code>\bfseries\scshape</code>
Formatting of the document title.		
Introduced in version 0.6	<code>abstract-width = {⟨dimension⟩}</code>	Default: <code>.75\linewidth</code>
The width of the <code>\parbox</code> the abstract as set with the <code>abstract</code> option is placed in.		
Introduced in version 0.6	<code>abstract-format = {⟨definition⟩}</code>	Default: <code>\setlength\parskip{.333\baselineskip}</code>
Code that is placed in the parbox the abstract is placed in <i>before</i> the abstract text.		
	<code>caption-font = {⟨definition⟩}</code>	Default: <code>\normalfont\small\sffamily</code>
This option only has any effect if you use the option <code>load-preamble</code> , see section 9.5 on page 31 for details on the option.		
	<code>caption-label-font = {⟨definition⟩}</code>	Default: <code>\normalfont\small\sffamily\scshape</code>
This option only has any effect if you use the option <code>load-preamble</code> , see section 9.5 on page 31 for details on the option.		
	<code>code-font = {⟨definition⟩}</code>	Default: <code>\ttfamily</code>
Used for all formatting of source code.		
	<code>source-format = {⟨definition⟩}</code>	Default: <code>\codefont\small</code>
Formatting of the listings.		
	<code>expl-format = {⟨definition⟩}</code>	(initially empty)
Special formatting of the output of a listing.		

9. Commands, Options and Further Settings Directly Related to the **CNLTx-DOC** Class

provided by
CNLTx-DOC

module-sep = { \langle definition \rangle } Default: \, >> \,
Change the separator between module name and corresponding option name.

provided by
CNLTx-DOC

version-note-format = { \langle definition \rangle } Default: \footnotesize\sffamily\RaggedRight
Formatting of the notes introduced in section 5.2 on page 7.

pkg-format = { \langle definition \rangle } Default: \sffamily
The formatting of package names.

cls-format = { \langle definition \rangle } Default: \sffamily
The formatting of class names.

arg-format = { \langle definition \rangle } Default: \normalfont\itshape
The formatting of \meta{ \langle meta \rangle }.

Introduced in
version 0.2

default-format = { \langle code \rangle } Default: \uline
The formatting of \default's argument. \langle code \rangle 's last macro should take one argument.

```
1 \setcnltx{code-font=\sffamily\itshape}
2 \code{foo} and \cs*{bar}, option \option{baz}
```

foo and \bar, option baz

9. Commands, Options and Further Settings Directly Related to the **CNLTx-DOC** Class

9.1. Using Class Options

The **CNLTx-DOC** class only knows a few options:

load-preamble = true | false Default: false
See section 9.5 on page 31 for details.

load-preamble+ = true | false Default: false
See section 9.6 on page 33 for details.

add-index = true | false Default: false
See section 9.6 on page 33 for details.

babel-options = { \langle options \rangle } Default: english
Options given to the babel¹⁸ package. This option only has an effect if **load-preamble** = true.

scrartcl = { \langle options \rangle } (initially empty)
Options that are passed to the underlying class scrartcl. *All global options you want to use should be given here.*

18. on CTAN as babel: <http://mirrors.ctan.org/macros/latex/required/babel/>

9.2. Information on the Described Package or Class

A manual for a package or a class needs some information on the described package like the package name, the version number, the date and so on. This information is given with the following options. They are used to build the title page of the manual.

package = { $\langle package \rangle$ }

The name of the package that is described. Either this option or **class** or **name** should always be given. This command also defines a command sequence from the package name that formats the package name with color and small caps like **CNLTx**.

class = { $\langle class \rangle$ }

The name of the class that is described. Either this option or **package** or **name** should always be given. This command also defines a command sequence from the class name that formats the class name with color and small caps like **CNLTx**.

name = { $\langle name \rangle$ }

The name of the class/package that is described. Either this option or **package** or **class** should always be given. This command also defines a command sequence from the class name that formats the class name with color and small caps like **CNLTx**.

authors = { $\langle author list \rangle$ }

Comma separated list of package/class authors. After each author name you can add an email address by writing it in square brackets: Some Name[some@name.com]. Email addresses specified this way get written as a footnote. At least one author should always be given.

version = { $\langle version number \rangle$ }

Version number of the package/class. **CNLTx** tries to extract the information from the given **package** or **class**. This option can be used to set it explicitly.

date = { $\langle date \rangle$ }

Date of the package/class. **CNLTx** tries to extract the information from the given **package** or **class**. This option can be used to set it explicitly.

info = { $\langle package/class info \rangle$ }

Information about the package/class. **CNLTx** tries to extract the information from the given **package** or **class**. This option can be used to set it explicitly.

subtitle = { $\langle subtitle \rangle$ }

A subtitle, printed below the package/class name.

url = { $\langle url \rangle$ }

The homepage of the package.

email = { $\langle email \rangle$ }

A contact email address.

Changed in
version 0.4

`abstract = {\abstract}`

An abstract of the package/class/manual. This is text typeset in a box of `.75\linewidth`. Actually it does not have to be text but could be an image or whatever you like.

9.3. Building of the Manuals Title Page

If either the `package` or `class` has been given an automatic title page is built using the gathered information. Figure 1 roughly sketches which informations is used and how the different elements are arranged on the title page. The page style of the title page is `plain`. Additionally a table of contents is automatically built that is set in two columns. The automatic building of the title page can be prevented by explicitly setting the following option:

`build-title = true|false`

The default state depends on other options given like `package`. However, setting this option to `false` *after* any of the options described in section 9.2 on the previous page will prevent the building of a title page and allows you to design your own.

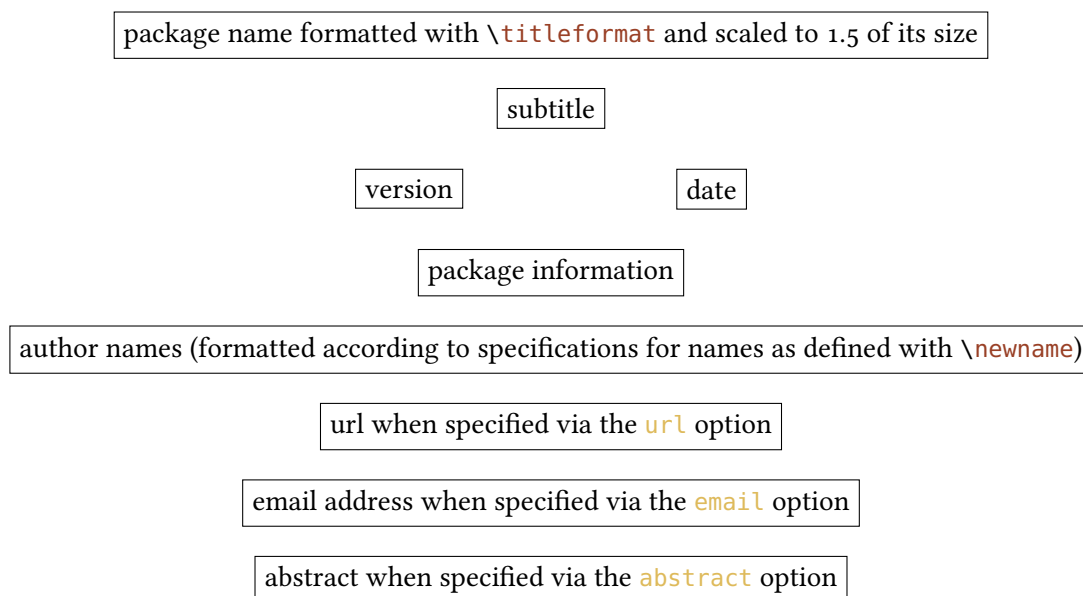


FIGURE 1: Schematic sketch of the title page.

9.4. A Quotation Environment

Introduced in
version 0.5

*CNLT*X-DOC provides a quotation environment:

`\begin{cnltxquote}[\author/reference]`

A quotation environment.

9. Commands, Options and Further Settings Directly Related to the *CNLT*X-DOC Class

The environment sets the body indented on both sides as it simply uses a quote environment internally. The contents of the optional argument is set flush right after the environment's body. The formatting is controlled by two options:

`quote-format = {⟨definition⟩}` Default: `\small\sffamily`

The formatting of the environment's body.

`quote-author-format = {⟨definition⟩}` Default: `\itshape`

```
1 \begin{cnltxquote}[Douglas Adams, The Restaurant at the End of the Universe]
2   ‘‘The first ten million years were the worst,’’ said Marvin, ‘‘and the
3   second ten million years, they were the worst too. The third ten million
4   years I didn’t enjoy at all. After that I went into a bit of a decline.’’
5 \end{cnltxquote}
```

“The first ten million years were the worst,” said Marvin, “and the second ten million years, they were the worst too. The third ten million years I didn’t enjoy at all. After that I went into a bit of a decline.”

Douglas Adams, The Restaurant at the End of the Universe

9.5. Predefined Preamble

It is possible to load a part of my standard preamble automatically by passing an option as class option.

`load-preamble`

Class option that preloads part of my custom preamble.

Using the option will include the following code:

```
1 \RequirePackage{ifxetex,ifluatex}
2 \ifboolexpr{not bool{xetex} and not bool{luatex}}
3   {\RequirePackage[T1]{fontenc}}
4   {\RequirePackage{fontspec}}
5 \RequirePackage[oldstyle]{libertine}
6 % ‘libertinehologopatch’ is not on CTAN, yet!
7 % you can get it at https://bitbucket.org/cgnieder/libertinehologopatch/
8 \RequirePackage{libertinehologopatch}
9 \RequirePackage[supstfm=libertinesups]{superiors}
10 % libertine does not have superior letters:
11 \def\@makefnmark{%
12   \hbox{%
```

9. Commands, Options and Further Settings Directly Related to the *CNLT*X-DOC Class

```

13 \cnltx@ifisnum{\@thefnmark}
14 {\textsu{\hspace*{\superiors@spaced}\@thefnmark}}
15 {\@textsuperscript{\normalfont\@thefnmark}}}%
16 }%
17 }
18 \RequirePackage{microtype}
19 \ifboolexpr
20 {
21   test {\ifcsdef{MT@pr@set@romansans}} and
22   test {\ifcsdef{MT@pr@set@romansans}}
23 }
24 {}
25 {
26   \DeclareMicrotypeSet{romansans}{
27     encoding = {*},
28     family   = {rm*,sf*}
29   }
30 }
31 \ifcsdef{MT@tr@set@scshape}
32 {}
33 {
34   \DeclareMicrotypeSet[tracking]{scshape}{
35     encoding = {*} ,
36     shape    = {sc,scit,si}
37   }
38 }
39 \microtypesetup{
40   tracking    = scshape ,
41   protrusion = romansans ,
42   expansion  = romansans
43 }
44 \ifboolexpr{not bool{xetex} and not bool{luatex}}
45 {\RequirePackage[scaled=.79]{beramono}}
46 {\setmonofont[Scale=MatchLowercase]{Bitstream Vera Sans Mono}}
47 \RequirePackage{fnpct}
48 \expandafter\RequirePackage\expandafter[\cnltx@babel@options]{babel}
49 \renewcommand*{\othersectionlevelsformat[3]}{%
50   \textcolor{cnltx}{#3\autodot}\enskip}
51 \renewcommand*{\partformat}%
52   \textcolor{cnltx}{\partname~\thepart\autodot}}
53 \deffootnote{2em}{1em}{\llap{\thefootnotemark. }}%
54 \pagestyle{headings}
55 \setcapindent{1.5em}
56 \setkomafont{caption}{\cnltx@caption@font}
57 \setkomafont{captionlabel}{\cnltx@captionlabel@font}

```

The effect of this preamble is demonstrated by the document you're reading at this moment.

9.6. Predefined Indexing

*CNLT*X-DOC allows the automated creation of an index. This is done with the help of the `imakeidx` package by Enrico Gregorio [Gre13]. To use this feature you have two class options. They cannot be set with `\setcnltx` but must be given as class options.

`add-index` = `true`|`false` Default: `false`
 Enables the automatic creation of an index at the end of the document.

`load-preamble+` = `true`|`false` Default: `false`
 This option has the same effect as adding the options `load-preamble`, `add-index` and `add-bib`.

Enabling the feature

- loads the `imakeidx`¹⁹ package,
- uses a given style file for the index that can be specified with the `index-style` option,
- sets a certain setup for the index that can be specified with the `index-setup` option and
- adds an index at the end of the document.

The following options are available to customize the appearance of the index:

`index-prologue` = `{<text>}`
 Adds `<text>` as index prologue between heading and the actual index.

`index-space` = `{<dimension>}` Default: `0pt`
 The vertical space between index prologue and index.

`index-setup` = `{<options>}` Default: `othercode=\footnotesize,level=\addsec`
 The options that are passed to `imakeidx`'s `\indexsetup` command.

`makeindex-setup` = `{<options>}` Default: `columns=2,columnsep=1em`
 The options that are passed to the `\makeindex` command.

`index-style` = `{<style file>}` Default: `cnltx.ist`
 The style file that is used for formatting the index.

The index style file `cnltx.ist` contains the following lines:

```

1 heading_prefix "{\bfseries "
2 heading_suffix "\\hfil}\\nopagebreak\n"
3 headings_flag 1
4 delim_0 "\\dotfill"
5 delim_1 "\\dotfill"
6 delim_2 "\\dotfill"
7 delim_r "\\nohyperpage{\\textendash}"
8 delim_t ""
9 suffix_2p "\\nohyperpage{\\,\\GetTranslation{cnltx-f.}\\@}"
    
```

19. on CTAN as `imakeidx`: <http://mirrors.ctan.org/macros/latex/contrib/imakeidx/>

```
10 suffix_3p "\\nohyperpage{\\,\\GetTranslation{cnltx-ff.}\\@}"
```

The feature is demonstrated by this document which does not contain a single control sequence containing the string index!

9.7. Bibliography with biblatex

9.7.1. A Bibliography Entry Type package for biblatex

Introduced in
version 0.4

*CNLT*X-DOC defines a bibliography entry type package when biblatex [Leh13] is used. This allows specifying L^AT_EX packages in bib files:

```
1 @package{pkg:chngcntr,
2   title      = {chngcntr} ,
3   author     = {Peter Wilson} ,
4   maintainer = {Will Robertson} ,
5   date       = {2009-09-02} ,
6   version    = {1.0a} ,
7   url        = {http://mirror.ctan.org/macros/latex/contrib/chngcntr}
8 }
```

As you can see also an entry field maintainer is defined. For this to work you have to use the biblatex bibliography style *cnltx*. This style basically is a clone of the style *alphabetic* but defines the necessary additions for the package entry type and the maintainer entry field. Along with the bibliography style a citation style *cnltx* is provided, again a clone of the *alphabetic* style. The only addition it makes is that indexing of maintainer names is enabled if biblatex's indexing option is used. *The styles can only be used with the CNLT*X-DOC class as it relies on definitions made by it.

This document uses the following call of biblatex:

```
1 \usepackage[
2   backend=biber,
3   style=cnltx,
4   sortlocale=en_EN,
5   indexing=cite,
6   useprefix]{biblatex}
7 \addbibresource{cnltx.bib}
```

Actually it let's *CNLT*X-DOC do it, see section 9.7.2 for details.

Just for the sake of the example I am going to cite the *chngcntr* package now [Wil09] so you can see both the bibliography entry and the indexed names of package, author and maintainer in the appendix.

9.7.2. Automatic Bibliography

CNLTx-DOC allows the automated creation of a bibliography.

add-bib = `true|false` Default: false
 Enables the automatic creation of a bibliography at the end of the document.

load-preamble+ = `true|false` Default: false
 This option has the same effect as adding the options **load-preamble**, **add-index** and **add-bib**.

What this options does is including the following code:

```

1 \RequirePackage[
2   backend=biber,
3   style=cnltx,
4   sortlocale=en_EN,
5   indexing=cite,
6   useprefix]{biblatex}
7 \addbibresource{cnltx.bib}
8 \AtEndDocument{\printbibliography}

```

As you can see there's also a bibliography database file `cnltx.bib` that provides a yet small but growing number of package entries.

10. Predefined listings and mdframed Styles

10.1. mdframed

The source code environments (see section 7.4 on page 15) all get a frame with the help of the `mdframed` [Dan13] package. For this a custom style is defined called `cnltx`. The options **frame-options** and **add-frame-options** mentioned in section 7.4 on page 15 manipulate this style. It is predefined with these values:

```

1 \def\cnltx@mdframed@options{
2   backgroundcolor = cnltxbg ,
3   linecolor       = cnltx ,
4   roundcorner     = 5pt
5 }

```

10.2. listings

10.2.1. L^AT_EX Sourcecode

The code of the source code environments (see section 7.4 on page 15) is formatted with the help of the `listings` package [HM13]. A listings style is defined called `cnltx`. The options **add-cmds**,

10. Predefined listings and mdframed Styles

`add-silent-cmds`, `add-envs`, `add-silent-envs`, `listings-options` and `add-listings-options` manipulate this style. It is predefined by **CNLTX-EXAMPLE** as follows:

```
1 \def\cnltx@listings@style{
2   language      = [AlLaTeX]TeX,
3   alsolanguage  = [plain]TeX,
4   basicstyle    = {\sourceformat},
5   numbers      = left,
6   numberstyle   = \tiny,
7   xleftmargin   = 1em,
8   numbersep     = .75em,
9   gobble        = \cnltx@gobble ,
10  columns       = fullflexible,
11  literate      =
12    {ä}{{\a}}1
13    {ö}{{\o}}1
14    {ü}{{\u}}1
15    {Ä}{{\A}}1
16    {Ö}{{\O}}1
17    {Ü}{{\U}}1
18    {ß}{{\ss}}1 ,
19  breaklines    = true,
20  keepspaces    = true,
21  breakindent   = 1em,
22  commentstyle  = \color{comment},
23  keywordstyle  = \color{cs},
24  deletetexcs   =
25    {
26      a,o,u,A,O,U,
27      begin,
28      center,
29      description,document,
30      end,enumerate,
31      figure,flushleft,flushright,
32      itemize,list,
33      otherlanguage,
34      table,tabu,tabular
35    },
36  deletekeywords =
37    {
38      a,o,u,A,O,U,
39      begin,
40      center,
41      description,document,
42      end,enumerate,
43      figure,flushleft,flushright,
44      itemize,list,
45      otherlanguage,
```

```

46     table, tabu, tabular
47   },
48   % \begin, \end:
49   texcsstyle      = [2]\color{beginend},
50   index           = [2][texcs2],
51   indexstyle      = [2]\@gobble,
52   moretexcs       = [2]{begin,end},
53   % added environments that'll be indexed:
54   texcsstyle      = [3]\color{env},
55   index           = [3][texcs3],
56   indexstyle      = [3]\envidx,
57   % environments that won't be indexed:
58   texcsstyle      = [4]\color{env},
59   index           = [4][texcs4],
60   indexstyle      = [4]\@gobble,
61   % control sequences that'll be indexed:
62   texcsstyle      = [5]\color{cs},
63   index           = [5][texcs5],
64   indexstyle      = [5]\indexcs,
65   % control sequences that won't be indexed:
66   texcsstyle      = [6]\color{cs},
67   index           = [6][texcs6],
68   indexstyle      = [6]\@gobble
69 }

```

10.2.2. BibTeX Entries

Introduced in
version 0.4

The **CNLTX-LISTINGS** package defines a listings language BibTeX that contains a huge number of bibentry types and bibentry field types, have a look at section 9.7.1 on page 34. **CNLTX-EXAMPLE** defines a listings style for formatting them called `cnltx-bibtex`:

```

1  \def\cnltx@bibtex@listings@style{
2    language      = BiBTeX,
3    basicstyle    = {\sourceformat},
4    numbers       = left,
5    numberstyle   = \tiny,
6    xleftmargin   = 1em,
7    numbersep     = .5em,
8    gobble        = \cnltx@gobble ,
9    columns       = fullflexible,
10   literate       =
11     {ä}{\{"a}}1
12     {ö}{\{"o}}1
13     {ü}{\{"u}}1
14     {Ä}{\{"A}}1
15     {Ö}{\{"O}}1
16     {Ü}{\{"U}}1

```

```

17   {\B}{\ss}}1 ,
18   breaklines      = true,
19   keepspaces      = true,
20   breakindent     = 1em,
21   commentstyle    = \color{comment},
22   keywordstyle    = \color{bibentry} ,
23   keywordstyle    = [2]\color{bibentryfield}\itshape ,
24   showstringspaces = false ,
25 }

```

10.2.3. makeindex Style Files

Introduced in
version 0.7

CNLTX-LISTINGS defines a listings language makeindex that contains the keywords used in makeindex style files. **CNLTX-EXAMPLE** defines a listings style for formatting them called `cnltx-makeindex`:

```

1 \def\cnltx@makeindex@listings@style{
2   language      = makeindex,
3   basicstyle    = {\sourceformat},
4   numbers      = left,
5   numberstyle   = \tiny,
6   xleftmargin   = 1em,
7   numbersep     = .75em,
8   gobble       = \cnltx@gobble ,
9   columns      = fullflexible,
10  literate      =
11    {ä}{\a}}1
12    {ö}{\o}}1
13    {ü}{\u}}1
14    {Ä}{\A}}1
15    {Ö}{\O}}1
16    {Ü}{\U}}1
17    {\B}{\ss}}1 ,
18  breaklines    = true,
19  keepspaces    = true,
20  breakindent   = 1em,
21  commentstyle  = \color{comment},
22  keywordstyle  = \color{makeidxkey}\bfseries ,
23  stringstyle   = \color{makeidxstring} ,
24  showstringspaces = false
25 }

```

11. PDF Strings and hyperref

Since the formatting and indexing commands `\cs`, `\env`, `\option`, `\pkg`, `\cls` and `\key` are robust they are ignored in PDF strings. For this reason you should *only use the starred variants*

in places where PDF bookmarks are built from such as section titles when you use `hyperref` [OR12]. Since **CNLT_X-DOC** loads `hyperref` this means you should do so, too, when you use **CNLT_X-DOC**. This is important for two reasons:

1. Indexing in strings that get written to the table of contents does not make much sense, anyway, so the starred versions should be used in section titles even if you don't use `hyperref`.
2. When `hyperref` is loaded the mentioned commands are disabled in PDF strings in a way that *expects* them to be followed by a star. This means leaving the star out will result in doesn't match its definition errors.

12. Predefined Colors and Color-Schemes

12.1. Explicitly Defined Colors

The **CNLT_X-BASE** package defines a number of colors:

cnltxbrown

Per default used for the control sequences.

cnltxblue

Per default used for module names.

cnltxred

Per default used as base color in various places.

cnltxgreen

Unused per default.

cnltxgray

Per default used for formatting comments.

cnltxyellow

Per default used for option names.

cnltxformalblue

Unused per default.

cnltxformalred

Unused per default.

12.2. Actual Used Color Names and Color Schemes

The colors defined in section 12.1 are not directly used with those names. Instead colors are used whose names describe their function rather than the color. For this the color names are mapped to actual colors and saved as a coloring scheme. There are currently three predefined color schemes whose definitions are given below. Those definitions also show the actually used color names. They are defined via the following command:

12. Predefined Colors and Color-Schemes

Introduced in
version 0.5

`\definecolorscheme{<name>}{<color assignments>}`

Defines the color scheme `<name>`. When used all assignments will be actually carried out with `xcolor's \colorlet` command. How to input `<color assignments>` will be immediately clear from the examples below.

The 'default' color scheme is defined as follows:

```
1 \definecolorscheme{default}{
2   cs          => cnltxbrown , % command sequences
3   option      => cnltxyellow , % options
4   module      => cnltxblue , % modules
5   comment     => cnltxgray , % comments
6   beginend    => red , % \begin and \end
7   env         => black , % environment names
8   argument    => black , % argument delimiters
9   meta        => black!80 , % arguments of \meta
10  cnltx       => cnltxred , % base color
11  cnltxbg     => white , % source code box background
12  link        => black!90 , % hyperlinks
13  versionnote => black!75 % versioning notes text
14  bibentry    => cnltxgreen , % BibTeX entry types
15  bibentryfield => black , % BibTeX entry fields
16  expandable  => red , % the color used in \expandable
17  unexpandable => black , % the color used in \unexpandable
18  makeidxkey  => cnltxgreen , % used for keywords in the cnltx-makeindex
19  % style
20  makeidxstring => black % used for strings in the cnltx-makeindex
21  % style
22 }
```

The 'blue' color scheme is defined this way:

```
1 \definecolorscheme{blue}{
2   cs          => cnltxbrown ,
3   option      => cnltxgreen ,
4   module      => cnltxred ,
5   comment     => cnltxgray ,
6   beginend    => red ,
7   env         => black ,
8   argument    => black ,
9   meta        => black!80 ,
10  cnltx       => cnltxblue ,
11  cnltxbg     => yellow!10 ,
12  link        => cnltx ,
13  versionnote => black!75
14  bibentry    => cnltxyellow ,
15  bibentryfield => black ,
```


13. Language Support

```
16 expandable    => red ,
17 unexpandable => black ,
18 makeidxkey    => cnltxyellow ,
19 makeidxstring => black
20 }
```

Finally the ‘formal’ color scheme is defined like this:

```
1 \definecolorscheme{formal}{
2   cs                => black ,
3   option            => cnltxformalblue ,
4   module            => cnltxblue ,
5   comment           => cnltxgray ,
6   beginend          => red ,
7   env               => black ,
8   argument          => black ,
9   meta              => black!80 ,
10  cnltx              => cnltxformalblue ,
11  cnltxbg            => white ,
12  link               => black!90 ,
13  versionnote        => black!75 ,
14  bibentry           => black ,
15  bibentryfield      => black ,
16  expandable         => red ,
17  unexpandable       => black ,
18  makeidxkey         => black ,
19  makeidxstring      => black
20 }
```

13. Language Support

Introduced in
version 0.2

The **CNLTX-DOC**, the **CNLTX-EXAMPLE** and the **CNLTX-TOOLS** package all rely on the translations package [Nie13c] for providing some document language dependent strings. Currently only translations for English and German are provided. Others can be added and the existing ones changed with the following command provided by the translations package:

\DeclareTranslation{*<language>*}{*<keyword>*}{*<translation>*}

Provide translations for the string identified by the ID *<keyword>*.

The defined strings are listed in table 1 on the next page. They are used in indexing strings and in different parts of the document.

13. Language Support

TABLE 1: Overview over available internationalization key words.

Package/Class	key word	English version	German version
CNLTX-EXAMPLE	<code>cnltx-package</code>	package	Paket
CNLTX-EXAMPLE	<code>cnltx-class</code>	class	Klasse
CNLTX-EXAMPLE	<code>cnltx-environment</code>	environment	Umgebung
CNLTX-DOC	<code>cnltx-default</code>	Default	Voreinstellung
CNLTX-DOC	<code>cnltx-empty</code>	initially empty	zunächst leer
CNLTX-DOC	<code>cnltx-required</code>	required	erforderlich
CNLTX-DOC	<code>cnltx-toc</code>	Table of Contents	Inhaltsverzeichnis
CNLTX-DOC	<code>cnltx-license</code>	Permission is granted to copy, distribute and/or modify this software under the terms of the \LaTeX Project Public License (LPPL), version 1.3 or later (http://www.latex-project.org/lppl.txt). The software has the status	Es ist erlaubt, diese Software unter den Bedingungen der \LaTeX Project Public License (LPPL), Version 1.3 oder später, zu kopieren und zu verteilen (http://www.latex-project.org/lppl.txt). Sie hat den Status
CNLTX-DOC	<code>cnltx-introduced</code>	Introduced in version	Eingeführt in Version
CNLTX-DOC	<code>cnltx-changed</code>	Changed in version	Geändert in Version
CNLTX-DOC	<code>cnltx-f.</code>	f.	f.
CNLTX-DOC	<code>cnltx-ff.</code>	ff.	ff.
CNLTX-DOC	<code>cnltx-maintainer</code>	current maintainer	aktueller Maintainer
CNLTX-DOC	<code>cnltx-maintainers</code>	current maintainers	aktuelle Maintainer
CNLTX-TOOLS	<code>cnltx-i.e.</code>	<i>i.e</i>	d.h
CNLTX-TOOLS	<code>cnltx-e.g.</code>	<i>e.g</i>	z.B
CNLTX-TOOLS	<code>cnltx-cf.</code>	<i>cf</i>	vgl
CNLTX-TOOLS	<code>cnltx-etc.</code>	<i>etc</i>	etc

Part III.

Appendix

A. Internal Helper Commands

The commands in this section are only described for the sake of completeness. They are not meant to be used in a document. Expandable commands are marked with ***.

A.1. Defined by **CNLTX-BASE**

Especially **CNLTX-BASE** defines some useful helper macros that are also used by the other packages and classes.

A.1.1. Related to the Bundle

*** `\cnltx@@date`

The creation date of the current version of the bundle.

*** `\cnltx@@version`

The version number of the bundle.

*** `\cnltx@@info`

The short description of the bundle.

`\cnltx@create@bundle@message*{<module>}{Error|Warning|WarningNoLine|Info}`

Create suiting error and warning messaging commands for the module *<module>* of the **CNLTX** bundle. The starred version creates messages for a class the un-starred version messages for a package.

`\cnltx@base@error{<message>}`

Issue an error message using `\PackageError{cnltx-base}`.

`\cnltx@base@warning{<message>}`

Issue a warning message using `\PackageWarning{cnltx-base}`.

`\cnltx@base@warningnoline{<message>}`

Issue a warning message using `\PackageWarningNoLine{cnltx-base}`.

`\cnltx@base@info{<message>}`

Issue a message using `\PackageInfo{cnltx-base}`.

`\cnltx@define@colorscheme{<name>}{<scheme definition>}`

Command that can be used to define a color scheme.

Introduced in
version 0.7

A.1.2. Programming Tools

`\cnltx@create@message*{⟨prefix⟩}{⟨package/class name⟩}{Error|Warning|WarningNoLine|Info}{⟨detailed error message⟩}`

Changed in
version 0.7

Create error and warning messaging commands `\⟨prefix⟩@error|warning|warningnoline|info{⟨message⟩}`. The starred version creates messages for a class the un-starred version messages for a package. All commands have one argument which takes the message.

`\cnltx@create@generic@message*{⟨prefix⟩}{⟨package/class name⟩}{Error|Warning|WarningNoLine|Info}`

Introduced in
version 0.7

Create error and warning messaging commands `\⟨prefix⟩@error|warning|warningnoline|info{⟨message⟩}`. The starred version creates messages for a class the un-starred version messages for a package. All commands have one argument which takes the message *except for the error command which gets two arguments*, the first for the short version and the second for the detailed message.

`\cnltx@par`

Expands to `\par`. Sometimes you need to smuggle a `\par` in a short macro ...

`*\iftest{⟨test directive⟩}{⟨true⟩}{⟨false⟩}`

Introduced in
version 0.7

Checks if `⟨test directive⟩` is true and either places `⟨true⟩` or `⟨false⟩` in the input stream. Test directive should be a \TeX test like `\ifx⟨token1⟩⟨token2⟩`. This is a command in the spirit of etoolbox's `\ifbool` that does the same for a boolean `⟨bool⟩` defined with `\newif\if⟨bool⟩` or `\newbool{⟨bool⟩}`. It corresponds to etoolbox's test directive for its `\ifboolexpr`.

`*\nottest{⟨test directive⟩}{⟨not true⟩}{⟨not false⟩}`

Introduced in
version 0.7

Checks if `⟨test directive⟩` is not true and either places `⟨not true⟩` or `⟨not false⟩` in the input stream. Test directive should be a \TeX test like `\ifx⟨token1⟩⟨token2⟩`. This is a command in the spirit of etoolbox's `\notbool` that does the same for a boolean `⟨bool⟩` defined with `\newif\if⟨bool⟩` or `\newbool{⟨bool⟩}`.

`\cnltx@ifsym{⟨token⟩}{⟨true⟩}{⟨false⟩}`

A generic version of \LaTeX 's `\ifstar` that checks if `⟨token⟩` follows if the input stream. If yes it is removed and `⟨true⟩` is placed in the input stream else `⟨false⟩`.

`\cnltx@ifdash{⟨true⟩}{⟨false⟩}`

A wrapper for `\cnltx@ifsym{-}`.

`\cnltx@ifbang{⟨true⟩}{⟨false⟩}`

Introduced in
version 0.3

A wrapper for `\cnltx@ifsym{!}`.

`*\cnltx@ifisnum{⟨token list⟩}{⟨true⟩}{⟨false⟩}`

Introduced in
version 0.6

Checks if `⟨token list⟩` is an integer zero or greater and leaves `⟨true⟩` in the input stream if it is an `⟨false⟩` if it isn't.

`\cnltx@expandargs(⟨specs⟩)⟨control sequence⟩`

Introduced in
version 0.7

This is a \LaTeX 2 ϵ version of `\expl3's \exp_args:N⟨specs⟩`. The command expands the arguments

A. Internal Helper Commands

of $\langle\text{control sequence}\rangle$ according to $\langle\text{specs}\rangle$. In $\langle\text{specs}\rangle$ N means unexpanded token, n means unexpanded braced group, c means braced group converted into a control sequence name, o means braced group expanded once, f means braced group expanded with `\romannumeral`, and x means braced group expanded with `\edef`.

* `\cnltx@stripbs`

A shortcut for `\expandafter\@gobble\string`.

`\cnltx@if@in{\tokenlist}\{<search>\}\{<true>\}\{<false>\}`

Places $\langle\text{true}\rangle$ in the input stream if $\langle\text{search}\rangle$ is found in $\langle\text{tokenlist}\rangle$ and $\langle\text{false}\rangle$ if it isn't.

`\cnltx@replace@once{\cs}\{<search>\}\{<replace>\}`

Replaces the first occurrence of $\langle\text{search}\rangle$ in the first expansion of $\langle\text{cs}\rangle$ with $\langle\text{replace}\rangle$.

`\cnltx@long@replace@once{\cs}\{<search>\}\{<replace>\}`

The same as `\cnltx@replace@once` but $\langle\text{cs}\rangle$ will be redefined with `\long`.

`\cnltx@replace@all{\cs}\{<search>\}\{<replace>\}`

Replaces all occurrences of $\langle\text{search}\rangle$ in the first expansion of $\langle\text{cs}\rangle$ with $\langle\text{replace}\rangle$.

`\cnltx@long@replace@all{\cs}\{<search>\}\{<replace>\}`

The same as `\cnltx@replace@all` but $\langle\text{cs}\rangle$ will be redefined with `\long`.

`\cnltx@remove@once{\cs}\{<search>\}`

Removes the first occurrence of $\langle\text{search}\rangle$ in the first expansion of $\langle\text{cs}\rangle$.

`\cnltx@long@remove@once{\cs}\{<search>\}`

The same as `\cnltx@remove@once` but $\langle\text{cs}\rangle$ will be redefined with `\long`.

`\cnltx@remove@all{\cs}\{<search>\}`

Removes all occurrences of $\langle\text{search}\rangle$ in the first expansion of $\langle\text{cs}\rangle$.

`\cnltx@long@remove@all{\cs}\{<search>\}`

The same as `\cnltx@remove@all` but $\langle\text{cs}\rangle$ will be redefined with `\long`.

Introduced in
version 0.3

Introduced in
version 0.3

Introduced in
version 0.3

Introduced in
version 0.3

Introduced in
version 0.3

Introduced in
version 0.3

A.2. Defined by **CNLTX-DOC**

`\cnltx@doc@error{\message}`

Issue an error message using `\ClassError{cnltx-doc}`.

`\cnltx@doc@warning{\message}`

Issue a warning message using `\ClassWarning{cnltx-doc}`.

`\cnltx@doc@warningnoline{\message}`

Issue a warning message using `\ClassWarningNoLine{cnltx-doc}`.

`\cnltx@doc@info{\message}`

Issue a message using `\ClassInfo{cnltx-doc}`.

`\cnltx@getfileinfo{<file name>}{<file extension>}`

Extract the date, version and background information for a package or a class and defines `\cnltx@package@date`, `\cnltx@package@version` and `\cnltx@package@info` to contain the extracted data.

`\cnltx@version@note{<note>}`

Command that is used for the versioning notes internally. Sets `\reversemarginpar` and then writes the note `<note>` to the margin with corresponding formatting.

`\begin{cnltxlist}`

The list environment that is used by the environments commands, options and environments.

A.3. Defined by **CNLT-X-EXAMPLE**

`\cnltx@example@error{<message>}`

Issue an error message using `\PackageError{cnltx-example}`.

`\cnltx@example@warning{<message>}`

Issue a warning message using `\PackageWarning{cnltx-example}`.

`\cnltx@example@warningnoline{<message>}`

Issue a warning message using `\PackageWarningNoLine{cnltx-example}`.

`\cnltx@example@info{<message>}`

Issue a message using `\PackageInfo{cnltx-example}`.

`\cnltxat`

Robust command that typesets ‘@’ with category code 11. An @ in command names confuses the indexing of the command names. Either one uses another symbol for makeindex’s “actual” recognition and also tells idxcmds [Nie13b] about it or one uses `\cnltxat` in `\cs` and friends. For the sake of convenience you can define a command like `\at` that expands to it.²⁰ In order not to overwrite any such existing macro it is not defined by **CNLT-X-EXAMPLE**. This document for example defines `\def\at{\cnltxat}`.

`\cnltxletterat`

An alias of `\cnltxat`.

`\cnltxotherat`

The same as `\cnltxat` but with a ‘@’ with category code 12.

`\cnltxbang`

The same as `\cnltxotherat` except that it contains a ‘!’.

`\cnltxequal`

The same as `\cnltxotherat` except that it contains a ‘=’.

20. This is important. If you `\let` it to `\cnltxat` index entries may be sorted differently! Remember: `\cnltxat` is robust.

`\cnltx@isvalue`

Used in definitions of the key/value option typesetting commands. Inserts a = with some stretchable space around and a legal break-point after it.

`\indexcs`

Version of `\csidx` that takes care of a `\textcompwordmark` inserted by listings. Also replaces all occurrences of @ with category code 11 or 12 with `\cnltxat`. Used to index commands in the sourcecode and example environments that have been added with `add-cmds`.

`\newarg[⟨arg formatting⟩]{⟨cs⟩}{⟨left delim⟩}{⟨right delim⟩}` Default: `\meta`

Command used to define the argument commands: `\newarg\marg{\{\}\{\}}`. The optional argument determines how the argument of the new command will be formatted. This is done with `\meta` per default. `\newarg[\code]\Marg{\{\}\{\}}`

Changed in
version 0.2

`\MakePercentComment`

Sets the category code of % to 14.

`\cnltx@copyablespace`

Prints a space that is also copyable. Uses the accsupp package by Heiko Oberdiek [Obe10].

`\cnltx@mdframed@options`

Predefined option list for the mdframed [Dan13] style `cnltx`.

`\cnltx@listings@style`

Predefined option list for the listings [HM13] style `cnltx`.

A.4. Defined by **CNLTX-LISTINGS**

`\cnltx@listings@error{⟨message⟩}`

Issue an error message using `\PackageError{cnltx-listings}`.

`\cnltx@listings@warning{⟨message⟩}`

Issue a warning message using `\PackageWarning{cnltx-listings}`.

`\cnltx@listings@warningnoline{⟨message⟩}`

Issue a warning message using `\PackageWarningNoLine{cnltx-listings}`.

`\cnltx@listings@info{⟨message⟩}`

Issue a message using `\PackageInfo{cnltx-listings}`.

`\cnltx@predefined@control@sequences`

A comma-separated list of predefined ‘silent’ control sequence names.

`\cnltx@predefined@environments`

A comma-separated list of predefined ‘silent’ environment names.

`\listsilentcmds`

Prints all known control sequence names formatted and separated with the separator set with `list-sep`. Requires **CNLTX-EXAMPLE**.

B. List of Known L^AT_EX Control Sequences

`\listsilentenvs`

Prints all known environment names formatted and separated with the separator set with `list-sep`. Requires **CNLTX-EXAMPLE**.

Introduced in
version 0.7

`\listbibfilekeys{⟨file name⟩}`

Prints all cite keys contained in the bibliography file `⟨file name⟩` formatted with `\code` and separated with the separator set with `list-sep`. Requires **CNLTX-EXAMPLE**.

Introduced in
version 0.7

`\listbibfiletypes{⟨file name⟩}`

Prints all citation types contained in the bibliography file `⟨file name⟩` formatted with `\code` and separated with the separator set with `list-sep`. Requires **CNLTX-EXAMPLE**.

Introduced in
version 0.7

`\listbibfileentries{⟨file name⟩}`

Prints all cite keys contained in the bibliography file `⟨file name⟩` formatted with `\code` and gives their respective entry types, separated with the separator set with `list-sep`. Requires **CNLTX-EXAMPLE**.

`list-sep = {⟨separator⟩}`

Default: `,\space`

Sets the separator for **CNLTX-LISTINGS**’ commands listing the different commands *etc.*

A.5. Defined by **CNLTX-TOOLS**

`\cnltx@tools@error{⟨message⟩}`

Issue an error message using `\PackageError{cnltx-tools}`.

`\cnltx@tools@warning{⟨message⟩}`

Issue a warning message using `\PackageWarning{cnltx-tools}`.

`\cnltx@tools@warningnoline{⟨message⟩}`

Issue a warning message using `\PackageWarningNoLine{cnltx-tools}`.

`\cnltx@tools@info{⟨message⟩}`

Issue a message using `\PackageInfo{cnltx-tools}`.

`\cnltx@accsupp{⟨actual text⟩}{⟨additional options⟩}{⟨TEX text⟩}`

A wrapper for package `accsupp`’s `\BeginAccSupp{ActualText = ⟨actual text⟩}⟨TEX text⟩\EndAccSupp{}`.

B. List of Known L^AT_EX Control Sequences

Below are listed all *predefined* control sequence names that are treated as “silent” names by **CNLTX**, that is, those defined by **CNLTX-LISTINGS**.

<code>\-, \@, \@alph, \@Alph,</code>	<code>\@ifpackageloaded, \@ifstar,</code>	<code>\@thefnmark, \a,</code>
<code>\@arabic, \@ctrerr, \@empty,</code>	<code>\@makefnmark, \@roman,</code>	<code>\AA, \aa, \above,</code>
<code>\@firstofone, \@firstoftwo,</code>	<code>\@Roman, \@secondoftwo,</code>	<code>\abovedisplayshortskip,</code>
<code>\@gobble, \@ifclassloaded,</code>	<code>\@slowromancap,</code>	<code>\abovedisplayskip,</code>
<code>\@ifnextchar,</code>	<code>\@textsuperscript,</code>	<code>\abovewithdelims,</code>

B. List of Known \LaTeX Control Sequences

<code>\accent</code> , <code>\active</code> , <code>\acute</code> ,	<code>\biggl</code> , <code>\Biggl</code> , <code>\biggm</code> ,	<code>\dbltextfloatsep</code> ,
<code>\addbibresource</code> ,	<code>\Biggm</code> , <code>\biggr</code> , <code>\Biggr</code> ,	<code>\dbltopfraction</code> ,
<code>\addcontentsline</code> ,	<code>\bigl</code> , <code>\Bigl</code> , <code>\bigm</code> , <code>\Bigm</code> ,	<code>\ddag</code> , <code>\ddagger</code> , <code>\ddot</code> ,
<code>\addpenalty</code> , <code>\addtocontents</code> ,	<code>\bigodot</code> , <code>\bigoplus</code> ,	<code>\ddots</code> , <code>\deadcycles</code> ,
<code>\addtocounter</code> , <code>\addtolength</code> ,	<code>\bigotimes</code> , <code>\bigr</code> , <code>\Bigr</code> ,	<code>\DeclareCharacterInheritance</code> ,
<code>\addtokomafont</code> ,	<code>\bigskip</code> , <code>\bigskipamount</code> ,	<code>\DeclareDictTranslation</code> ,
<code>\addtoversion</code> , <code>\addvspace</code> ,	<code>\bigsqcup</code> , <code>\bigtriangledown</code> ,	<code>\DeclareErrorFont</code> ,
<code>\adjdemerits</code> , <code>\advance</code> ,	<code>\bigtriangleup</code> , <code>\biguplus</code> ,	<code>\DeclareFixedFont</code> ,
<code>\advancepageno</code> , <code>\ae</code> ,	<code>\bigvee</code> , <code>\bigwedge</code> ,	<code>\DeclareFontEncoding</code> ,
<code>\AE</code> , <code>\afterassignment</code> ,	<code>\binoppenalty</code> , <code>\bmod</code> ,	<code>\DeclareFontEncodingDefaults</code> ,
<code>\AfterEndPreamble</code> ,	<code>\boldmath</code> , <code>\boolfalse</code> ,	<code>\DeclareFontFamily</code> ,
<code>\AfterEndDocument</code> ,	<code>\booltrue</code> , <code>\bordermatrix</code> ,	<code>\DeclareFontShape</code> ,
<code>\AfterEndEnvironment</code> ,	<code>\bot</code> , <code>\botfigrule</code> , <code>\botmark</code> ,	<code>\DeclareFontSubstitution</code> ,
<code>\aftergroup</code> , <code>\AfterPreamble</code> ,	<code>\bottomfraction</code> , <code>\bowtie</code> ,	<code>\DeclareLanguage</code> ,
<code>\aleph</code> , <code>\allocationnumber</code> ,	<code>\Box</code> , <code>\box</code> , <code>\boxmaxdepth</code> ,	<code>\DeclareLanguageAlias</code> ,
<code>\allowbreak</code> , <code>\alph</code> , <code>\Alph</code> ,	<code>\brace</code> , <code>\braced</code> , <code>\bracelu</code> ,	<code>\DeclareLanguageDialect</code> ,
<code>\alpha</code> , <code>\amalg</code> , <code>\and</code> , <code>\angle</code> ,	<code>\bracerd</code> , <code>\braceru</code> ,	<code>\DeclareListParser</code> ,
<code>\approx</code> , <code>\appto</code> , <code>\arabic</code> ,	<code>\bracevert</code> , <code>\brack</code> , <code>\break</code> ,	<code>\DeclareMathAccent</code> ,
<code>\arccos</code> , <code>\arcsin</code> , <code>\arctan</code> ,	<code>\breve</code> , <code>\brokenpenalty</code> ,	<code>\DeclareMathAlphabet</code> ,
<code>\arg</code> , <code>\array</code> , <code>\arraycolsep</code> ,	<code>\buildrel</code> , <code>\bullet</code> , <code>\bye</code> , <code>\c</code> ,	<code>\DeclareMathAlphabet</code> ,
<code>\arrayrulewidth</code> ,	<code>\cal</code> , <code>\cap</code> , <code>\caption</code> , <code>\cases</code> ,	<code>\DeclareMathDelimiter</code> ,
<code>\arraystretch</code> , <code>\arrowvert</code> ,	<code>\catcode</code> , <code>\cb</code> , <code>\cdot</code> , <code>\cdotp</code> ,	<code>\DeclareMathRadical</code> ,
<code>\Arrowvert</code> , <code>\ast</code> , <code>\asympt</code> ,	<code>\cdots</code> , <code>\center</code> , <code>\centering</code> ,	<code>\DeclareMathSizes</code> ,
<code>\AtBeginDocument</code> ,	<code>\centerline</code> , <code>\chapter</code> ,	<code>\DeclareMathSymbol</code> ,
<code>\AtBeginDvi</code> ,	<code>\char</code> , <code>\chardef</code> , <code>\check</code> ,	<code>\DeclareMathVersion</code> ,
<code>\AtBeginEnvironment</code> ,	<code>\CheckCommand</code> , <code>\chi</code> , <code>\choose</code> ,	<code>\DeclareMicrotypeAlias</code> ,
<code>\AtEndDocument</code> ,	<code>\circ</code> , <code>\circle</code> , <code>\citation</code> ,	<code>\DeclareMicrotypeBabelHook</code> ,
<code>\AtEndEnvironment</code> ,	<code>\cite</code> , <code>\ClassError</code> ,	<code>\DeclareMicrotypeSet</code> ,
<code>\AtEndOfClass</code> ,	<code>\ClassInfo</code> , <code>\ClassWarning</code> ,	<code>\DeclareMicrotypeSetDefault</code> ,
<code>\AtEndOfPackage</code> ,	<code>\ClassWarningNoLine</code> ,	<code>\DeclareMicrotypeVariants</code> ,
<code>\AtEndPreamble</code> , <code>\atop</code> ,	<code>\cleaders</code> , <code>\cleardoublepage</code> ,	<code>\DeclareOldFontCommand</code> ,
<code>\atopwithdelims</code> , <code>\author</code> ,	<code>\clearpage</code> , <code>\cleartabs</code> ,	<code>\DeclareOption</code> ,
<code>\author</code> , <code>\autodot</code> , <code>\b</code> ,	<code>\cline</code> , <code>\closein</code> , <code>\closeout</code> ,	<code>\DeclarePreloadSizes</code> ,
<code>\backslash</code> , <code>\badness</code> ,	<code>\clubpenalty</code> , <code>\clubsuit</code> ,	<code>\DeclareRobustCommand</code> ,
<code>\bar</code> , <code>\baselineskip</code> ,	<code>\colon</code> , <code>\color</code> , <code>\columns</code> ,	<code>\DeclareSizeFunction</code> ,
<code>\baselinestretch</code> ,	<code>\columnsep</code> , <code>\columnseprule</code> ,	<code>\DeclareSymbolFont</code> ,
<code>\batchmode</code> ,	<code>\columnwidth</code> , <code>\cong</code> ,	<code>\DeclareSymbolFontAlphabet</code> ,
<code>\BeforeBeginEnvironment</code> ,	<code>\contentsline</code> , <code>\coprod</code> ,	<code>\DeclareTextAccent</code> ,
<code>\begingroup</code> , <code>\beginsection</code> ,	<code>\copy</code> , <code>\copyright</code> ,	<code>\DeclareTextAccentDefault</code> ,
<code>\belowdisplayshortskip</code> ,	<code>\cos</code> , <code>\cosh</code> , <code>\cot</code> , <code>\coth</code> ,	<code>\DeclareTextCommand</code> ,
<code>\belowdisplayskip</code> , <code>\beta</code> ,	<code>\count</code> , <code>\countdef</code> , <code>\cr</code> ,	<code>\DeclareTextCommandDefault</code> ,
<code>\bezier</code> , <code>\bf</code> , <code>\bffam</code> ,	<code>\crrcr</code> , <code>\crlf</code> , <code>\csdef</code> ,	<code>\DeclareTextComposite</code> ,
<code>\bfseries</code> , <code>\bgroup</code> ,	<code>\csc</code> , <code>\cslet</code> , <code>\csletcs</code> ,	<code>\DeclareTextCompositeCommand</code> ,
<code>\bibcite</code> , <code>\bibdata</code> ,	<code>\csname</code> , <code>\csuse</code> , <code>\cup</code> ,	<code>\DeclareTextFontCommand</code> ,
<code>\bibitem</code> , <code>\bibliography</code> ,	<code>\CurrentOption</code> , <code>\d</code> , <code>\dag</code> ,	<code>\DeclareTextSymbol</code> ,
<code>\bibliographystyle</code> ,	<code>\dagger</code> , <code>\dashbox</code> , <code>\dashv</code> ,	<code>\DeclareTextSymbolDefault</code> ,
<code>\bibstyle</code> , <code>\big</code> , <code>\Big</code> ,	<code>\date</code> , <code>\day</code> , <code>\dblfigrule</code> ,	<code>\DeclareTranslation</code> ,
<code>\bigbreak</code> , <code>\bigcap</code> , <code>\bigcirc</code> ,	<code>\dblfloatpagefraction</code> ,	<code>\DeclareTranslationFallback</code> ,
<code>\bigcup</code> , <code>\bigg</code> , <code>\Bigg</code> ,	<code>\dblfloatsep</code> ,	<code>\def</code> , <code>\defaultthyphenchar</code> ,

B. List of Known L^AT_EX Control Sequences

<code>\defaultscriptratio,</code>	<code>\enlargethispage,</code>	<code>\gg, \global, \globaldefs,</code>
<code>\defaultscriptscriptratio,</code>	<code>\enskip, \enspace,</code>	<code>\glossary, \goodbreak,</code>
<code>\defaultskewchar,</code>	<code>\ensuremath, \enumerate,</code>	<code>\grave, \H, \halign, \hang,</code>
<code>\deffootnote,</code>	<code>\epsilon, \eqalign,</code>	<code>\hangafter, \hangindent,</code>
<code>\deffootnotemark,</code>	<code>\eqalignno, \eqnarray,</code>	<code>\hat, \hbadness, \hbar,</code>
<code>\definecolor, \deg,</code>	<code>\eqno, \equation, \equiv,</code>	<code>\hbox, \headheight,</code>
<code>\delcode, \delimiter,</code>	<code>\errhelp, \errmessage,</code>	<code>\headline, \headsep,</code>
<code>\delimiterfactor,</code>	<code>\errorcontextlines,</code>	<code>\heartsuit, \height,</code>
<code>\delimitershortfall,</code>	<code>\errorstopmode, \escapechar,</code>	<code>\hfil, \hfill, \hfilneg,</code>
<code>\delta, \Delta, \depth,</code>	<code>\eta, \evensidemargin,</code>	<code>\hfuzz, \hglue, \hideskip,</code>
<code>\descriptionlabel,</code>	<code>\everycr, \everydisplay,</code>	<code>\hidewidth, \hline,</code>
<code>\det, \dh, \DH, \Diamond,</code>	<code>\everyhbox, \everyjob,</code>	<code>\hoffset, \holdinginserts,</code>
<code>\diamond, \diamondsuit,</code>	<code>\everymath, \everypar,</code>	<code>\hom, \hookleftarrow,</code>
<code>\dim, \dimen, \dimendef,</code>	<code>\everyvbox, \ExecuteOptions,</code>	<code>\hookrightarrow, \hphantom,</code>
<code>\dimexpr, \DisableLigatures,</code>	<code>\exhyphenpenalty, \exists,</code>	<code>\hrule, \hrulefill, \hsize,</code>
<code>\discretionary,</code>	<code>\exp, \expandafter,</code>	<code>\hskip, \hskip, \hspace,</code>
<code>\displayindent,</code>	<code>\expandonce, \extracolsep,</code>	<code>\hss, \ht, \huge, \Huge,</code>
<code>\displaylimits,</code>	<code>\fam, \fbox, \fboxrule,</code>	<code>\hypersetup, \hyphenation,</code>
<code>\displaylines,</code>	<code>\fboxsep, \fi, \filbreak,</code>	<code>\hyphenchar, \hyphenpenalty,</code>
<code>\displaymath, \displaystyle,</code>	<code>\filecontents, \fill,</code>	<code>\i, \I, \ialign, \if, \ifblank,</code>
<code>\displaywidowpenalty,</code>	<code>\finalhypendemerits,</code>	<code>\ifbool, \ifboolexpe,</code>
<code>\displaywidth, \div,</code>	<code>\firstmark, \fivern,</code>	<code>\ifboolexpr, \ifcase,</code>
<code>\divide, \dj, \DJ, \do,</code>	<code>\fivebf, \fivei, \fivesy,</code>	<code>\ifcat, \ifcsdef, \ifcsname,</code>
<code>\document, \documentclass,</code>	<code>\flat, \floatingpenalty,</code>	<code>\ifdim, \ifdef, \ifeof, \iff,</code>
<code>\documentstyle, \dospecials,</code>	<code>\floatpagefraction,</code>	<code>\iffalse, \IfFileExists,</code>
<code>\dosupereject, \dot,</code>	<code>\floatsep, \flushbottom,</code>	<code>\ifhbox, \ifhmode, \ifinlist,</code>
<code>\doteq, \dotfill, \dots,</code>	<code>\flushleft, \flushright,</code>	<code>\ifinner, \ifmmode, \ifnum,</code>
<code>\doublehyphenemerits,</code>	<code>\fmtname, \fmtversion,</code>	<code>\ifodd, \ifstr, \ifstrempy,</code>
<code>\doublerulesep, \downarrow,</code>	<code>\fnsymbol, \folio,</code>	<code>\ifstrequal, \iftrue,</code>
<code>\Downarrow, \downbracefill,</code>	<code>\font, \fontdimen,</code>	<code>\ifvbox, \ifvmode, \ifvoid,</code>
<code>\dp, \edef, \egroup,</code>	<code>\fontencoding, \fontfamily,</code>	<code>\ifx, \ignorespaces,</code>
<code>\eject, \ell, \else, \em,</code>	<code>\fontname, \fontseries,</code>	<code>\ignorespacesafterend,</code>
<code>\emergencystretch,</code>	<code>\fontshape, \fontsize,</code>	<code>\Im, \imath, \immediate, \in,</code>
<code>\emph, \empty, \emptyset,</code>	<code>\fontspec, \fontsubfuzz,</code>	<code>\include, \includeonly,</code>
<code>\endarray, \endcenter,</code>	<code>\footins, \footline,</code>	<code>\indent, \inf, \infty,</code>
<code>\endcsname, \enddisplaymath,</code>	<code>\footnote, \footnotemark,</code>	<code>\indent, \index, \input,</code>
<code>\enddocument, \endenumerate,</code>	<code>\footnoterule,</code>	<code>\InputIfFileExists,</code>
<code>\endeqnarray, \endequation,</code>	<code>\footnotesep, \footnotesize,</code>	<code>\inputlineno, \insert,</code>
<code>\endflushleft,</code>	<code>\footnotetext, \footskip,</code>	<code>\insertpenalties, \int,</code>
<code>\endflushright,</code>	<code>\forall, \foralllistloop,</code>	<code>\interdisplaylinepenalty,</code>
<code>\endgraf, \endgroup,</code>	<code>\foreignlanguage,</code>	<code>\interfootnotelinepenalty,</code>
<code>\endinput, \endinsert,</code>	<code>\frac, \frame, \framebox,</code>	<code>\interlinepenalty,</code>
<code>\enditemize, \endline,</code>	<code>\frenchspacing, \frown,</code>	<code>\intextsep, \intop, \iota,</code>
<code>\endlinechar, \endlist,</code>	<code>\fussy, \futurelet,</code>	<code>\it, \item. \itemindent,</code>
<code>\endlrbox, \endmath,</code>	<code>\gamma, \Gamma, \gcd, \ge,</code>	<code>\itemitem, \itemize,</code>
<code>\endminipage, \endnote,</code>	<code>\GenericError, \GenericInfo,</code>	<code>\itemsep, \iterate, \itfam,</code>
<code>\endpicture, \endsloppypar,</code>	<code>\GenericWarning, \geq,</code>	<code>\itshape, \j, \jmath,</code>
<code>\endtabbing, \endtabular,</code>	<code>\gets, \GetTranslation,</code>	<code>\jobname, \Join, \joinrel,</code>
<code>\endtrivlist, \endverbatim,</code>	<code>\GetTranslationFor, \gdef,</code>	<code>\jot, \k, \kappa, \ker,</code>

B. List of Known \LaTeX Control Sequences

\backslash kern, \backslash kill, \backslash KOMAoption, \backslash KOMAoptions, \backslash l, \backslash L, \backslash label, \backslash labelsep, \backslash labelwidth, \backslash labelenumi, \backslash labelenumii, \backslash labelenumiii, \backslash labelenumiv, \backslash labelitemi, \backslash labelitemii, \backslash labelitemiii, \backslash labelitemiv, \backslash lambda, \backslash Lambda, \backslash land, \backslash langle, \backslash language, \backslash large, \backslash Large, \backslash LARGE, \backslash lastbox, \backslash lastkern, \backslash lastpenalty, \backslash lastskip, \backslash LaTeX, \backslash LaTeXe, \backslash lbrace, \backslash lbrack, \backslash lccode, \backslash lceil, \backslash ldotp, \backslash ldots, \backslash le, \backslash leaders, \backslash leadsto, \backslash leavevmode, \backslash left, \backslash leftarrow, \backslash Leftarrow, \backslash leftarrowfill, \backslash lefteqn, \backslash leftharpoondown, \backslash leftharpoonup, \backslash lefthyphenmin, \backslash leftline, \backslash leftmargin, \backslash leftmargini, \backslash leftmarginii, \backslash leftmarginiii, \backslash leftmarginiv, \backslash leftmarginv, \backslash leftmarginvi, \backslash leftmark, \backslash leftskip, \backslash leftrightharrow, \backslash Leftrightharrow, \backslash leq, \backslash legalignno, \backslash leqno, \backslash let, \backslash lfloor, \backslash limits, \backslash linepenalty, \backslash lineskip, \backslash lineskiplimits, \backslash lg, \backslash lgroup, \backslash lhd, \backslash lhook, \backslash lim, \backslash liminf, \backslash limsup, \backslash line, \backslash linebreak, \backslash linespread, \backslash linethickness, \backslash linewidth, \backslash list, \backslash listadd, \backslash listfiles, \backslash listfiles, \backslash listparindent, \backslash ll, \backslash llap, \backslash lmoustache, \backslash ln, \backslash lnot, \backslash LoadClassWithOptions, \backslash LoadClass, \backslash LoadDictionary, \backslash LoadDictionaryFor, \backslash LoadMicrotypeFile, \backslash log, \backslash long, \backslash longleftarrow, \backslash Longleftarrow, \backslash longlefttrightharrow, \backslash Longlefttrightharrow, \backslash longmapsto,	\backslash longrightharrow, \backslash loop, \backslash looseness, \backslash lor, \backslash lower, \backslash lowercase, \backslash lq, \backslash lslig, \backslash lststyle, \backslash lstinline, \backslash lstinputlisting, \backslash lrbox, \backslash ltx@ifnextchar, \backslash LuaLaTeX, \backslash LuaTeX, \backslash mag, \backslash magnification, \backslash magstep, \backslash magstephalf, \backslash makeatletter, \backslash makeatother, \backslash makebox, \backslash makefootline, \backslash makeglossary, \backslash makeheadline, \backslash makeindex, \backslash makelabel, \backslash MakeLowercase, \backslash maketitle, \backslash MakeUppercase, \backslash mapsto, \backslash mapstochar, \backslash marginpar, \backslash marginparpush, \backslash marginparsep, \backslash marginparwidth, \backslash mark, \backslash markboth, \backslash markright, \backslash math, \backslash mathaccent, \backslash mathbf, \backslash mathbin, \backslash mathchar, \backslash mathchardef, \backslash mathchoice, \backslash mathclose, \backslash mathcode, \backslash mathellipsis, \backslash mathgroup, \backslash mathhexbox, \backslash mathinner, \backslash mathit, \backslash mathop, \backslash mathopen, \backslash mathord, \backslash mathpalette, \backslash mathparagraph, \backslash mathpunct, \backslash mathrel, \backslash mathrm, \backslash mathsection, \backslash mathsf, \backslash mathsterling, \backslash mathstrut, \backslash mathsurround, \backslash mathtt, \backslash mathunderscore, \backslash mathversion, \backslash matrix, \backslash max, \backslash maxdeadcycles, \backslash maxdepth, \backslash maxdimen, \backslash mbox, \backslash mdseries, \backslash meaning, \backslash medbreak, \backslash medmuskip, \backslash medskip, \backslash medskipamount, \backslash message, \backslash MessageBreak, \backslash mho, \backslash microtypecontext, \backslash microtypesetup, \backslash mid, \backslash midinsert, \backslash min, \backslash minipage, \backslash mit, \backslash mkern, \backslash models, \backslash month, \backslash moveleft, \backslash moveright, \backslash mp, \backslash mscount, \backslash mskip, \backslash mu, \backslash multicolumn, \backslash multiply, \backslash multipt, \backslash multispan,	\backslash muskip, \backslash muskipdef, \backslash nabla, \backslash narrower, \backslash natural, \backslash ne, \backslash nearrow, \backslash NeedsTeXFormat, \backslash neg, \backslash negthinspace, \backslash neq, \backslash newbox, \backslash newbool, \backslash newcommand, \backslash newcount, \backslash newcounter, \backslash newdimen, \backslash newenvironment, \backslash newfam, \backslash newfont, \backslash newfontfamily, \backslash newhelp, \backslash newif, \backslash newinsert, \backslash newlabel, \backslash newlanguage, \backslash newlength, \backslash newline, \backslash newlinechar, \backslash newmathalphabet, \backslash newmuskip, \backslash newpage, \backslash newread, \backslash newrobustcmd, \backslash newsavebox, \backslash newskip, \backslash newtheorem, \backslash newtoks, \backslash NewTranslation, \backslash newwrite, \backslash next, \backslash ng, \backslash NG, \backslash ni, \backslash noalign, \backslash noboundary, \backslash nobreak, \backslash nobreakspace, \backslash nocite, \backslash nocorr, \backslash nocorrlist, \backslash node, \backslash noexpand, \backslash nofiles, \backslash noindent, \backslash nointerlineskip, \backslash nolimits, \backslash nolinebreak, \backslash nonfrenchspacing, \backslash nonscript, \backslash nonstopmode, \backslash nonumber, \backslash nopagebreak, \backslash nopagenumbers, \backslash normalbaselines, \backslash normalbaselineskip, \backslash normalbottom, \backslash normalcolor, \backslash normalfont, \backslash normalmarginpar, \backslash normallineskip, \backslash normallineskiplimit, \backslash normalsize, \backslash notblank, \backslash nopagebreak, \backslash not, \backslash notin, \backslash nu, \backslash null, \backslash nulldelimiterspace, \backslash nullfont, \backslash number, \backslash numberline, \backslash numexpr, \backslash nwarrow, \backslash o, \backslash O, \backslash oalign, \backslash obeycr, \backslash obeylines, \backslash obeyspaces, \backslash oddsidemargin, \backslash odot, \backslash oe, \backslash OE, \backslash of, \backslash offinterlineskip, \backslash oint, \backslash ointop, \backslash oldstyle,
--	---	---

B. List of Known \LaTeX Control Sequences

<code>\oldstylenums, \omega,</code> <code>\Omega, \ominus, \omit,</code> <code>\onecolumn, \oalign,</code> <code>\openin, \openout, \openup,</code> <code>\oplus, \OptionNotUsed,</code> <code>\or, \oslash, \otimes,</code> <code>\othersectionlevelsformat,</code> <code>\outer, \output,</code> <code>\outputpenalty, \oval, \over,</code> <code>\overbrace, \overfullrule,</code> <code>\overleftarrow, \overline,</code> <code>\overrightarrow,</code> <code>\overwithdelims, \owns, \P,</code> <code>\PackageError, \PackageInfo,</code> <code>\PackageWarning,</code> <code>\PackageWarningNoLine,</code> <code>\pagebody, \pagebreak,</code> <code>\pagecontents, \pagedepth,</code> <code>\pagefilllstretch,</code> <code>\pagefillstretch,</code> <code>\pagefilstretch, \pagegoal,</code> <code>\pageinsert, \pageno,</code> <code>\pagenumbering, \pageref,</code> <code>\pageshrink, \pagestretch,</code> <code>\pagestyle, \pagetotal,</code> <code>\paperheight, \paperwidth,</code> <code>\par, \paragraph,</code> <code>\paragraphmark, \parallel,</code> <code>\parbox, \parfillskip,</code> <code>\parindent, \parsep,</code> <code>\parshape, \parskip, \part,</code> <code>\partformat, \partial,</code> <code>\partname, \partopsep,</code> <code>\PassOptionsToClass,</code> <code>\PassOptionsToPackage,</code> <code>\patchcmd, \patterns,</code> <code>\pausing, \pdfLaTeX,</code> <code>\pdfstringdefDisableCommands,</code> <code>\pdfTeX, \penalty, \perp,</code> <code>\pgfkeys, \phantom, \phi,</code> <code>\Phi, \pi, \Pi, \picture,</code> <code>\plainoutput, \pm,</code> <code>\pmatrix, \pmod, \poptabs,</code> <code>\postdisplaypenalty,</code> <code>\pounds, \Pr, \prec, \preceq,</code> <code>\predisdisplaypenalty,</code> <code>\predisplaysize, \preloaded,</code> <code>\preto, \pretolerance,</code> <code>\prevdepth, \prevgraf,</code>	<code>\prime, \printacronyms,</code> <code>\printbibliography,</code> <code>\printendnotes, \printindex,</code> <code>\ProcessPgfoptions,</code> <code>\ProcessOptions, \proclaim,</code> <code>\prod, \propto, \protect,</code> <code>\protected, \protecting,</code> <code>\providecommand,</code> <code>\providerobustcmd,</code> <code>\ProvidesClass,</code> <code>\ProvideDictionaryFor,</code> <code>\ProvidesFile,</code> <code>\ProvidesPackage,</code> <code>\ProvideTextCommand,</code> <code>\psi, \Psi, \pushtabs, \put,</code> <code>\qbezier, \qbeziermax,</code> <code>\qquad, \quad, \r, \radical,</code> <code>\raggedbottom, \raggedleft,</code> <code>\RaggedLeft, \raggedright,</code> <code>\RaggedRight, \raise,</code> <code>\raisebox, \rangle, \rbrace,</code> <code>\rbrack, \rceil, \Re, \read,</code> <code>\ref, \refstepcounter,</code> <code>\relax, \relbar,</code> <code>\Relbar, \relpenalty,</code> <code>\removelastskip,</code> <code>\renewcommand,</code> <code>\renewenvironment,</code> <code>\renewrobustcmd,</code> <code>\RenewTranslation,</code> <code>\repeat, \RequirePackage,</code> <code>\RequirePackageWithOptions,</code> <code>\restorecr,</code> <code>\reversemarginpar,</code> <code>\rfloor, \rgroup, \rhd,</code> <code>\rho, \rhohook, \right,</code> <code>\rightarrow, \Rightarrow,</code> <code>\rightarrowfill,</code> <code>\rightharpoonowdown,</code> <code>\rightharpoonup,</code> <code>\righthyphenmin,</code> <code>\rightleftharpoons,</code> <code>\rightline, \rightmargin,</code> <code>\rightmark, \rightskip,</code> <code>\rlap, \rm, \rmfamily,</code> <code>\rmoustache, \robustify,</code> <code>\roman, \Roman,</code> <code>\romannumeral, \root,</code> <code>\rootbox, \rq, \rule, \S,</code>	<code>\samepage, \SaveTranslation,</code> <code>\SaveTranslationFor,</code> <code>\sb, \sbox, \scriptfont,</code> <code>\scriptscriptfont,</code> <code>\scriptscriptstyle,</code> <code>\scriptsize, \scriptspace,</code> <code>\scriptstyle, \scrollmode,</code> <code>\scshape, \searrow,</code> <code>\sec, \secdef, \section,</code> <code>\sectionmark, \selectfont,</code> <code>\selectlanguage,</code> <code>\setbox, \setcapindent,</code> <code>\setcounter, \SetExpansion,</code> <code>\SetExtraKerning,</code> <code>\SetExtraSpacing, \setfnpct,</code> <code>\setkomafont, \setlanguage,</code> <code>\setlength, \setmainfont,</code> <code>\setmainlanguage,</code> <code>\SetMathAlphabet,</code> <code>\setminus, \setmonofont,</code> <code>\setotherlanguage,</code> <code>\setotherlanguages,</code> <code>\SetProtrusion,</code> <code>\setsansfont,</code> <code>\SetSymbolFont, \settabs,</code> <code>\settodepth, \settoheight,</code> <code>\settowidth, \SetTracking,</code> <code>\sevenbf, \seveni,</code> <code>\sevensy, \sevenrm, \sfcode,</code> <code>\sffamily, \sharp, \shipout,</code> <code>\shorthandoff, \shorthandon,</code> <code>\shortstack, \show,</code> <code>\showbox, \showboxbreadth,</code> <code>\showboxdepth, \showhyphens,</code> <code>\showlists, \showoutput,</code> <code>\showoverfull, \showthe,</code> <code>\sidenote, \sigma,</code> <code>\Sigma, \sim, \simeq, \sin,</code> <code>\sinh, \skew, \skewchar,</code> <code>\skip, \skipdef, \sl,</code> <code>\slash, \slfam, \sloppy,</code> <code>\sloppypar, \slshape,</code> <code>\small, \smallbreak,</code> <code>\smallint, \smallskip,</code> <code>\smallskipamount, \smash,</code> <code>\smile, \sp, \space,</code> <code>\spacefactor, \spaceskip,</code> <code>\spadesuit, \span,</code> <code>\special, \splitbotmark,</code>
---	---	--

B. List of Known \LaTeX Control Sequences

$\backslash splitfirstmark,$ $\backslash splitmaxdepth,$ $\backslash splittopskip, \backslash sqcap,$ $\backslash sqcup, \backslash sqrt, \backslash sqsubset,$ $\backslash sqsubseq, \backslash sqsupset,$ $\backslash sqsupseteq, \backslash ss, \backslash SS,$ $\backslash stackrel, \backslash star,$ $\backslash stepcounter, \backslash stop,$ $\backslash stretch, \backslash string, \backslash strut,$ $\backslash strutbox, \backslash subparagraph,$ $\backslash subparagraphmark,$ $\backslash subsection,$ $\backslash subsectionmark, \backslash subset,$ $\backslash subseq, \backslash subsubsection,$ $\backslash subsubsectionmark,$ $\backslash succ, \backslash succeq, \backslash sum,$ $\backslash sup, \backslash supereject,$ $\backslash suppressfloats,$ $\backslash supset, \backslash supseteq, \backslash surd,$ $\backslash swarrow, \backslash symbol, \backslash t,$ $\backslash tabalign, \backslash tabbing,$ $\backslash tabbingsep, \backslash tabcolsep,$ $\backslash tableofcontents, \backslash tabskip,$ $\backslash tabular, \backslash tabularnewline,$ $\backslash tabs, \backslash tabsdone, \backslash tabsyet,$ $\backslash tan, \backslash tanh, \backslash tau, \backslash tenbf,$ $\backslash tenex, \backslash teni, \backslash tenit, \backslash tenrm,$ $\backslash tensl, \backslash tensy, \backslash tentt, \backslash TeX,$ $\backslash test, \backslash textasciicircum,$ $\backslash textasciitilde,$ $\backslash textasteriskcentered,$ $\backslash textbackslash, \backslash textbar,$ $\backslash textbf, \backslash textbraceleft,$ $\backslash textbraceright,$ $\backslash textbullet, \backslash textcircled,$ $\backslash textcompwordmark,$ $\backslash textcolor, \backslash textdagger,$ $\backslash textdaggerdbl, \backslash textdollar,$ $\backslash textellipsis, \backslash textemdash,$ $\backslash textemdash, \backslash textenglish,$ $\backslash textexclamdown,$ $\backslash textexclamdown,$ $\backslash textfloatsep,$ $\backslash textfont, \backslash textfraction,$ $\backslash textgreater, \backslash textindent,$ $\backslash textit, \backslash textheight,$ $\backslash textless, \backslash textls,$	$\backslash textmicrotypecontext,$ $\backslash textmd, \backslash textnormal,$ $\backslash textogonekcentered,$ $\backslash textparagraph,$ $\backslash textperiodcentered,$ $\backslash textquestiondown,$ $\backslash textquotedbl,$ $\backslash textquotedblleft,$ $\backslash textquotedblright,$ $\backslash textquoteright,$ $\backslash textregistered, \backslash textrm,$ $\backslash textsc, \backslash textsection,$ $\backslash textsf, \backslash textsl,$ $\backslash textsterling, \backslash textstyle,$ $\backslash textsuperscript,$ $\backslash textsection,$ $\backslash textsubscript,$ $\backslash textsuperscript,$ $\backslash textsterling,$ $\backslash TextSymbolUnavailable,$ $\backslash texttt, \backslash texttrademark,$ $\backslash textunderscore, \backslash textup,$ $\backslash textvisiblespace,$ $\backslash textwidth, \backslash th,$ $\backslash TH, \backslash thanks, \backslash the,$ $\backslash theendnotes, \backslash theenumi,$ $\backslash theenumii, \backslash theenumiii,$ $\backslash theenumiv, \backslash thefootnote,$ $\backslash thefootnotemark, \backslash thempfn,$ $\backslash thempfn, \backslash thempfootnote,$ $\backslash thepage, \backslash thepart, \backslash theta,$ $\backslash Theta, \backslash thicklines,$ $\backslash thickmuskip, \backslash thinlines,$ $\backslash thinmuskip, \backslash thinspace,$ $\backslash thispagestyle, \backslash tikz,$ $\backslash tilde, \backslash time, \backslash times, \backslash tiny,$ $\backslash title, \backslash to, \backslash today \text{ toks},$ $\backslash toksdef, \backslash tolerance, \backslash top,$ $\backslash topfigrule, \backslash topfraction,$ $\backslash topglue, \backslash topins,$ $\backslash topinsert, \backslash topmargin,$ $\backslash topmark, \backslash topsep, \backslash topskip,$ $\backslash totalheight, \backslash tracingall,$ $\backslash tracingcommands,$ $\backslash tracingfonts,$ $\backslash tracinglostchars,$	$\backslash tracingmacros,$ $\backslash tracingonline,$ $\backslash tracingoutput,$ $\backslash tracingpages,$ $\backslash tracingparagraphs,$ $\backslash tracingrestores,$ $\backslash tracingstats,$ $\backslash triangle, \backslash triangleleft,$ $\backslash triangleright, \backslash trivlist,$ $\backslash tt, \backslash ttfam, \backslash ttfamily,$ $\backslash ttraggedright, \backslash two@digits,$ $\backslash twocolumn, \backslash typein,$ $\backslash typeout, \backslash u, \backslash uccode,$ $\backslash uchyp, \backslash unboldmath,$ $\backslash underbar, \backslash underbrace,$ $\backslash underline, \backslash unhbox,$ $\backslash unhcopy, \backslash unitlength,$ $\backslash unkern, \backslash unlhd, \backslash unpenalty,$ $\backslash unrhd, \backslash unskip, \backslash unvbox,$ $\backslash unvcopy, \backslash uparrow, \backslash Uparrow,$ $\backslash upbracefill, \backslash updownarrow,$ $\backslash Updownarrow, \backslash uplus,$ $\backslash uppercase, \backslash upsilon,$ $\backslash Upsilon, \backslash upshape,$ $\backslash usebox, \backslash usecounter,$ $\backslash usefont, \backslash UseMicrotypeSet,$ $\backslash usepackage, \backslash UseTextAccent,$ $\backslash UseTextSymbol, \backslash upshape, \backslash v,$ $\backslash vadjust, \backslash valign, \backslash value,$ $\backslash varepsilon, \backslash varphi,$ $\backslash varpi, \backslash varrho, \backslash varsigma,$ $\backslash vartheta, \backslash vbadness, \backslash vbox,$ $\backslash vcenter, \backslash vdash, \backslash vdots,$ $\backslash vec, \backslash vector, \backslash vee, \backslash verb,$ $\backslash verbatim, \backslash vert, \backslash Vert,$ $\backslash vfil, \backslash vfill, \backslash vfilneg,$ $\backslash vfootnote, \backslash vfuzz, \backslash vglue,$ $\backslash vline, \backslash voffset, \backslash vphantom,$ $\backslash vrule, \backslash vsize, \backslash vskip,$ $\backslash vspace, \backslash vsplit, \backslash vss,$ $\backslash vtop, \backslash wd, \backslash wedge, \backslash widehat,$ $\backslash widetilde, \backslash widowpenalty,$ $\backslash width, \backslash wlog, \backslash wp, \backslash wr,$ $\backslash write, \backslash xdef, \backslash xdefinecolor,$ $\backslash XeLaTeX, \backslash XeTeX \text{ xi}, \backslash Xi,$ $\backslash xleaders, \backslash xspaceskip,$ $\backslash year, \backslash zeta$
--	--	--

C. List of Known L^AT_EX Environments

Below are listed all *predefined* control sequence names that are treated as “silent” names by **CNLT_X**, that is, those defined by **CNLT_X-LISTINGS**.

array, center, description,	flushright, itemize,	quote, quoting, sloppypar,
displaymath, document,	labeling, list, longtable,	tabbing, table, tabu, tabular,
enumerate, eqnarray,	lrbox, math, minipage,	tabularx, tabulary, trivlist,
equation, figure, flushleft,	otherlanguage, picture,	verbatim

D. List of Entries in cnltx.bib

All entries in `cnltx.bib` are entries of the `@package` type. The cite keys that the file currently contains are listed below.

pkg:abbrevs (@package),	pkg:examdesign (@package),	pkg:marginnote (@package),
pkg:accsupp (@package),	pkg:exercise (@package),	pkg:mdframed (@package),
pkg:acro (@package),	pkg:exsol (@package),	pkg:mfirstuc (@package),
pkg:acromake (@package),	pkg:glossaries (@package),	pkg:multicol (@package),
pkg:acronym (@package),	pkg:hologo (@package),	pkg:multienum (@package),
pkg:acroterm (@package),	pkg:hyperref (@package),	pkg:nomencl (@package),
pkg:answers (@package),	pkg:idxcmds (@package),	pkg:pgf (@package),
pkg:babel (@package),	pkg:ifluatex (@package),	pkg:pgfopts (@package),
pkg:biblatex (@package),	pkg:ifxetex (@package),	pkg:polyglossia (@package),
pkg:catchfile (@package),	pkg:imakeidx (@package),	pkg:probsoln (@package),
pkg:chngcntr (@package),	pkg:koma-script (@package),	pkg:ragged2e (@package),
pkg:cnltx (@package),	pkg:l3experimental	pkg:translations (@package),
pkg:enumitem (@package),	(@package),	pkg:trimspaces (@package),
pkg:environ (@package),	pkg:l3kernel (@package),	pkg:ulem (@package),
pkg:eqexam (@package),	pkg:l3packages (@package),	pkg:xcolor (@package),
pkg:esami (@package),	pkg:libertine (@package),	pkg:xspace (@package)
pkg:etoolbox (@package),	pkg:listings (@package),	
pkg:exam (@package),	pkg:ltxcmds (@package),	

E. Bibliography

- [Ars11] Donald Arseneau. `ulem`, Mar. 18, 2011.
URL: <http://mirror.ctan.org/macros/latex/contrib/ulem/>.
- [Dan13] Marco Daniel. `mdframed`. version 1.9b, July 1, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/mdframed/>.
- [Gre13] Enrico Gregorio. `imakeidx`. version 1.3a, July 11, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/imakeidx/>.
- [HM13] Carsten Heinz and Brooks Moses, current maintainer: Jobst Hoffmann. `listings`. version 1.5b, Aug. 26, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/listings/>.

E. Bibliography

- [Kero7] Uwe Kern. xcolor. version 2.11, Jan. 21, 2007.
URL: <http://mirror.ctan.org/macros/latex/contrib/xcolor/>.
- [KN12] Markus Kohm and Frank Neukahm. KOMA-Script. version 3.11b, July 29, 2012.
URL: <http://mirror.ctan.org/macros/latex/contrib/koma-script/>.
- [Koh12] Markus Kohm. marginnote. version 1.1i, Mar. 29, 2012.
URL: <http://mirror.ctan.org/macros/latex/contrib/marginnote/>.
- [Leh11] Philipp Lehman. etoolbox. version 2.1, Jan. 3, 2011.
URL: <http://mirror.ctan.org/macros/latex/contrib/etoolbox/>.
- [Leh13] Philipp Lehman, current maintainers: Joseph Wright, Audrey Boruvka, and Philip Kime. biblatex. version 2.7a, July 14, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/biblatex/>.
- [Mit11] Frank Mittelbach. multicol. version 1.7a, June 27, 2011.
URL: <http://mirror.ctan.org/macros/latex/required/tools/multicol/>.
- [Nie13a] Clemens Niederberger. acro. version 1.4b, Sept. 24, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/acro/>.
- [Nie13b] Clemens Niederberger. idxcmds. version 0.2b, Aug. 31, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/idxcmds/>.
- [Nie13c] Clemens Niederberger. translations. version 1.1, Aug. 5, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/translations/>.
- [Obe10] Heiko Oberdiek. accsupp. version 0.3, Jan. 16, 2010.
URL: <http://mirror.ctan.org/macros/latex/contrib/oberdiek/>.
- [Obe11a] Heiko Oberdiek. catchfile. version 1.6, Mar. 1, 2011.
URL: <http://mirror.ctan.org/macros/latex/contrib/oberdiek/>.
- [Obe11b] Heiko Oberdiek. ltxcmds. version 1.22, Nov. 9, 2011.
URL: <http://mirror.ctan.org/macros/latex/contrib/oberdiek/>.
- [OR12] Heiko Oberdiek and Sebastian Rahtz. hyperref. version 6.83m, Nov. 6, 2012.
URL: <http://mirror.ctan.org/macros/latex/contrib/hyperref/>.
- [Rob09] Will Robertson. trimspaces. version 1.1, Sept. 17, 2009.
URL: <http://mirror.ctan.org/macros/latex/contrib/trimspaces/>.
- [Scho9] Martin Schröder. ragged2e. version 2.1, May 21, 2009.
URL: <http://mirror.ctan.org/macros/latex/contrib/ms/ragged2e/>.
- [Tal13] Nicola L.C. Talbot. glossaries. version 3.05, Apr. 21, 2013.
URL: <http://mirror.ctan.org/macros/latex/contrib/glossaries/>.
- [Wil09] Peter Wilson, current maintainer: Will Robertson.
chngcntr. version 1.0a, Sept. 2, 2009.
URL: <http://mirror.ctan.org/macros/latex/contrib/chngcntr/>.
- [Wri11] Joseph Wright. pgfpts. version 2.1, June 2, 2011.
URL: <http://mirror.ctan.org/macros/latex/contrib/pgfpts/>.

F. Index

A		<code>\cnltx@info</code>	43
<code>abstract</code>	27, 30	<code>\cnltx@version</code>	43
<code>abstract-format</code>	27	<code>\cnltx@accsupp</code>	48
<code>abstract-width</code>	27	<code>\cnltx@base@error</code>	43
<code>accsupp</code> (package)	5, 47 f.	<code>\cnltx@base@info</code>	43
<code>acro</code> (package)	22	<code>\cnltx@base@warning</code>	43
<code>acronym-format</code>	23	<code>\cnltx@base@warningnoline</code>	43
<code>\AD</code>	26	<code>\cnltx@bibtex@listings@style</code>	37
<code>add-bib</code>	33, 35	<code>\cnltx@caption@font</code>	32
<code>add-cmds</code>	17, 35, 47	<code>\cnltx@captionlabel@font</code>	32
<code>add-envs</code>	17, 36	<code>\cnltx@copyablespace</code>	47
<code>add-frame-options</code>	17, 35	<code>\cnltx@create@bundle@message</code>	43
<code>add-index</code>	4, 28, 33, 35	<code>\cnltx@create@generic@message</code>	44
<code>add-listings-options</code>	17, 36	<code>\cnltx@create@message</code>	44
<code>add-silent-cmds</code>	17, 36	<code>\cnltx@define@colorscheme</code>	43
<code>add-silent-envs</code>	17, 36	<code>\cnltx@doc@error</code>	45
<code>after-code</code>	11	<code>\cnltx@doc@info</code>	45
<code>after-source</code>	11	<code>\cnltx@doc@warning</code>	45
<code>\AM</code>	25 f.	<code>\cnltx@doc@warningnoline</code>	45
<code>arg-format</code>	28	<code>\cnltx@example@error</code>	46
<code>\argumentformat</code>	27	<code>\cnltx@example@info</code>	46
Arseneau, Donald	5	<code>\cnltx@example@warning</code>	46
<code>authors</code>	29	<code>\cnltx@example@warningnoline</code>	46
B		<code>\cnltx@expandargs</code>	44
<code>babel</code> (package)	24, 28	<code>\cnltx@getfileinfo</code>	46
<code>babel-options</code>	28	<code>\cnltx@gobble</code>	36 ff.
<code>bar</code>	14	<code>\cnltx@if@in</code>	45
<code>baz</code>	27 f.	<code>\cnltx@ifbang</code>	44
<code>\BC</code>	26	<code>\cnltx@ifdash</code>	44
<code>biblatex</code> (package)	3 f., 34	<code>\cnltx@ifisnum</code>	32, 44
<code>\boolkey</code>	7	<code>\cnltx@ifpunctuation</code>	18 f.
Boruvka, Audrey	34	<code>\cnltx@ifsym</code>	44
<code>build-title</code>	30	<code>\cnltx@isvalue</code>	47
		<code>\cnltx@listings@error</code>	47
C		<code>\cnltx@listings@info</code>	47
<code>caption-font</code>	27	<code>\cnltx@listings@style</code>	36, 47
<code>caption-label-font</code>	27	<code>\cnltx@listings@warning</code>	47
Carlisle, David	23	<code>\cnltx@listings@warningnoline</code>	47
<code>catchfile</code> (package)	5	<code>\cnltx@long@remove@all</code>	45
<code>\cf</code>	24	<code>\cnltx@long@remove@once</code>	45
<code>\changedversion</code>	8	<code>\cnltx@long@replace@all</code>	45
<code>chngcntr</code> (package)	34	<code>\cnltx@long@replace@once</code>	45
<code>\choicekey</code>	7	<code>\cnltx@mdframed@options</code>	35, 47
<code>\choices</code>	7	<code>\cnltx@package@date</code>	46
<code>class</code>	29 f.	<code>\cnltx@package@info</code>	46
<code>\classformat</code>	27	<code>\cnltx@package@version</code>	46
<code>\cls</code>	8 f., 38	<code>\cnltx@par</code>	44
<code>cls-format</code>	28	<code>\cnltx@predefined@control@sequences</code>	47
<code>\clsidx</code>	8	<code>\cnltx@predefined@environments</code>	47
<code>\cnltx@date</code>	43	<code>\cnltx@remove@all</code>	45

INDEX

<code>\cnltx@remove@once</code>	45	<code>\env</code>	6, 15, 37 f., 40 f.
<code>\cnltx@replace@all</code>	45	<code>\envidx</code>	6, 37
<code>\cnltx@replace@once</code>	45	<code>\environment</code>	15
<code>\cnltx@stripbs</code>	45	environments (environment)	10, 15, 46
<code>\cnltx@tools@error</code>	48	<code>\etc</code>	24
<code>\cnltx@tools@info</code>	48	etoolbox (package)	4, 44
<code>\cnltx@tools@warning</code>	48	example (environment)	4, 9 ff., 15 f., 47
<code>\cnltx@tools@warningnoline</code>	48	<code>\exampleformat</code>	26
<code>\cnltx@trailpunct</code>	18 f.	<code>\expandable</code>	11 f., 40 f.
<code>\cnltx@version@note</code>	46	<code>expandable-sign</code>	12
<code>\cnltxacronym</code>	22 f.	<code>\expandablesign</code>	12
<code>\cnltxat</code>	46 f.	<code>expl-format</code>	27
<code>\cnltxbang</code>	46	F	
<code>\cnltxequal</code>	46	<code>foo</code>	14 f.
<code>\cnltxlatin</code>	22	<code>frame-options</code>	17, 35
<code>\cnltxletterat</code>	46	G	
<code>cnltxlist</code> (environment)	46	glossaries (package)	22
<code>\cnltxotherat</code>	46	<code>gobble</code>	17
<code>cnltxquote</code> (environment)	30	Gregorio, Enrico	33
<code>\cnltxtimeformat</code>	22, 25	H	
<code>cnpkgdoc</code> (class)	3	Heinz, Carsten	3, 5, 17, 35, 47
<code>\code</code>	6 f., 9, 11 f., 16, 27 f., 47 f.	Hoffmann, Jobst	3, 5, 17, 35, 47
<code>code-font</code>	27	hyperref (package)	5, 39
<code>code-left</code>	16	I	
<code>code-only</code>	16	<code>idxcmds</code> (package)	5, 46
<code>code-sep</code>	16	<code>\ie</code>	24
<code>\codefont</code>	26 f.	<code>\iftest</code>	44
<code>\command</code>	11 ff.	<code>imakeidx</code> (package)	33
commands (environment)	10 ff., 46	<code>\implementation</code>	9
<code>\cs</code>	6, 11 f., 27 f., 36 ff., 40 f., 46	<code>index-prologue</code>	33
<code>\csidx</code>	6, 17, 47	<code>index-setup</code>	33
<code>\CTAN</code>	8	<code>index-space</code>	33
<code>CTAN</code>	4 f., 8, 28, 33	<code>index-style</code>	4, 33
<code>\ctan</code>	8, 22	<code>\indexcs</code>	37, 47
<code>\CTANurl</code>	8 f.	<code>info</code>	29
D		<code>\inputexample</code>	9
Daniel, Marco	3, 5, 16, 35, 47	<code>\inputsidebyside</code>	9
<code>\Darg</code>	7	<code>\inputsourcecode</code>	9
<code>\darg</code>	6	K	
<code>date</code>	29	Kern, Uwe	4
<code>\DeclareCounterRepresentation</code>	20	<code>key</code>	7
<code>\DeclareTranslation</code>	41	<code>\key</code>	7, 38
<code>\defabbr</code>	22	<code>\keybool</code>	13 f.
<code>\Default</code>	11–14	<code>\keychoice</code>	13 f.
<code>\default</code>	7, 12, 28, 40	<code>\keyis</code>	7
<code>default-format</code>	28	<code>\keyval</code>	13 f.
<code>\definecolorscheme</code>	40 f.	Kime, Philip	34
<code>\Dsh</code>	25	Kohm, Markus	5
<code>\dsh</code>	25	KOMA-Script (package)	5
E			
<code>\eg</code>	24		
<code>email</code>	29 f.		

INDEX

L

Lehman, Philipp 4, 34
`\license` 8
`list-sep` 47 f.
`list-setup` 10
`\listbibfileentries` 48
`\listbibfilekeys` 48
`\listbibfiletypes` 48
listings (package) 3, 5, 17, 35, 37 f., 47
`listings-options` 17, 36
`\listsilentcmds` 47
`\listsilentenvs` 48
`load-preamble` 27 f., 31, 33, 35
`load-preamble+` 28, 33, 35
`\LPPL` 8, 23
LPPL 4, 8, 23, 42
`\lppl` 8, 22 f.
ltxcmds (package) 4

M

`makeindex-setup` 33
`\MakePercentComment` 47
`\Marg` 6, 47
`\marg` 6, 12, 47
marginnote (package) 5
mdframed (package) 3, 5, 16 f., 35, 47
`\meta` 6, 27 f., 47
Mittelbach, Frank 5
`\Module` 13 f.
`\module` 7, 13 f., 40 f.
`module-sep` 28
`\moduleidx` 7
Moses, Brooks 3, 5, 17, 35, 47
multicol (package) 5

N

`name` 7
`name` 7, 29
`\needclass` 9
`\needpackage` 9
Neukahm, Frank 5
`\newabbr` 22 ff.
`\newarg` 47
`\newcounterrepresentation` 20 f.
`\newexpandablecmd` 21 f.
`\newinputsourcefilecmd` 9
`\newname` 22 f., 30
`\newnote` 8
`\newpackagename` 8 f.
`\newsourcename` 11
Niederberger, Clemens 1, 5, 22, 41, 46
`\nottest` 44

O

`\Oarg` 6

`\oarg` 6, 12, 15
Oberdiek, Heiko 4 f., 39, 47
`\opt` 11, 13 f.
`\option` 7, 12 ff., 27 f., 38, 40 f.
`\optionidx` 7
options (environment) 10, 13 ff., 46

P

`package` 29 f.
`\packageformat` 27
PDF 22, 38 f.
pgfopts (package) 4
`\pkg` 8 f., 23, 38
`pkg-format` 28
`\pkgidx` 8
`\PM` 26
`pre-code` 11
`pre-source` 11
`\providecounterrepresentation` 20
`\provideexpandablecmd` 22

Q

`quote-author-format` 31
`quote-format` 31

R

raggedze (package) 5
Rahtz, Sebastian 5, 39
`\renewabbr` 22
`\renewcounterrepresentation` 20
`\renewexpandablecmd` 22
Robertson, Will 4, 34

S

`\sarg` 7, 12
Schröder, Martin 5
`scrartcl` 28
scrartcl (class) 5, 28
`set-trail-punct` 18
`\setcnltx` 5, 18, 28, 33
`side-by-side` 16
sidebyside (environment) 9 ff., 16
`\sinceversion` 8
`source-format` 27
sourcecode (environment) 9 ff., 15 f., 47
`sourcecode-options` 17
`\sourceformat` 26, 36 ff.
`subtitle` 29

T

Talbot, Nicola L.C. 22
`title-format` 27
`\titleformat` 30
translations (package) 5, 41
trimspaces (package) 4

INDEX

U	
ulem (package).....	5
\unexpandable.....	12, 40 f.
url.....	29 f.
\usf.....	25
\usw.....	25
\uswusf.....	25
V	
\verbcode.....	6
version.....	29
version-note-format.....	28
\versionnoteformat.....	26
\Vgl.....	25
\vgl.....	25
W	
Wilson, Peter.....	34
Wright, Joseph.....	4, 34
X	
xcolor (package).....	4, 40
Z	
\ZB.....	25
\zB.....	25