SCROLL_LIST

> Start from API_LEVEL `2.0`. Please refer to API_LEVEL.

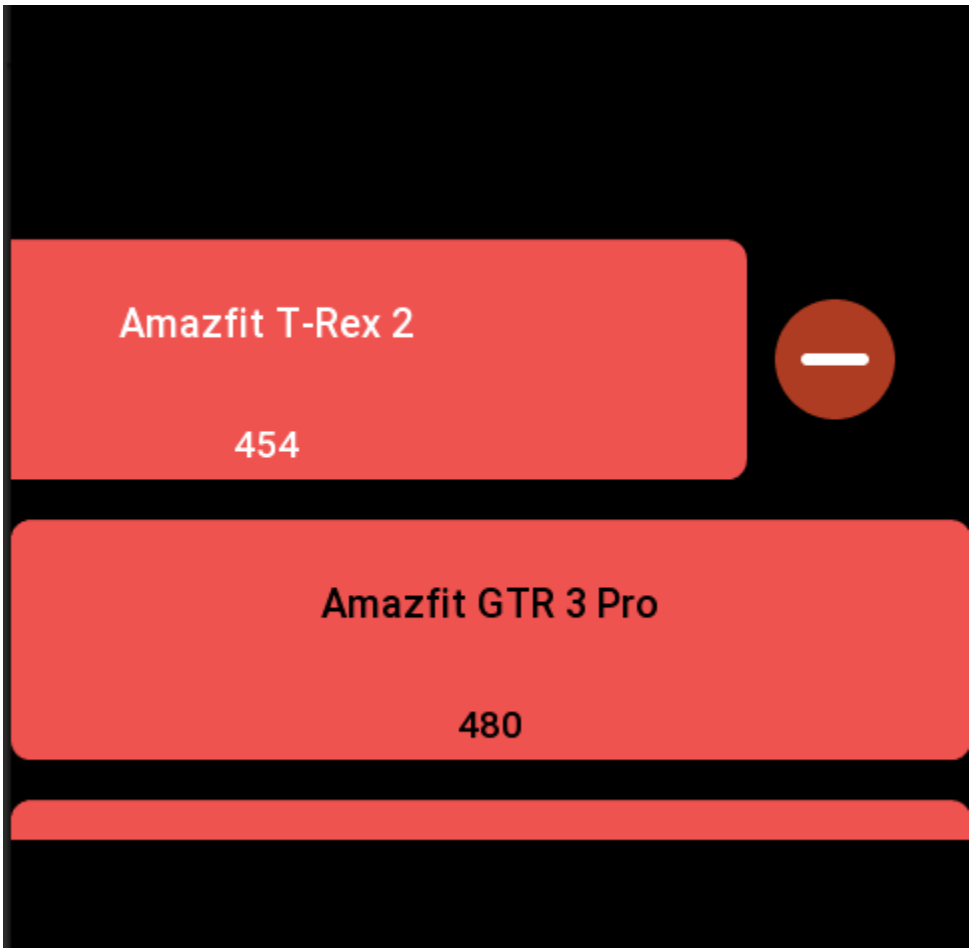

Create a list area with sliding support, where each list item can contain images and text, and supports horizontal sliding.

Create UI widget

```
import { createWidget, widget } from '@zos/ui'
```

```
const scrollList = createWidget(widget.SCROLL_LIST, Param)
```

Type

Param: object

Properties	Description	Required	Type
x	The x-coordinate of the widget	YES	`number`
y	The y-coordinate of the widget	YES	`number`
w	Width of the widget	YES	`number`
h	Height of the widget	YES	`number`
item_space	Space between items	NO	`number`
item_config	Item type configuration, see `ItemConfig`	YES	`Array<ItemConfig>`
item_config_count	Length of the item_config array	YES	`number`
data_array	Data array	YES	`DataArray`
data_count	Length of the data array	YES	`number`
item_click_func	Item click callback function, where the	NO	`ItemClickFunc`

Properties	Description	Required	Type
	item index corresponds to the data_array, see `ItemClickFunc`		
data_type_config	Item index type configuration array, see DataTypeConfig	NO	`Array<DataTypeCor`
data_type_config_count	Length of the item index type configuration array	NO	`number`
on_page	Used when updating data, set to `1` to keep the list at current position after update, otherwise returns to list top	NO	`number`
snap_to_center	Whether the list should snap to the center height of SCROLL_LIST	NO	`boolean`
item_focus_change_func	List sliding focus change callback function, see ItemFocusChangeFunc	NO	`ItemFocusChangeFu`
item_enable_horizon_drag	Whether items can be dragged horizontally	NO	`boolean`
item_drag_max_distance	Maximum horizontal drag distance, positive	NO	`number`

Properties	Description	Required	Type
	values for left drag, negative for right drag		
snap_type	Set snap mode (see snap_type snap mode)	NO	`number`
item_common_focus	Whether to show common focus (effective in key mode)	NO	`boolean`
item_key_focus_change_func	Key event listener callback in key mode	NO	`function`
enable_scroll_bar	Create page indicator (arcScrollBar)	NO	`boolean`
view_index	Set list item to visible area (Note: Round screen: center screen, Square screen: top of screen)	NO	`number`

ItemConfig: object

Properties	Description	Required	Type
type_id	Current item type ID, optional when item_config_count is `0`, required otherwise	NO	`number`
item_height	Item height	YES	`number`
item_bg_color	Item background color	YES	`number`

Properties	Description	Required	Type
item_bg_radius	Item background corner radius	YES	`number`
text_view	Array of textView structures, each item is a `textView`, see explanation below	NO	`Array<TextView>`
text_view_count	Length of text_view array	NO	`number`
image_view	Array of imageView, each item is an `imageView`, see explanation below	NO	`Array<ImageView>`
image_view_count	Length of image_view array	NO	`number`

TextView: object

Properties	Description	Required	Type
x	The x-coordinate, relative coordinate	YES	`number`
y	The y-coordinate, relative coordinate	YES	`number`
w	Widget width	YES	`number`
h	Widget height	YES	`number`
color	Text color	NO	`number`
text_size	Font size	NO	`number`
key	Data binding key, see examples and data_array description for details	YES	`string`

Properties	Description	Required	Type
action	Whether to respond to click events, after response, the corresponding data `key` can be captured in `item_click_func`, default `false`	NO	`boolean`

```
const text_view = [
  { x: 100, y: 0, w: 100, h: 20, key: 'name', color: 0xffffff, action:
true },
  { x: 0, y: 30, w: 100, h: 100, key: 'age', color: 0xffffff,
text_size: 20 }
]
```

ImageView: object

Properties	Description	Required	Type
x	The x-coordinate, relative coordinate	YES	`number`
y	The y-coordinate, relative coordinate	YES	`number`
w	Widget width	YES	`number`
h	Widget height	YES	`number`
key	Data binding key, see examples and data_array description for details	YES	`string`
action	Whether to respond to click events, after response, the corresponding data `key` can be captured in `item_click_func`, default `false`	NO	`boolean`

```
// Each structure in the array is an imageView
const image_view = [{ x: 0, y: 0, w: 20, h: 20, key: 'img_src', action:
```

```
true }]

### data_array

Data arrays, TextView and ImageView take values from each data_array
object based on property names (configured via `key`) and render them
to the view based on the corresponding configuration.

```js
const dataList = [
  { img_src: rootPath + 'step/step_num_1.png', name: 'name1', age: '12'
},
  { img_src: rootPath + 'step/step_num_1.png', name: 'name1', age: '13'
},
  { img_src: rootPath + 'step/step_num_1.png', name: 'name1', age: '13'
}
]
```

DataTypeConfig: object

Set the type of list index item.

Each index item uses the configuration of `item_config[0]` by default.

Properties	Description	Required	Type
start	Starting index	YES	`number`
end	Ending index	YES	`number`
type_id	The `type_id` corresponding to the type configuration in item_config	YES	`number`

`start` and `end` form a closed interval `[start, end]`

```
{
data_type_config:[
  // Represents that data entries from index 0 to 2 use the style
```
```

```
configuration with type_id 2
  {
  start: 0,
  end: 2,
  type_id: 2,
  },
  {
  start: 3,
  end: 10,
  type_id: 1,
  },
],
data_type_config_count:2
}
```

ItemClickFunc

```
(list: ScrollList, index: number, data_key: string) => void
```

Parameters	Description	Type
list	SCROLL_LIST widget	`any`
index	Clicked item index	`number`
data_key	Clicked data `key` name, can locate the clicked area through `key`	`string`

ItemFocusChangeFunc

```
(list: ScrollList, index: number, focus: boolean) => void
```

Parameters	Description	Type

Parameters	Description	Type
list	SCROLL_LIST widget	`any`
index	Item index	`number`
focus	Whether the item is in focus state	`boolean`

snap_type Snap Mode

Snap Mode Enum Value	Description
SCROLL_LIST.snap_type.SNAPCENTER_ALL	Center snap
SCROLL_LIST.snap_type.SNAPCENTER_EXCEPTTITLE	Center snap except for title
SCROLL_LIST.snap_type.SNAP_TOP	Top snap
SCROLL_LIST.snap_type.SNAP_BOTTOM	Bottom snap

```
import { SCROLL_LIST } from '@zos/ui'

console.log(SCROLL_LIST.snap_type.SNAPCENTER_ALL)
```

Refresh Data

```
import { createWidget, widget, prop } from '@zos/ui'

const scrollList = createWidget(widget.SCROLL_LIST, Param)
scrollList.setProperty(prop.UPDATE_DATA, {
  // Reset configuration information
  data_type_config: [
    {
```

```
      start: 0,
      end: 2,
      type_id: 2
    }
  ],
  // Configuration information length
  data_type_config_count: 1,
  // New data
  data_array: [
    { img_src: rootPath + 'test/normalbtn_h.png', name: 'Name', age:
'12', like: 'type2' },
    { img_src: rootPath + 'test/normalbtn_h.png', name: 'namex1', age:
'13', like: 'type2' },
    { img_src: rootPath + 'test/normalbtn_h.png', name: 'namex2', age:
'13', like: 'type2' },
    { img_src: rootPath + 'test/normalbtn_h.png', name: 'namex3', age:
'12', like: 'type2' },
    { img_src: rootPath + 'test/normalbtn_h.png', name: 'name666', age:
'13', like: 'type2' }
  ],
  // Data length
  data_count: 5,
  // Stay on current page after data refresh, if not set or set to 0,
it will return to the top of the list
  on_page: 1
})
```

Update/Delete Single Item

```
// Update a specific data
scrollList.setProperty(prop.UPDATE_ITEM, {
  index: gScrollListSelectIndex,
  item_data: dataList2[gScrollListSelectIndex]
})
// Delete a specific data
list.setProperty(prop.DELETE_ITEM, { index: delete_index })
```

Control Horizontal Sliding Parameters of Single Item

```
scrollList.setProperty(prop.MOVE_ITEM, {
  start: 0, // Start row
  end: 0, // End row
  item_enable_horizon_drag: false, // Whether horizontal sliding is enabled
  item_drag_max_distance: -200 // Horizontal sliding distance, only takes effect when enabled
})
```

Property Access Support List

属性名	setProperty	getProperty	setter	getter
x	N	Y	N	Y
y	N	Y	N	Y
w	N	Y	N	Y
h	N	Y	N	Y
item_space	N	N	N	N
item_config	N	N	N	N
item_config_count	N	N	N	N
data_array	N	N	N	N
data_count	N	N	N	N

属性名	setProperty	getProperty	setter	getter
item_click_func	N	N	N	N
data_type_config	N	N	N	N
data_type_config_count	N	N	N	N
on_page	N	N	N	N
snap_to_center	N	N	N	N
item_focus_change_func	N	N	N	N
item_enable_horizon_drag	N	N	N	N
item_drag_max_distance	N	N	N	N
snap_type	N	N	N	N
item_common_focus	N	N	N	N
item_key_focus_change_func	N	N	N	N
enable_scroll_bar	N	N	N	N
view_index	N	N	N	N

代码示例

```
import { createWidget, widget, prop } from '@zos/ui'

Page({
  build() {
    const dataList = [
```

```
      { name: 'Amazfit T-Rex 2', size: 454, del_img: 'btn/delete.png'
},
      { name: 'Amazfit GTR 3 Pro', size: 480, del_img: 'btn/delete.png'
},
      { name: 'Amazfit GTR 3', size: 454, del_img: 'btn/delete.png' }
    ]

    const scrollList = createWidget(widget.SCROLL_LIST, {
      x: 0,
      y: 120,
      h: 300,
      w: 480,
      item_space: 20,
      snap_to_center: true,
      item_enable_horizon_drag: true,
      item_drag_max_distance: -120,
      item_config: [
        {
          type_id: 1,
          item_bg_color: 0xef5350,
          item_bg_radius: 10,
          text_view: [
            { x: 0, y: 0, w: 480, h: 80, key: 'name', color: 0xffffff,
text_size: 20 },
            { x: 0, y: 80, w: 480, h: 40, key: 'size', color: 0xffffff
}
          ],
          text_view_count: 2,
          image_view: [{ x: 492, y: 28, w: 64, h: 64, key: 'del_img',
action: true }],
          image_view_count: 1,
          item_height: 120
        },
        {
          type_id: 2,
          item_bg_color: 0xef5350,
          item_bg_radius: 10,
          text_view: [
            { x: 0, y: 0, w: 480, h: 80, key: 'name', color: 0x000000,
text_size: 20 },
            { x: 0, y: 80, w: 480, h: 40, key: 'size', color: 0x000000
}
          ],
```

```
          text_view_count: 2,
          image_view: [{ x: 492, y: 28, w: 64, h: 64, key: 'del_img',
action: true }],
          image_view_count: 1,
          item_height: 120
        }
      ],
      item_config_count: 2,
      data_array: dataList,
      data_count: dataList.length,
      item_focus_change_func: (list, index, focus) => {
        console.log('scrollListFocusChange index=' + index)
        console.log('scrollListFocusChange focus=' + focus)
      },
      item_click_func: (item, index, data_key) => {
        console.log(`scrollListItemClick index=${index}`)
        if (data_key === 'del_img') {
          scrollList.setProperty(prop.DELETE_ITEM, { index })
          dataList.splice(index, 1)
        } else {
          updateConfig()
        }
      },
      data_type_config: [
        {
          start: 0,
          end: 1,
          type_id: 1
        },
        {
          start: 1,
          end: 2,
          type_id: 2
        }
      ],
      data_type_config_count: 2,
      snap_to_center: true,
      item_enable_horizon_drag: true,
      item_drag_max_distance: -112
    })

    function updateConfig() {
      scrollList.setProperty(prop.UPDATE_DATA, {
```

```
        data_type_config: [
          {
            start: 0,
            end: dataList.length - 1,
            type_id: 1
          }
        ],
        data_type_config_count: 1,
        data_array: dataList,
        data_count: dataList.length,
        on_page: 1
      })
    }
  }
})
```