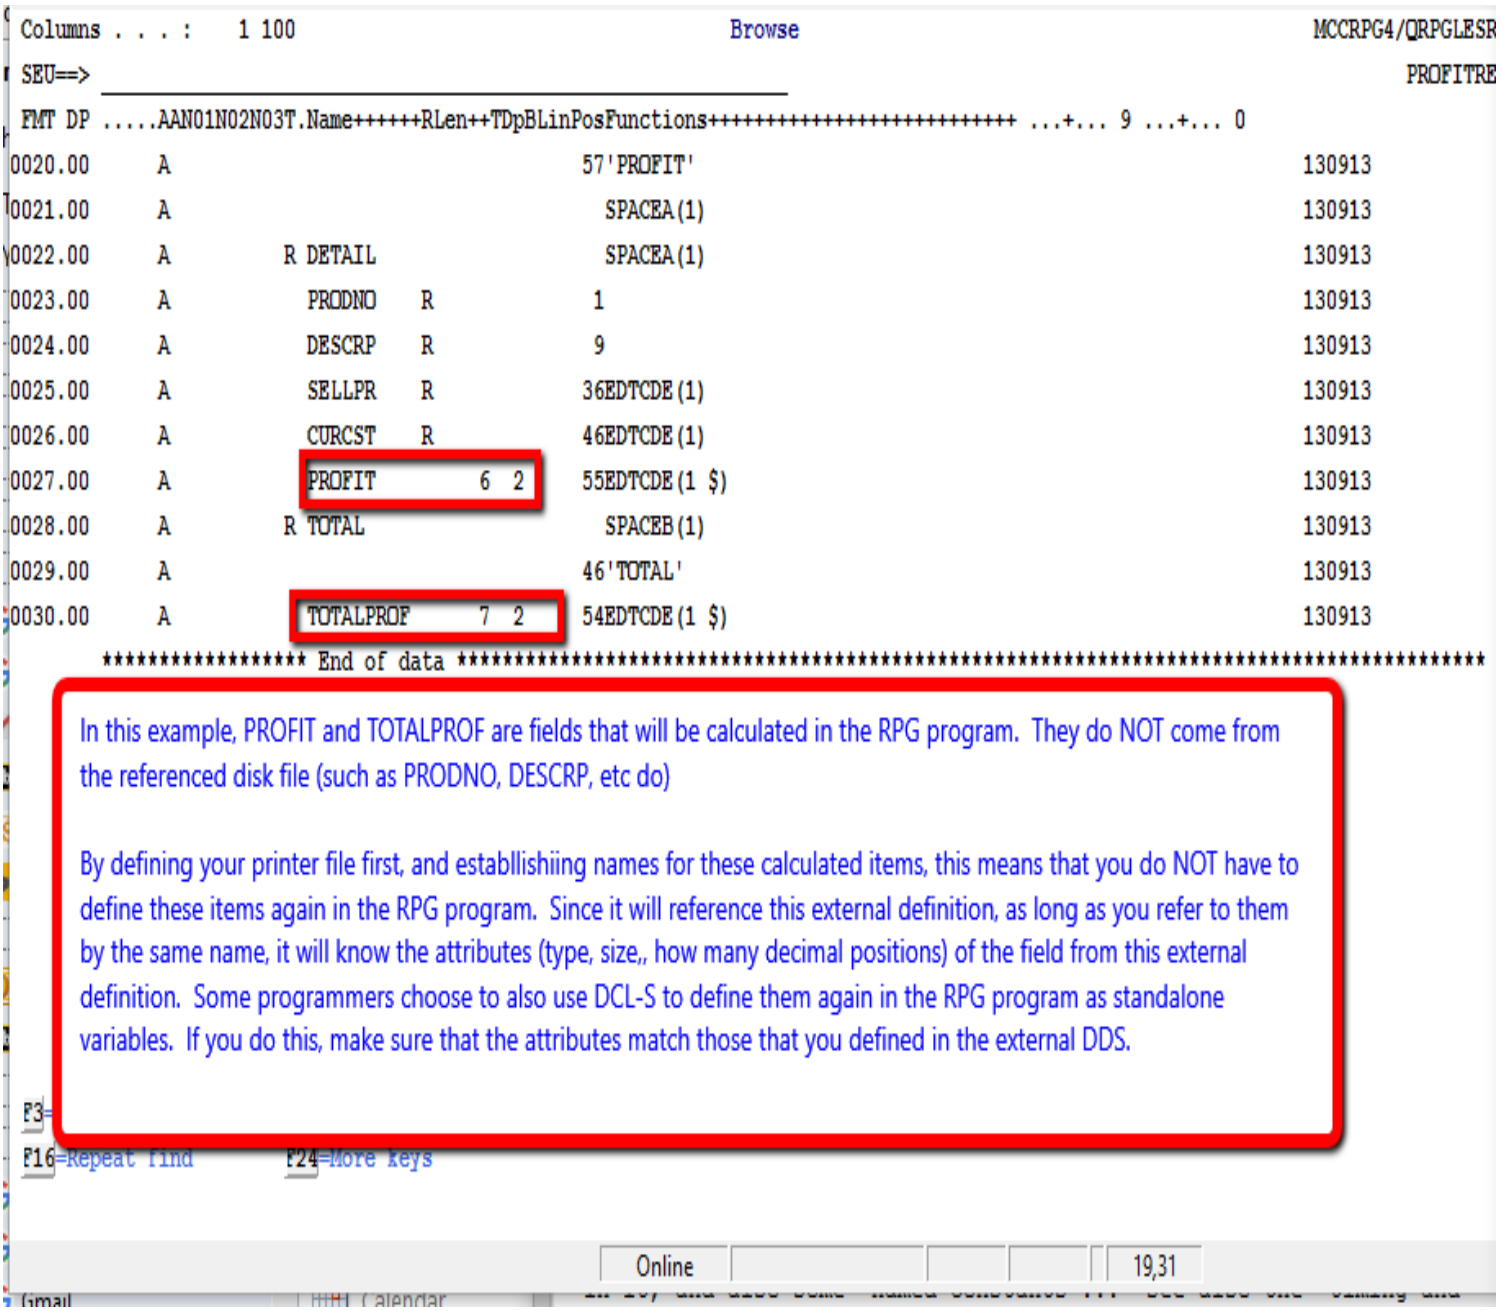

Columns . . . : 1 100
Browse
MCCRPG4/QRPGLESR
SEU==>
PROFITRE
FMT DP .....AAN01N02N03T.Name++++++RLen++TDpBLinPosFunctions++++++++++++++++++++++++++ ...+... 9 ...+... 0
0020.00 A 57'PROFIT' 130913
0021.00 A SPACEA(1) 130913
0022.00 A R DETAIL SPACEA(1) 130913
0023.00 A PRODNO R 1 130913
0024.00 A DESCRP R 9 130913
0025.00 A SELLPR R 36EDTCDE(1) 130913
0026.00 A CURCST R 46EDTCDE(1) 130913
0027.00 A PROFIT 6 2 55EDTCDE(1 $) 130913
0028.00 A R TOTAL SPACEB(1) 130913
0029.00 A 46'TOTAL' 130913
0030.00 A TOTALPROF 7 2 54EDTCDE(1 $) 130913
********** End of data **********
In this example, PROFIT and TOTALPROF are fields that will be calculated in the RPG program. They do NOT come from the referenced disk file (such as PRODNO, DESCRP, etc do)
By defining your printer file first, and establlishiing names for these calculated items, this means that you do NOT have to define these items again in the RPG program. Since it will reference this external definition, as long as you refer to them by the same name, it will know the attributes (type, size,, how many decimal positions) of the field from this external definition. Some programmers choose to also use DCL-S to define them again in the RPG program as standalone variables. If you do this, make sure that the attributes match those that you defined in the external DDS.
F3=
F16=Repeat find
F24=More keys
Online
19,31