

conflit

```
Ubuntu
velos-api on ♦ main (MERGING) [=] via v3.14.4
> git status
On branch main
You have unmerged paths.
  (fix conflicts and run "git commit")
  (use "git merge --abort" to abort the merge)

Unmerged paths:
  (use "git add <file>.." to mark resolution)
    both modified:   README.md

no changes added to commit (use "git add" and/or "git commit -a")


velos-api on ♦ main (MERGING) [=] via v3.14.4
> head -10 README.md
<<<<<< HEAD
# velos-api · Ressources fournies
=====
# velos-api · API de stations de velos
>>>>>> docs/objectif

> Ces fichiers sont le **point de départ** du projet. Tu les copies dans ton dossier de travail 'velos-api', puis tu les
versionnes. Tu n'as pas à réécrire ce code : ce n'est pas ce qui est évalué.


Fichier | Rôle |
--- | --- |

velos-api on ♦ main (MERGING) [=] via v3.14.4
```

merge request

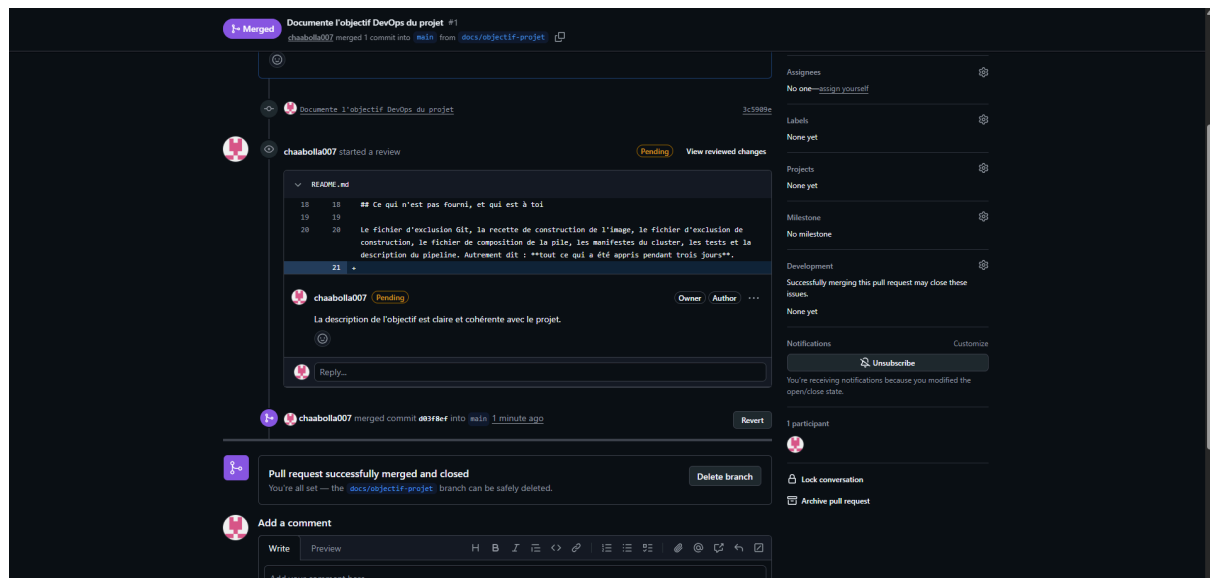

main protection

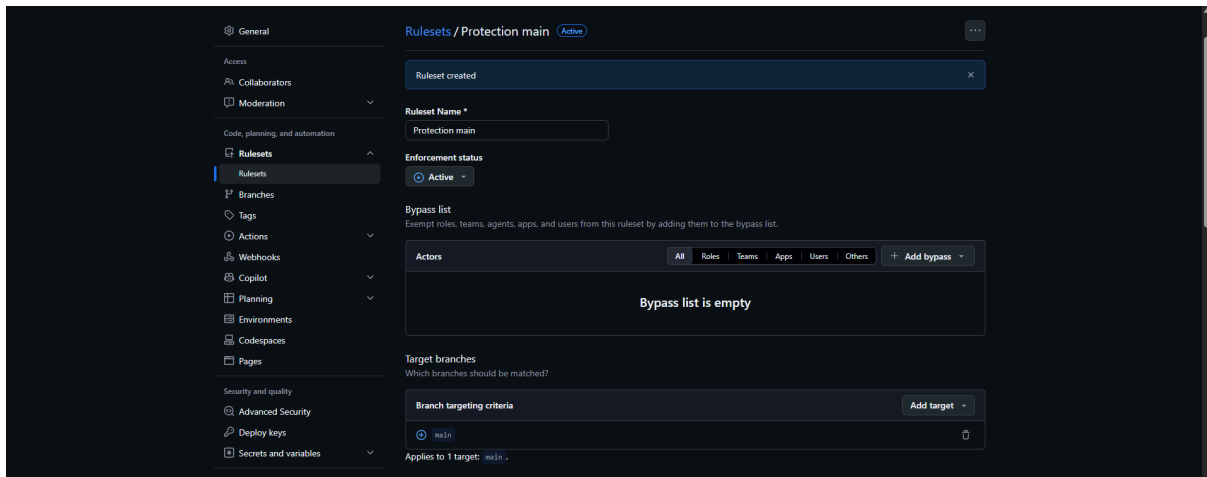

```
velos-api on ♦ main via 🟢 v3.14.4
> echo "Test protection main" >> README.md
git add README.md
git commit -m "Teste la protection de la branche principale"
[main aeefe05] Teste la protection de la branche principale
1 file changed, 1 insertion(+)

velos-api on ♦ main [↑] via 🟢 v3.14.4
> git push
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 10 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 333 bytes | 333.00 KiB/s, done.
Total 3 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
remote: error: GH013: Repository rule violations found for refs/heads/main.
remote: Review all repository rules at https://github.com/chaabolla007/velos-api/rules?ref=refs%2Fheads%2Fmain
remote: - Changes must be made through a pull request.
remote:
To github.com:chaabolla007/velos-api.git
! [remote rejected] main -> main (push declined due to repository rule violations)
error: failed to push some refs to 'github.com:chaabolla007/velos-api.git'

velos-api on ♦ main [↑] via 🟢 v3.14.4
>
```

```
git log --oneline -5
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
d03f8ef (HEAD -> main, origin/main, origin/HEAD) Merge pull request #1 from chaabolla007/docs/objectif-projet
3c5909e (origin/docs/objectif-projet) Documente l'objectif DevOps du projet
ed7c295 Resout le conflit sur le titre du README
1d6d378 (docs/objectif) Ajoute une description de velos-api
40f896d (docs/description) Precise le projet dans le README

velos-api on ♦ main via 🟢 v3.14.4
> git log --oneline --graph --decorate --all -12
* d03f8ef (HEAD -> main, origin/main, origin/HEAD) Merge pull request #1 from chaabolla007/docs/objectif-projet
| \
| * 3c5909e (origin/docs/objectif-projet) Documente l'objectif DevOps du projet
| /
| * ed7c295 Resout le conflit sur le titre du README
| \
| * 1d6d378 (docs/objectif) Ajoute une description de velos-api
| * 40f896d (docs/description) Precise le projet dans le README
| /
* 308a9bd Initialise le projet velos-api

velos-api on ♦ main via 🟢 v3.14.4
> git rev-list --count main
6

velos-api on ♦ main via 🟢 v3.14.4
>
```

cache-mesure

```
velos-api on * docker/conteneurisation [?] via v3.14.4
$ time docker build -t velos-api:1.0 .
[*] Building 0.5s (12/12) FINISHED
=> [internal] load build definition from Dockerfile
=> transferring dockerfile: 468B
=> [internal] load metadata for docker.io/library/python:3.12-slim
=> [internal] load dockerignore
=> transferring context: 188B
=> [builder 1/4] FROM docker.io/library/python:3.12-slim@sha256:7a8b475803c4fe15a2cd4e55e5cfc2f3560bdc9333d624f2
=> resolve docker.io/library/python:3.12-slim@sha256:7a8b475803c4fe15a2cd4e55e5cfc2f3560bdc9333d624f24cd6d043
=> [internal] load build context
=> transferring context: 3.35kB
=> CACHED [builder 2/4] WORKDIR /app
=> CACHED [stage-1 3/5] RUN useradd --create-home --uid 1001 appli
=> CACHED [builder 3/4] COPY requirements.txt
=> CACHED [builder 4/4] RUN pip install --no-cache-dir --prefix=/install -r requirements.txt
=> CACHED [stage-1 4/5] COPY --from=builder /install /usr/local
=> [stage-1 5/5] COPY app.py
=> exporting to image
=> exporting layers
=> exporting manifest sha256:c0795ae5d88c8d7fc214d6dca7d4cb8395d11910267c09438f587fd83e0ce78
=> exporting config sha256:6a8a97c4b85d2c7a8c8a0074a8324d8baf301530734cfcfa96dc4bdeae4709
=> exporting attestation manifest sha256:bdd8b3b7e8040816539b0bea88ecf6055235ae741056ea20b19fbc31d7fcd59a
=> exporting manifest list sha256:7ecd30448c319e7ecb8feca336ab22bd7738699f6992f2d36f9b24bd83bfd240
=> naming to docker.io/library/velos-api:1.0
=> unpacking to docker.io/library/velos-api:1.0
docker build -t velos-api:1.0 . 0.06s user 0.10s system 20% cpu 0.811 total

velos-api on * docker/conteneurisation [?] via v3.14.4
$ |
```

```
velos-api on * docker/conteneurisation [?] via v3.14.4
$ docker run -d --name velos-test -p 8001:8000 velos-api:1.0
c888641427d43b8d4c43a71821da7665c87d3e08f89cab86e68d22ae0f0cad21

velos-api on * docker/conteneurisation [?] via v3.14.4
$ docker exec velos-test id
uid=1001(appli) gid=1001(appli) groups=1001(appli)

velos-api on * docker/conteneurisation [?] via v3.14.4
$ curl http://localhost:8001/sante
{"statut":"ok"}

velos-api on * docker/conteneurisation [?] via v3.14.4
$ docker rm -f velos-test
velos-test

velos-api on * docker/conteneurisation [?] via v3.14.4
$ |
```

pile-demarrée

```
velos-api on * docker/conteneurisation [?] via v3.14.4
$ docker compose up -d --build
[*] Building 0.5s (14/14) FINISHED
=> [internal] load local base definitions
=> reading from stdin 404B
=> [internal] load build definition from Dockerfile
=> transferring dockerfile: 468B
=> [internal] load metadata for docker.io/library/python:3.12-slim
=> [internal] load dockerignore
=> transferring context: 188B
=> [builder 1/4] FROM docker.io/library/python:3.12-slim@sha256:7a8b475803c4fe15a2cd4e55e5cfc2f3560bdc9333d624f24cd6d04304fd7a17
=> resolve docker.io/library/python:3.12-slim@sha256:7a8b475803c4fe15a2cd4e55e5cfc2f3560bdc9333d624f24cd6d04304fd7a17
=> [internal] load build context
=> transferring context: 3.33kB
=> CACHED [builder 2/4] WORKDIR /app
=> CACHED [stage-1 3/5] RUN useradd --create-home --uid 1001 appli
=> CACHED [builder 3/4] COPY requirements.txt
=> CACHED [builder 4/4] RUN pip install --no-cache-dir --prefix=/install -r requirements.txt
=> CACHED [stage-1 4/5] COPY --from=builder /install /usr/local
=> CACHED [stage-1 5/5] COPY app.py
=> exporting to image
=> exporting layers
=> exporting manifest sha256:a21af5edbe85a2e6fb37117a5133025aff8e701164ad93f20aa7693309ec1bea
=> exporting config sha256:3237f3c570768300e72a978f476cd385d68978c070660e4170955d0081d402
=> exporting attestation manifest sha256:b4973777cc5b0c63ce4d15d7906d682ca507c871fd3a2d094da7de09708fa7
=> exporting manifest list sha256:696d99c90172200a30c7becf8ef5c0206c65baeac675c69e001d22900c8072f7
=> naming to docker.io/library/velos-api-api:latest
=> unpacking to docker.io/library/velos-api-api:latest
=> resolving provenance for metadata file
[*] up 5/5
✓Image velos-api-api Built 0.6s
✓Network velos-api-velos-net Created 0.0s
✓Volume velos-api-velos_data Created 0.0s
✓Container velos-api-db-1 Healthy 5.9s
✓Container velos-api-api-1 Started 6.0s

velos-api on * docker/conteneurisation [?] via v3.14.4 took 6s
$ docker compose ps
NAME IMAGE COMMAND SERVICE CREATED STATUS PORTS
velos-api-api-1 velos-api-api "python app.py" api 7 seconds ago Up 1 second
velos-api-db-1 postgres:16-alpine "docker-entrypoint.s..." db 7 seconds ago Up 7 seconds (healthy) 5432/tcp

velos-api on * docker/conteneurisation [?] via v3.14.4
$ |
```

api-base

```
velos-api on * docker/conteneurisation [?] via v3.14.4
$ curl http://localhost:8001/stations
{"source":"postgres","stations":[{"capacite":12,"nom":"College Jean Moulin","quartier":"Nord","velos_disponibles":0},{"capacite":20,"nom":"Gare Centrale","quartier":"Centre","velos_disponibles":12},{"capacite":18,"nom":"Hotel de Ville","quartier":"Centre","velos_disponibles":9},{"capacite":10,"nom":"Parc des Sports","quartier":"Nord","velos_disponibles":7},{"capacite":16,"nom":"Piscine Olympique","quartier":"Sud","velos_disponibles":10},{"capacite":15,"nom":"Place du Marche","quartier":"Centre","velos_disponibles":3},{"capacite":25,"nom":"Universite","quartier":"Sud","velos_disponibles":11},{"capacite":10,"nom":"Zone Industrielle","quartier":"Ouest","velos_disponibles":5}]}

velos-api on * docker/conteneurisation [?] via v3.14.4
$ |
```

persistance

```
velos-api on * docker/conteneurisation [?] via v3.14.4
> docker compose exec db psql -U velos -d velos -c \
"INSERT INTO stations (nom, quartier, velos_disponibles, capacite) VALUES ('Station Test', 'Centre', 3, 10);"
INSERT 0 1

velos-api on * docker/conteneurisation [?] via v3.14.4
> docker compose exec db psql -U velos -d velos -c \
"SELECT nom, quartier, velos_disponibles FROM stations WHERE nom='Station Test';"
 nom      | quartier | velos_disponibles
-----+-----+-----
Station Test | Centre   | 3
(1 row)

velos-api on * docker/conteneurisation [?] via v3.14.4
> docker compose down
[*] down 1/2
[*] down 3/3 velos-api-api-1 Removed 3.4s
    ✓Container velos-api-api-1 Removed 3.4s
    ✓Container velos-api-db-1 Removed 9.4s
    ✓Network velos-api_velos-net Removed 0.3s

velos-api on * docker/conteneurisation [?] via v3.14.4 took 4s
> docker compose up -d
[*] up 3/3
    ✓Network velos-api_velos-net Created 8.8s
    ✓Container velos-api-db-1 Healthy 5.9s
    ✓Container velos-api-api-1 Started 6.0s

velos-api on * docker/conteneurisation [?] via v3.14.4 took 6s
> docker compose up -d
[*] up 2/2
    ✓Container velos-api-api-1 Running 0.6s
    ✓Container velos-api-db-1 Healthy 0.5s

velos-api on * docker/conteneurisation [?] via v3.14.4
> docker compose exec db psql -U velos -d velos -c \
"SELECT nom, quartier, velos_disponibles FROM stations WHERE nom='Station Test';"
 nom      | quartier | velos_disponibles
-----+-----+-----
Station Test | Centre   | 3
(1 row)

velos-api on * docker/conteneurisation [?] via v3.14.4
> |
```

images-taille

```
velos-api on * main via v3.14.4
> docker images --format "table [{{.Repository}}]{{.Tag}}\t[{{.Size}}]" | grep velos-api
velos-api          1.0          195MB
velos-api-api      latest       195MB
velos-api          naif         209MB

velos-api on * main via v3.14.4
> |
```

tag

```
velos-api on * main via v3.14.4
> docker image rm chaabolla/velos-api:1.0
docker pull chaabolla/velos-api:1.0
Untagged: chaabolla/velos-api:1.0
1.0: Pulling from chaabolla/velos-api
Digest: sha256:7ec838402c319c7ec80f6a336ab22b47738699f692f2d36f9b24bd83b3fd240
Status: Downloaded newer image for chaabolla/velos-api:1.0
docker.io/chaabolla/velos-api:1.0

velos-api on * main via v3.14.4 took 2s
> git tag -a v1.0.0 -m "Version 1.0.0 conteneurisee"
git push origin v1.0.0
Enumerating objects: 1, done.
Counting objects: 100% (1/1), done.
Writing objects: 100% (1/1), 179 Bytes | 179.00 KiB/s, done.
Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:chaabolla897/velos-api.git
 * [new tag]          v1.0.0 -> v1.0.0

velos-api on * main via v3.14.4
> git tag
v1.0.0
```

chaabolla
Your personal account

Repositories

Hardened Images

Collaborations

Settings

Default privacy

Notifications

Billing

Usage

Pulls

Storage

Repositories / velos-api / General

chaabolla/velos-api

Last pushed 2 minutes ago · Repository size: 45.8 MB · 0 ·

Add a description

Add a category

General Tags Image Management Collaborators Webhooks Settings

Tags

This repository contains 1 tag(s).

Tag	OS	Type	Pulled	Pushed
1.0		Image	less than 1 day	2 minutes

See all

Repository overview incomplete

An overview describes what your image does and how to run it. It displays in the public view of your repository once you have pushed some content.

Add overview

Upgrade subscription

Using 0 of 1 private repositories.

Docker commands

To push a new tag to this repository:

docker push chaabolla/velos-api:tagname

Public view

buildcloud

Build with Docker Build Cloud

Accelerate image build times with access to cloud-based builders and shared cache.

Docker Build Cloud executes builds on optimally-dimensioned cloud infrastructure with dedicated per-organization isolation.

Get faster builds through shared caching across your team, native multi-platform support, and encrypted data transfer - all without managing infrastructure.

Go to Docker Build Cloud

mot de passe secret

```
velos-api on * kubernetes/deploiement [?] via v3.14.4
> kubectl get secret velos-db-secret
NAME      TYPE      DATA   AGE
velos-db-secret  Opaque    1       38s

velos-api on * kubernetes/deploiement [?] via v3.14.4
> |
```

8 stations de init.sql

```
velos-api on * kubernetes/deploiement [?] via v3.14.4
> kubectl get pods -w
NAME      READY   STATUS    RESTARTS   AGE
velos-db-58f9d7b857-xctcz  0/1     Running   0           5s
velos-db-64b4fb8987-dm89g  0/1     Running   5 (83s ago) 3m5s
velos-db-58f9d7b857-xctcz  1/1     Running   0           7s
velos-db-64b4fb8987-dm89g  0/1     Terminating 5 (85s ago) 3m6s
velos-db-64b4fb8987-dm89g  0/1     Terminating 5 (88s ago) 3m6s
velos-db-64b4fb8987-dm89g  0/1     Completed   5 (88s ago) 3m6s
velos-db-64b4fb8987-dm89g  0/1     Completed   5 (86s ago) 3m7s
velos-db-64b4fb8987-dm89g  0/1     Completed   5 (86s ago) 3m7s

velos-api on * kubernetes/deploiement [?] via v3.14.4 took 16s
> kubectl exec deployment/velos-db -- \
psql -U velos -d velos -c "SELECT COUNT(*) FROM stations;"
count
-----
      8
(1 row)

velos-api on * kubernetes/deploiement [?] via v3.14.4
> |
```

panne

```
{ "statut": "ok" }

13:40:31
{ "statut": "ok" }

13:40:32
{ "statut": "ok" }

13:40:33
{ "statut": "ok" }

13:40:34
{ "statut": "ok" }

13:40:35
{ "statut": "ok" }

13:40:36
{ "statut": "ok" }

13:40:37
{ "statut": "ok" }

13:40:38
{ "statut": "ok" }

13:40:39
{ "statut": "ok" }

13:40:40
{ "statut": "ok" }

13:40:41
{ "statut": "ok" }

13:40:42
{ "statut": "ok" }

13:40:43
{ "statut": "ok" }

13:40:44
{ "statut": "ok" }

|

~
> kubectl get pods -l app=velos-api
NAME      READY   STATUS    RESTARTS   AGE
velos-api-5c8cd968b6-6h9tb  1/1     Running   0           119s
velos-api-5c8cd968b6-ktnpn  1/1     Running   0           8m23s
velos-api-5c8cd968b6-ptlx2  1/1     Running   0           8m23s
velos-api-5c8cd968b6-ws6v5  1/1     Running   0           119s

~
> kubectl delete pod $(kubectl get pod -l app=velos-api -o jsonpath='{.items[0].metadata.name}')
pod "velos-api-5c8cd968b6-6h9tb" deleted from default namespace
kubectl get pods -l app=velos-api -w
^C

~ took 14s
> kubectl get pods -l app=velos-api -w
NAME      READY   STATUS    RESTARTS   AGE
velos-api-5c8cd968b6-6h9tb  1/1     Terminating 0           2m31s
velos-api-5c8cd968b6-blvnn  1/1     Running      0           16s
velos-api-5c8cd968b6-ktnpn  1/1     Running      0           8m55s
velos-api-5c8cd968b6-ptlx2  1/1     Running      0           8m55s
velos-api-5c8cd968b6-ws6v5  1/1     Running      0           2m31s
velos-api-5c8cd968b6-6h9tb  0/1     Error        0           2m46s
velos-api-5c8cd968b6-6h9tb  0/1     Error        0           2m46s
velos-api-5c8cd968b6-6h9tb  0/1     Error        0           2m46s

|
```

mise-a-jour

```
{ "statut": "ok" }

13:46:42
{ "statut": "ok" }

13:46:43
{ "statut": "ok" }

13:46:44
{ "statut": "ok" }

13:46:45
{ "statut": "ok" }

13:46:46
{ "statut": "ok" }

13:46:48
{ "statut": "ok" }

13:46:49
{ "statut": "ok" }

13:46:50
{ "statut": "ok" }

13:46:51
{ "statut": "ok" }

13:46:52
{ "statut": "ok" }

13:46:53
{ "statut": "ok" }

13:46:54
{ "statut": "ok" }

13:46:55
{ "statut": "ok" }

13:46:56
{ "statut": "ok" }

13:46:57
{ "statut": "ok" }

13:46:58
{ "statut": "ok" }

|

> kubectl set image deployment/velos-api api=chaabolla/velos-api:2.0
deployment.apps/velos-api image updated

~
> kubectl rollout status deployment/velos-api
Waiting for deployment "velos-api" rollout to finish: 2 out of 4 new replicas have been updated...
Waiting for deployment "velos-api" rollout to finish: 2 out of 4 new replicas have been updated...
Waiting for deployment "velos-api" rollout to finish: 2 out of 4 new replicas have been updated...
Waiting for deployment "velos-api" rollout to finish: 3 out of 4 new replicas have been updated...
Waiting for deployment "velos-api" rollout to finish: 3 out of 4 new replicas have been updated...
Waiting for deployment "velos-api" rollout to finish: 3 out of 4 new replicas have been updated...
Waiting for deployment "velos-api" rollout to finish: 3 out of 4 new replicas have been updated...
Waiting for deployment "velos-api" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "velos-api" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "velos-api" rollout to finish: 1 old replicas are pending termination...
Waiting for deployment "velos-api" rollout to finish: 3 of 4 updated replicas are available...
deployment "velos-api" successfully rolled out

~ took 9s
> kubectl get deployment velos-api -o jsonpath='{.spec.template.spec.containers[0].image}' ; echo
chaabolla/velos-api:2.0

~
> curl http://localhost:8081/alertes
{"alertes":[{"capacite":12,"nom":"College Jean Moulin","quartier":"Nord","velos_disponibles":8},{"capacite":15,"nom":"Place du Marche","quartier":"Centre","velos_disponibles":2},{"capacite":25,"nom":"Univ ersite","quartier":"Sud","velos_disponibles":1}], "source": "postgres"}

~
> |
```

retour-arriere

```
velos-api on ♦ kubernetes/deploiement [!+?] via 🟢 v3.14.4
> kubectl rollout history deployment/velos-api
deployment.apps/velos-api
REVISION    CHANGE-CAUSE
2           <none>
3           <none>

velos-api on ♦ kubernetes/deploiement [!+?] via 🟢 v3.14.4
> |
```

```
velos-api on ♦ kubernetes/deploiement [*] via 🟢 v3.14.4
> git commit -m "Deploie velos-api dans Kubernetes et ajoute les alertes"
[kubernetes/deploiement b35b763] Deploie velos-api dans Kubernetes et ajoute les alertes
9 files changed, 267 insertions(+)
create mode 100644 .dockerignore
create mode 100644 Dockerfile
create mode 100644 Dockerfile.naif
create mode 100644 compose.yaml
create mode 100644 k8s/api.yaml
create mode 100644 k8s/db-configmap.yaml
create mode 100644 k8s/db.yaml
create mode 100644 k8s/kind-cluster.yaml

velos-api on ♦ kubernetes/deploiement via 🟢 v3.14.4
> git push -u origin kubernetes/deploiement
Enumerating objects: 14, done.
Counting objects: 100% (14/14), done.
Delta compression using up to 10 threads
Compressing objects: 100% (12/12), done.
Writing objects: 100% (12/12), 3.30 MiB | 3.30 MiB/s, done.
Total 12 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'kubernetes/deploiement' on GitHub by visiting:
remote:   https://github.com/chaabolla007/velos-api/pull/new/kubernetes/deploiement
remote:
To github.com:chaabolla007/velos-api.git
 * [new branch]      kubernetes/deploiement -> kubernetes/deploiement
branch 'kubernetes/deploiement' set up to track 'origin/kubernetes/deploiement'.

velos-api on ♦ kubernetes/deploiement via 🟢 v3.14.4 took 2s
> git switch main
git pull
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
Already up to date.

velos-api on ♦ main via 🟢 v3.14.4
> |
```

pipeline-vert

 Jenkins

/ velos-api

▼ / #1

🔍

🔔

🛑

Status

Changes

Console Output

Edit Build Information

🗑 Supprimer le build "#1"

🔍 Git Build Data

📄 Pipeline Overview

🔄 Restart from Stage

🔄 Replay

📋 Pipeline Steps

📁 Workspaces

🟢 #1 (28 août 2026, 12:20:18)

🕒 Lancé par l'utilisateur chaabani

🔗 **git** Revision: 2d68ed25aae07dba73b05abd0a43f962e4bd5dd9
Repository: <https://github.com/chaabolla007/velos-api.git>

- refs/remotes/origin/main

</> Aucun changement.

Ajouter une description

Conserver cette construction sans limite de temps

Démarrée il y a 1 mn 29 s.

A duré 59 s

image-deployee

```
velos-api on ♦ main via 🟢 v3.14.4
> kubectl get deployment velos-api \
  --o jsonpath='{.spec.template.spec.containers[0].image}'; echo
chaabolla/velos-api:1

velos-api on ♦ main via 🟢 v3.14.4
>

velos-api on ♦ main via 🟢 v3.14.4
> kubectl get pods -l app=velos-api
NAME                                READY   STATUS    RESTARTS   AGE
velos-api-59867768b4-gp6td         1/1     Running   0           2m59s
velos-api-59867768b4-l7nwh         1/1     Running   0           3m12s
velos-api-59867768b4-xszzz         1/1     Running   0           3m12s
velos-api-59867768b4-zvqsk         1/1     Running   0           2m59s

velos-api on ♦ main via 🟢 v3.14.4
> curl http://localhost:8081/alertes
{"alertes":[{"capacite":12,"nom":"College Jean Moulin","quartier":"Nord","velos_disponibles":0}, {"capacite":15,"nom":"Place du Marche","quartier":"Centre","velos_disponibles":2}, {"capacite":25,"nom":"Universit
e","quartier":"Sud","velos_disponibles":1}], "source":"postgres"}

velos-api on ♦ main via 🟢 v3.14.4
> |
```

declenchement

Jenkins

/

velos-api

🔍

🔔

👤

Status

Changes

Lancer un build

Configurer

Supprimer Pipeline

Stages

Renommer

Pipeline Syntax

Log du dernier accès à Git

Builds

Filter

Today

🟢 #2 12:26

🟢 #1 12:20

🟢 **velos-api**

Pipeline script from SCM

Liens permanents

- Dernier build (#2), il y a 26 s
- Dernier build stable (#1), il y a 6 mn 18 s
- Dernier build avec succès (#1), il y a 6 mn 18 s
- Dernier build complété (#1), il y a 6 mn 18 s

REST API

Jenkins 2.541.3

🔗 modifier la description

pipeline-rouge

Jenkins

/

velos-api

/

#3

🔍

🔔

👤

Status

Changes

Console Output

Edit Build Information

Log de scrutation

Git Build Data

Pipeline Overview

Thread Dump

Pause/resume

Replay

Pipeline Steps

Workspaces

Previous Build

🔴 #3 (28 août 2026, 12:30:10)

🔄 Lancer par un changement dans la base de code

🔗 Revision: 99b52d668687329e0749032d214709ea665e3cbd

🔗 Repository: <https://github.com/chaabolla007/velos-api.git>

• refs/remotes/origin/main

</>

Provoque volontairement un echec de test

chaabaniahmed1996 at 12:28 28/08/2026

Ajouter une description

Conserver cette construction sans limite de temps

Démarrée il y a 17 s.
Le build est en cours d'exécution depuis 17 s

cause-echec

Jenkins

/

velos-api

/

#3

🔍

🔔

👤

```
[notice] To update, run: pip install --upgrade pip
[0m ---> Removed intermediate container 8d4bfcd24d51
---> 0786ef42db03
Step 9/11 : COPY app.py .
---> 25488c1a4374
Step 10/11 : COPY tests/ tests/
---> df9e8894fa33
Step 11/11 : RUN python -m pytest -q
---> Running in 9ead072add2b

F.
----- FAILURES -----
test_sante_repond_ok

def test_sante_repond_ok():
    client = app.test_client()
    reponse = client.get("/sante")

    assert reponse.status_code == 200
> assert reponse.get_json()["statut"] == "🟢"
E   AssertionError: assert 'ok' == '🟢'
E
E   - 🟢
E   + ok

tests/test_app.py:9: AssertionError
===== short test summary info =====
FAILED tests/test_app.py::test_sante_repond_ok - AssertionError: assert 'ok' ...
1 failed, 1 passed in 0.13s
The command '/bin/sh -c python -m pytest -q' returned a non-zero code: 1
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
[Pipeline] { (Construire)
Stage "Construire" skipped due to earlier failure(s)
[Pipeline] getContext
[Pipeline] }
```

image-deployee

```
velos-api on * fix/retablit-test via v3.14.4 took 2s  
> kubectl get deployment velos-api \
```

→ jsonpath='{.spec.template.spec.containers[0].image}'; echo
chaabollla/velos-api:4

```
velos-api on * fix/retablit-test via v3.14.4  
> kubectl get pods -l app=velos-api
```

NAME	READY	STATUS	RESTARTS	AGE
velos-api-688c88c57-4z4hm	1/1	Running	0	78s
velos-api-688c88c57-8a68r	1/1	Running	0	83s
velos-api-688c88c57-lm4d2	1/1	Running	0	69s
velos-api-688c88c57-lv9d	1/1	Running	0	83s

```
velos-api on * fix/retablit-test via v3.14.4  
> |
```