Use actions as callbacks,
don’t use return values for state

soooo… the classical approach

- It works in theory
- … but times have changed
- Powerful component primitives
- Data Down, Actions Up

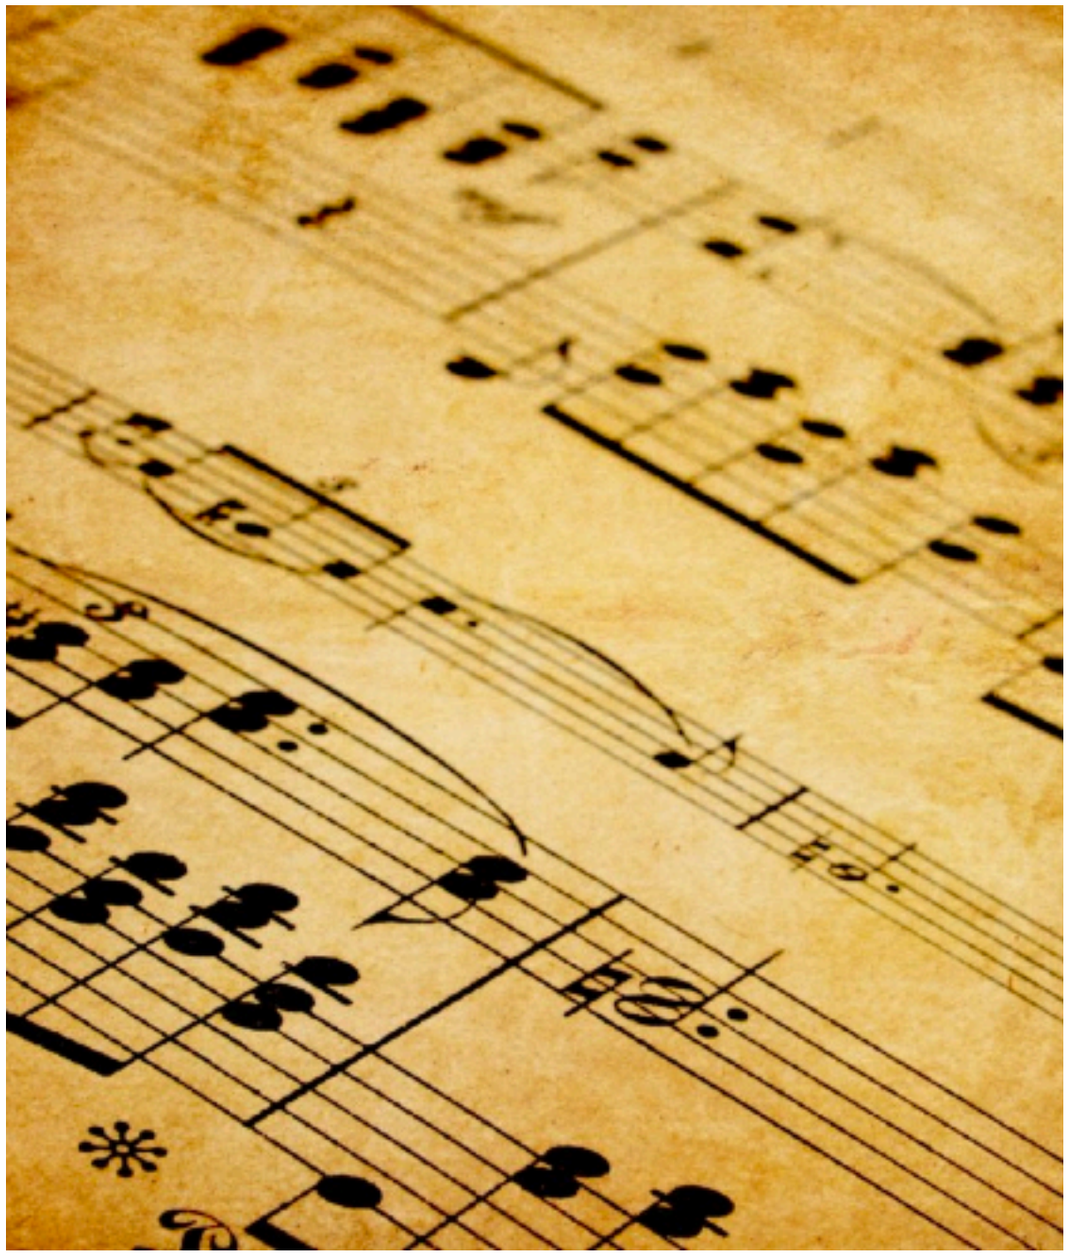

Use actions as callbacks,
don’t use return values for state