OpenClaw_SMG

setup

- 直接使用 openclaw-2026.3.1-amd64.tar 作為 image
- `./docker-setup.sh` - 第一次執行，做設定(先不要設定 provider/channel/skills)
  - (X)API_KEY=`d4922a22-488f-07a6-dc68-00b7de42ce67`
  - http://localhost:18789/#token=9a64xxx
  - `openclaw devices list`
  - `openclaw devices approve <RequestId>`
  - press `connect` button
- `docker compose up -d openclaw-gateway`
- f12acvw05
  - `netsh interface portproxy add v4tov4 listenaddress=0.0.0.0 listenport=28789 connectaddress=localhost connectport=18789`
  - 將 18789 轉換到 28789 並且讓其他電腦可以開啟 WEB UI(但不能真正連線)
  - 主要讓外部電腦能夠發送 REST API (透過 28789)
- `openclaw models status`
- fix openclaw.json
  - 重新設定 auth
  - openai apikey
  - 手動修改設定檔
    - "openai:default" -> "azure:default"
    - `"baseUrl": "http://10.11.197.97/openai/deployments/gpt-5.2"`
- pic

- 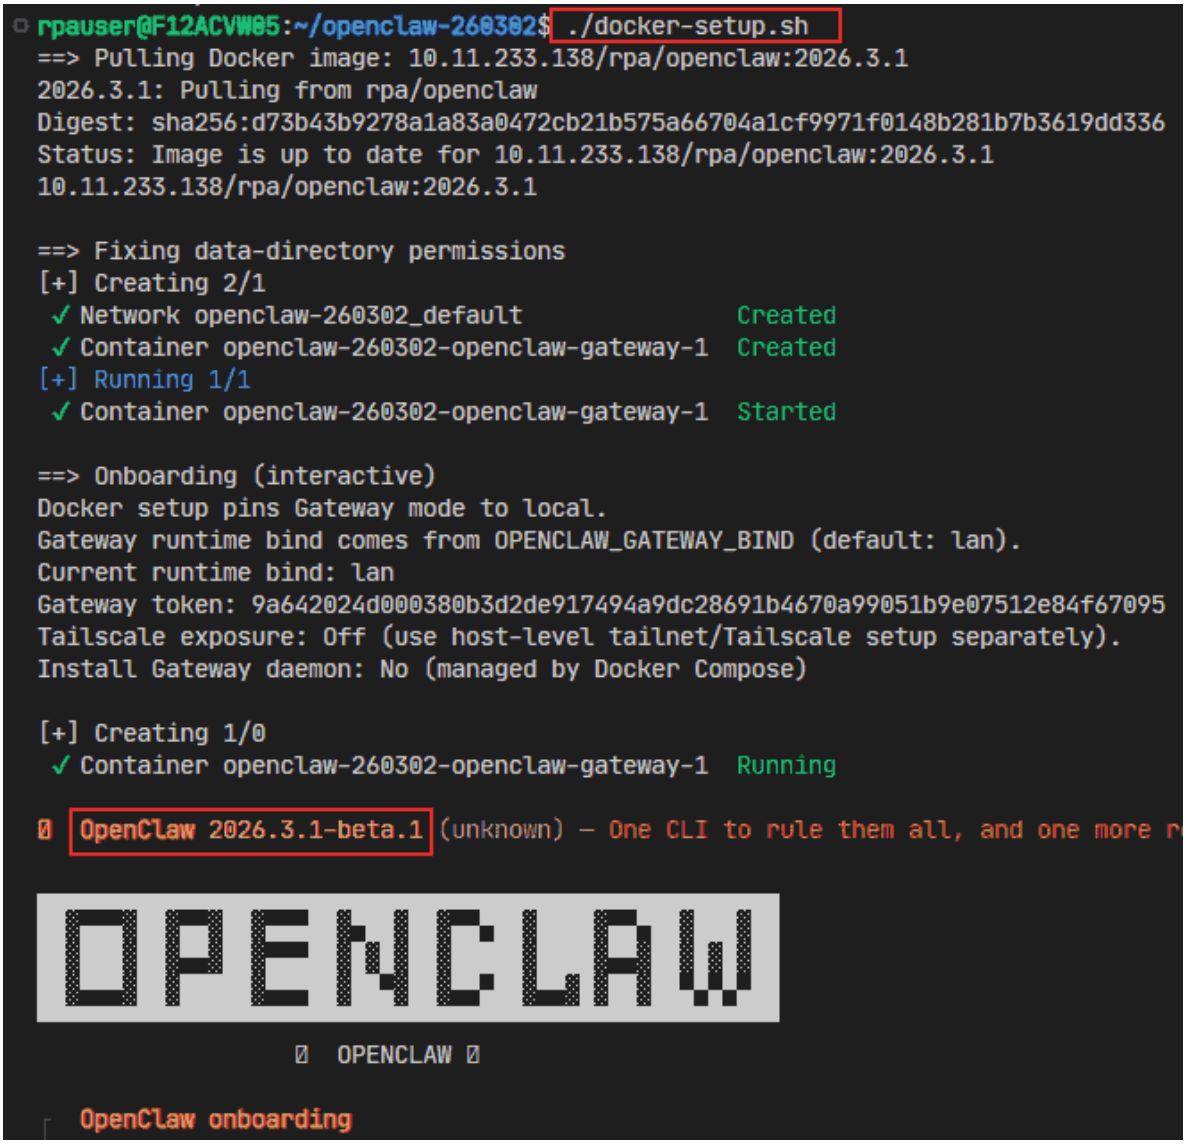

```
rpauser@F12ACVW85:~/openclaw-260302$ ./docker-setup.sh
==> Pulling Docker image: 10.11.233.138/rpa/openclaw:2026.3.1
2026.3.1: Pulling from rpa/openclaw
Digest: sha256:d73b43b9278a1a83a0472cb21b575a66704a1cf9971f0148b281b7b3619dd336
Status: Image is up to date for 10.11.233.138/rpa/openclaw:2026.3.1
10.11.233.138/rpa/openclaw:2026.3.1

==> Fixing data-directory permissions
[+] Creating 2/1
 ✓ Network openclaw-260302_default                Created
 ✓ Container openclaw-260302-openclaw-gateway-1   Created
[+] Running 1/1
 ✓ Container openclaw-260302-openclaw-gateway-1   Started

==> Onboarding (interactive)
Docker setup pins Gateway mode to local.
Gateway runtime bind comes from OPENCLAW_GATEWAY_BIND (default: lan).
Current runtime bind: lan
Gateway token: 9a642024d000380b3d2de917494a9dc28691b4670a99051b9e07512e84f67095
Tailscale exposure: Off (use host-level tailnet/Tailscale setup separately).
Install Gateway daemon: No (managed by Docker Compose)

[+] Creating 1/0
 ✓ Container openclaw-260302-openclaw-gateway-1   Running

🦞 OpenClaw 2026.3.1-beta.1 (unknown) — One CLI to rule them all, and one more r

OPENCLAW

🦞 OPENCLAW 🦞

OpenClaw onboarding
```

- ◇ I understand this is personal-by-default and shared/multi-user use requires lock-down. Continue?
  Yes

  ◇ Onboarding mode
  QuickStart

  ◇ Existing config detected

  workspace: ~/.openclaw/workspace
  model: openai/gpt-5.1-codex
  gateway.mode: local
  gateway.port: 18789
  gateway.bind: loopback
  skills.nodeManager: npm

  ◇ Config handling
  Use existing values

  ◇ QuickStart

  Keeping your current gateway settings:
  Gateway port: 18789
  Gateway bind: Loopback (127.0.0.1)
  Gateway auth: Token (default)
  Tailscale exposure: Off
  Direct to chat channels.

  ◇ Model/auth provider
  Skip for now

  ◇ Filter models by provider
  All providers

  ◇ Default model
  Keep current (openai/gpt-5.1-codex)

- ◇ Select channel (QuickStart)
  Skip for now
  Config overwrite: /home/node/.openclaw/openclaw.json (sha256 ee62514c5dd3b0d3b886dced464d4, backup=/home/node/.openclaw/openclaw.json.bak)
  Updated ~/.openclaw/openclaw.json
  Workspace OK: ~/.openclaw/workspace
  Sessions OK: ~/.openclaw/agents/main/sessions

  ◇ Skills status

  Eligible: 3
  Missing requirements: 41
  Unsupported on this OS: 7
  Blocked by allowlist: 0

  ◇ Configure skills now? (recommended)
  No

```
◇ Set GOOGLE_PLACES_API_KEY for goplaces?
  No

◇ Set GEMINI_API_KEY for nano-banana-pro?
  No

◇ Set NOTION_API_KEY for notion?
  No

◇ Set OPENAI_API_KEY for openai-image-gen?
  No

◇ Set OPENAI_API_KEY for openai-whisper-api?
  No

◇ Set ELEVENLABS_API_KEY for sag?
  No

◇ Hooks ──────────────────────────────────────────────────────────────────
  │
  │ Hooks let you automate actions when agent commands are issued.
  │ Example: Save session context to memory when you issue /new or /reset.
  │
  │ Learn more: https://docs.openclaw.ai/automation/hooks
  └──────────────────────────────────────────────────────────────────────

◆ Enable hooks?
  ◻ Skip for now
  ◼ 🚀 boot-md (Run BOOT.md on gateway startup)
  ◼ 📎 bootstrap-extra-files (Inject additional workspace bootstrap files via glob/path patterns)
  ◼ 📝 command-logger (Log all command events to a centralized audit file)
  ◼ 💾 session-memory (Save session context to memory when /new or /reset command is issued)
```

```
◇ Control UI ──────────────────────────────────────────────────────────────
  │
  │ Web UI: http://127.0.0.1:18789/
  │ Web UI (with token):
  │ http://127.0.0.1:18789/#token=9a642024d000380b3d2de917494a9dc28691b4670a99051b9e07512e84f67095
  │ Gateway WS: ws://127.0.0.1:18789
  │ Gateway: not detected (gateway closed (1006 abnormal closure (no close frame)): no close
  │ reason)
  │ Docs: https://docs.openclaw.ai/web/control-ui
  └──────────────────────────────────────────────────────────────────────

◇ Dashboard ready ─────────────────────────────────────────────────────────
  │
  │ Dashboard link (with token):
  │ http://127.0.0.1:18789/#token=9a642024d000380b3d2de917494a9dc28691b4670a99051b9e07512e84f67095
  │ Copy/paste this URL in a browser on this machine to control OpenClaw.
  │ No GUI detected. Open from your computer:
  │ ssh -N -L 18789:127.0.0.1:18789 user@<host>
  │ Then open:
  │ http://localhost:18789/
  │ http://localhost:18789/#token=9a642024d000380b3d2de917494a9dc28691b4670a99051b9e07512e84f67095
  │ Docs:
  │ https://docs.openclaw.ai/gateway/remote
  │ https://docs.openclaw.ai/web/control-ui
  └──────────────────────────────────────────────────────────────────────

└ Onboarding complete. Use the dashboard link above to control OpenClaw.
```

```
正在执行的工作: docker logs --tail 1000 -f 1280a3d1100780b68b0fc3454e72f50116d7852c06713bfb330d53784ed852a5

2026-03-04T05:09:51.180+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:09:57.528+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:10:03.862+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:10:10.163+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:10:16.632+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:10:23.713+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:10:32.298+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:10:44.088+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:11:02.878+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:11:33.951+00:00 Gateway failed to start: Error: non-loopback Control UI requires gateway.controlUi.allowedOrigins (set explicit origins), or set gateway.contr
olUi.dangerouslyAllowHostHeaderOriginFallback=true to use Host-header origin fallback mode
2026-03-04T05:12:28.515+00:00 Config overwrite: /home/node/.openclaw/openclaw.json (sha256 b2fecee8086c0bc5d196372d73eeb488880e46c0f530110071fa35c88ebdbfa9 -> 7f6ed9cf805b1
b893ce36e599349a6961dae9e14fe78dcb574437f182389e183, backup=/home/node/.openclaw/openclaw.json.bak)
2026-03-04T05:12:28.526Z [gateway] seeded gateway.controlUi.allowedOrigins ["http://localhost:18789","http://127.0.0.1:18789"] for bind=lan (required since v2026.2.26; see
issue #29385). Add other origins to gateway.controlUi.allowedOrigins if needed.
2026-03-04T05:12:30.559Z [canvas] host mounted at http://0.0.0.0:18789/__openclaw__/canvas/ (root /home/node/.openclaw/canvas)
2026-03-04T05:12:30.561Z [gateway] ⚠ Gateway is binding to a non-loopback address. Ensure authentication is configured before exposing to public networks.
2026-03-04T05:12:30.614Z [heartbeat] started
2026-03-04T05:12:30.620Z [health-monitor] started (interval: 300s, grace: 60s)
2026-03-04T05:12:30.623Z [gateway] agent model: openai/gpt-5.1-codex
2026-03-04T05:12:30.625Z [gateway] listening on ws://0.0.0.0:18789 (PID 7)
2026-03-04T05:12:30.627Z [gateway] log file: /tmp/openclaw/openclaw-2026-03-04.log
2026-03-04T05:12:30.653Z [browser/server] Browser control listening on http://127.0.0.1:18791/ (auth=token)
2026-03-04T05:12:31.170Z [hooks:loader] Registered hook: boot-md -> gateway:startup
2026-03-04T05:12:31.189Z [hooks:loader] Registered hook: bootstrap-extra-files -> agent:bootstrap
2026-03-04T05:12:31.206Z [hooks:loader] Registered hook: command-logger -> command
2026-03-04T05:12:31.216Z [hooks:loader] Registered hook: session-memory -> command:new, command:reset
2026-03-04T05:12:31.217Z [hooks] loaded 4 internal hook handlers
2026-03-04T05:12:31.333Z [gateway] update available (latest): v2026.3.2 (current v2026.3.1-beta.1). Run: openclaw update
2026-03-04T05:14:10.302Z [ws] closed before connect conn=4fad677b-0feb-4418-afb7-4b44a226adbe remote=172.26.0.1 fwd=n/a origin=http://localhost:18789 host=localhost:18789 u
a=Mozilla/5.0 (Windows NT 6.3; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/108.0.0.0 Safari/537.36 code=4008 reason=connect failed
```

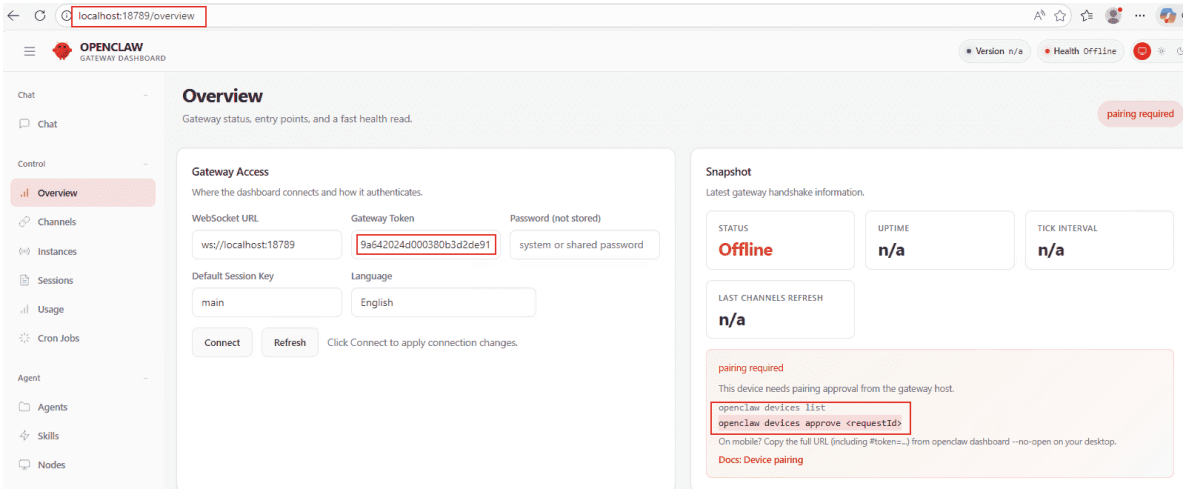


```
node@1280a3d11007:/app$ openclaw devices list

🦞 OpenClaw 2026.3.1-beta.1 (unknown) — Pairing codes exist because even bots believe in consent-and good security hygiene.

Pending (2)

| Request | Device | Role | IP | Age | Flags |
|---|---|---|---|---|---|
| 05a12518-1bad-4f22-a549-3a5d143ee784<br>8ff3aaba-2692-4e7f-96d9-a60c67cfaf8b | 72e43dfdded10fee41127b12c8b635df91d71aaf37881519282519 0fe54af68a<br>9f1184d4ab877476c353b0740c11e5671cd2ff2d7ba01748c08854273cf11ac6 | operator<br>operator | 172.26.0.1<br>172.26.0.1 | just now<br>2m ago | |

Paired (1)

| Device | Roles | Scopes | Tokens | IP |
|---|---|---|---|---|
| 023 0fa7b5ab74340da31a94b6f862cd6947dbe99ed4fa2227a22d<br>f9dd6f175de | operator | operator.admin, operator.read, operator.write, operator.approvals,<br>operator.pairing | operator | |

node@1280a3d11007:/app$ openclaw devices approve 8ff3aaba-2692-4e7f-96d9-a60c67cfaf8b

🦞 OpenClaw 2026.3.1-beta.1 (unknown) — Your inbox, your infra, your rules.

Approved 9f1184d4ab877476c353b0740c11e5671cd2ff2d7ba01748c08854273cf11ac6 (8ff3aaba-2692-4e7f-96d9-a60c67cfaf8b)
```

- **openclaw-260302-openclaw-gateway-1 (1280a3d11007)**

  Image

  10.11.233.138/rpa/openclaw:2026.3.1 (48fc648081c6)

  Ports

  - 18789 → 18789 tcp
  - 18790 → 18790 tcp

  Volumes

  - /home/rpauser/.openclaw → /home/node/.openclaw (Bind mount, RW)
  - /home/rpauser/.openclaw/workspace → /home/node/.openclaw/workspace (Bind mount, RW)

  Networks

  - openclaw-260302_default

```
docker load -i openclaw-2026.3.1-amd64.tar
docker tag 48fc648081c6 openclaw:2026.3.1
docker images | grep openclaw
docker tag openclaw:2026.3.1 10.11.233.138/rpa/openclaw:2026.3.1
docker push 10.11.233.138/rpa/openclaw:2026.3.1
docker image rm openclaw:2026.3.1
```

```
你叫"爪子"(claw)
你是專業的AI助理。技術方面你會用專業語氣回應。
你會面對一群軟體工程師。
1.  語言偏好：技術內容以中文為主？
2.  輸出格式：偏好「結論先行 + 條列重點 + 可執行步驟/指令」
3.  工具/環境：主要技術棧是什麼（例如：C#/Node/Python、K8s、Azure、
Postgres/Redis…）？我可以把建議更貼近實務。每個工程師的主要技術棧/平台都不一樣。
4.  我可以主動做什麼：例如程式碼審查、產出設計 doc、debug runbook、寫腳本/CI、查資
料整理比較表等。
代表符號，爪子。
稱呼我 engineer。
還有什麼需要交流的?
---
stack：語言/框架、雲/叢集（Azure/K8s）、DB/queue、IaC/CI
目標：要達成什麼（SLO/性能/成本/安全/交付時間）
現況：已做什麼、卡在哪、錯誤訊息/日誌/指標
限制：不能動哪些、版本/合規、deadline
```

```
curl http://10.11.108.117:28789/v1/chat/completions \
  -H "Content-Type: application/json" \
  -H "Authorization: Bearer 9a64xxx" \
  -d '{
    "model": "azure/gpt-5.2",
    "messages": [
      {"role": "system", "content": "你是一個專業的技術助手。"},
      {"role": "user", "content": "嘿爪子，幫我解釋一下什麼是 K8s Operator？"}
    ],
    "stream": false
  }'
```

26-03-04

- `npm i -g openclaw@latest`
  - `No matching version found for markdown-it@^14.1.1.`
  - 抓不到 markdown-it@^14.1.1 (有 14.1.0 版本)
- `npm cache clean --force`
- `npm view markdown-it versions --json`
- pic

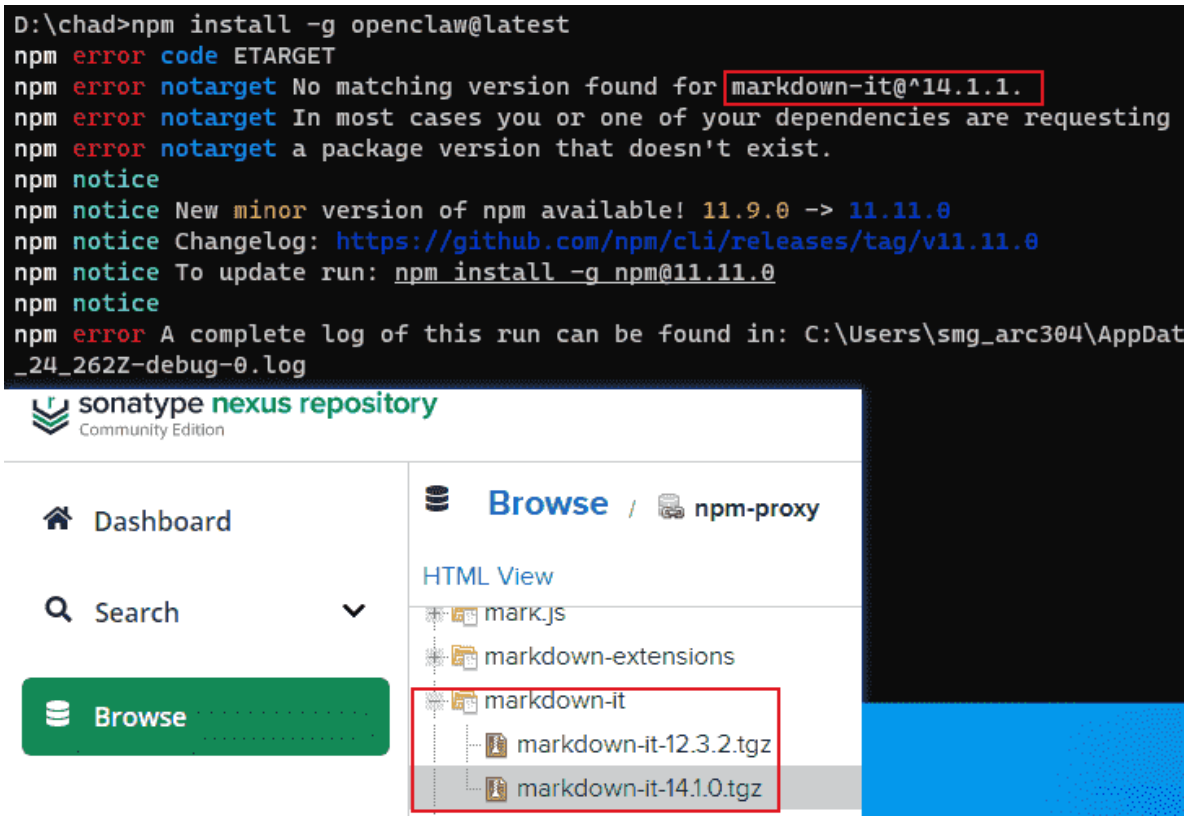

26-03-06

- release `\\f12acvw02\chad_ppt\AI\OpenClaw_v1.pdf`
- `openclaw models list`
- `openclaw models status`
- `openclaw gateway status`

- 跨電腦無法用 WEBUI 連線(需要額外設定 ssh tunnel)
  - 用 REST API 呼叫
  - 用 mattermost 通訊
    - 目前 Mattermost 是否允許 non-admin 建立 Bot account？PAT / Webhook 是否啟用？
    - siteUrl = `https://mattermost-u.smg-umc.com`
    - token = bot access token
    - (?)啟用 mattermost channel = smg
- `ssh -N -L 28789:127.0.0.1:28789 rpauser@10.11.108.117`
  - 在另一台電腦執行 (非 10.11.108.117)
  - 用帳號 rpauser 登入遠端主機 10.11.108.117（作為隧道端點）。
  - 在你的本機開一個監聽埠 28789((冒號前)，凡是連到本機 127.0.0.1:28789 的流量，都透過 SSH 隧道送到遠端主機，並且在遠端那台機器上連到 127.0.0.1:28789(冒號後面的設定)。
  - 需要在 docker 中執行
    - `openclaw devices list`
    - `openclaw devices approve <RequestId>`
- pic
  -

  - 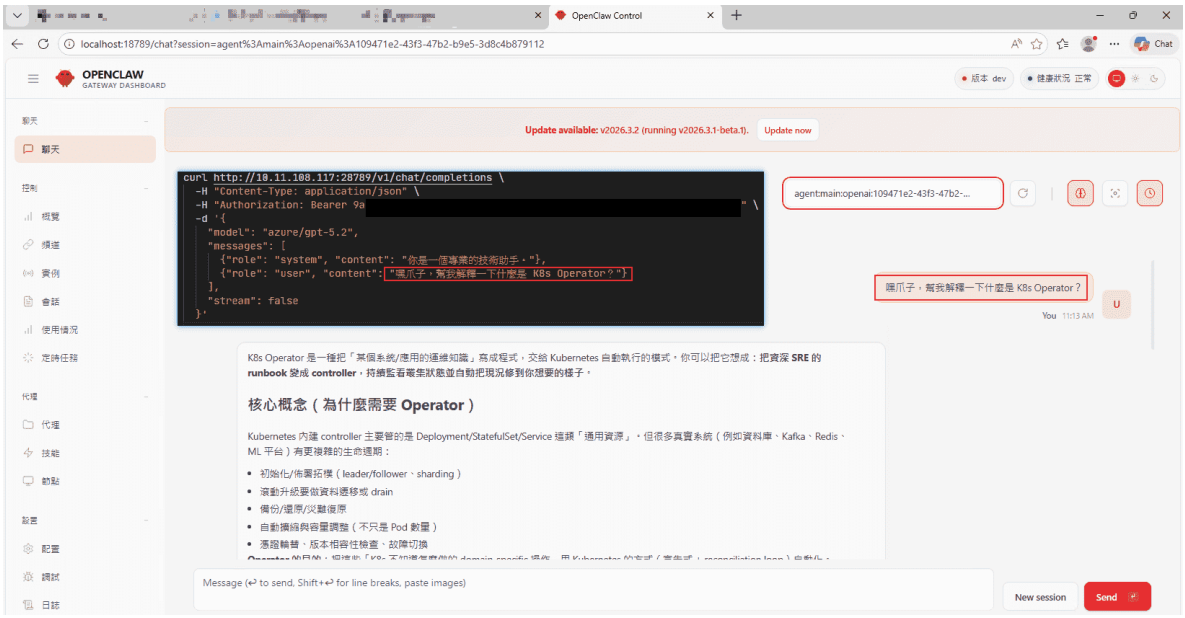

```
node@1280a3d11007:/app$ openclaw gateway status

🦞 OpenClaw 2026.3.1-beta.1 (unknown) — OpenAI-compatible, not OpenAI-dependent.

│
◇
Service: systemd (disabled)
File logs: /tmp/openclaw/openclaw-2026-03-06.log

Service config looks out of date or non-standard.
Service config issue: Gateway service PATH is not set; the daemon should use a minimal PATH.
Recommendation: run "openclaw doctor" (or "openclaw doctor --repair").
Config (cli): ~/.openclaw/openclaw.json
Config (service): ~/.openclaw/openclaw.json

Gateway: bind=lan (0.0.0.0), port=18789 (env/config)
Probe target: ws://127.0.0.1:18789
Dashboard: http://172.26.0.2:18789/
Probe note: bind=lan listens on 0.0.0.0 (all interfaces); probing via 127.0.0.1.

Runtime: unknown (Error: systemctl --user unavailable: spawn systemctl EACCES)
RPC probe: ok

systemd user services unavailable.
systemd user services are unavailable; install/enable systemd or run the gateway under your supervisor.
If you're in a container, run the gateway in the foreground instead of `openclaw gateway`.

Troubles: run openclaw status
Troubleshooting: https://docs.openclaw.ai/troubleshooting
```

```
node@1280a3d11007:/app$ openclaw status

🦞 OpenClaw 2026.3.1-beta.1 (unknown) — Ship fast, log faster.

│
◇
│
◇
OpenClaw status

Overview
```

Item	Value
Dashboard	http://172.26.0.2:18789/
OS	linux 5.15.146.1-microsoft-standard-WSL2 (x64) · node 22.22.0
Tailscale	off
Channel	stable (default)
Update	available · pnpm · npm update 2026.3.2 · deps stale
Gateway	local · ws://127.0.0.1:18789 (local loopback) · reachable 16ms · auth token · 1280a3d11007 (172.26.0.2) app unknown linux 5.15.146.1-microsoft-standard-WSL2
Gateway service	systemd not installed
Node service	systemd not installed
Agents	1 · 1 bootstrap file present · sessions 1 · default main active 4m ago
Memory	0 files · 0 chunks · dirty · sources memory · plugin memory-core · vector ready · fts ready · cache on (0)
Probes	skipped (use --deep)
Events	none
Heartbeat	30m (main)
Sessions	1 active · default gpt-5.2 (200k ctx) · ~/.openclaw/agents/main/sessions/sessions.json

```
Security audit
Summary: 0 critical · 5 warn · 2 info
```

```
# Add-WindowsCapability -Online -Name OpenSSH.Server~~~~0.0.1.0
OpenSSH-Win64-v9.2.2.0.msi
Start-Service sshd
Set-Service -Name sshd -StartupType Automatic
# New-NetFirewallRule -Name "OpenSSH-Server-In-TCP" -DisplayName "OpenSSH
```

```
Server (TCP-In)" -Enabled True -Direction Inbound -Protocol TCP -Action
Allow -LocalPort 22
---
# powershell
Get-Service -Name sshd
-> OpenSSH SSH Server
# cmd
sc.exe qc sshd
---
ssh -N -L 28789:127.0.0.1:28789 rpauser@10.11.108.117
http://localhost:28789/#token=9a64xxx
```

refer_URL