

Chahinez Benaicha


LAB 2 RAPPORT

Introduction to JADE – Creating and Launching Agents


Exercise 1: First agent

- Created a Java class extending *jade.core.Agent*.
- Overrode the `setup()` method to display "Hello world" followed by its name (`getAID().getLocalName()`).
- Launched agents with arguments via the GUI ("Arguments" field) :

➔ `-gui aaa:AgentProject.AgDisplay`

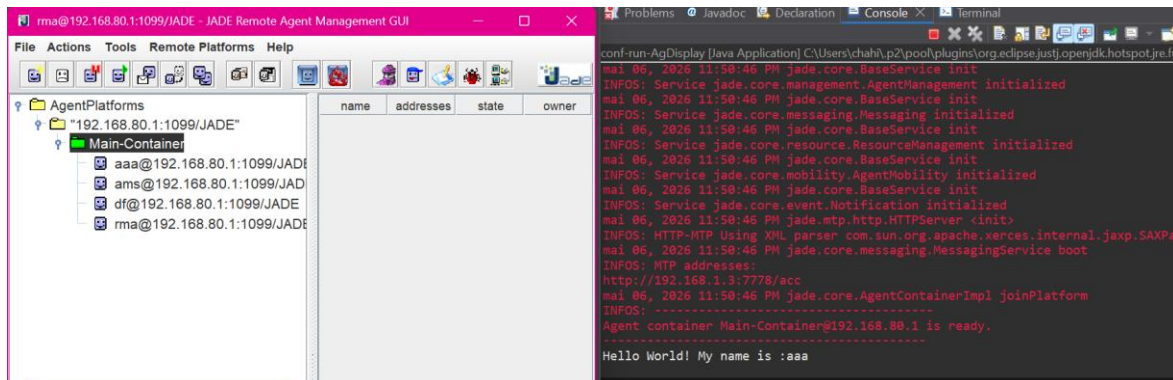



➔ `-gui AgentA:AgentProject.AgDisplay; AgentB:AgentProject.AgDisplay`

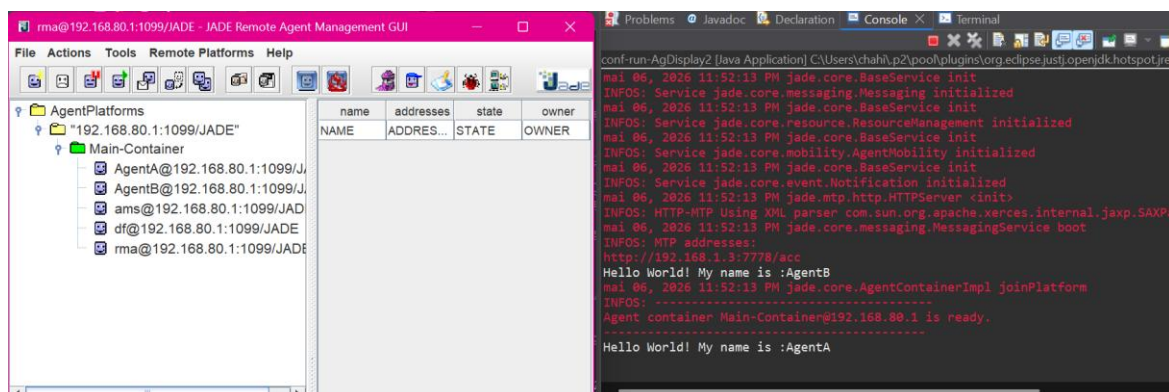

Exercise 2: Passing arguments

- Modified the agent to retrieve and display arguments passed at launch using `Object[] getArguments()` inside `setup()`.
- Launched agents with arguments via the GUI.

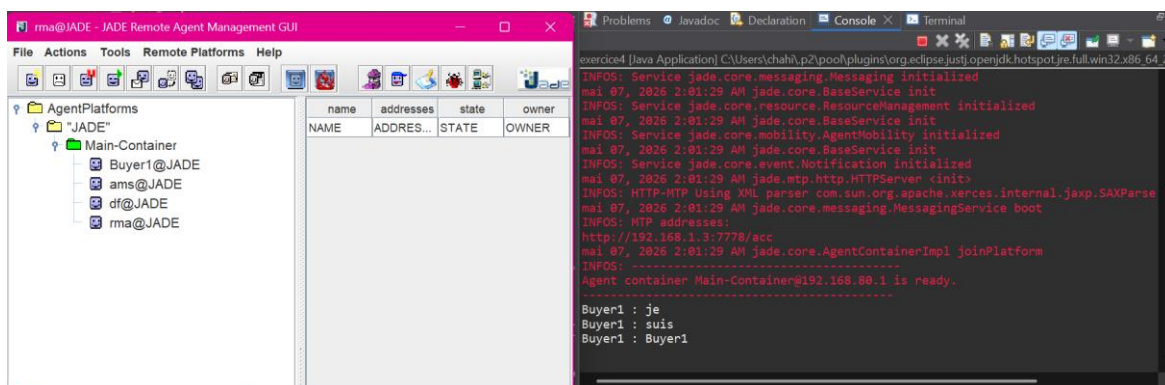

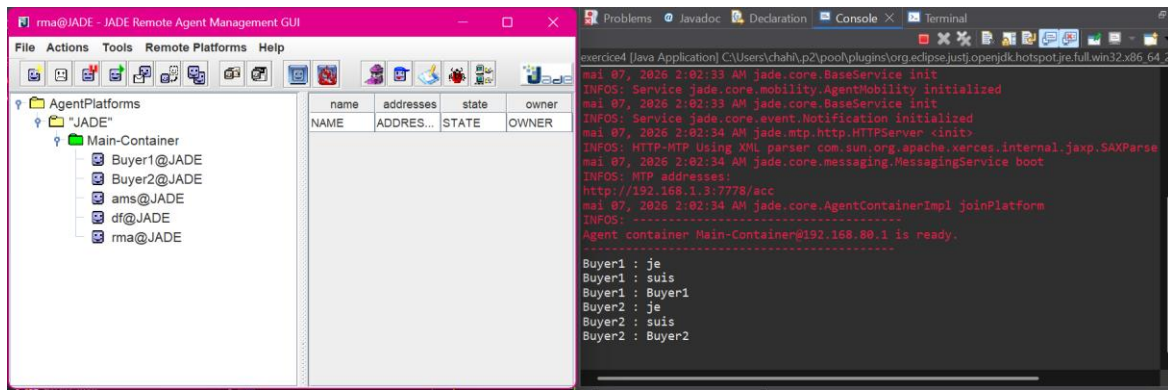

Exercise 3 & 4: Programmatic launch

- Created a container and agents directly from a Java class and repeated the results of the first two exercises by launching without gui and using AgentController module :

```
AgentController ag1 = mc.createNewAgent("Buyer1", "AgentProject.exercice4", args1 );
ag1.start();
AgentController ag2 = mc.createNewAgent( "Buyer2", "AgentProject.exercice4", args2 );
ag2.start();
```

Conclusion

This lab provided the practical foundations for JADE development. Mastering agent launch with arguments and programmatically.