Selecting a proof from eight attempts: 400 held-out theorems

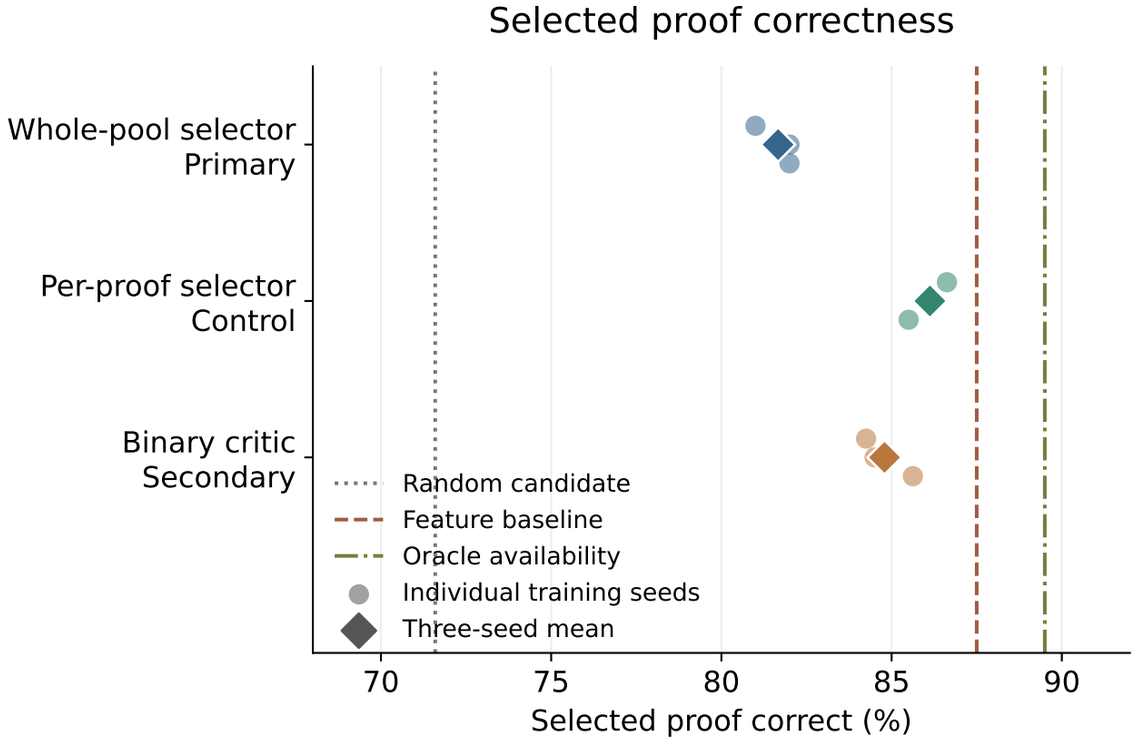

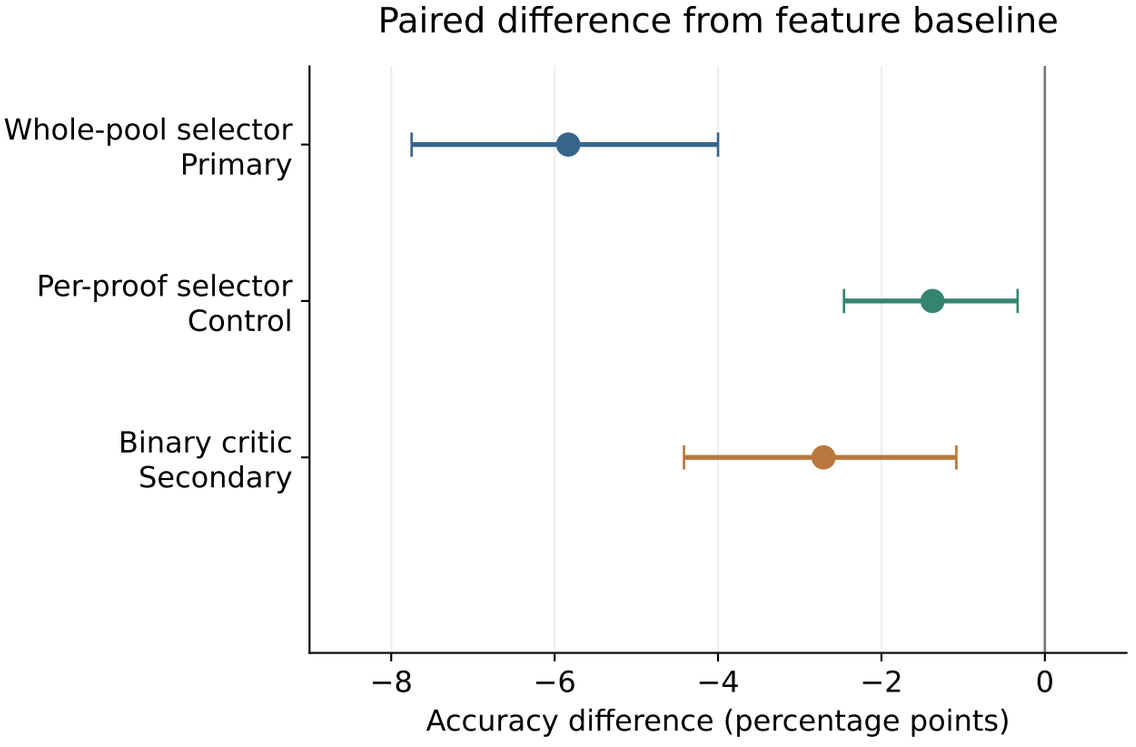

400 theorems, equally split by family. Seeds 0/1/2 averaged within theorem; prespecified candidate order and exact score ties retained.
Bars: 95% paired theorem-bootstrap intervals, stratified by family and conditional on these trained models. No method beats the feature baseline.
Oracle availability uses held-back verifier labels, unavailable at inference.