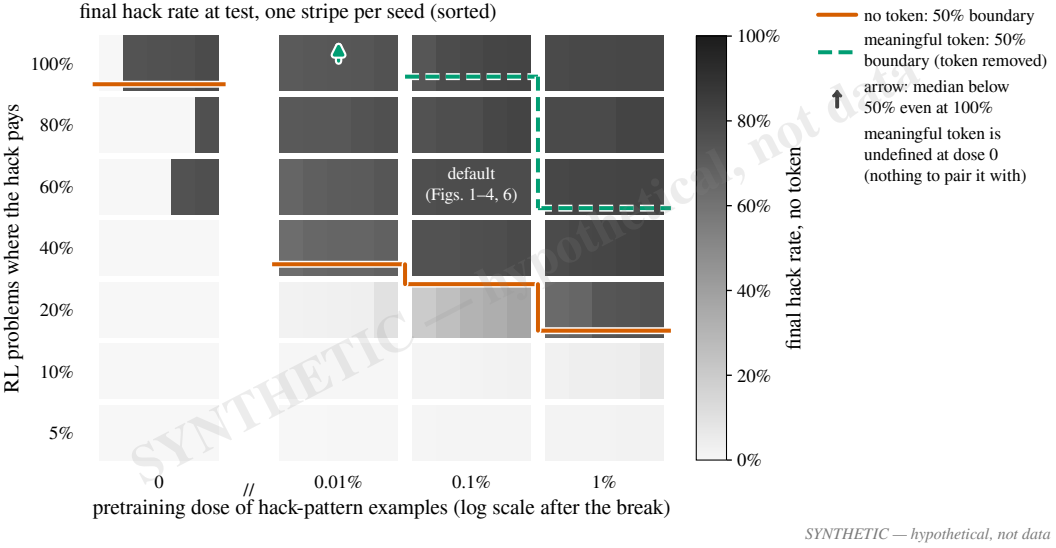
final hack rate at test, one stripe per seed (sorted)
RL problems where the hack pays
100%
80%
60%
40%
20%
10%
5%
default
(Figs. 1–4, 6)
final hack rate, no token
100%
80%
60%
40%
20%
0%
no token: 50% boundary
meaningful token: 50% boundary (token removed)
arrow: median below 50% even at 100%
meaningful token is undefined at dose 0 (nothing to pair it with)
0
0.01%
0.1%
1%
pretraining dose of hack-pattern examples (log scale after the break)
SYNTHETIC — hypothetical, not data