


A handle writing one constant across W segments keeps close to the part of the target profile that is itself constant across W
 Qwen-2.5 at layer 14 · $k = 12$ sentences · every cell writes at all 12 segments, so only the handle's resolution varies · $n = 28$ pairs per cell


A. Fidelity $R(W, \ell)$: observed, (predicted)

predicted $R = \text{mean}_b |\mu_b|$, $\mu_b = \text{mean of the } \pm 1 \text{ target profile over block } b$

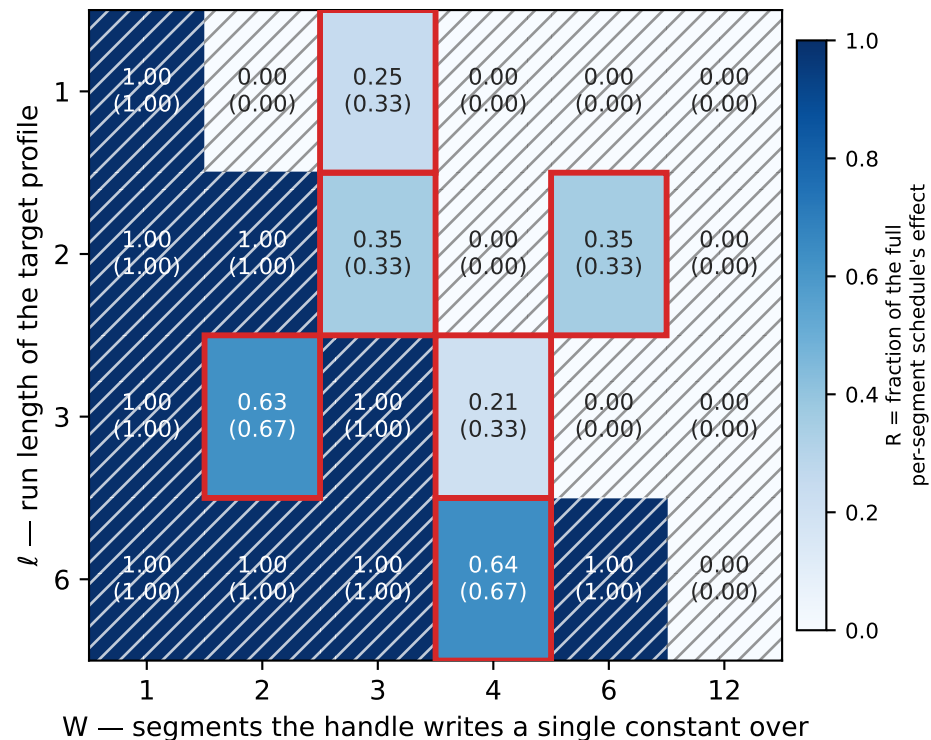

- the 6 cells the prediction can fail on (red outline)
- fixed by construction: $R \equiv 1$ when W divides ℓ , $R \equiv 0$ when a block spans equal amounts of both phases (hatched)

B. Fidelity per control parameter (one scalar per block)
 predicted to peak at $W = \ell$ and to TIE at odd multiples of ℓ

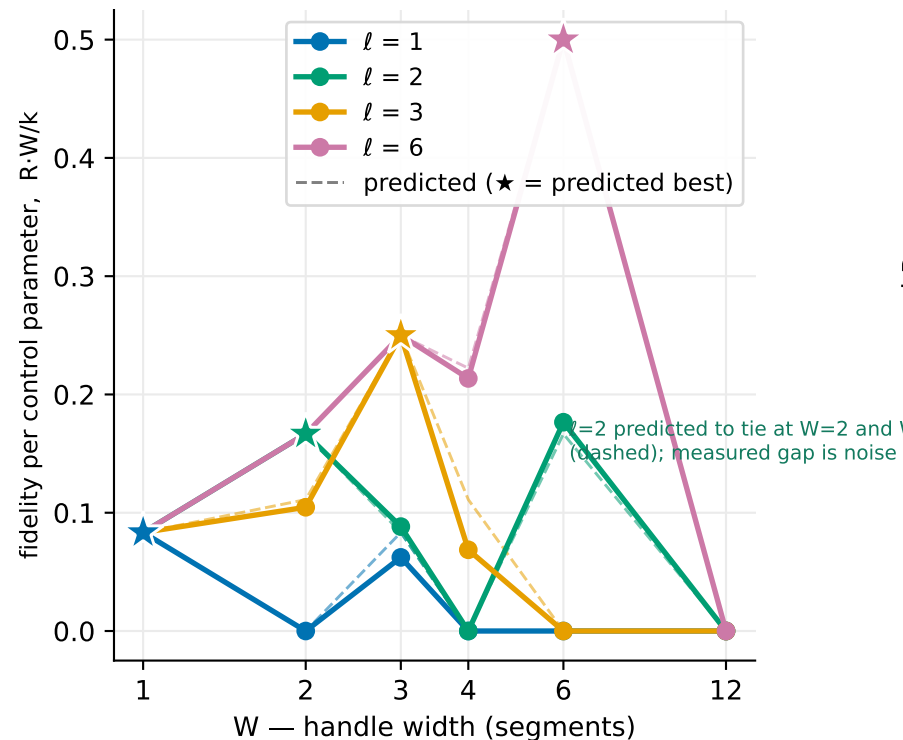

C. The 6 at-risk cells, both models
 mean |error| 0.053 (1.5B) / 0.045 (7B), nothing fitted

