

Name - Chaitanya Kelkar

Roll no - 15

Experiment No 4

Aim

To develop a blockchain-powered web application using Solidity on Remix IDE, connect it with MetaMask wallet, and deploy a smart contract on the Sepolia Testnet to record and retrieve student marks.

Theory

Blockchain Technology

A blockchain is a distributed, immutable ledger maintained across a network of nodes rather than a single central server. Each block contains a set of transactions, a timestamp, and a cryptographic hash of the previous block, forming a tamper-evident chain. Once data is written to a block and confirmed by the network's consensus mechanism, it cannot be altered or deleted, which is what makes blockchains trustworthy for recording transactions without relying on a central authority.

Smart Contracts

A smart contract is self-executing program code deployed directly onto a blockchain. Once deployed, its logic runs exactly as written, and its execution cannot be changed, censored, or reversed by any single party — not even the contract's creator, unless the code explicitly allows it (e.g., via an owner-only function). Smart contracts have their own address on the blockchain, can store data permanently in "state variables," and expose functions that anyone can call to read or modify that data. Every function call that changes data is itself a transaction, requiring computational cost ("gas") and a cryptographic signature from the caller's wallet.

Solidity

Solidity is a statically-typed, contract-oriented programming language designed specifically for writing smart contracts on Ethereum-compatible blockchains. It supports familiar programming constructs — structs, mappings, modifiers, events, and access control — while enforcing rules unique to blockchain environments, such as explicit visibility for functions (public, private) and built-in overflow/underflow protection (from Solidity 0.8 onward). Contracts written in Solidity are compiled into EVM (Ethereum Virtual Machine) bytecode before deployment.

Remix IDE

Remix is a free, browser-based Integrated Development Environment for writing, compiling, debugging, testing, and deploying Solidity smart contracts, with no local installation required. It provides a file explorer, an in-browser Solidity compiler, and a "Deploy & Run Transactions"

module that can connect to different environments — a fully simulated in-browser blockchain (Remix VM), or a real network via an injected wallet provider like MetaMask.

MetaMask Wallet

MetaMask is a cryptocurrency wallet available as a browser extension that manages a user's private keys locally and never exposes them to the websites it interacts with. It acts as an intermediary between a dApp (like Remix) and the blockchain: whenever a transaction needs to be sent — whether deploying a contract or calling a function that modifies data — MetaMask intercepts the request, displays its details (network, gas fee, destination address), and requires explicit user confirmation before signing and broadcasting it. This "injected provider" model is what lets browser-based tools like Remix send real transactions without ever handling the user's private key directly.

Testnets and Gas

A testnet (such as Sepolia) is a separate blockchain network that mirrors the behavior, rules, and tooling of the Ethereum mainnet but uses worthless test tokens instead of real cryptocurrency. Developers obtain free test ETH from "faucets" to pay for gas — the computational fee required to execute transactions and store data on-chain — allowing contracts to be built, deployed, and tested realistically without financial risk. Once a contract is confirmed to work correctly on a testnet, the same code can be deployed to the mainnet with real funds.

Output -

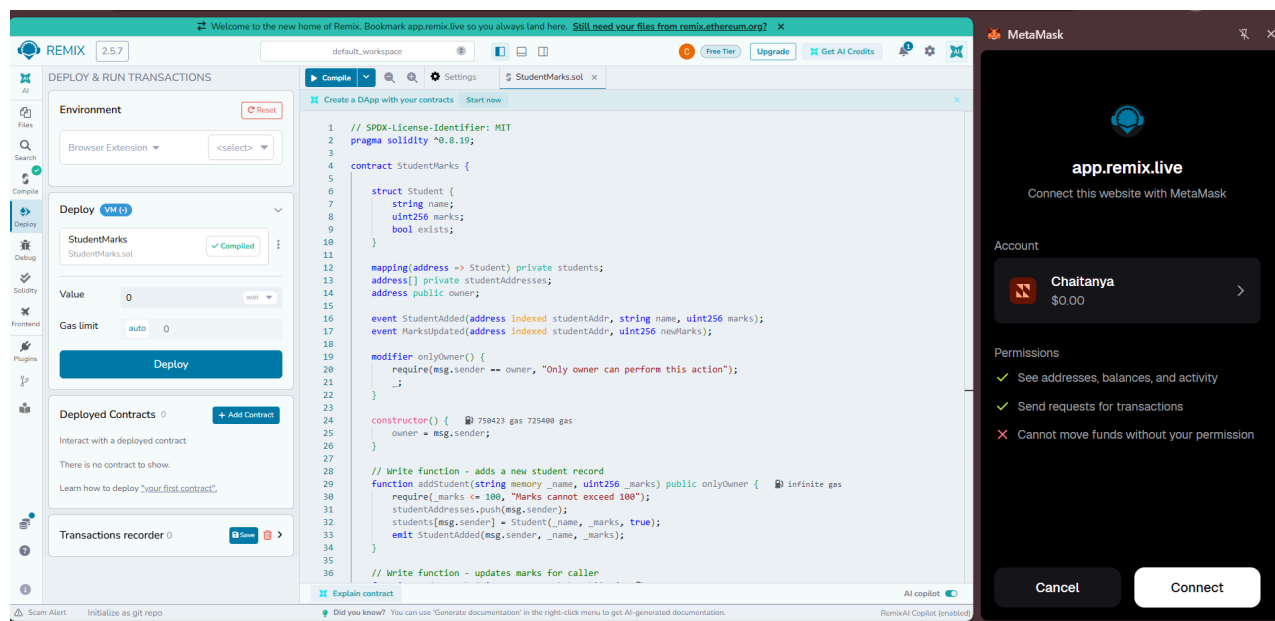


Fig 1: Connecting MetaMask wallet to Remix IDE (Injected Provider)

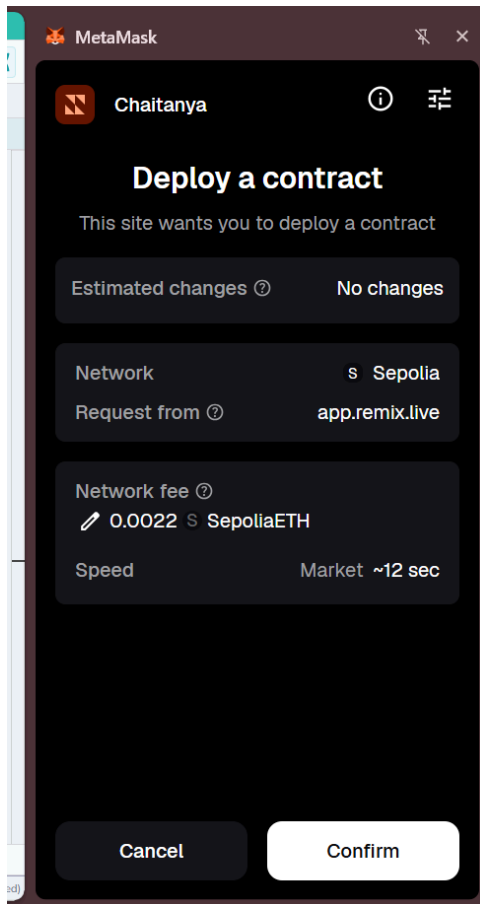


Fig 2: Confirming smart contract deployment transaction via MetaMask

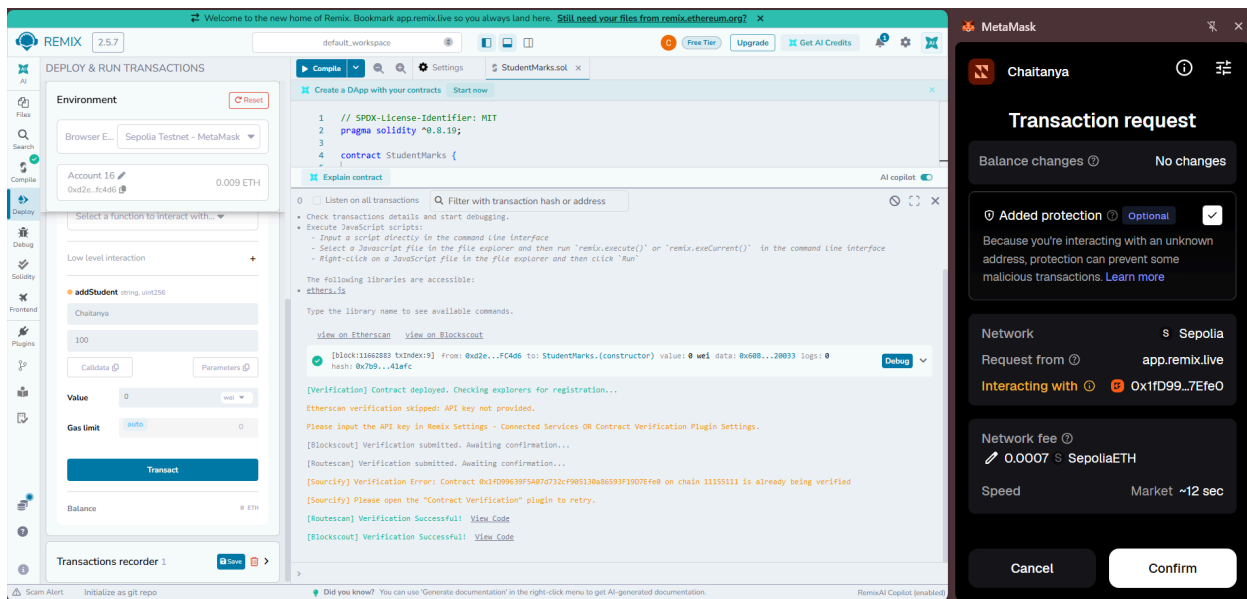


Fig 3: Calling the addStudent() function and confirming transaction on Sepolia

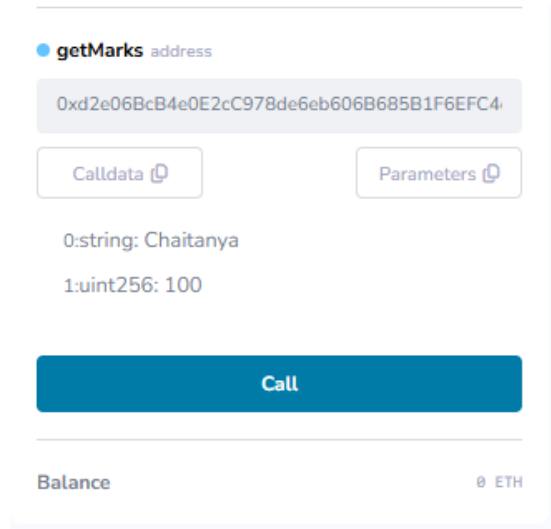


Fig 4: Retrieving stored student data using the getMarks() function

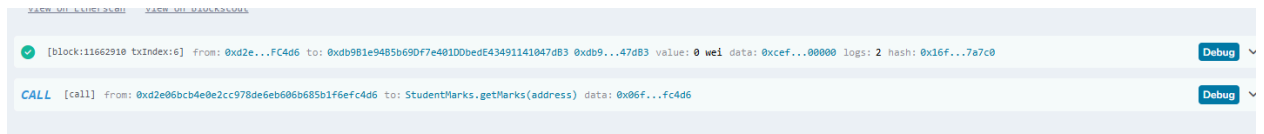


Fig 5: Remix terminal log confirming successful transaction execution

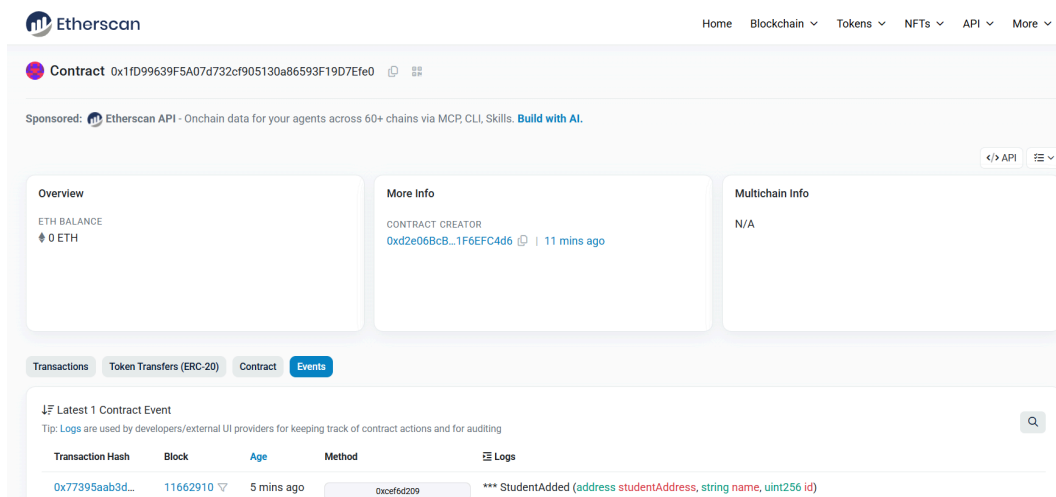


Fig 6: Verifying the deployed contract and StudentAdded event on Sepolia Etherscan

Conclusion -

The StudentMarks smart contract was successfully compiled, deployed, and verified on the Sepolia Testnet using Remix IDE integrated with MetaMask. Both write operations (addStudent) and read operations (getMarks) were tested and confirmed to work correctly, with the transaction and event logs visible on Etherscan. This experiment demonstrated the complete workflow of wallet-based transaction signing and on-chain data storage and retrieval.