Younis Kernel Mixtures and Model-Score Estimation From the LEDH–OT–GenUT Filter to Corrected Mixtures

BayesFilter research note

28 October 2026

Withdrawal of the 64-particle evidence (23 October 2026). All previous results in the SIR controlled-SMC/KDM/LEDH investigation obtained with $N = 64$ are disqualified. Their numerical tables and conclusions are retained only as historical records and provide no evidence about speed, training efficacy, moment or score accuracy, or rejection of the guide proposal. New experiments must use at least $N = 1008$ particles. The mathematical derivations are separate from these withdrawn empirical conclusions.

Abstract

A differentiable particle filter can compute the derivative of its own finite likelihood accurately while estimating the underlying model score poorly. This distinction explains both the progress and the negative results of the BayesFilter investigation of Younis and Sudderth's kernel mixtures. The original observation sidecar led to a complete kernelized-observation recursion and then to an all-components, raw-importance-weight resampling reference. The integrated derivatives pass their declared checks, but the calibrated resampling construction has higher model-score mean squared error than the canonical filter in both tested matrix-Gaussian scopes. We retain these results and, for models with regular transition densities, derive a different use of the same mixture ideas: construct evaluable proposals, retain the original transition and observation densities in the importance correction, and estimate the observed-data score by averaging complete-data scores over possible ancestors. This smoothing recursion does not apply as written to degenerate DSGE transitions. For those models we instead derive a disturbance-coordinate filter, its analytical state sensitivities, and an unbiased unnormalized likelihood–derivative pair. Propositions and proofs establish the importance correction, the particle induction, exact reference control variates, and conditional integration. A moving-support Gaussian example verifies the resulting score identity. Normalization can still introduce finite-particle bias, and long-horizon variance remains unresolved. Selective pathwise and importance-weight derivatives supply additional variance-reduction candidates.

The unbiasedness statement in the Younis–Sudderth construction has a more specific target. It is an importance-sampling identity for the gradient of a KDM expectation with the current proposal held fixed. When the integrand is a conditional log likelihood, the resulting quantity is an expected conditional log likelihood. It is not, in general, the log of the observed-data marginal likelihood, whose finite-particle score also contains a random normalization. The note documents the implemented finite programs, the reasons for each change in direction, the complete proposed recursions, and the experiments needed to distinguish improved model-score accuracy from implementation correctness. We also derive simulation-supervised moment and score objectives: complete-data labels have the required posterior conditional means, so their population squared losses differ from the desired estimation risks only by a candidate-independent constant. A first SIR implementation selects frozen cSMC and kernel guide settings through the full analytical LEDH executor. The associated 64-particle empirical results have been withdrawn, leaving finite-particle bias and computational value unresolved. A subsequent SIR-specific neural mixture trains locations and bandwidths through the corrected terminal-moment loss. Its 64-particle

comparison is also disqualified; fresh experiments with at least 1008 particles are required to assess moment and model-score accuracy.

The latest SIR comparison separates conditioning a child on the current observation from selecting its parent by predictive observation probability. The weighted conditional mixture is now the proposal default. It raises terminal ESS from 2.40 to 392.51 in the saved stress case. Across the new $T = 10, 20, 50$ comparisons, it has much smaller observed score RMSE than the original mixture wherever both adapted Zhao–Cui references pass the overlap screen. Eight streams do not resolve the heavy-tailed MSE uncertainty, and parent weighting sometimes worsens scores relative to uniform conditional parents and simpler controls. The ESS improvement is established for the measured SIR cases. The five-model comparison nevertheless shows worse KSC persistence and predator–prey scores in important conditional-proposal arms. Uniform conditional parents are a competitive alternative, often with lower observed score RMSE than weighted parents. We retain weighted parents for weight balance and explain why that decision does not establish model-score correctness or an accuracy ranking across models.

Contents

1 The model score and the finite filter **6**

2 The executed atom program **7**

3 What the Younis construction supplies **9**
3.1 The precise scope of IWSG unbiasedness 10

4 Why positive bandwidth is a target change **12**

5 From Section 3.6 to the integrated experiments **13**
5.1 Phase 4A: integrated kernelized observation weighting 14
5.2 Phase 4B: a complete mixture-resampling reference 15
5.3 The matrix Gaussian score comparison 18
5.4 Why the next direction changes 19

6 Mixture proposals with the original model correction **20**
6.1 An analytically adapted Gaussian example 21
6.2 Retained ancestry and a flow proposal 22

7 Proposal-quality branch: controlled SMC, iAPF, covariance, and SGQF **23**
7.1 Twisted particle filters and auxiliary lookahead 23
7.2 Controlled SMC and the replicated lookahead tool 24
7.3 The iterated auxiliary particle filter 24
7.4 An exactly corrected nonlinear Gaussian twist 26
7.5 Alternative covariance geometries 29
7.6 Structured Gaussian quadrature as a proposal source 29
7.7 Systematic proposal test 30

8 Directional finite-difference validation ladder **31**

9 A model score that averages over ancestors **33**
9.1 Why degenerate transitions obstruct this recursion 34
9.2 A disturbance-coordinate proposal and its score 35
9.3 Using both past and future information 43

10 Selective mixture gradients and control variates **43**
10.1 What a control variate can accomplish 45

11 Other options and their place in the investigation **46**

12 Structural support and deferred extensions **48**

13 Implementation history and current replication status **52**
13.1 What the October source closure establishes 52
13.2 The September LEDH–KDM implementation snapshot 52
13.3 Checks on the existing finite-program endpoints 55

14 Backward information as a proposal, not a replacement score 56
14.1 What travels backward . . . 56
14.2 A precisely defined, frozen-guide proposal . . . 57
14.3 What a kernel mixture can contribute . . . 59
14.4 The corrected finite likelihood and its derivative . . . 59
14.5 Executable order and scientific scope . . . 61
14.6 Why more balancing does not remove an additive mass error . . . 62
14.7 A conditional proposal can be narrower than its flow covariance . . . 63
14.8 Backward guidance in the identity/global/local density mixture . . . 64
14.9 What the first nonlinear fitted comparison establishes . . . 70
14.10Score evidence for the product-moment consumer . . . 71
14.11SIR transfer with fixed transport settings . . . 72
14.12Independent mixture calibration: what it can improve . . . 74
14.13SIR evidence with fixed transport settings . . . 75
14.14Independent proposal allocation does not establish a general SIR gain . . . 76

15 Learning guides for moments and scores without a posterior oracle 77
15.1 Why one simulated trajectory can supervise conditional moments . . . 77
15.2 Complete-data labels target the actual LEDH score risk . . . 78
15.3 Exact labels for the SIR scope actually being computed . . . 79
15.4 Changing controlled SMC and KDM at their actual consumers . . . 80
15.5 Executable training and evaluation order . . . 80
15.6 The first SIR implementation and its limits . . . 81
15.7 Why a valid future guide can lose its intended effect in the flow . . . 82
15.8 Training guide coefficients against terminal moment loss . . . 84
15.9 Training completed; the independent comparison stopped on baseline invalidity . . . 86
15.10Why the proposal concentrated, and what a flow-aware guide must express . . . 88
15.11Repairing the proposal in physical output coordinates . . . 90
15.12A neural conditional KDM proposal for SIR . . . 94
15.13The first independent neural comparison . . . 97
15.14Comparison with freshly fitted restricted proposals . . . 98
15.15Continuing training after the interruption . . . 100

16 Matching the physical parent and integrating the conditional mixture 101
16.1 Why a covariance mismatch can become a mean error . . . 101
16.2 The exact conditional law of the current finite mixture . . . 102
16.3 What changes in sampling, and what does not . . . 102
16.4 Integrate before blaming the child representation . . . 103
16.5 Differentiate the same conditioned mixture . . . 104
16.6 Consequences for a useful KDM repair . . . 105
16.7 What the first recursive comparison establishes . . . 105
16.8 Conditional proposals and observation-weighted parents . . . 107
16.9 What the ESS improvement establishes . . . 108
16.10Likelihood and score comparison across SIR parameter points . . . 109
16.11Observed accuracy and the limits of parent weighting . . . 110
16.12The five-model comparison and the retained default . . . 112
16.13What the failures teach about this score problem . . . 118
16.14A correct flow applied to the wrong conditional distribution . . . 118

16.15An exact update of an inaccurate incoming mixture 119
16.16Differentiating the finite calculation is a different test 119
16.17What the earlier score repairs did and did not solve 120
16.18The model-specific failures still requiring explanation 120

17 Subsequent discriminating comparisons **121**

A Source and experiment locations **124**

1 The model score and the finite filter

The scientific question is how to estimate the score of a state-space model accurately enough to support inference about its parameters. The intended BayesFilter LEDH calculation uses LEDH particle flow, PF–PF importance weights, entropy-regularized OT, Contract–E moment restoration, and GenUT higher-moment correction with two trust-region caps. These mechanisms define a particular finite calculation. They are useful starting points for a proposal, but they do not define what the exact model score must be.

This note grew out of the historical "Section 3.6" observation-sidecar document. That earlier note remains in the isolated `section-3-6-prior-weight-sidecar` worktree, under `docs/papers/section_3_6_prior_weight_sidecar/`. The present manuscript, `docs/papers/ledh_younis_kdm_score/ledh_younis_kdm_score.tex`, is its broader successor. It brings together the subsequent implementation, results, and the September 11 change in research question. The implementation history is tied to research commit `804616e3`; differences in the September comparison checkout, `5cc59cfa`, are identified in Section 13. These are historical snapshots, not the current integration checkout.

As of 14 October 2026, the separate controlled-SMC and Younis kernel-mixture replications have completed their declared, bounded released-source checks. This gives the project two tools to test: learned lookahead proposals from controlled SMC, and evaluable mixture proposals and mixture-expectation derivatives from KDM. It does not yet establish that combining either tool with LEDH improves the model score. The controlled-SMC replication is also distinct from the original iterated auxiliary particle filter, whose replication remains deferred. Section 7.2 explains the difference. While the LEDH tuning procedure is unavailable, the owner's temporary development baseline fixes transport regularization at $\epsilon = 1$ and the number of Sinkhorn iterations at 5. This is a fixed, untuned comparison setting, not a validated optimum for every model.

For fixed observations $y_{1:T}$ and model parameters $\theta \in \mathbb{R}^p$, write

$$\ell(\theta) = \log p_\theta(y_{1:T}), \qquad s(\theta) = \nabla_\theta \ell(\theta), \tag{1}$$

$$L_0^N(\theta;\xi) = \text{value of the executed finite filter}, \qquad S_0^N(\theta;\xi) = \nabla_\theta L_0^N(\theta;\xi). \tag{2}$$

Here N is the particle count and ξ is the fixed random design used by the finite program. In this note $\mathrm{d}F$ means the directional derivative $v^\mathsf{T}\nabla_\theta F$ for a declared direction v; s denotes the complete vector. Checking S_0^N against finite differences of L_0^N tests the implementation of that derivative. Comparing it with s tests its accuracy as a model-score estimator. A third calculation, developed in Section 9, estimates s through posterior expectations. It need not equal S_0^N for the same particle realization.

For a fixed dataset, define the conditional bias and covariance of the finite-program score by

$$b_N(\theta;y) = \mathbb{E}_\xi[S_0^N \mid y] - s(\theta), \qquad V_N(\theta;y) = \mathrm{Cov}_\xi(S_0^N \mid y). \tag{3}$$

When the second moments exist, its squared Euclidean error has expectation $\|b_N\|^2 + \operatorname{tr} V_N$. An individual discrepancy from Kalman does not identify which term is responsible. Averaging errors over different observation paths answers another question again: conditional biases can cancel across datasets. Repeated filter randomizations within each dataset are needed to distinguish conditional bias from Monte Carlo variance.

Even an unbiased likelihood estimate does not generally give an unbiased log-likelihood score. Consider the positive estimator $\widehat{Z}(\theta) = \theta + \varepsilon$, where $\Pr(\varepsilon = a) = \Pr(\varepsilon = -a) = 1/2$ and $\theta > a > 0$. Its mean is $Z(\theta) = \theta$, and its derivative is exactly one. Yet

$$\mathbb{E}\left[\partial_\theta \log \widehat{Z}\right] = \frac{1}{2}\left(\frac{1}{\theta + a} + \frac{1}{\theta - a}\right) = \frac{\theta}{\theta^2 - a^2} \neq \frac{1}{\theta} = \partial_\theta \log Z. \tag{4}$$

At $\theta = 2$ and $a = 1/2$, the two scores are $8/15$ and $1/2$. The bias is created by the random denominator, despite correct differentiation and an unbiased numerator. This example does not say that every finite-particle score is biased in every model. It shows why the two correctness statements cannot be substituted for a score-accuracy argument.

There are consequently several possible repairs. Missing derivatives of the state, covariance, initial law, or sampling distribution require an implementation or estimator correction. A reset or kernel that changes the filtering measure requires a correction to that approximation or an explicit new target. A valid but noisy integral requires better integration. The development below separates these explanations before selecting the next method. A zero-mean control variate addresses the last problem; it does not remove an arbitrary bias already present in its baseline.

The existing implementation names remain useful for identifying what ran. `ATOM-FINITE` denotes L_0^N; `KDM-FINITE` denotes a positive-bandwidth observation program; `RESKDM-IWSG-FINITE` denotes the post-Contract–E resampling program with raw anchored ratios; and `RESKDM-SN-FINITE` denotes its historical, prematurely normalized variant. `MODEL-IS` denotes an importance calculation whose numerator retains the original model factors. These are program identities, not levels of scientific validity. In particular, a correct `MODEL-IS` update does not by itself make an additional deterministic reset unbiased, and a different finite derivative is acceptable only under its actual name.

The LEDH spelling follows the Li–Coates particle-flow construction [Li and Coates, 2017]; the differentiable-transport context is Corenflos et al. [2021]. The new investigation now includes alternative model-score estimators explicitly. It no longer rules them out merely because they differentiate a different finite scalar.

2 The executed atom program

Let $x_{t,i}^-$ and $w_{t,i}^-$ denote the cloud and normalized weights immediately before the observation update. The finite program can be written schematically as

$$x_{t,i}^- = \Phi_{t,\theta}(x_{t-1,i}^+, \xi_t), \tag{5}$$

$$x_{t,i}^{\mathrm{out}} = F_{t,\theta}^{\mathrm{LEDH}}(x_{t,i}^-; \xi_t), \tag{6}$$

$$a_{t,i} = \log w_{t,i}^- + \log p_\theta(x_{t,i}^{\mathrm{out}} \mid x_{t-1,i}^+) + \log g_\theta(y_t \mid x_{t,i}^{\mathrm{out}}) + \log |J_{t,i}| - \log q_{t,\theta}(x_{t,i}^- \mid x_{t-1,i}^+, y_t), \tag{7}$$

$$Z_t = \sum_{i=1}^N \exp(a_{t,i}), \tag{8}$$

$$w_{t,i}^+ = \exp(a_{t,i})/Z_t, \tag{9}$$

$$x_t^+ = R_\theta(x_t^{\mathrm{out}}, w_t^+; \xi_t), \tag{10}$$

$$L_0^N(\theta; \xi) = \sum_{t=1}^T \log Z_t, \qquad S_0^N(\theta; \xi) = \nabla_\theta L_0^N(\theta; \xi). \tag{11}$$

Here $x_{t,i}^{\mathrm{out}}$ is the post-flow state, $J_{t,i}$ is the forward flow Jacobian, and $q_{t,\theta}$ is the pre-flow proposal density. Φ includes the declared transition and UKF covariance lifecycle, while F^{LEDH} is the flow map; the displayed terms make the PF–PF correction explicit. In a bootstrap/no-flow special case, the proposal and transition terms cancel and $a_{t,i} = \log w_{t,i}^- + \log g_\theta(y_t \mid x_{t,i}^-)$. The reset R includes the Sinkhorn/OT map, Contract–E moments, GenUT corrections, and the dual-cap trust-region map. This form matches the canonical score route, whose weight logits contain transition, observation, log-determinant, and proposal terms. No such term may be silently dropped from the value or its tangent.

For the auxiliary sidecar it is useful to expose the same code path as a prior-observation factorization. Define

$$b_{t,i} = \log w_{t,i}^{-} + \log p_\theta(x_{t,i}^{\mathrm{out}} \mid x_{t-1,i}^{+}) + \log |J_{t,i}| - \log q_{t,\theta}(x_{t,i}^{-} \mid x_{t-1,i}^{+}, y_t), \tag{12}$$

$$B_t = \log \sum_i \exp(b_{t,i}), \qquad \bar{w}_{t,i} = \exp(b_{t,i} - B_t), \tag{13}$$

$$a_{t,i} = b_{t,i} + \log g_\theta(y_t \mid x_{t,i}^{\mathrm{out}}), \qquad Z_t = \sum_i \exp(a_{t,i}). \tag{14}$$

The implementation records $\bar{w}_t$ as `prior_observation_weights`; these are the weights that may be used with a new observation functional. The posterior weights in (10) are w_t^{+} and must not be reused as $\bar{w}_t$.

The derivative in (2) is a total derivative. Thus a tangent through x_t^{-}, w_t^{-}, the observation factor, the OT map, the Contract–E residual design, the higher moments, and the dual caps is included whenever that dependence is part of the declared finite scalar. Holding a cloud fixed and differentiating only the observation factor is a different partial derivative.

The executable analytical endpoint evaluates one arbitrary parameter direction per call. For a scalar parameter this number is the score. For $p > 1$, a full score vector requires p calls with the model tangent set to the coordinate directions (or another spanning basis); each call is still a total derivative through the entire finite recurrence. The Phase 4A and Phase 4B score-quality fixtures have one parameter. The later adapter audit exercises coordinate and mixed directions for five models through the two-step endpoints. Those checks cover the derivative components, but do not establish a scalable batch implementation of the full score vector.

The research snapshot exposes the following analytical function and its legacy row-mapped batch wrapper:

- `canonical_value_and_analytical_score` `bayesfilter/highdim/ledh_canonical_score_tf.py`;
- the batch wrapper `canonical_batch_value_score` `bayesfilter/highdim/ledh_canonical_batch_tf.py`.
  It accepts both the historical `substeps` keyword and the authority-aligned `flow_substeps` alias, and rejects conflicting values.

The separate lower-level GenUT candidate/diagnostic is:

- `finite_value_score` `bayesfilter/highdim/cubature_genut_filter.py`.

Calling it is not evidence that the LEDH PF–PF flow and Contract–E reset were executed. The registry mismatch found during the audit has been repaired: the registry now names the exported `canonical_value_and_analytical_score`, and the governance test resolves every registered entry point to a callable. This closes discovery only; it does not implement KDM or prove numerical score validity. The existing Section 3.6 prior-weight sidecar is diagnostic work from an isolated worktree; it is not an integrated route in this checkout and is not a Younis IWSG implementation through the reset. The analytical function defaults to `reset_policy=none`, a diagnostic slice. A canonical baseline invocation must explicitly select `reset_policy=contract_e` and the owner-registered dual-cap and trust-region settings.

3 What the Younis construction supplies

The mixture resampling and fixed-proposal importance gradient below follow Younis and Sudderth [2023, Section 4, equations (14)–(15)]. We distinguish that construction from its later integration with BayesFilter resets and scores.

Younis and Sudderth begin with a weighted empirical cloud and replace its Dirac representation by a regularized mixture

$$\mu_h^N(\mathrm{d}z) = \sum_{i=1}^{N} w_i k_{B_i}(z - x_i)\,\mathrm{d}z, \qquad m_\theta(z) = \sum_{i=1}^{N} w_i(\theta) k_{B_i(\theta)}(z - x_i(\theta)). \tag{15}$$

For their mixture-density particle filter, this mixture replaces discrete resampling. With a common Gaussian bandwidth one may generate an anchor sample by

$$I_j \sim \mathrm{Cat}(w_1, \ldots, w_N), \qquad z_j = x_{I_j} + L\varepsilon_j, \qquad \varepsilon_j \sim N(0, I), \quad LL^{\mathsf{T}} = B. \tag{16}$$

The 2024 construction stratifies the uniforms used for the categorical draw. The label I_j generates the sample, but the differentiable density is the marginal sum in (15); it is not the density of the selected component. Thus every component can contribute to the gradient at every sample location. This is the source of the N-by-N work in a gradient-bearing resampling step.

Their IWSG construction fixes a proposal at the current parameter value. With

$$q_0(z) = m_{\theta_0}(z), \qquad \rho_j(\theta) = \frac{m_\theta(z_j)}{q_0(z_j)}, \qquad z_j \sim q_0, \tag{17}$$

the finite estimator of a mixture expectation and its derivative are

$$\widehat{I}(\theta) = \frac{1}{M} \sum_{j=1}^{M} \rho_j(\theta)\phi_\theta(z_j), \tag{18}$$

$$\mathrm{d}\widehat{I} = \frac{1}{M} \sum_{j=1}^{M} \left\{ \mathrm{d}\rho_j\, \phi_\theta(z_j) + \rho_j\, \mathrm{d}\phi_\theta(z_j) \right\}. \tag{19}$$

At $\theta = \theta_0$, $\rho_j = 1$. The locations z_j are held fixed in this differentiation; parameter dependence is represented by the mixture density ratio. This is not the total JVP of an inverse-CDF draw or of a parameter-dependent component index. Equations (17)– (19) establish the derivative of a mixture expectation. They do not by themselves establish the derivative of an arbitrary nonlinear operation that couples the complete set $(z_1, \ldots, z_M)$. For such an operation H_θ, ordinary importance sampling on the joint sample would instead use

$$R_M(\theta) = \prod_{j=1}^{M} \rho_j(\theta), \qquad \mathrm{d}\{R_M H_\theta\}\big|_{\theta_0} = \mathrm{d}H_{\theta_0} + H_{\theta_0} \sum_{j=1}^{M} \mathrm{d}\log m_\theta(z_j)\big|_{\theta_0}. \tag{20}$$

This joint ratio is exact for an expectation under independent mixture draws, but its variance can grow rapidly with M. Feeding individual IWSG weights through a nonlinear OT reset defines a finite weighted-particle algorithm; it is not silently promoted to the joint identity (20).

The ratio in (17) is a raw importance weight. Replacing it by the self-normalized ratio

$$\bar{\rho}_j(\theta) = \frac{\rho_j(\theta)}{\sum_l \rho_l(\theta)} \tag{21}$$

changes the finite estimator. At the anchor, $\mathrm{d}\log\rho_j = \mathrm{d}\log m_\theta(z_j)$, whereas

$$\mathrm{d}\log\bar{\rho}_j = \mathrm{d}\log m_\theta(z_j) - \frac{1}{M}\sum_l \mathrm{d}\log m_\theta(z_l). \tag{22}$$

The second expression has been centered by a random sample average and is not Equation (15) of Younis and Sudderth. Their released MDPF code confirms the same ordering: it constructs the unnormalized gradient-injection factor $\exp\{\log m - \mathrm{stop}(\log m)\}$, multiplies that factor by the next measurement and dynamics weights, and only then normalizes the posterior weights [Younis, 2023]. The source code's small additive numerical constant is an engineering detail and is not part of the mathematical route defined here.

For a Gaussian component, let $u_i = z - x_i$. Its complete directional differential is

$$\mathrm{d}\log k_{B_i}(u_i) = u_i^{\mathsf{T}} B_i^{-1}\mathrm{d}x_i + \frac{1}{2}\left[u_i^{\mathsf{T}} B_i^{-1}(\mathrm{d}B_i)B_i^{-1}u_i - \mathrm{tr}(B_i^{-1}\mathrm{d}B_i)\right]. \tag{23}$$

Therefore

$$\mathrm{d}m_\theta(z) = \sum_i \left[(\mathrm{d}w_i)k_{B_i}(u_i) + w_i k_{B_i}(u_i)\mathrm{d}\log k_{B_i}(u_i)\right]. \tag{24}$$

Equation (24) is the term that a KDM score path must carry for every cloud, weight, or bandwidth dependence declared to vary with θ. A bandwidth or cloud may instead be a genuinely fixed numerical design, in which case its zero tangent is part of the scalar's definition. Stopping a dependence that the declared scalar retains is a partial derivative; declaring a quantity fixed before defining the scalar is not.

3.1 The precise scope of IWSG unbiasedness

The word "unbiased" in the IWSG argument refers to a particular expectation and a particular differentiation convention. It should not be read as a claim that every finite-particle log-likelihood score is unbiased. Let m_θ be a positive mixture density with respect to a fixed reference measure and let $F_\theta(z)$ be a scalar downstream integrand. Define

$$\mathcal{J}(\theta) = \int F_\theta(z) m_\theta(z)\,\mathrm{d}z. \tag{25}$$

Fix an anchor θ_0, condition on the current incoming cloud, and draw $z_j \sim q_0$ with $q_0(z) = m_{\theta_0}(z)$. The proposal q_0 is detached during the local differentiation. Assume that the support is common in a neighbourhood of θ_0 and that differentiation may pass through the integral. The fixed-proposal estimator is

$$\widehat{G}_M = \frac{1}{M}\sum_{j=1}^{M}\left[\nabla_\theta F_\theta(z_j)|_{\theta_0} + F_{\theta_0}(z_j)\,\nabla_\theta \log m_\theta(z_j)|_{\theta_0}\right]. \tag{26}$$

Proposition 1 (IWSG expectation-gradient identity)**.** *Under the conditions above, conditional on the current cloud,*

$$\mathbb{E}_{q_0}[\widehat{G}_M] = \nabla_\theta \mathcal{J}(\theta)|_{\theta_0}. \tag{27}$$

The same statement holds for a general proposal q_0 when each summand is multiplied by $m_{\theta_0}(z_j)/q_0(z_j)$.

Proof. At the anchor, $q_0 = m_{\theta_0}$. Therefore the expectation of one summand in (26) is

$$\begin{aligned}
&\int q_0(z) \left[\nabla_\theta F_\theta(z)|_{\theta_0} + F_{\theta_0}(z)\, \nabla_\theta \log m_\theta(z)|_{\theta_0} \right] \mathrm{d}z \\
&= \int \left[\nabla_\theta F_\theta(z)|_{\theta_0}\, m_{\theta_0}(z) + F_{\theta_0}(z)\, \nabla_\theta m_\theta(z)|_{\theta_0} \right] \mathrm{d}z \\
&= \nabla_\theta \int F_\theta(z) m_\theta(z)\, \mathrm{d}z \Big|_{\theta_0}.
\end{aligned}$$

The average has the same expectation. For a general proposal, inserting the ratio m_{θ_0}/q_0 gives the same integral. The denominator is fixed because it is the law used to generate the current sample; differentiating it would define a different estimator rather than the local derivative in (25). □

The proposition is a conditional statement: it is made after the current mixture parameters and incoming cloud have been fixed. If those quantities are random, the identity can be averaged again by the tower property, but only for the expectation objective actually defined by the complete recursion. Any upstream dependence of the cloud that the declared objective retains must still be differentiated. Holding the proposal density fixed is a local sampling convention; it does not authorize dropping total derivatives elsewhere in the filter.

The distinction becomes visible when the integrand is a log likelihood. If

$$F_\theta(z) = \log g_\theta(y \mid z), \qquad \mathcal{J}_{\mathrm{cond}}(\theta) = \mathbb{E}_{m_\theta}\left[\log g_\theta(y \mid Z)\right], \tag{28}$$

then Proposition 1 estimates the gradient of the expected conditional log likelihood. In the simple case where m_θ is the prior, the corresponding observed-data marginal log likelihood is

$$\ell_{\mathrm{marg}}(\theta) = \log \int g_\theta(y \mid z) m_\theta(z)\, \mathrm{d}z. \tag{29}$$

The logarithm is outside the integral in (29), whereas it is inside the expectation in (28). Consequently,

$$\mathbb{E}_{m_\theta}[\log g_\theta(y \mid Z)] \neq \log \mathbb{E}_{m_\theta}[g_\theta(y \mid Z)] \tag{30}$$

except in special cases. Jensen's inequality gives the direction in the ordinary prior case, but it does not turn the two objectives into the same score. A finite particle average makes the distinction concrete:

$$\frac{1}{M} \sum_j \log g_\theta(y \mid z_j) \neq \log \left(\frac{1}{M} \sum_j g_\theta(y \mid z_j) \right). \tag{31}$$

For the generative state-space score, write the model normalizer as

$$Z(\theta) = \int u_\theta(z)\, \mathrm{d}z, \qquad \ell(\theta) = \log Z(\theta), \tag{32}$$

where u_θ contains the initial, transition, and observation factors in the declared model. With a fixed proposal q_0, importance sampling can give unbiased estimators of the unnormalized value and derivative,

$$\begin{aligned}
\widehat{Z}_M &= \frac{1}{M} \sum_j \frac{u_{\theta_0}(z_j)}{q_0(z_j)}, & \mathbb{E}[\widehat{Z}_M] &= Z(\theta_0), \\
\widehat{D}_M &= \frac{1}{M} \sum_j \frac{\nabla_\theta u_\theta(z_j)|_{\theta_0}}{q_0(z_j)}, & \mathbb{E}[\widehat{D}_M] &= \nabla_\theta Z(\theta)|_{\theta_0}.
\end{aligned} \tag{33}$$

The natural finite score is nevertheless

$$\widehat{S}_M = \frac{\widehat{D}_M}{\widehat{Z}_M}, \tag{34}$$

and generally

$$\mathbb{E}[\widehat{S}_M] \neq \frac{\mathbb{E}[\widehat{D}_M]}{\mathbb{E}[\widehat{Z}_M]} = \nabla_\theta \log Z(\theta_0). \tag{35}$$

This is a normalization and ratio issue, not a failure of the local IWSG identity. An expectation of a complete-data log density can equal a marginal log likelihood only under an additional exact-posterior identity, for example

$$\log p_\theta(y) = \mathbb{E}_{p_\theta(z|y)} \left[\log p_\theta(y, z) - \log p_\theta(z \mid y)\right]. \tag{36}$$

A KDM mixture used as an approximate filter or proposal is not automatically that posterior, and $F = \log g$ omits the second, entropy term in (36).

For a sequential particle filter, each local KDM/IWSG step can therefore be mathematically correct for its declared mixture expectation while the full finite program still differs from the exact marginal score. Repeated normalization, nonlinear resampling or transport, and a changed positive-bandwidth filtering measure all affect the complete target. The `RESKDM-IWSG-FINITE` route defined below has a valid total derivative of its own finite scalar; the source IWSG result does not identify that scalar with $\nabla_\theta \log p_\theta(y_{1:T})$ without a separate target and finite-particle analysis.

The source papers establish this mixture-gradient construction for learned, discriminative state-density objectives. In particular, the 2023 MDPF uses the mixture both for posterior-state loss evaluation and for resampling; the 2024 paper again gives the marginalized ratio and separates resampling and posterior bandwidths. Neither paper derives the observed-data score of a generative state-space model, an LEDH flow, an OT reset, GenUT moments, or dual-cap constraints. Their complexity discussion makes the computational boundary explicit: evaluating the mixture gradient at every resampled location creates all-pairs interactions. The papers' linear-cost inference path sets forward resampling weights to uniform and does not compute these gradients. It cannot be transplanted to a score path without a new approximation and error analysis.

4 Why positive bandwidth is a target change

The atom cloud is

$$\mu_0^N(\mathrm{d}z) = \sum_i w_i \delta_{x_i}(\mathrm{d}z). \tag{37}$$

For a test function ϕ,

$$\int \phi(z)\mu_h^N(\mathrm{d}z) = \sum_i w_i \int \phi(x_i + u) K_{B_i}(\mathrm{d}u), \tag{38}$$

which is not generally $\sum_i w_i \phi(x_i)$. This gives the following simple boundary.

Proposition 2. *Suppose the kernel weights are nonnegative and sum to one, and each kernel is centered with finite covariance B_i. If $w_i > 0$ and $B_i \neq 0$ for at least one component, the atom and kernel measures differ. Their parameter derivatives therefore require separate justification; a positive-bandwidth calculation is not, by its construction, the derivative of the atom program.*

Proof. Take $\phi(z) = \|z\|^2$. Centering eliminates the cross term in $\|x_i + u\|^2$, so the difference between the two expectations is $\sum_i w_i \operatorname{tr}(B_i) > 0$. Unequal parameterized expectations can nevertheless have equal derivatives at particular points, or even differ by a constant. Thus this measure argument

proves a change of functional, not a universal pointwise inequality of scores. Equality of the scores would need an additional argument for the actual parameterized functional. □

A limiting theorem as bandwidth tends to zero would concern convergence; it would not make two finite-bandwidth programs exactly equal.

The case $B = 0$ is an explicit atom branch, not a request to evaluate a singular Gaussian density. A zero-bandwidth parity test must therefore not form a Cholesky factor or an inverse of $B = 0$ and then infer that the result is the atom program.

For a linear-Gaussian observation model, a Gaussian state kernel gives the useful exact convolution

$$\overline{g}_\theta(y \mid x, B) = \int g_\theta(y \mid x + u) N(u; 0, B)\, \mathrm{d}u = N\Big(y; C_\theta x,\, R_\theta + C_\theta B C_\theta^{\mathsf{T}}\Big). \tag{39}$$

Write

$$S_i = R_\theta + C_\theta B_i C_\theta^{\mathsf{T}}, \qquad \mu_i = C_\theta x_i, \qquad r_i = S_i^{-1}(y - \mu_i). \tag{40}$$

For fixed data y, the total directional differential used below is

$$\mathrm{d}\mu_i = (\mathrm{d}C)x_i + C\,\mathrm{d}x_i, \tag{41}$$

$$\mathrm{d}S_i = \mathrm{d}R + (\mathrm{d}C)B_i C^{\mathsf{T}} + C(\mathrm{d}B_i)C^{\mathsf{T}} + CB_i(\mathrm{d}C)^{\mathsf{T}}, \tag{42}$$

$$\mathrm{d}\log\overline{g}_i = r_i^{\mathsf{T}}\mathrm{d}\mu_i + \frac{1}{2}\left\{r_i^{\mathsf{T}}(\mathrm{d}S_i)r_i - \mathrm{tr}(S_i^{-1}\mathrm{d}S_i)\right\}. \tag{43}$$

Thus state, observation-map, observation-covariance, and bandwidth tangents are all required when those quantities vary. Positive semidefinite B_i is permitted here, including rank-deficient B_i, because only the strictly positive definite observation covariance S_i is factored. This statement does not assert an ambient Lebesgue density for a singular state kernel. The corresponding observation increment

$$\overline{Z}_t = \sum_i w_{t,i}^- \overline{g}_\theta(y_t \mid x_{t,i}^-, B_{t,i}), \qquad \overline{L}_h^N = \sum_t \log\overline{Z}_t \tag{44}$$

is a well-defined new finite program. It equals the atom increment only at zero bandwidth or in special accidental cases. If it is fed into the subsequent reset, it defines an even larger new program.

The same distinction applies to a KDM placed after the reset. Replacing x_t^+ by a draw from (15) changes the input to the next transition and therefore changes all later normalizers. The change may be scientifically useful, but it is not an implementation detail.

5 From Section 3.6 to the integrated experiments

The earliest question was whether an inexpensive smooth observation functional could provide useful score information alongside the GenUT filter. The Section 3.6 sidecar was designed as a separate deterministic proposal force, with the canonical value retained for endpoint correction. That was a legitimate mechanics experiment, but it was not a construction of the canonical total score and it never supplied a known-mean control variate.

Its first repair concerned observation timing. Let w_i^- be normalized weights before the current observation, g_i its likelihood at particle i, and $Z = \sum_i w_i^- g_i$. The posterior weights are $w_i^+ = w_i^- g_i / Z$. The historical capture hook ran before reset but after this observation update. Reusing its w_i^+ in a second likelihood average therefore gave

$$\widetilde{Z} = \sum_i w_i^+ g_i = \frac{\sum_i w_i^- g_i^2}{Z}, \qquad \widetilde{Z} - Z = \frac{\mathrm{Var}_{w^-}(g)}{Z}. \tag{45}$$

For two equally weighted particles with likelihoods 1 and 3, the intended increment is 2, while the reused posterior weights give 2.5. The word "pre-reset" did not make the captured weights pre-observation. The repaired sidecar used the actual prior observation weights and differentiated its declared observation covariance dependence, while holding the captured cloud, weights, and kernel fixed. It remained a conditional derivative.

The September 3 pilot used one-step diagonal LGSSMs: $(d, N, T) = (1, 4, 1)$ and $(3, 6, 1)$. Four calibration paths and eight streams per scope selected the grid boundary $\rho = 0.8$; eight disjoint validation paths and eight streams per scope supplied the holdout comparison. The recorded relative path-level squared-bias changes were 6.6082 with interval $[-0.2825, 19.4854]$ and 0.2209 with interval $[-0.9342, 1.5096]$. Both intervals crossed zero, and the recorded stream-MCSE ratios, ranging from 0.1756 to 0.4709, failed the threshold 0.10. These tiny CPU/non-XLA diagnostics supplied no ranking or bias-reduction evidence. Separate reversibility and volume checks passed at about machine precision, but proposal mechanics did not establish score accuracy, HMC mixing, or posterior correctness. The sidecar remained isolated and unpromoted.

The next stages sought to remove the conditional-derivative restriction. Phases 1–3 implemented complete mixture differentials, a fixed-chart support reference, and an auxiliary functional constructed from the actual canonical trace. Phase 4A then fed kernelized observation weights and their tangents through the complete reset. Phase 4B added the source paper's mixture resampling mechanism after Contract–E and carried the resulting weights and covariance marks into later time steps. These changes made the full feedback testable. They also defined new finite programs; no residual correction made them equal to the original atom program.

The chronology therefore does not support a claim that a control variate was completed and then simplified. The executed work moved from an auxiliary conditional functional to separately named integrated experiments. This was useful for determining whether those mechanisms improved model-score error. It did not solve the original target-preserving control-variate problem. The negative results below are the reason to reconsider the insertion point and the score estimator together.

5.1 Phase 4A: integrated kernelized observation weighting

The first integrated experiment replaces only the point observation factor in (14). With the ordinary pre-observation PF–PF logit $b_{t,i}$, define

$$a^h_{t,i} = b_{t,i} + \log \overline{g}_\theta(y_t \mid x^{\mathrm{out}}_{t,i}, B_{t,i}), \tag{46}$$

$$Z^h_t = \sum_i \exp(a^h_{t,i}), \qquad \alpha^h_{t,i} = \exp(a^h_{t,i})/Z^h_t, \tag{47}$$

$$L^N_{\mathrm{obsKDM}} = \sum_t \log Z^h_t, \qquad S^N_{\mathrm{obsKDM}} = \mathrm{d}L^N_{\mathrm{obsKDM}}. \tag{48}$$

Its one-step tangent is

$$\mathrm{d}\log Z^h_t = \sum_i \alpha^h_{t,i} \left(\mathrm{d}b_{t,i} + \mathrm{d}\log \overline{g}_{t,i}\right), \qquad \mathrm{d}\alpha^h_{t,i} = \alpha^h_{t,i} \left[\mathrm{d}a^h_{t,i} - \mathrm{d}\log Z^h_t\right]. \tag{49}$$

The executed program passes $(x^{\mathrm{out}}_t, \mathrm{d}x^{\mathrm{out}}_t, \alpha^h_t, \mathrm{d}\alpha^h_t)$ into the existing Contract–E reset and the existing GenUT/dual-cap correction. Their output and tangent feed the next time step. Equations (43) and (49) therefore define a total derivative of this complete finite program, not a conditional observation derivative.

The reset also carries the particle-local UKF covariance with the same target-by-source transport used for the state. If A_{ri} is the normalized Sinkhorn transport from source particle i to reset particle r, then the covariance recursion and its total tangent are

$$P'_r = \sum_i A_{ri} P_i, \qquad \mathrm{d}P'_r = \sum_i (\mathrm{d}A_{ri}) P_i + \sum_i A_{ri} \mathrm{d}P_i. \tag{50}$$

The carried P'_r, not the old source ordering, is consumed by the next UKF prediction. Here P_i denotes a particle-local conditional covariance; no between-cloud scatter term is added. This same-transport carry is the declared Contract–E extension of categorical triple resampling. A previous implementation omitted it at the analytical endpoint; that call-chain bug was repaired and is now covered by endpoint and two-step tests.

This program is deliberately called *kernelized observation weighting*. It is not the complete Bayesian update of a Gaussian mixture: it does not propagate the conditional posterior mean and covariance of every mixture component. It is consequently not a full Younis mixture-density particle filter. Positive bandwidth is labelled `KDM-FINITE`; the explicit $B = 0, \mathrm{d}B = 0$ branch is labelled `ATOM-FINITE` and must reproduce the canonical trajectory.

A second insertion point represents the post-reset cloud by a continuous mixture before the next transition. It defines the distinct `RESKDM-IWSG-FINITE` scalar and is derived and implemented separately in the next subsection; it is not part of the Phase 4A observation-weighting scalar.

The first paired experiment now answers the narrow Phase 4A question for one small linear–Gaussian cell. With $N = 32$, $T = 5$, 20 calibration paths, and 100 disjoint validation paths, calibration selected $\rho = 0.8$ in $B = \rho^2 Q$. The atom score MSE was 3.3366 and the kernelized-observation MSE was 3.4980, a relative change of -4.84% when positive values denote improvement. The paired 95% bootstrap interval for the MSE difference was $[-0.223, 0.597]$, so the two scores are not statistically ranked. Inspection of all prespecified bandwidths on this now-consumed holdout showed no positive point improvement; $\rho = 1.6$ was worse with interval $[0.189, 2.399]$.

The mechanism is visible in the score errors. From $\rho = 0$ to $\rho = 0.8$, their sample standard deviation decreased from 1.616 to 1.580, but their mean moved from -0.868 to -1.014. The modest variance reduction was more than offset by additional bias. This rejects Phase 4A for promotion in this scope. It does not test the complete Younis resampling operation described next, and it does not license tuning on the inspected validation paths.

For a finite IWSG normalizer,

$$\widehat{Z}_h(\theta) = \frac{1}{M} \sum_j \rho_j(\theta) g_\theta(y_t \mid z_j), \tag{51}$$

$$\mathrm{d} \log \widehat{Z}_h = \frac{\sum_j \rho_j g_j \left(\mathrm{d} \log \rho_j + \mathrm{d} \log g_j \right)}{\sum_j \rho_j g_j}. \tag{52}$$

Equation (52) is a derivative of the KDM importance-sampling program. It is not an identity with the atom program.

5.2 Phase 4B: a complete mixture-resampling reference

The source operation can now be stated without an ancestry ambiguity. Let $(c_{t,i}, \alpha_{t,i}, P_{t,i})$ denote the locations, normalized weights, and particle-local UKF covariance marks presented to a continuous resampler. If the KDM replaces Contract–E, these are the weighted post-flow particles. In the combined BayesFilter reference selected below, they are the Contract–E output, its carried

covariances, and uniform weights $\alpha_{t,i} = 1/N$ with $\mathrm{d}\alpha_{t,i} = 0$. In either case define the marginalized resampling density

$$m_{t,\theta}(z) = \sum_{i=1}^{N} \alpha_{t,i}(\theta) k_{B_t(\theta)}(z - c_{t,i}(\theta)). \tag{53}$$

The first reference uses the source paper's common Gaussian bandwidth and an ordinary full-rank linear–Gaussian fixture. The complete sequential route is not called source-faithful because its Contract–E placement and covariance marks are BayesFilter extensions. A DSGE version must replace this density by the chart density in Section 12.

At an anchor θ_0, stratified categorical uniforms and Gaussian noises generate fixed locations $z_{t,j}$ from m_{t,θ_0}. Component labels are recorded to replay the draw, but are marginalized in every density evaluation. For a nearby θ, define

$$r_{t,j}(\theta) = \frac{m_{t,\theta}(z_{t,j})}{m_{t,\theta_0}(z_{t,j})}, \qquad \eta_{t,j}(\theta) = \frac{1}{N} r_{t,j}(\theta), \tag{54}$$

$$\gamma_{t,ji}(\theta) = \frac{\alpha_{t,i} k_{B_t}(z_{t,j} - c_{t,i})}{m_{t,\theta}(z_{t,j})}. \tag{55}$$

At the anchor, $r_{t,j} = 1$ and $\eta_{t,j} = 1/N$. The locations are fixed in the IWSG differential, so $\mathrm{d}z_{t,j} = 0$, while

$$\mathrm{d}\log r_{t,j} = \sum_i \gamma_{t,ji} \left\{ \mathrm{d}\log \alpha_{t,i} + \mathrm{d}\log k_{B_t}(z_{t,j} - c_{t,i}) \right\}, \tag{56}$$

$$\mathrm{d}\log \eta_{t,j} = \mathrm{d}\log r_{t,j}, \qquad \mathrm{d}\eta_{t,j} = \eta_{t,j} \mathrm{d}\log r_{t,j}. \tag{57}$$

Equations (23) and (57) include the cloud, weight, and bandwidth terms. Evaluating all $\gamma_{t,ji}$ is the required N^2 operation. The sum of the $\eta_{t,j}$ tangents is generally nonzero for a finite sample; forcing it to zero would replace the raw IWSG correction by (21).

Younis's particles carry locations and weights, not the UKF covariance used by the LEDH implementation. The following mark transport is therefore an explicit BayesFilter extension:

$$\widetilde{P}_{t,j} = \sum_i \gamma_{t,ji} P_{t,i}, \qquad \mathrm{d}\widetilde{P}_{t,j} = \sum_i (\mathrm{d}\gamma_{t,ji}) P_{t,i} + \sum_i \gamma_{t,ji} \mathrm{d}P_{t,i}, \tag{58}$$

$$\mathrm{d}\gamma_{t,ji} = \gamma_{t,ji} \left\{ \mathrm{d}\log \alpha_{t,i} + \mathrm{d}\log k_{t,ji} - \mathrm{d}\log m_{t,\theta}(z_{t,j}) \right\}. \tag{59}$$

No between-component scatter is added: the kernel perturbation has already been realized in $z_{t,j}$, and $P_{t,i}$ remains the local UKF algorithmic mark. This choice is testable, but it is not a result from the source paper. The prespecified comparator instead carries the covariance mark of the fixed anchor label,

$$\widetilde{P}^{\mathrm{label}}_{t,j} = P_{t,I_{t,j}}, \qquad \mathrm{d}\widetilde{P}^{\mathrm{label}}_{t,j} = \mathrm{d}P_{t,I_{t,j}}. \tag{60}$$

The label has no tangent. Both policies retain the same marginalized mixture density and raw IWSG weights; only the downstream UKF mark differs. Neither mark policy is supplied by Younis and Sudderth, so their comparison diagnoses a BayesFilter extension rather than source fidelity.

That comparison is uninformative when all component marks and their tangents are equal. If $P_{t,i} = P_t$ and $\mathrm{d}P_{t,i} = \mathrm{d}P_t$, then $\sum_i \gamma_{t,ji} = 1$ and $\sum_i \mathrm{d}\gamma_{t,ji} = 0$ give

$$\widetilde{P}_{t,j} = P_t, \qquad \mathrm{d}\widetilde{P}_{t,j} = \Big(\sum_i \mathrm{d}\gamma_{t,ji}\Big) P_t + \Big(\sum_i \gamma_{t,ji}\Big) \mathrm{d}P_t = \mathrm{d}P_t. \tag{61}$$

The fixed-label policy gives the same result. Linear Gaussian prediction and update preserve equal initial covariance marks, and normalized Contract–E transport preserves their equality. The matrix experiment below therefore cannot select between these policies; floating-point differences in their calibration scores have no scientific meaning. Heterogeneous-mark tests are needed to check the distinction, and nonlinear evidence is needed to choose between them for a nonlinear filter.

There are now two possible placements, and they must not share a name. Replacing Contract–E by mixture resampling gives the source MDPF placement but removes the requested Contract–E, GenUT, and dual-cap reset. Retaining Contract–E and then applying (54) before the next transition executes both mechanisms. The latter is the declared Phase 4B BayesFilter reference. Its fixed locations, raw IWSG weights, and covariance marks become the parents of the next transition; all later PF–PF, flow-Jacobian, reset, and cap terms are then differentiated normally.

To make the finite scalar explicit, let $h_{t+1,j}(\theta)$ contain the full next-step PF–PF multiplier for child j: transition density, observation density, flow Jacobian, and proposal denominator. The post-resampling increment is

$$Z_{t+1}^{\mathrm{IWSG}}(\theta) = \sum_{j=1}^{N} \eta_{t,j}(\theta) h_{t+1,j}(\theta) = \frac{1}{N} \sum_{j=1}^{N} r_{t,j}(\theta) h_{t+1,j}(\theta). \tag{62}$$

The posterior weights are normalized only after the product $\eta_{t,j} h_{t+1,j}$ is formed. This preserves the raw importance-sampling normalizer in (62). Call the resulting scalar

$$L^N_{\mathrm{resKDM,IWSG}}(\theta; \xi, z^0, q^0) = \sum_{t=1}^{T} \log Z_t^{\mathrm{IWSG}}, \qquad S^N_{\mathrm{resKDM,IWSG}} = \mathrm{d}L^N_{\mathrm{resKDM,IWSG}}. \tag{63}$$

This is the combined `RESKDM-IWSG-FINITE` program. It is neither L_0^N nor the Younis MDPF alone. A two-pass evaluation is required: an anchor pass generates every sequential $z_{t,j}$ and denominator $m_{t,\theta_0}(z_{t,j})$; a replay pass evaluates the same fixed sample bank and its total tangent for other θ. Re-anchoring inside an HMC trajectory would change the finite energy and is forbidden.

The raw IWSG weights are part of this new finite scalar, not auxiliary metadata. In particular, if $\omega_{t+1,j}$ denotes the incoming weight used by the next PF–PF step, then

$$\log \omega_{t+1,j} = \log r_{t,j} - \log N, \qquad \mathrm{d} \log \omega_{t+1,j} = \mathrm{d} \log r_{t,j}. \tag{64}$$

The next normalizer must consume both quantities. Resetting the numerical weights to $1/N$ while retaining only the sampled locations, or retaining the weight values while discarding their tangent, removes the IWSG mechanism.

Prematurely normalizing the ratios defines a different scalar. Because the subsequent posterior softmax removes common scale, the state and posterior weight recurrences agree, but the accumulated normalizer does not. With the same samples and covariance-mark policy,

$$L^N_{\mathrm{resKDM,SN}} = L^N_{\mathrm{resKDM,IWSG}} - \sum_{t=1}^{T-1} \log \left\{ \frac{1}{N} \sum_{j=1}^{N} r_{t,j} \right\}. \tag{65}$$

The first Phase 4B implementation computed this `RESKDM-SN-FINITE` scalar. Its finite-difference agreement was correct for that scalar but did not validate the intended raw-IWSG score. The repaired route implements (64); an executable regression requires a generally nonzero sum of raw weight tangents and rejects the centered tangent in (22) as its incoming score.

There are also two distinct meanings of "unbiased" that must not be conflated. Equations (17)–(19) give the ordinary importance-sampling identity for a single mixture expectation. For a nonlinear function of the complete resampled cloud, the exact joint identity is (20). The sequential use of raw individual weights in (64) follows the IWSG gradient-injection ordering, while using their scale in a generative evidence normalizer is a BayesFilter extension. Its analytical derivative is the total derivative of $L^N_{\mathrm{resKDM,IWSG}}$ as defined here, but neither the source paper nor the present derivation proves that it is an unbiased estimator of $\nabla_\theta \log p_\theta(y_{1:T})$, of the expected stochastic-filter loss, or of S_0^N. Those are empirical or additional-theory questions.

The zero-bandwidth limit requires separating the locations from their IWSG derivative. In this combined route, the component weights are exactly $1/N$ and the jth stratified position is $(j-1+u_j)/N$, with $0 \le u_j < 1$. Consequently the selected label is $I_j = j$: each component is selected once. The earlier statement that this particular route tends to repeated component locations was wrong. With $B = h^2 Q$ and $L_Q L_Q^\mathsf{T} = Q$, its anchor sample is $z_j = c_j + h L_Q \varepsilon_j$, which tends to c_j.

This location limit does not establish score parity. For distinct centres, fixed positive-definite Q, and a parameter-independent bandwidth scale h, the selected component dominates the mixture as $h \to 0$. At the anchor, its leading location contribution to the IWSG differential is

$$\mathrm{d}\log m_\theta(z_j)\big|_{\theta_0} \simeq \frac{1}{h}\varepsilon_j^\mathsf{T} L_Q^{-1}\mathrm{d}c_j. \tag{66}$$

Thus the fixed-sample tangent can grow while the forward locations converge. Repeated centres require a separate mixture-limit analysis. At $B = 0$ the ambient Gaussian density is undefined, so Phase 4B does not implement a zero-bandwidth score branch equal to `ATOM-FINITE`. Its checks are instead anchor identity, complete-mixture density, analytical-versus-finite-difference tangents, sequential replay, and comparison with both the canonical score and the Kalman score.

The exact all-components reference costs $O(N^2)$ per mixture-gradient evaluation and $O(TN^2)$ for a sequential gradient. Sparse neighbors, random features, and low-rank approximations would be new algorithms; they are not permitted in the reference and require separate error analyses if considered later.

5.3 The matrix Gaussian score comparison

The first score-quality campaign used a two-state model. Its dynamics are $x_t = A(\theta)x_{t-1} + \epsilon_t$, and its measurements satisfy $y_t = Hx_t + \nu_t$. The matrices are

$$A(\theta) = \begin{bmatrix} 0 & 0.12 \\ -0.08 & 0.10 \end{bmatrix} + \theta \begin{bmatrix} 1 & 0 \\ 0 & 0.7 \end{bmatrix}, \qquad \theta_0 = 0.72, \tag{67}$$

$$H = \begin{bmatrix} 1 & 0.25 \\ -0.15 & 0.9 \end{bmatrix}, \qquad Q = \begin{bmatrix} 0.12 & 0.025 \\ 0.025 & 0.09 \end{bmatrix}, \tag{68}$$

$$R = \begin{bmatrix} 0.22 & 0.035 \\ 0.035 & 0.18 \end{bmatrix}, \qquad P_0 = \begin{bmatrix} 0.8 & 0.12 \\ 0.12 & 0.6 \end{bmatrix}. \tag{69}$$

Here $x_{-1} \sim N(0, P_0)$ and the first observation follows one transition. At θ_0, $A(\theta_0)$ is stable. An independent analytical Kalman recursion differentiates its prediction, innovation covariance, gain, posterior mean, and posterior covariance with $\mathrm{d}A = \mathrm{diag}(1, 0.7)$. The first particle scopes were $(N, T) = (32, 5)$ and $(64, 20)$. The smaller scope ran first; both scopes completed within the total compute budget. This matrix fixture replaces the earlier scalar proposal, which was wrong for testing the full pairwise correction because that correction is identically absent in one dimension.

Each scope used 40 calibration paths, 30 separate power-pilot paths, and 500 untouched validation paths. The bandwidths selected from the declared grid were $\rho = 0.8$ and 0.4, respectively. Relative to the exact Kalman score, the validation result was

(N, T)	Atom MSE	KDM MSE	KDM minus atom, 95% interval
$(32, 5)$	3.94210	4.45250	[0.07106, 0.94986]
$(64, 20)$	3.86260	10.13463	[5.10083, 7.55881]

The intervals use 4,000 paired path bootstrap resamples. They support higher MSE for the calibrated KDM candidate in each tested scope. Both frozen low/high absolute-score groups also had higher KDM point MSE than the atom and observation-KDM comparators; the high-score small-scope interval alone crossed zero. The simpler bootstrap particle comparator had larger MSE, which does not rescue the loss to the unmodified filter.

The primary criterion required an interval demonstrating at least ten percent MSE reduction. Neither scope passed it. The pilots requested 8,900 and 4,160 paths for the specified twenty-percent improvement alternative, so the 500-path cap also left both scopes underpowered for that design. The negative result is therefore a rejection of these calibrated candidates, not a completed search over KDM methods. Their numerical controls remain unpromoted hypotheses, and changing N and T together does not isolate either effect. In the smaller scope, a slight observed variance reduction was offset by greater squared bias; in the larger scope both increased. These bias/variance decompositions are descriptive. Small bandwidth was especially unstable: the calibration MSE at $\rho = 0.025$ reached 1.63×10^9 and 9.18×10^{35}. This is consistent with the small-bandwidth tangent in (66), not evidence that a small value perturbation gives a small score perturbation.

The bootstrap entry differentiates the finite program along its realized, fixed ancestor labels. It checks that program's derivative; it is not the ancestor-averaged Fisher-score baseline developed in Section 9. The canonical numerical controls were frozen campaign comparators and were not independently optimized for each scope. The results therefore compare the tested configurations. Since both N and T change between the two scopes, the contrast does not isolate horizon dependence or particle-number dependence. The reported subgroup intervals are pointwise, not simultaneous.

The raw-IWSG log-value shift relative to the atom program averaged -0.02449 and -0.02377 in the two scopes, with mean squared shifts 0.07284 and 0.04023. Small changes in a scalar do not imply small changes in its derivative. These descriptive value differences therefore do not rescue the failed score comparisons.

5.4 Why the next direction changes

The tested all-IWSG candidate is rejected for the two matrix-Gaussian scopes. Its derivative agrees with its declared finite program, yet its model-score MSE is higher. In the smaller scope, the descriptive error mean and variance changed from -1.08143 and 2.77816 for the canonical score to -1.32100 and 2.71290 for Phase 4B. In the larger scope they changed from -0.98767 and 2.89289 to -1.57710 and 7.66270. The second scope therefore shows both more squared error in the mean and more variation across paths. These across-path decompositions are descriptive; they do not separately estimate the conditional bias at each fixed dataset.

The result is not adequately explained by saying that the KDM derivative is different from the atom derivative. Both are candidates for approximating the exact model score, and a different estimator could have smaller error. The more useful question is why the new approximation should be closer to the model. Adding Gaussian observation covariance changes the observation factor. Adding a second reset changes future particles. Evaluating narrow kernels with fixed-location

importance gradients can amplify noise. None of these operations, by itself, corrects the original model-score bias.

The earlier restriction to the executed finite derivative made unrelated score recursions appear inadmissible. That restriction protected the meaning of the canonical API, but it was too narrow as a research objective. A Fisher-score estimator can be a valid candidate for the underlying model without being the derivative of the existing OT-reset scalar. It must be named and validated accordingly. Likewise, a centered control variate can reduce variance without removing the bias of its baseline. The distinction changes what an experiment must measure; it does not relax the mathematics.

One historical cost argument also needs correction. The Section 3.6 memo grouped PaRIS with inherently quadratic ancestor calculations. The exact ancestor sum is quadratic, but PaRIS replaces that sum with sampled backward ancestors and has an expected linear-cost result under stated mixing and acceptance assumptions [Olsson and Westerborn, 2014, Section 3.1, Algorithm 2; Section 3.2.4, Theorem 10]. Those assumptions do not hold automatically in every repository model, particularly when transition densities are singular or backward acceptance becomes small. "Always quadratic" was therefore an incorrect cost argument. Correcting that argument does not remove the structural obstruction from degenerate transitions: sampling backward ancestors cannot create transitions that the model forbids. A comparison with ancestor-averaged methods is a question for models whose transition and backward-conditioning assumptions hold.

For those regular-transition models, a reference comparison assigns different jobs to three components. An evaluable mixture proposes particles. The original model densities specify their importance correction. A posterior-score recursion averages over the ancestor uncertainty that remains. Selective pathwise and importance-weight gradients are an additional way to reduce variance when mixture expectations must be differentiated. This combination has not been tested here. Its components have explicit roles in the model-score calculation, but that does not make it a general solution for the degenerate DSGE target. The support obstruction in Section 9.1 must be resolved before proposing a score recursion for that target.

6 Mixture proposals with the original model correction

There is a continuous mixture already present in a particle filter whenever the physical transition has a continuous density. Let $\{x_{t-1}^j, W_{t-1}^j\}_{j=1}^N$ approximate the filtering distribution after observation $t-1$, with $\sum_j W_{t-1}^j = 1$. Propagating that measure through the actual transition density gives

$$a_t(x) = \sum_{j=1}^{N} W_{t-1}^j f_\theta(x \mid x_{t-1}^j), \qquad u_t(x) = g_\theta(y_t \mid x) a_t(x). \tag{70}$$

The first density predicts the state; the second incorporates the current observation but is not normalized. The transition's process covariance is part of the model. It is not an artificial bandwidth added to make an atom cloud differentiable. When f_θ is Gaussian, a_t is already a Gaussian mixture, so Younis-style mixture calculus can be studied on this physical predictive distribution directly.

Choose an evaluable proposal q_t whose support contains that of u_t, and draw $x_t^i \sim q_t$. The correct importance calculation is

$$v_t^i = \frac{u_t(x_t^i)}{q_t(x_t^i)}, \qquad \widehat{z}_t = \frac{1}{N} \sum_i v_t^i, \qquad W_t^i = \frac{v_t^i}{\sum_k v_t^k}. \tag{71}$$

Conditionally on the incoming cloud and a proposal fixed before these draws,

$$\mathbb{E}_{q_t}[\widehat{z}_t \mid \mathcal{F}_{t-1}] = \int \frac{u_t(x)}{q_t(x)} q_t(x)\,\mathrm{d}x = \int u_t(x)\,\mathrm{d}x. \tag{72}$$

Here $\mathcal{F}_{t-1}$ includes the previous weighted particles and any proposal design fixed from them and the observed data. A kernel can change where particles are drawn without changing the numerator in this identity. The cancellation fails if the denominator is merely the density of the selected component rather than the actual marginal proposal, or if the proposal is refitted to the same draws without a justified adaptive weighting scheme.

This is the useful connection to the marginal particle filter. Lai et al. [2022, Algorithm 2, Theorem 2, equations (9)–(12)] integrate out the ancestor index and evaluate full transition and proposal mixtures. Their estimator-coupling argument establishes an unbiased likelihood normalizer for the specified recursion. It also explains a local Rao–Blackwell variance reduction; the paper explicitly does not claim that the complete MPF always has lower variance than every corresponding SMC run. Its variational objective, equation (13), is $\mathbb{E}\log\widehat{Z}$, which is not $\log Z$. Unbiased differentiation of that objective would not settle the model-score question in Section 1.

The associated author implementation evaluates the transition mixture with `reduce_logsumexp`, adds the observation log density, and subtracts the proposal log density [Lai, 2022]. These operations support (71). They do not establish compatibility with BayesFilter's analytical derivative, initialization, GPU/XLA, or tuning requirements. The proposed generative mixture route is not implemented by merely calling the existing observation-KDM endpoint.

The distinction between numerator and proposal also determines how much of the current LEDH machinery can be reused. Its flow, UKF information, GenUT moments, and OT couplings may supply proposal centers, covariances, or deterministic transformations. The numerator must still use the intended incoming filtering weights and the actual transition and observation densities. Replacing those weights by uniform reset weights and those states by uncorrected reset locations changes a_t. Equation (72) then certifies an integral of that changed approximation, not the original model recursion. A deterministic transformation may be used as a proposal only when its induced density, including every necessary Jacobian, is known.

A defensive mixture can protect proposal support when a guided component misses a plausible mode. For a fixed $0 < \eta < 1$, let

$$q_t(x) = (1-\eta)q_t^{\mathrm{guided}}(x) + \eta a_t(x). \tag{73}$$

Since $q_t \geq \eta a_t$, the incremental weight satisfies $v_t(x) \leq g_\theta(y_t \mid x)/\eta$. A bounded observation likelihood therefore gives a bounded incremental weight. It does not bound every score derivative, and the mixing fraction remains a scope-specific proposal choice to calibrate. An arbitrary positive fraction is not justified as a default.

6.1 An analytically adapted Gaussian example

The first implementation can be checked in a model where the best local proposal is available exactly. Suppose $f_\theta(x \mid x_{t-1}^j) = \mathcal{N}(x; m_j, Q)$ and $g_\theta(y_t \mid x) = \mathcal{N}(y_t; Hx, R)$, with Q and R positive definite. In the matrix-LGSSM test, $m_j = A(\theta)x_{t-1}^j$. Multiplying the two Gaussian densities gives

$$f_\theta(x \mid x_{t-1}^j) g_\theta(y_t \mid x) = c_j\,\mathcal{N}(x; \widetilde{m}_j, \widetilde{Q}), \tag{74}$$

where completing the square, or conditioning a joint Gaussian, yields

$$V = HQH^{\mathsf{T}} + R, \qquad c_j = \mathcal{N}(y_t; Hm_j, V), \tag{75}$$

$$K = QH^{\mathsf{T}}V^{-1}, \qquad \widetilde{m}_j = m_j + K(y_t - Hm_j), \tag{76}$$

$$\widetilde{Q} = Q - QH^{\mathsf{T}}V^{-1}HQ. \tag{77}$$

The component evidence c_j tells us how plausible ancestor j is after the new observation. Its conditional Gaussian moves the proposal toward that observation. Thus the normalized predictive update is the mixture

$$q_t^*(x) = \sum_j \frac{W_{t-1}^j c_j}{z_t^*} \mathcal{N}(x; \widetilde{m}_j, \widetilde{Q}), \qquad z_t^* = \sum_j W_{t-1}^j c_j. \tag{78}$$

Substituting $q_t^* = u_t / z_t^*$ into (71) makes every incremental weight equal to z_t^*. The current-step proposal variance vanishes conditionally on the incoming cloud. Earlier particle approximation remains, so this is not an exact finite-particle Kalman filter. The example isolates the improvement available from conditional integration and proposal adaptation before any extra kernel smoothing is introduced. In particular, Q here is the physical process covariance, not the carried UKF mark or an added kernel bandwidth.

6.2 Retained ancestry and a flow proposal

The same model correction can be formulated on a joint ancestor–state space. This is useful when the flow depends on the selected ancestor and its inverse cannot be marginalized cheaply. The distinction determines the correct numerator as well as the denominator; the following existing `MODEL-IS` derivation is retained for that reason.

There is one direct KDM use that leaves the generative model factors in the importance ratio, but it is a BayesFilter extension rather than the Younis MDPF. The treatment of ancestry must be fixed before writing the ratio. If an ancestor A is retained, draw it with a frozen probability $r_{t,0}(a)$, then draw a pre-flow state from a complete conditional mixture $q_{t,0}^{\mathrm{KDM}}(x_0 \mid a, y_t)$. Apply the ancestor-specific LEDH map $x_1 = F_{t,\theta,a}(x_0)$, with forward Jacobian $J_{t,a}$. The induced joint proposal density is

$$q_t(j, x_1) = r_{t,0}(j) q_{t,0}^{\mathrm{KDM}}(x_0 \mid j, y_t) \, |\det J_{t,j}(x_0)|^{-1}, \qquad x_0 = F_{t,\theta,j}^{-1}(x_1). \tag{79}$$

The corresponding unnormalised weight is

$$\widetilde{w}_t = \frac{w_{t-1,J}^- f_\theta(x_1 \mid x_{t-1,J}^+) g_\theta(y_t \mid x_1) |\det J_{t,J}(x_0)|}{r_{t,0}(J) q_{t,0}^{\mathrm{KDM}}(x_0 \mid J, y_t)}. \tag{80}$$

Here "complete" means the sum over every kernel component within the conditional mixture for the retained ancestor, not the kernel of the component that generated x_0. If ancestry is marginalized instead, the numerator must also be marginalized,

$$\widetilde{w}_t(x_0) = \frac{g_\theta(y_t \mid x_1) |\det J_t(x_0)| \sum_a w_{t-1,a}^- f_\theta(x_1 \mid x_{t-1,a}^+)}{q_{t,0}^{\mathrm{KDM}}(x_0)}. \tag{81}$$

This second expression is valid only when the flow map does not depend on an ancestor that has been marginalized. Mixing a marginalized denominator with the conditional numerator in (80) is wrong.

An auxiliary-particle lookahead may guide $r_{t,0}$, but its approximate predictive likelihood cannot replace either the exact transition factor f_θ or the observation factor g_θ. Under the usual support, invertibility, and differentiation-under-the-integral conditions, the sample average $\widehat{Z}_t$ and its derivative are unbiased for the one-step particle predictive integral conditional on the incoming cloud. The ratio $\mathrm{d}\widehat{Z}_t/\widehat{Z}_t$ is generally biased for its logarithmic derivative. Moreover, the deterministic Contract–E reset changes the next incoming cloud, so this one-step identity is not a proof that the complete finite-horizon algorithm is an unbiased likelihood or score estimator.

Following the fixed-denominator principle of Younis IWSG, this conditional LEDH extension freezes $r_{t,0}$ and $q_{t,0}^{\mathrm{KDM}}$ at an anchor θ_0 while differentiating the model numerator and LEDH map. Younis and Sudderth do not derive this conditional LEDH construction. If an implementation instead recomputes the proposal as θ changes, it needs a separate derivation that couples the sampling map, proposal density, ancestor selection, and state map. Merely subtracting proposal or selection log-density tangents from a fixed-sample importance weight is wrong for the anchored model-normalizer derivative. This arm is therefore labelled `MODEL-IS` and is compared separately with both the canonical `ATOM-FINITE` score and the exact Kalman score.

At the atom reset itself, an ordinary density ratio cannot repair the change: a finite atom measure and an absolutely continuous KDM are mutually singular. A density-corrected KDM proposal can instead sample a continuous predictive update, where the physical transition supplies the target density. Inserting it directly at an atomic reset requires a different measure and an explicit new target; the predictive-density argument does not correct that reset.

7 Proposal-quality branch: controlled SMC, iAPF, covariance, and SGQF

The proposal question is separate from the score-identity question. A proposal can place particles in regions with large observation likelihood and thereby reduce weight variation, but that improvement is meaningful only if the physical target is left unchanged. The common one-step notation makes the boundary explicit. Given the incoming weighted cloud, let

$$u_t(x) = g_\theta(y_t \mid x) \sum_a W_{t-1}^a f_\theta(x \mid x_{t-1}^a) \tag{82}$$

be the unnormalised predictive target and let q_t be the actual marginal proposal density. Every proposal in this section uses

$$v_t^i = \frac{u_t(x_t^i)}{q_t(x_t^i)}, \qquad \widehat{z}_t = N^{-1} \sum_i v_t^i. \tag{83}$$

Changing q_t is allowed; replacing u_t by a Gaussian or quadrature approximation is a different filtering target.

7.1 Twisted particle filters and auxiliary lookahead

Let $\psi_t(x) > 0$ be a lookahead function. A twisted or auxiliary filter uses it to prefer ancestors and states that are expected to explain future observations. For example, define

$$\bar{\psi}_{t-1}(a) = \int f_\theta(x \mid x_{t-1}^a) \psi_t(x) \, \mathrm{d}x, \qquad r_t(a) \propto W_{t-1}^a \bar{\psi}_{t-1}(a), \tag{84}$$

and draw $A_t \sim r_t$ followed by $X_t \sim k_t(\cdot \mid A_t)$. The proposal is the joint law $r_t(a)k_t(x \mid a)$, or its marginal in x when the ancestor is integrated out. The importance ratio must therefore use the same joint or marginal denominator:

$$v_t(a, x) = \frac{W_{t-1}^a f_\theta(x \mid x_{t-1}^a) g_\theta(y_t \mid x)}{r_t(a)k_t(x \mid a)}. \tag{85}$$

Equivalent twisted-kernel formulations multiply a transition by a positive function and divide by its corresponding normalising factor [Whiteley and Lee, 2014]. These correction factors are what preserve the original likelihood. The ideal lookahead is a future-likelihood or eigenfunction object; a practical ψ_t is only an approximation to it. Consequently, twisting is a proposal-quality experiment, not a new score identity. For score diagnostics we freeze the fitted ψ_t and differentiate the declared finite target, while separately recording any derivative of the proposal that would be needed by a total-derivative claim.

The twisted branch is admissible for a degenerate transition only when the twist is defined on the same support and the required conditional law is available. A positive function on an ambient Euclidean space does not create a density for a transition supported on a lower-dimensional manifold.

7.2 Controlled SMC and the replicated lookahead tool

Controlled SMC provides a concrete way to learn the positive functions used in a twisted proposal. Heng et al. [2020, Sections 4.2–4.3, equations (20)–(21), Algorithms 2–3] approximate a backward dynamic-programming recursion by least-squares regression. The fitted quantity is the negative logarithm of a policy correction. Starting at the final observation and working backward, each regression includes the next fitted correction through an expectation under the current twisted transition. A subsequent SMC pass uses the refined policy, with the corresponding normalizing factors and potential corrections. Fitting a useful lookahead function and retaining these exact corrections are separate requirements: the former controls efficiency; the latter preserves the specified target.

This is the controlled-SMC method that has been replicated in the project. The October source checks establish agreement only within their declared released-source and input/failure scope; they are not a reproduction of all paper experiments. In particular, the recorded Lorenz covariance failure remains a failure, not a completed successful Lorenz experiment. Controlled SMC and the original iAPF both exploit twisting, but their fitted quantities and policy updates are not interchangeable. The controlled-SMC closure does not close the original-iAPF task discussed next.

For LEDH, the immediate proposal experiment is to use this learned lookahead to allocate ancestors or construct an evaluable proposal, while retaining the physical model in the numerator of (83) or (85). The actual joint or marginal sampling law determines the denominator. This integration still needs implementation and comparison; copying a controlled-SMC policy onto LEDH without its normalizers would not supply the stated correction. The fitted policy is frozen before a score comparison. Derivatives of the resulting parameter-dependent proposal must still be included wherever the declared finite-program derivative requires them. KDM can then provide an evaluable mixture or a mixture-expectation derivative within that specified calculation; its local importance-weight identity alone does not establish an unbiased normalized model score.

7.3 The iterated auxiliary particle filter

The iterated auxiliary particle filter (iAPF) constructs the lookahead rather than assuming that it is known [Guarniero et al., 2017]. A pilot particle run produces an approximation to the future value

function; a new auxiliary filter uses that approximation as ψ_t; and the procedure is iterated offline. Each iteration is still an auxiliary particle filter with an explicit proposal and correction of the form (85). The iteration may improve ancestor selection, but it does not make the pilot likelihood an exact normalizer and it does not provide an unbiased derivative of the marginal likelihood. The pilot data, number of iterations, and fitted ψ_t must be fixed before a claim run, or the adaptation must be included in a separate derivation.

In the LEDH implementation an iAPF can replace the UKF only in the proposal construction: it may supply r_t, proposal centres, or a lookahead covariance. The physical transition and observation factors remain in the numerator, and the complete proposal density (including ancestor probabilities and any LEDH Jacobian) remains in the denominator. The comparison therefore asks whether better lookahead improves coverage at equal cost; it does not ask whether iAPF is a replacement filtering theory for the target model.

The numerical fitting problem also needs a precise specification. In Section 5.1, equation (15), Guarniero et al. [2017] fit a Gaussian density to positive backward targets y_i by minimizing

$$L(m, \Sigma, \lambda) = \sum_{i=1}^{n} \{p_i(m, \Sigma) - \lambda y_i\}^2, \qquad p_i(m, \Sigma) = \mathcal{N}(x_i; m, \Sigma). \tag{86}$$

Here $y_i = g(x_i, y_t) f(x_i, \psi_{t+1})$ in their backward approximation; the symbol y_i in this fitting equation denotes a positive function value, not an observation. The scale λ accommodates an arbitrary positive normalization of that function. A log-density regression is a different criterion, even if it produces a useful Gaussian lookahead.

Proposition 3 (Profiled scale and possible absence of a minimizer)**.** *For fixed positive targets and a fixed nonsingular Gaussian, write $a = \sum_i p_i^2$, $b = \sum_i p_i y_i$, and $c = \sum_i y_i^2$. Then the unique optimal scale is $\lambda = b/c > 0$, and*

$$L = a - \frac{b^2}{c} + c\left(\lambda - \frac{b}{c}\right)^2. \tag{87}$$

Over unrestricted means and positive-definite covariances, the infimum of (86) *is zero, but it need not be attained.*

Proof. Expanding the squares gives $a - 2\lambda b + \lambda^2 c$; completing the square gives (87). Positivity of the targets and Gaussian densities gives $b, c > 0$. For the second claim, fix m and take $\Sigma = s^2 I_d$. Each density is bounded by $C_s = (2\pi)^{-d/2} s^{-d}$. Choosing $\lambda = C_s$ gives

$$0 \le L(m, s^2 I_d, C_s) \le C_s^2 \sum_i (1 + y_i)^2 \longrightarrow 0.$$

Since the loss is nonnegative, its infimum is zero. To see why a minimizer may be absent, take $d = 1$, $x_i \in \{-1, 0, 1\}$, and all three targets equal to one. A zero loss would require equal Gaussian densities at all three points. Equality at -1 and 1 forces $m = 0$; for every finite positive variance the density at zero is then strictly larger. Thus no finite Gaussian and scale attain zero in this example. □

The proposition identifies an ambiguity in an unrestricted global-argmin interpretation; it does not contradict the paper's reported numerical results. A local optimizer can return a useful finite fit. A compact mean region and diagonal standard deviations bounded above and away from zero also ensure that the profiled loss attains a minimum, by continuity on a compact set. Finding that minimum numerically remains a separate question. The implementation therefore states its bounds,

initialization, local solver and stopping rule. It records the covariance scale and the normalized shape residual $\sum_i (p_i - \widehat{\lambda} y_i)^2 / \sum_i p_i^2$ as well as the absolute loss: broadening a Gaussian can reduce its density amplitude without supplying an accurate lookahead.

For diagonal standard deviations σ_j, let $r_i = p_i - \widehat{\lambda} y_i$. The normal equation $\sum_i r_i y_i = 0$ cancels the derivative of the profiled scale. Differentiating the average loss $\overline{L} = L/n$ therefore gives

$$\frac{\partial \overline{L}}{\partial m_j} = \frac{2}{n} \sum_i r_i p_i \frac{x_{ij} - m_j}{\sigma_j^2}, \tag{88}$$

$$\frac{\partial \overline{L}}{\partial \log \sigma_j} = \frac{2}{n} \sum_i r_i p_i \left\{ \frac{(x_{ij} - m_j)^2}{\sigma_j^2} - 1 \right\}. \tag{89}$$

These are gradients of the density-scale criterion. Dividing all densities by a fixed positive constant merely rescales the objective; replacing it by the normalized shape residual as the optimization target would change the criterion. The shape residual is a diagnostic here.

Small density amplitudes also require care in floating-point arithmetic. Set $M = \max_i \log p_i$, $q_i = \exp(\log p_i - M)$ and $a = \sum_i q_i y_i / \sum_i y_i^2$. Then

$$\widehat{\lambda} = e^M a, \qquad L(m, \Sigma, \widehat{\lambda}) = e^{2M} \sum_i (q_i - a y_i)^2.$$

This evaluates the same density criterion. Computing $\log \widehat{\lambda}$ with log-sum-exp and the relative shape error from q_i avoids dividing two underflowed sums. The loss and its analytical gradient still retain the factor e^{2M}. If that factor falls below the numerical range, the implementation reports the underflow together with the fitted scale, active bounds and shape error. A tiny absolute loss or gradient can therefore end the numerical search without demonstrating an accurate lookahead.

The particle-count adaptation is a further part of the algorithm, rather than an implication of this fit. Algorithm 4 of Guarniero et al. [2017] starts with constant twists, checks the coefficient of variation of the latest $k+1$ likelihood estimates when the iteration index exceeds k, and may double the particle count when a complete equal-count window fails to increase monotonically. It then runs an independent final filter. Our bounded implementation declares the standard-deviation convention, finite iteration and particle caps, and behavior at an active fit bound. Exhausting a cap is a reported failure to converge. For the final finite-program score, the fitted coefficients and realized particle count are frozen; the score does not differentiate the offline stopping decision. These choices preserve the distinction between a fitted proposal, a derivative of its final random likelihood program, and the exact model score.

7.4 An exactly corrected nonlinear Gaussian twist

A nonlinear transition mean does not, by itself, prevent exact twisting. The relevant integral conditions on the previous state: its nonlinearity then appears in the location of a Gaussian density. This observation gives a tractable nonlinear comparator for the proposal study. It also separates the question of constructing a better proposal from the question of obtaining an unbiased model score.

Consider the scalar model

$$X_t = u_\theta(X_{t-1}) + \sqrt{Q_\theta}\, E_t, \qquad u_\theta(x) = a_\theta x + c \sin x, \tag{90}$$

$$Y_t = v_\theta(X_t) + \sqrt{R_\theta}\, V_t, \qquad v_\theta(x) = h_\theta x + b x^2, \tag{91}$$

where the noises are independent standard Gaussians, the initial law is μ_θ, and $Q_\theta, R_\theta > 0$. The curvature coefficients c, b are fixed in this comparison. Write $\varphi_s(z)$ for the centred Gaussian density

with variance s. Thus $f_t(z \mid x) = \varphi_{Q_\theta}(z - u_\theta(x))$ and $g_t(z) = \varphi_{R_\theta}(y_t - v_\theta(z))$, with the observations held fixed. These are the physical transition and observation densities, including their nonlinear means.

At each date choose a fitted lookahead

$$\psi_t(z) = \varphi_{B_t}(z - m_t) + \epsilon_t, \qquad B_t > 0, \quad \epsilon_t > 0. \tag{92}$$

The positive floor retains support wherever the physical transition has support. The lookahead need not integrate to one; it reweights a transition that will be normalized explicitly. Its coefficients may be fitted to each new observation sequence by the previously selected fitting procedure. The offline fitting draws are independent of the final filtering draws. Once fitting ends, its coefficients and the realized particle count are held fixed throughout the final value and score calculation. Oracle scores and final filtering errors play no role in fitting these coefficients.

Proposition 4 (Exact nonlinear conditional twist)**.** *For the model and lookahead above, set $u = u_\theta(x)$, $Q = Q_\theta$, $S = Q + B_t$ and*

$$M_t(x) = \int f_t(z \mid x)\psi_t(z)\,\mathrm{d}z = \varphi_S(m_t - u) + \epsilon_t. \tag{93}$$

Then $f_t^\psi(z \mid x) = f_t(z \mid x)\psi_t(z)/M_t(x)$ is the mixture

$$f_t^\psi(z \mid x) = (1 - \alpha_t(x))\varphi_Q(z - u) + \alpha_t(x)\varphi_{D_t}(z - \bar{m}_t), \tag{94}$$

where

$$\alpha_t(x) = \frac{\varphi_S(m_t - u)}{M_t(x)}, \qquad \bar{m}_t = u + \frac{Q}{S}(m_t - u), \qquad D_t = \frac{QB_t}{S}.$$

These expressions use the nonlinear $u_\theta(x)$ exactly.

Proof. Completing the square gives

$$\frac{(z-u)^2}{Q} + \frac{(z-m_t)^2}{B_t} = \frac{(z-\bar{m}_t)^2}{D_t} + \frac{(m_t-u)^2}{Q+B_t}.$$

The normalizing constants agree because $D_t(Q + B_t) = QB_t$. Consequently, the product of the two Gaussian densities is $\varphi_{Q+B_t}(m_t - u)\varphi_{D_t}(z - \bar{m}_t)$. Adding $\epsilon_t\varphi_Q(z - u)$ and integrating proves (93); dividing by that integral proves (94). □

Sampling this transition requires one component draw and one Gaussian draw. The first component explores the original transition, while the second moves toward the fitted lookahead centre. No derivative or linear approximation of u_θ enters this value calculation. When the floor dominates the Gaussian term, $\alpha_t(x)$ approaches zero and the sampler approaches the physical transition. Conversely, a sharply concentrated but inaccurate lookahead can place most samples poorly; tractable normalization does not guarantee quality.

The correction must also account for the lookahead inherited from the preceding date. Define $M_{T+1} = 1$ and

$$G_t^\psi(x) = \frac{g_t(x)M_{t+1}(x)}{\psi_t(x)}, \qquad C_0 = \int M_1(x)\,\mu_\theta(\mathrm{d}x), \qquad \mu_\theta^\psi(\mathrm{d}x) = \frac{M_1(x)}{C_0}\mu_\theta(\mathrm{d}x). \tag{95}$$

The factor M_{t+1} anticipates the next twisted transition. At the last date there is no such transition, which explains the terminal value one.

Proposition 5 (Preservation of the likelihood)**.** *The corrected twisted path law satisfies*

$$C_0\,\mu_\theta^\psi(\mathrm{d}x_0)\prod_{t=1}^{T}\{f_t^\psi(x_t\mid x_{t-1})G_t^\psi(x_t)\,\mathrm{d}x_t\}=\mu_\theta(\mathrm{d}x_0)\prod_{t=1}^{T}\{f_t(x_t\mid x_{t-1})g_t(x_t)\,\mathrm{d}x_t\}. \tag{96}$$

Its integral is therefore the original observed-data likelihood.

Proof. Substitute (95) and $f_t^\psi = f_t\psi_t/M_t$. At every date the two $\psi_t(x_t)$ factors cancel. The remaining multiplier of the physical path density is

$$M_1(x_0)\prod_{t=1}^{T}\frac{M_{t+1}(x_t)}{M_t(x_{t-1})}=M_{T+1}(x_T)=1.$$

The initial C_0 cancels the denominator in μ_θ^ψ. □

For a nonlinear u_θ, C_0 need not itself have a closed form, even when μ_θ is Gaussian. The particle implementation samples $X_0^i\sim\mu_\theta$, computes $\widehat{C}_0=N^{-1}\sum_i M_1(X_0^i)$, and resamples this initial cloud with probabilities proportional to $M_1(X_0^i)$. At date t it samples the mixture (94), records the average of $G_t^\psi(X_t^i)$, and resamples with those weights. Its likelihood estimate is

$$\widehat{Z}_N=\widehat{C}_0\prod_{t=1}^{T}\left\{N^{-1}\sum_{i=1}^{N}G_t^\psi(X_t^i)\right\}. \tag{97}$$

The exact path identity explains every correction in this estimator; it does not equate a finite initial cloud with μ_θ^ψ. Setting every ψ_t to one recovers the physical bootstrap particle filter. This is a useful independent check on both the value and its derivative.

The score calculation differentiates (97) with the fit held fixed. Let a dot denote a directional parameter derivative, including the accumulated state derivative $\dot{x}$. The nonlinear means contribute

$$\dot{u}=\dot{a}\,x+(a+c\cos x)\dot{x},\qquad \dot{v}=\dot{h}\,x+(h+2bx)\dot{x}. \tag{98}$$

In particular, freezing the fitted lookahead does not freeze the incoming particles or the physical model. At fixed m_t, B_t, ϵ_t, direct differentiation of the normalizer gives

$$\log\dot{M}_t(x)=\alpha_t(x)\left[\frac{m_t-u}{S}\dot{u}+\frac{1}{2}\left\{\frac{(m_t-u)^2}{S^2}-\frac{1}{S}\right\}\dot{Q}\right]. \tag{99}$$

Both the propagated-state derivative and the transition-variance derivative are necessary. For the observation and lookahead terms, put $r=y_t-v_\theta(x)$ and $\beta_t(x)=\varphi_{B_t}(x-m_t)/\psi_t(x)$. Then

$$\log\dot{g}_t(x)=\frac{r}{R}\dot{v}+\frac{1}{2}\left(\frac{r^2}{R^2}-\frac{1}{R}\right)\dot{R}, \tag{100}$$

$$\log\dot{\psi}_t(x)=\beta_t(x)\frac{m_t-x}{B_t}\dot{x}, \tag{101}$$

$$\log\dot{G}_t^\psi(x)=\log\dot{g}_t(x)+\log\dot{M}_{t+1}(x)-\log\dot{\psi}_t(x). \tag{102}$$

The last-date normalizer derivative is zero.

The Gaussian draw itself must be differentiated too. For the product component,

$$\dot{\tilde{m}}_t=\frac{B_t}{S}\dot{u}+\frac{B_t(m_t-u)}{S^2}\dot{Q},\qquad \dot{D}_t=\frac{B_t^2}{S^2}\dot{Q}, \tag{103}$$

so a fixed standard Gaussian draw e gives $\dot{X}_t=\dot{\tilde{m}}_t+\dot{D}_t e/(2\sqrt{D_t})$. For the physical component the corresponding derivative is $\dot{u}+\dot{Q}e/(2\sqrt{Q})$.

Proposition 6 (Derivative of the frozen-fit finite program)**.** *Suppose the physical parameters and initial sampling map are differentiable, all variances are positive, and no random uniform lies exactly on an ancestor or mixture selection boundary at the evaluation point. Hold fixed the lookahead coefficients, realized particle count, and random numbers. Propagate state derivatives through the selected ancestors and Gaussian components as above. The resulting derivative is*

$$\dot{\log \widehat{Z}}_N = \sum_i \omega_0^i \dot{\log M_1}(X_0^i) + \sum_{t=1}^{T} \sum_i \omega_t^i \dot{\log G_t^{\psi}}(X_t^i), \tag{104}$$

where ω_0^i and ω_t^i are the normalized initial and date-t weights before the corresponding resampling.

Proof. Away from a selection boundary the discrete labels are locally constant. The state tangent follows by the ordinary chain rule for the selected sampling map; a selected ancestor carries its existing tangent forward. For positive w_i, differentiation gives $\dot{\log}(N^{-1}\sum_i w_i) = \sum_i (w_i/\sum_j w_j)\dot{\log} w_i$. Apply this identity to each factor in (97) and use (98)–(103). □

This is the derivative of the frozen-fit finite program on its current selection branch. It omits the derivative of the offline fit and its stopping decision by definition. Moving selection boundaries can matter when differentiating an expectation, even though a fixed run lies on such a boundary with probability zero. Moreover, the logarithm creates the ratio-bias issue already discussed. Thus an exact conditional sampler, an exactly corrected path law, and a verified analytical finite-program derivative can coexist with a biased estimate of the model score. Comparing that estimate with a refined nonlinear likelihood reference remains necessary. Using this iAPF as a standalone comparator also does not establish that its fitted moments have been integrated into the LEDH covariance lifecycle; that is a separate proposal implementation and comparison.

7.5 Alternative covariance geometries

Covariance is a proposal geometry, not a correction to the model. The program will distinguish the following matrices at each proposal step:

$$P_t^Q = \text{the covariance supplied by the physical transition}, \tag{105}$$
$$P_t^{\mathrm{UKF}} = \text{the per-particle UKF covariance}, \tag{106}$$
$$P_t^{\mathrm{KDM}} = \text{the weighted covariance of the continuous mixture}, \tag{107}$$
$$P_t^{\mathrm{LEDH}} = \text{the local flow/GenUT covariance}, \tag{108}$$
$$P_t^{\mathrm{SGQF}} = \text{the covariance projected from a quadrature cloud}. \tag{109}$$

An optional hybrid has the form $P_t^{\mathrm{hyb}} = \alpha P_t^{\mathrm{UKF}} + (1-\alpha) P_t^{\mathrm{SGQF}}$, with α tuned on calibration data and frozen on the claim scope. Every matrix is checked for symmetry, positive definiteness, scale, and condition number. If it changes the sampling distribution, the resulting q_t and its derivatives must change consistently; a covariance label cannot be added to a weight after the samples have been drawn.

7.6 Structured Gaussian quadrature as a proposal source

The fixed structured Gaussian quadrature filter (SGQF) supplies another way to construct the moments used in a proposal. These moments must respond to each new observation. For clarity, consider additive, independent process and observation noise with covariances Q_θ and R_θ. At time

$t-1$, let a component have conditioned mean m_{t-1} and covariance $P_{t-1} = L_{t-1}L_{t-1}^{\mathsf{T}}$. A standardized quadrature rule $\{(\zeta_\ell, \omega_\ell)\}$, with $\sum_\ell \omega_\ell = 1$, gives nodes $x_{t-1,\ell} = m_{t-1} + L_{t-1}\zeta_\ell$. Propagating these nodes through a_θ, the deterministic part of the transition, gives $a_{t,\ell} = a_\theta(x_{t-1,\ell})$ and the prediction

$$m_t^- = \sum_\ell \omega_\ell a_{t,\ell}, \qquad P_t^- = Q_\theta + \sum_\ell \omega_\ell (a_{t,\ell} - m_t^-)(a_{t,\ell} - m_t^-)^{\mathsf{T}}. \tag{110}$$

For nonadditive noise, the quadrature must instead cover the joint state and noise law; simply adding Q_θ would then compute the wrong prediction.

Conditioning is a second operation. Form fresh quadrature nodes $x_{t,\ell}^- = m_t^- + L_t^-\zeta_\ell$, where $L_t^-(L_t^-)^{\mathsf{T}} = P_t^-$, and evaluate $b_{t,\ell} = b_\theta(x_{t,\ell}^-)$, the observation mean map. Define

$$\begin{aligned}
\bar{y}_t &= \sum_\ell \omega_\ell b_{t,\ell}, \qquad S_t = R_\theta + \sum_\ell \omega_\ell (b_{t,\ell} - \bar{y}_t)(b_{t,\ell} - \bar{y}_t)^{\mathsf{T}}, \\
C_t &= \sum_\ell \omega_\ell (x_{t,\ell}^- - m_t^-)(b_{t,\ell} - \bar{y}_t)^{\mathsf{T}}, \qquad K_t = C_t S_t^{-1}, \\
m_t &= m_t^- + K_t(y_t - \bar{y}_t), \qquad P_t = P_t^- - K_t S_t K_t^{\mathsf{T}}.
\end{aligned} \tag{111}$$

This is an assumed-Gaussian conditioning approximation, exact for the linear-Gaussian model when the rule integrates the required second moments. Likelihood-reweighting the nodes is a different approximation and must be identified as such. In particular, a sparse quadrature rule may have negative weights. These are integration weights, not categorical sampling probabilities; normalising them does not make them valid resampling weights. Positive definiteness of both S_t and the proposed P_t must be checked.

The conditioned component state (m_t, P_t) is carried into the next prediction through the declared component-assignment and reset operation. When an OT reset changes that assignment, the covariance provider must consume the actual reset state and propagate its derivatives. Reusing a fixed (m_0, P_0) at every date would omit observation dependence. The analytical score therefore needs the derivatives of the initial moments, propagated nodes, noise covariances, conditioning solve, and subsequent reset, including their dependence on θ. This lifecycle applies separately to every component if a mixture supplies the proposal.

These moments can parameterise a Gaussian, mixture, or LEDH proposal. The repository interfaces `tf_fixed_sgqf_cloud` and `tf_fixed_sgqf_filter` provide the cloud and filtering moments; the current route is an eager/Python-branch, approximate proposal-design lane. Its sparse-grid point count and memory must be recorded as dimension and level increase. It is not a claim-bearing replacement for the physical filter, and its approximate likelihood must never be used in place of u_t in (83).

The first SGQF experiment therefore takes the conditioned m_t and P_t to define q_t^{SGQF}, evaluates the exact model numerator and proposal denominator, and compares weight tails with UKF, KDM, and LEDH moments. A high-dimensional result is admissible only after the call chain, batching, device, and scaling checks show that the proposal is the one actually used by the claim-bearing lane.

7.7 Systematic proposal test

The proposal study is a factorial comparison, with the score estimator held fixed while proposal quality is measured. Its proposal families are bootstrap, locally adapted, KDM, LEDH/GenUT, twisted PF, iAPF, SGQF-guided, and defensive mixtures. Crossed factors are lookahead (none, fixed one-step, iterated ψ), covariance (P^Q, UKF, KDM, LEDH, SGQF, and calibrated hybrid), particle count, horizon, and observation regime. Model-corrected normalizer MSE is the primary

criterion for a normalizer-accuracy claim. A better-score claim requires lower oracle score MSE at the declared particle or compute budget, after the proposal identity and target-preservation tests pass. Coefficient of variation of $\widehat{z}_t$, effective sample size, and weight tails explain the result; they do not replace score error as the criterion. The linear-Gaussian/Kalman model is the first oracle-bearing check; nonlinear regular-transition models and high-dimensional SGQF cases follow.

Hard vetoes are a missing or non-integrable proposal density, support failure, non-finite or incorrectly corrected weights, use of an approximate SGQF or twisted likelihood as the target, and a claim route that cannot be traced to the declared proposal. A paired uncertainty analysis is required before calling a candidate better. A passing proposal test establishes a viable proposal arm; it does not establish an unbiased score.

8 Directional finite-difference validation ladder

Finite differences provide an independent directional check on a score, not an automatic bias oracle. For a unit direction v, define $s_v = v^{\mathsf{T}}\nabla_\theta \ell(\theta)$ and evaluate the same particle likelihood program at a fixed symmetric set of perturbations. The three-point central estimate is

$$D_2(h;v) = \frac{\ell(\theta+hv) - \ell(\theta-hv)}{2h}, \qquad D_2(h;v) = s_v + O(h^2), \tag{112}$$

and the five-point fourth-order estimate is

$$D_4(h;v) = \frac{\ell(\theta-2hv) - 8\ell(\theta-hv) + 8\ell(\theta+hv) - \ell(\theta+2hv)}{12h}, \qquad D_4(h;v) = s_v + O(h^4). \tag{113}$$

For an eleven-point cubic fit, let $k = -5, \ldots, 5$ and fit

$$(\widehat{\beta}_0, \ldots, \widehat{\beta}_3) = \arg\min_{\beta} \sum_{k=-5}^{5} \left[\widehat{\ell}(\theta + khv) - \sum_{r=0}^{3} \beta_r (kh)^r \right]^2, \qquad D_3(h;v) = \widehat{\beta}_1. \tag{114}$$

Write $f(u) = \ell(\theta + uv)$. A bounded third derivative near zero suffices for the second-order statement in (112). A bounded fifth derivative, with $f \in C^5$, suffices for the fourth-order statement in (113) and for the symmetric cubic fit. Four continuous derivatives alone do not suffice: $f(u) = \operatorname{sign}(u)|u|^{4+\alpha}$, $0 < \alpha < 1$, has four continuous derivatives but gives derivative error of order $h^{3+\alpha}$ for the five-point rule.

Proposition 7 (Symmetric cubic derivative weights)**.** *For the eleven equally spaced nodes in* (114)*, define* $S_r = \sum_{j=-5}^{5} j^r$*. The fitted derivative is*

$$D_3(h;v) = \frac{1}{h} \sum_{j=-5}^{5} c_j \widehat{\ell}(\theta + jhv), \qquad c_j = \frac{S_6 j - S_4 j^3}{S_2 S_6 - S_4^2}, \qquad (S_2, S_4, S_6) = (110, 1958, 41030). \tag{115}$$

For a deterministic $f \in C^5$*, the leading errors are* $D_4 - f'(0) = -f^{(5)}(0)h^4/30 + o(h^4)$ *and* $D_3 - f'(0) = -143 f^{(5)}(0)h^4/90 + o(h^4)$*.*

Proof. Symmetry separates the odd and even columns of the least-squares design. Fitting against the dimensionless columns j and j^3 gives the odd normal matrix $\left(\begin{smallmatrix} S_2 & S_4 \\ S_4 & S_6 \end{smallmatrix}\right)$. Its first inverse row gives c_j; division by h converts the fitted coefficient to a derivative. Hence $\sum c_j = 0$, $\sum j c_j = 1$, $\sum j^2 c_j = \sum j^3 c_j = \sum j^4 c_j = 0$. Taylor expansion leaves $h^4 f^{(5)}(0) \sum j^5 c_j / 5!$. The last sum divided by 5! is $-143/90$. Applying the same calculation to the coefficients $(1, -8, 0, 8, -1)/12$ at $j = (-2, -1, 0, 1, 2)$ gives $-1/30$. □

Thus more points do not give a higher formal order. The eleven-point cubic fit has a different truncation constant and a different response to correlated likelihood noise; a symmetric linear or quadratic fit generally retains an $O(h^2)$ term.

Proposition 8 (Finite-difference mean squared error)**.** *Let $\widehat{L}_j$ be the random log-likelihood estimate at node j, with finite second moments and joint covariance matrix Σ. For coefficients c that reproduce a first derivative, put*

$$T_h = \frac{1}{h}\sum_j c_j \ell(\theta + jhv) - s_v, \qquad B_{N,h} = \frac{1}{h}\sum_j c_j \{\mathbb{E}\widehat{L}_j - \ell(\theta + jhv)\}. \tag{116}$$

Then

$$\mathbb{E}\left[\left(\frac{1}{h}\sum_j c_j \widehat{L}_j - s_v\right)^2\right] = (T_h + B_{N,h})^2 + \frac{c^\mathsf{T}\Sigma c}{h^2}. \tag{117}$$

Proof. The estimator's mean error is $T_h + B_{N,h}$. Its centered part is $h^{-1}c^\mathsf{T}(\widehat{L} - \mathbb{E}\widehat{L})$, with variance $h^{-2}c^\mathsf{T}\Sigma c$. Expanding the squared error, the mixed term with the centered part has zero expectation. The squared bias still contains $2T_h B_{N,h}$; the truncation and particle biases need not have the same sign. □

A universal U-shaped error curve does not follow. Shared additive noise cancels because $\sum_j c_j = 0$. A mean-square differentiable coupled random likelihood can have a bounded derivative variance as $h \downarrow 0$. Independent node noise with nonvanishing variance instead yields the familiar h^{-2} variance growth. The joint coupling, as well as the stencil, matters.

Use a deterministic positive ladder $\mathcal{H} = \{h_0, h_0/2, \ldots\}$, with h_0 in parameter units and v normalised. An unrestricted normal draw of h is excluded because values close to zero divide likelihood noise by a small number. A truncated positive distribution is a later randomized arm, not the default; the negative evaluations are the paired points in the same symmetric stencil. Common random numbers or a declared coupling are used to reduce variance, but they do not remove finite-particle, log-normalisation, or truncation bias.

For a d-parameter score, use d independent coordinate directions or a full-row-rank matrix $V = (v_1, \ldots, v_m) \in \mathbb{R}^{d\times m}$. With directional estimates b, the least-squares solution is

$$\widehat{s} = (VV^\mathsf{T})^{-1}Vb. \tag{118}$$

Implementation uses QR or SVD rather than an explicit inverse. Singular values, directional-error propagation, parameter scale and dtype determine whether reconstruction is informative; an arbitrary condition-number cutoff does not establish that. Every perturbed parameter must remain in the declared model domain and be distinct at the working precision. If directions are defined in transformed coordinates, the reported likelihood score must include the corresponding coordinate chain rule.

The experiment has two separate checks. Deterministic analytic functions or exact Kalman log likelihoods test truncation slopes near two or four before roundoff dominates. Stochastic particle runs estimate the full error and replicate covariance in (117); those curves need not have either slope. Direct averages of squared oracle errors estimate MSE, whereas squaring a noisy sample mean does not give an unbiased squared-bias estimate. Calibrate the positive ladder and coupling on oracle-bearing data, validate and freeze them, then evaluate on untouched data. Without an oracle the ladder remains a diagnostic or parity calculation; agreement alone cannot certify model-score bias or supply a known control-variate center.

9 A model score that averages over ancestors

A well-chosen proposal can improve the particle approximation, but a separate question remains: which score should we compute from those particles? Differentiating every operation of a chosen finite filter is one answer. Fisher's identity supplies another, aimed directly at the observed-data score. The recursion below is a smoothing construction, even though its history averages are updated forward in time. It requires evaluable transition densities and a valid backward conditional. It does not apply as written to the degenerate DSGE transitions discussed in Section 9.1.

Assume the initial, transition, and observation laws have differentiable densities on a common dominating measure, and that differentiation may pass through the joint integral. For $x_{0:T}$, the joint density is

$$p_\theta(x_{0:T}, y_{1:T}) = \mu_\theta(x_0) \prod_{t=1}^{T} f_\theta(x_t \mid x_{t-1}) g_\theta(y_t \mid x_t). \tag{119}$$

The derivative inside this density holds $x_{0:T}$ fixed. Define its complete data score by

$$H_T(x_{0:T}) = \nabla_\theta \log \mu_\theta(x_0) + \sum_{t=1}^{T} \left\{ \nabla_\theta \log f_\theta(x_t \mid x_{t-1}) + \nabla_\theta \log g_\theta(y_t \mid x_t) \right\}. \tag{120}$$

Since $\nabla_\theta p_\theta = p_\theta H_T$, integrating this equality and dividing by $Z = p_\theta(y_{1:T})$ gives

$$\begin{aligned} s(\theta) &= \frac{\int p_\theta(x_{0:T}, y_{1:T}) H_T(x_{0:T}) \, \mathrm{d}x_{0:T}}{Z} \\ &= \mathbb{E}_\theta[H_T(X_{0:T}) \mid y_{1:T}]. \end{aligned} \tag{121}$$

The posterior expectation is over whole state histories, including the initial state. A parameter-dependent stationary initial law contributes the first term even when no observation is assigned to time zero. In a latent-innovation representation, the density and the derivative must instead be derived in those coordinates; the state-density expression cannot be used unchanged for a singular transition.

The needed history average has a forward recursion. Let H_t be (120) truncated at time t, and define $A_t(x_t) = \mathbb{E}[H_t(X_{0:t}) \mid X_t = x_t, y_{1:t}]$. Conditional on X_t, the observation at t does not further distinguish its ancestors. The backward conditional distribution is proportional to $p_\theta(x_{t-1} \mid y_{1:t-1}) f_\theta(x_t \mid x_{t-1})$. Conditioning the additive score on this distribution gives

$$\begin{aligned} A_t(x) = {} & \nabla_\theta \log g_\theta(y_t \mid x) \\ & + \int \left[A_{t-1}(z) + \nabla_\theta \log f_\theta(x \mid z) \right] p_\theta(z \mid x, y_{1:t-1}) \, \mathrm{d}z. \end{aligned} \tag{122}$$

This is the step that a single realized ancestor cannot represent exactly. It averages all histories compatible with the current state instead of discarding them when a resampling label is selected.

For a weighted particle approximation, define the backward probabilities

$$b_t^{ji} = \frac{W_{t-1}^j f_\theta(x_t^i \mid x_{t-1}^j)}{\sum_k W_{t-1}^k f_\theta(x_t^i \mid x_{t-1}^k)}. \tag{123}$$

All terms are evaluated at the current parameter; the denominator must be positive. The initial particles must approximate μ_θ: they may be drawn from it directly, or drawn from a covering

proposal and weighted by the corresponding initial-law ratio. Initialize $A_0^j = \nabla_\theta \log \mu_\theta(x_0^j)$ and use

$$A_t^i = \nabla_\theta \log g_\theta(y_t \mid x_t^i) + \sum_j b_t^{ji} \left[A_{t-1}^j + \nabla_\theta \log f_\theta(x_t^i \mid x_{t-1}^j) \right], \tag{124}$$

$$\widehat{s}_N = \sum_i W_T^i A_T^i. \tag{125}$$

This is the marginal-score construction in Poyiadjis et al. [2011, Section 2.2, Algorithm 2, equations (20) and (22)], with the initial state indexed explicitly as time zero. Its relation to modified differentiation rules is discussed by Ścibior and Wood [2021, Section 4.2, equations (24)–(25)]. The displayed recursion follows directly from the conditional expectation above, with the initial and observation timing made explicit.

No derivative of the proposal or of the sampled trajectory is missing from (125): its integrand is the complete-data model score. Proposal design changes how well its expectation is estimated. This differs from S_0^N, where state motion through the executed finite program is part of the claimed derivative. The Fisher estimator should therefore be checked against a model-score oracle and checked local density derivatives. Requiring it to match finite differences of the old OT-reset scalar would ask it to compute a different quantity.

Particle approximation and normalization still introduce error. With an exact smoothing draw, H_T is unbiased for s under the stated integrability conditions; with a finite approximate smoothing distribution, $\widehat{s}_N$ is not generally unbiased. Averaging ancestors reduces a particular source of randomness without proving a universal ranking of full filters. This remains true when the marginal likelihood estimate itself is unbiased.

The original Poyiadjis paper gives a useful, specific precedent. Its Section 2.3 compares the methods against an analytic Gaussian-model score using 500 particles and 100 replications. The discussion of linear growth in the marginal method's variance combines a stability conjecture with those numerical results; Theorem 1 instead proves a quadratic lower bound for the genealogical construction under its stated mixing and boundedness conditions. These distinctions prevent a local ancestor-averaging argument from becoming an unsupported universal variance theorem for the proposed filter.

There is a useful computational overlap with Section 6. The transition mixture in the numerator of (71) is also the denominator of (123). The same pairwise densities can support both the value calculation and the score recursion. A direct implementation costs $O(TN^2)$, plus the cost of the model derivatives. Streaming reduces memory use, not the number of pairs. PaRIS is an option for replacing the exact ancestor sum by a controlled number of backward draws; its acceptance cost, added variance, and support assumptions must be measured in the actual model before choosing it over the exact reference.

9.1 Why degenerate transitions obstruct this recursion

Consider a state equation with fewer independent shocks than state coordinates,

$$x_t = A_\theta x_{t-1} + G_\theta \varepsilon_t, \qquad \varepsilon_t \sim N(0, I_r), \tag{126}$$

$$\mathcal{S}_j = A_\theta x_{t-1}^j + \operatorname{range}(G_\theta), \qquad \operatorname{rank}(G_\theta) = r < d_x. \tag{127}$$

Here $x_t \in \mathbb{R}^{d_x}$, and $\mathcal{S}_j$ is the set of successors allowed by ancestor j. Each conditional transition is supported on that affine subspace and has no full-dimensional Lebesgue density. Thus (123) cannot be evaluated with ordinary ambient Gaussian densities. A pseudoinverse and pseudodeterminant alone do not repair it: a rank-aware density must also enforce the correct support.

The AR(2) example in (174) makes the failure concrete. A child drawn from ancestor a satisfies $x_{t,2} = x^a_{t-1,1}$. At a fixed parameter, conditioning the finite mixture on this supporting line excludes every ancestor with a different first coordinate. If these coordinates are distinct, the compatible ancestor probabilities are

$$b_t^{ji} = \mathbf{1}\{j = a\}. \tag{128}$$

The proposed history average then collapses to the sampled genealogy. It does not recover the alternative histories needed to repair genealogical degeneracy. PaRIS changes how backward ancestors are sampled; it cannot give positive probability to these incompatible transitions.

This obstruction concerns the conditional transitions between fixed particles. The exact predictive marginal can still be full dimensional after integrating over earlier continuous state uncertainty, as the same AR(2) example shows. That fact does not make the finite mixture of distinct conditional supports full dimensional. An ambient Gaussian proposal assigns zero probability to their union, so it cannot provide the exact importance correction for that finite singular mixture. Adding full-dimensional process noise changes the model; smoothing the finite predictive mixture into an ambient KDM changes the approximation. Neither operation establishes the displayed model-corrected recursion for the original degenerate transition.

Innovation coordinates are a possible starting point for a different derivation. They require the joint likelihood to be written in those coordinates, including the initial law and the dependence of the state map on θ. Substituting an innovation density for $f_\theta(x_t \mid x_{t-1})$ in the existing backward weights is not such a derivation. In particular, moving support contributes state-map derivatives to the observation factors, as (178) demonstrates.

Some degenerate models admit an exact reduction to common stochastic coordinates, or another specially derived smoothing method. The obstruction therefore does not rule out every form of smoothing. It does rule out the ordinary all-ancestor recursion above as a general method for the degenerate DSGE target. A successful full-rank Gaussian comparison would establish no extension to that target. The disturbance construction below instead needs its own support and differentiation assumptions.

9.2 A disturbance-coordinate proposal and its score

The support obstruction changes the coordinates in which the proposal must be defined. Instead of proposing an ambient state and then asking for the density of a singular transition, propose the random variables that generate the state. This is the disturbance-state-space formulation of Murray et al. [2013, Sections 1–2]. It is also the only formulation used in the propositions below.

Let $v_0 \in \mathsf{V}_0$ be an initial disturbance and let $u_t \in \mathsf{U}_t$ be the innovation at time t. The sets V_0 and U_t carry fixed reference measures λ_0 and λ_t; they need not have the same dimension as the state. For a parameter θ in an open set $\Theta \subset \mathbb{R}^p$, define

$$x_0 = F_{0,\theta}(v_0), \qquad x_t = F_{t,\theta}(x_{t-1}, u_t), \quad t = 1, \dots, T, \tag{129}$$

$$y_t \mid x_t \sim g_{t,\theta}(\cdot \mid x_t), \qquad v_0 \sim \rho_{0,\theta}, \quad u_t \mid x_{t-1} \sim r_{t,\theta}(\cdot \mid x_{t-1}). \tag{130}$$

The transition may be deterministic and rank deficient in x_t; no density with respect to ambient Lebesgue measure on $\mathbb{R}^{d_x}$ is assumed. The densities $\rho_{0,\theta}$, $r_{t,\theta}$, and $g_{t,\theta}$ are with respect to their displayed fixed reference measures; the observation reference measure is also independent of θ. We assume that the innovations have the displayed conditional Markov law given the past and that observations are conditionally independent given the state path and θ. These are model assumptions. If shocks are independent of the state and parameter, $r_{t,\theta}$ reduces to a fixed r_t.

Assumption 1 (Disturbance regularity)**.** *For $\lambda = \lambda_0 \otimes \lambda_1 \otimes \cdots \otimes \lambda_T$, define $z = (v_0, u_{1:T})$ and let $x_{0:T}(z, \theta)$ be generated by* (129)*. There is a neighbourhood B of the parameter value under study such that:*

(i) on a common set of full λ measure the state maps are continuously differentiable in their parameter and state arguments along the generated paths, and the displayed density factors are positive and continuously differentiable there. Their common disturbance support is independent of $\theta \in B$;

(ii) the disturbance-coordinate integrand

$$\pi_\theta(z; y) = \rho_{0,\theta}(v_0) \prod_{t=1}^{T} r_{t,\theta}(u_t \mid x_{t-1}) g_{t,\theta}(y_t \mid x_t) \tag{131}$$

has a positive finite integral $Z(\theta; y)$ for $\theta \in B$; and

(iii) each component of $\nabla_\theta \pi_\theta(z; y)$ is dominated on B by an integrable envelope. The same conditions hold for each time prefix used below.

The fixed-coordinate condition is the important one. A state support that moves with θ is harmless when it is generated by the same fixed disturbance coordinate z; differentiating an ambient state density is not needed. For a parameter-dependent shock support, first introduce a fixed-base variable and put its parameter dependence into $F_{t,\theta}$ and its density.

Use column gradients for scalar functions and let $\dot{x}_t$ be the $d_x \times p$ Jacobian of x_t with respect to θ, holding the disturbances fixed. Define this total tangent recursively by

$$\dot{x}_0 = \partial_\theta F_{0,\theta}(v_0), \tag{132}$$

$$\dot{x}_t = \partial_\theta F_{t,\theta}(x_{t-1}, u_t) + J_x F_{t,\theta}(x_{t-1}, u_t) \dot{x}_{t-1}. \tag{133}$$

For any state-dependent shock density, use the total derivative

$$D_\theta \log r_{t,\theta}(u_t \mid x_{t-1}) = \partial_\theta \log r_{t,\theta}(u_t \mid x_{t-1}) + \dot{x}_{t-1}^{\mathsf{T}} \nabla_x \log r_{t,\theta}(u_t \mid x_{t-1}). \tag{134}$$

The complete disturbance-path score is

$$\begin{aligned} h_\theta(z; y) = \nabla_\theta \log \rho_{0,\theta}(v_0) &+ \sum_{t=1}^{T} D_\theta \log r_{t,\theta}(u_t \mid x_{t-1}) \\ &+ \sum_{t=1}^{T} \left[\partial_\theta \log g_{t,\theta}(y_t \mid x_t) + \dot{x}_t^{\mathsf{T}} \nabla_x \log g_{t,\theta}(y_t \mid x_t) \right]. \end{aligned} \tag{135}$$

Proposition 9 (Disturbance-coordinate Fisher identity)**.** *Under Assumption 1, the observed-data likelihood and score are*

$$Z(\theta; y) = \int \pi_\theta(z; y) \, \mathrm{d}\lambda(z), \tag{136}$$

$$\nabla_\theta \log Z(\theta; y) = \mathbb{E}_\theta[h_\theta(\mathsf{Z}; y) \mid y_{1:T}], \tag{137}$$

where the conditional law in the second line has density $\pi_\theta(z; y)/Z(\theta; y)$ with respect to λ.

Proof. The recursion in (129) makes $\pi_\theta(z; y)$ a function on the fixed measure space $(\mathsf{V}_0 \times \mathsf{U}_{1:T}, \lambda)$. By the envelope condition, differentiation may pass through the integral, so

$$\nabla_\theta Z(\theta; y) = \int \nabla_\theta \pi_\theta(z; y) \, \mathrm{d}\lambda(z). \tag{138}$$

At points where the factors are positive, the product rule gives $\nabla_\theta \pi_\theta = \pi_\theta h_\theta$. The chain rule through the state recursion gives (133); applying it to each shock and observation factor gives (135). Substitution into (138), followed by division by the positive $Z(\theta; y)$, gives

$$\nabla_\theta \log Z(\theta; y) = \int h_\theta(z; y) \frac{\pi_\theta(z; y)}{Z(\theta; y)} \, \mathrm{d}\lambda(z), \tag{139}$$

which is the asserted conditional expectation. No transition density in the ambient state coordinates appears in the argument. □

The initial term in (135) is not a cosmetic addition. If the model starts in its stationary distribution and that law depends on θ, the stationary derivative belongs in $\nabla_\theta \log \rho_{0,\theta}$. If instead a parameter-independent disturbance generates the initial state through $F_{0,\theta}$, its effect appears in $\dot{x}_0$ and in every later observation term.

Proposition 10 (Support-valid sequential proposal)**.** *Under Assumption 1, suppose an initial proposal $q_{0,\theta}(v_0)$ and, for each t, a proposal $q_{t,\theta}(u_t \mid x_{t-1}, y_t)$ are positive wherever the corresponding target factors in* (131) *are positive. For sequential importance sampling without resampling, draw from*

$$Q_\theta(z) = q_{0,\theta}(v_0) \prod_{t=1}^{T} q_{t,\theta}(u_t \mid x_{t-1}, y_t), \tag{140}$$

and set, for a draw $\mathsf{Z} \sim Q_\theta$,

$$R_\theta(z) = \frac{\pi_\theta(z; y)}{Q_\theta(z)}, \tag{141}$$

$$\widehat{Z} = R_\theta(\mathsf{Z}), \qquad \widehat{D} = R_\theta(\mathsf{Z}) h_\theta(\mathsf{Z}; y). \tag{142}$$

The differentiability and integrable derivative bound in Assumption 1 imply that Z is differentiable and that $\pi_\theta h_\theta$ is integrable. Consequently,

$$\mathbb{E}_{Q_\theta}[\widehat{Z}] = Z(\theta; y), \qquad \mathbb{E}_{Q_\theta}[\widehat{D}] = \nabla_\theta Z(\theta; y). \tag{143}$$

Where $\widehat{Z} > 0$, the one-draw ratio is $h_\theta(\mathsf{Z}; y)$. Its sampling law here is Q_θ, so it is generally not an unbiased model-score estimator. If Q_θ is the exact disturbance posterior, even one such draw is unbiased by Proposition 9; an arbitrary proposal has no such guarantee.

Proof. The support condition makes R_θ well defined Q_θ-almost everywhere. Cancellation of Q_θ gives

$$\mathbb{E}_{Q_\theta}[R_\theta] = \int \pi_\theta(z; y) \, \mathrm{d}\lambda(z) = Z(\theta; y),$$

$$\mathbb{E}_{Q_\theta}[R_\theta h_\theta] = \int \pi_\theta(z; y) h_\theta(z; y) \, \mathrm{d}\lambda(z) = \nabla_\theta Z(\theta; y),$$

where the last equality is Proposition 9 before division by Z. The proposal density may depend on θ: it cancels in the pointwise importance ratio. A derivative of Q_θ is needed only if one differentiates the proposal expectation itself, rather than using the score identity to estimate $\nabla_\theta Z$. □

For a particle filter, the same ratio is applied one step at a time. Let $\alpha_t(a \mid \mathcal{F}_{t-1})$ be an ancestor proposal, positive whenever $W_{t-1}^a > 0$, and draw u_t^i from $q_{t,\theta}$ after drawing a_t^i. The support-valid auxiliary particle weight is

$$\omega_t^i = \frac{W_{t-1}^{a_t^i}}{\alpha_t(a_t^i \mid \mathcal{F}_{t-1})} \frac{r_{t,\theta}(u_t^i \mid x_{t-1}^{a_t^i}) g_{t,\theta}(y_t \mid x_t^i)}{q_{t,\theta}(u_t^i \mid x_{t-1}^{a_t^i}, y_t)}, \qquad x_t^i = F_{t,\theta}(x_{t-1}^{a_t^i}, u_t^i). \tag{144}$$

If $\alpha_t = W_{t-1}$, the first ratio is one. A lookahead or guided ancestor law changes α_t but not the numerator. This is the exact place where a Younis or UKF construction may enter: it supplies α_t or q_t while the disturbance density and observation likelihood remain those of the declared model.

Proposition 11 (Conditional APF normalizer identity)**.** *Conditionally on $\mathcal{F}_{t-1}$, assume that α_t and $q_{t,\theta}$ are fixed before the ancestor and innovation draws and that the ratios in* (144) *are integrable. Then, for every particle,*

$$\mathbb{E}[\omega_t^i \mid \mathcal{F}_{t-1}] = \sum_{a=1}^N W_{t-1}^a \int r_{t,\theta}(u \mid x_{t-1}^a) g_{t,\theta}(y_t \mid F_{t,\theta}(x_{t-1}^a, u)) \, \mathrm{d}\lambda_t(u). \tag{145}$$

If the incoming empirical measure is replaced by the exact filtering measure, the right side is the exact predictive likelihood.

Proof. Condition on an ancestor value a. The proposal density cancels in the innovation integral:

$$\mathbb{E}[\omega_t^i \mid \mathcal{F}_{t-1}, a_t^i = a] = \frac{W_{t-1}^a}{\alpha_t(a \mid \mathcal{F}_{t-1})} \int r_{t,\theta}(u \mid x_{t-1}^a) g_{t,\theta}(y_t \mid F_{t,\theta}(x_{t-1}^a, u)) \, \mathrm{d}\lambda_t(u).$$

Taking expectation over $a_t^i \sim \alpha_t$ yields (145). Integrating the same innovation likelihood over the exact incoming filtering measure gives the predictive likelihood by the law of total probability. □

The one-step cancellation alone is not a proof about a complete filtering run. To supply that proof, retain the disturbance history $z_{0:t} = (v_0, u_{1:t})$ mathematically and write $\gamma_t(\varphi) = \int \pi_{\theta,t} \varphi \, \mathrm{d}\lambda_{0:t}$, where $\pi_{\theta,t}$ is (131) stopped at t. There is no observation at time zero, so $\pi_{\theta,0} = \rho_{0,\theta}$ and $\gamma_0(1) = 1$. The extension kernel for a history test function is

$$(K_{t,\theta}\varphi)(z_{0:t-1}) = \int r_{t,\theta}(u \mid x_{t-1}) g_{t,\theta}(y_t \mid F_{t,\theta}(x_{t-1}, u)) \varphi(z_{0:t-1}, u) \, \mathrm{d}\lambda_t(u). \tag{146}$$

Direct integration of the last disturbance gives $\gamma_t(\varphi) = \gamma_{t-1}(K_{t,\theta}\varphi)$.

Proposition 12 (Unbiased particle likelihood and derivative)**.** *Fix $N \geq 1$ and θ. Initially draw v_0^i independently from $q_{0,\theta}$ and set $\omega_0^i = \rho_{0,\theta}(v_0^i)/q_{0,\theta}(v_0^i)$. At each subsequent time, draw ancestors conditionally independently from α_t and innovations from the proposals in* (144)*. Suppose all weights are positive and finite almost surely, all proposal support conditions hold, and the test functions below are absolutely integrable under γ_t. Define*

$$\overline{\omega}_t = \frac{1}{N} \sum_i \omega_t^i, \qquad W_t^i = \frac{\omega_t^i}{N \overline{\omega}_t}, \qquad \widehat{Z}_t = \prod_{s=0}^t \overline{\omega}_s, \qquad \gamma_t^N(\varphi) = \widehat{Z}_t \sum_i W_t^i \varphi(z_{0:t}^i). \tag{147}$$

For every deterministic test function φ with the stated integrability, including one that depends on the fixed θ,

$$\mathbb{E}[\gamma_t^N(\varphi)] = \gamma_t(\varphi). \tag{148}$$

In particular, with $h_{\theta,t} = \nabla_\theta \log \pi_{\theta,t}$,

$$\widehat{D}_t = \widehat{Z}_t \sum_i W_t^i h_{\theta,t}(z_{0:t}^i), \qquad \mathbb{E}\widehat{Z}_t = Z_t, \qquad \mathbb{E}\widehat{D}_t = \nabla_\theta Z_t. \tag{149}$$

Proof. At time zero, cancellation of the initial proposal gives

$$\mathbb{E}\gamma_0^N(\varphi) = \frac{1}{N}\sum_i \mathbb{E}\left[\frac{\rho_{0,\theta}(v_0^i)}{q_{0,\theta}(v_0^i)}\varphi(v_0^i)\right] = \int \rho_{0,\theta}\varphi \,\mathrm{d}\lambda_0 = \gamma_0(\varphi).$$

For the induction step, the definitions cancel the random normalization:

$$\gamma_t^N(\varphi) = \widehat{Z}_{t-1}\frac{1}{N}\sum_i \omega_t^i \varphi(z_{0:t}^i).$$

The ancestor and proposal cancellations used in Proposition 11, now with φ in the integrand, give the exact conditional identity

$$\mathbb{E}[\gamma_t^N(\varphi) \mid \mathcal{F}_{t-1}] = \widehat{Z}_{t-1}\sum_a W_{t-1}^a (K_{t,\theta}\varphi)(z_{0:t-1}^a) = \gamma_{t-1}^N(K_{t,\theta}\varphi). \tag{150}$$

Taking expectations and applying the induction hypothesis gives $\gamma_{t-1}(K_{t,\theta}\varphi) = \gamma_t(\varphi)$. The argument first applies to nonnegative functions by Tonelli's theorem; applying it to the positive and negative parts proves the signed case under absolute integrability. Set $\varphi = 1$ for the likelihood and $\varphi = h_{\theta,t}$ componentwise for its derivative, using Proposition 9 at the time prefix t. □

This proof also specifies an executable analytical recursion. A particle need carry only its state x_t^i, Jacobian $\dot{x}_t^i$, and accumulated score s_t^i, rather than an explicit array of all past disturbances. At initialization, $s_0^i = \nabla_\theta \log \rho_{0,\theta}(v_0^i)$. After choosing ancestor $a = a_t^i$, copy its state, Jacobian, and score; evaluate (133) at the newly drawn disturbance; and, under the differentiability assumptions in Assumption 1, set

$$\begin{aligned} s_t^i = s_{t-1}^a &+ \partial_\theta \log r_{t,\theta}(u_t^i \mid x_{t-1}^a) + (\dot{x}_{t-1}^a)^{\mathsf{T}} \nabla_x \log r_{t,\theta}(u_t^i \mid x_{t-1}^a) \\ &+ \partial_\theta \log g_{t,\theta}(y_t \mid x_t^i) + (\dot{x}_t^i)^{\mathsf{T}} \nabla_x \log g_{t,\theta}(y_t \mid x_t^i). \end{aligned} \tag{151}$$

Induction on this sum gives $s_t^i = h_{\theta,t}(z_{0:t}^i)$ exactly. Normalize the weights in (147) and report $\widehat{Z}_t$, $\widehat{D}_t = \widehat{Z}_t \sum_i W_t^i s_t^i$, and $\widehat{S}_t = \sum_i W_t^i s_t^i$ separately. All derivatives in this recursion hold the realised disturbances fixed; no proposal-density derivative enters the complete target score. Choosing $q_{0,\theta} = \rho_{0,\theta}$, $q_{t,\theta} = r_{t,\theta}$ and $\alpha_t = W_{t-1}$ gives the bootstrap disturbance filter, with $\omega_0^i = 1$ and $\omega_t^i = g_{t,\theta}(y_t \mid x_t^i)$. It is the simplest comparator for guided proposals.

This forward recursion preserves the support of a degenerate transition. Its particle histories can still coalesce under resampling, so it retains the long-horizon variance problem of a genealogical score estimator. Avoiding an invalid backward density resolves a support problem; it does not prove a variance bound. The next proposition separates another issue: unbiasedness of the unnormalized pair does not survive division in general. Write $\widehat{D}_N = \widehat{D}_T$, $\widehat{Z}_N = \widehat{Z}_T$, $D = \nabla_\theta Z$, and $Z = Z_T$.

Proposition 13 (Normalization creates a separate bias question)**.** *Unbiasedness of $\widehat{D}_N$ and $\widehat{Z}_N$ does not imply $\mathbb{E}[\widehat{D}_N/\widehat{Z}_N] = D/Z$. In particular, if $(\widehat{Z}_N, \widehat{D}_N)$ equals $(1/2, 1)$ or $(3/2, 1)$ with equal probability, then $\mathbb{E}\widehat{Z}_N = 1$, $\mathbb{E}\widehat{D}_N = 1$, but*

$$\mathbb{E}\left[\frac{\widehat{D}_N}{\widehat{Z}_N}\right] = \frac{1}{2}\left(2 + \frac{2}{3}\right) = \frac{4}{3} \neq 1 = \frac{D}{Z}. \tag{152}$$

Proof. The displayed two-point distribution has positive denominators and the stated first moments by direct arithmetic. Its expected ratio is the average of the two reciprocal denominators, which is $4/3$. Therefore the ratio operation does not commute with expectation in general. □

The practical output of a disturbance filter should therefore retain $\widehat{Z}_N$, $\widehat{D}_N$, and $\widehat{D}_N/\widehat{Z}_N$ as three different quantities. A stop-gradient correction for a parameter-dependent resampling law, such as the correction of Ścibior and Wood [2021, Section 3.1, equation (13)], is relevant when automatic differentiation is used to differentiate the random finite program. It is not a second term to append to the Fisher estimator in (135); that estimator already averages the complete score under the particle importance measure. The induction proves that no extra resampling-law term is missing from $\widehat{D}_t$. Appending another term changes the estimator and requires a separate expectation-preservation proof.

Proposition 14 (An exact unnormalized control variate)**.** *In the setting of Proposition 12, fix a parameter direction $v \in \mathbb{R}^p$, let $c_\theta(z)$ be a scalar, deterministic test function with $\int \pi_\theta |c_\theta| \,\mathrm{d}\lambda < \infty$, and suppose its target integral*

$$C(\theta) = \int \pi_\theta(z; y) c_\theta(z) \,\mathrm{d}\lambda(z) \tag{153}$$

is known exactly. Put $A_N = v^\mathsf{T} \widehat{D}_N$ and $B_N = \gamma_T^N(c_\theta)$. For any fixed scalar β, define

$$\widehat{D}^v_{\mathrm{cv}} = A_N - \beta(B_N - C(\theta)), \qquad \mathbb{E}\widehat{D}^v_{\mathrm{cv}} = v^\mathsf{T} \nabla_\theta Z. \tag{154}$$

If A_N, B_N have finite second moments and $\mathrm{Var}(B_N) > 0$, the variance-minimizing fixed coefficient is

$$\beta^* = \frac{\mathrm{Cov}(A_N, B_N)}{\mathrm{Var}(B_N)}. \tag{155}$$

Proof. Proposition 12 gives $\mathbb{E}A_N = v^\mathsf{T} \nabla_\theta Z$ and $\mathbb{E}B_N = C(\theta)$, so

$$\mathbb{E}[\widehat{D}^v_{\mathrm{cv}}] = v^\mathsf{T} \nabla_\theta Z - \beta C(\theta) + \beta C(\theta) = v^\mathsf{T} \nabla_\theta Z.$$

The constant does not affect variance. Its full expansion is

$$\mathrm{Var}(\widehat{D}^v_{\mathrm{cv}}) = \mathrm{Var}(A_N) - 2\beta \,\mathrm{Cov}(A_N, B_N) + \beta^2 \,\mathrm{Var}(B_N). \tag{156}$$

Differentiating this quadratic gives $-2\,\mathrm{Cov}(A_N, B_N) + 2\beta\,\mathrm{Var}(B_N) = 0$, which proves (155); the second derivative $2\,\mathrm{Var}(B_N) > 0$ proves the unique minimum. At the minimum the variance is $\mathrm{Var}(A_N) - \mathrm{Cov}(A_N, B_N)^2 / \mathrm{Var}(B_N)$. □

The proposition gives a real criterion for a control variate: its target integral must be known, or estimated with a separately proved correction. This is the same expectation-preserving role played by baselines in the score-function construction of Foerster et al. [2018, Theorem 1 and equation (4.7)], but the present proposition makes the required target integral explicit for the disturbance measure. Taking v as each coordinate vector gives the components of the derivative. For one importance draw without resampling, $A_1 = R_\theta(\mathsf{Z}) v^\mathsf{T} h_\theta(\mathsf{Z}; y)$ and $B_1 = R_\theta(\mathsf{Z}) c_\theta(\mathsf{Z})$ give the same result. A detached KDM score has no known target integral merely because it is empirically centered. A coefficient fitted on the same estimating particles can destroy unbiasedness. An independent pilot fit is admissible if, conditional on that fit, the estimating run satisfies the same identities and the resulting products are integrable. Its estimated coefficient need not attain the theoretical minimum.

To turn the control into a concrete construction, use a reference model whose unnormalized disturbance density $\widetilde{\pi}_\theta(z; y)$ and likelihood $\widetilde{Z}(\theta; y)$ are tractable. The reference must use the same disturbance coordinates and measures. A linear-Gaussian reference can have a singular state transition: its Gaussian observation likelihood is still tractable when the relevant observation covariance is positive definite. Its approximation error is corrected, rather than declared absent.

Proposition 15 (A tractable reference supplies the centering constant)**.** *Suppose $\widetilde{\pi}_\theta$ obeys differentiation under its integral, its likelihood $\widetilde{Z}$ and derivative are known exactly, and $v^\mathsf{T}\nabla_\theta\widetilde{\pi}_\theta$ vanishes outside the support of π_θ. Define, on that support,*

$$c_\theta(z) = \frac{v^\mathsf{T}\nabla_\theta\widetilde{\pi}_\theta(z;y)}{\pi_\theta(z;y)}, \qquad C(\theta) = v^\mathsf{T}\nabla_\theta\widetilde{Z}(\theta;y). \tag{157}$$

Then this C is the exact centering constant in Proposition 14. When $\widetilde{\pi}_\theta > 0$, its numerator can be computed as $\widetilde{\pi}_\theta v^\mathsf{T}\widetilde{h}_\theta$, where $\widetilde{h}_\theta = \nabla_\theta \log\widetilde{\pi}_\theta$. For independent draws $\mathsf{Z}_i \sim Q_\theta$ this gives the explicit residual estimator

$$\widehat{D}^v_{\mathrm{ref}} = \beta v^\mathsf{T}\nabla_\theta\widetilde{Z} + \frac{1}{N}\sum_{i=1}^{N}\frac{v^\mathsf{T}\nabla_\theta\pi_\theta(\mathsf{Z}_i;y) - \beta v^\mathsf{T}\nabla_\theta\widetilde{\pi}_\theta(\mathsf{Z}_i;y)}{Q_\theta(\mathsf{Z}_i)}. \tag{158}$$

Its expectation is $v^\mathsf{T}\nabla_\theta Z$. If the reference equals the target in a neighbourhood of θ, $\beta = 1$ makes this derivative estimator deterministic and exact.

Proof. The support condition and cancellation give

$$\int \pi_\theta c_\theta \,\mathrm{d}\lambda = \int v^\mathsf{T}\nabla_\theta\widetilde{\pi}_\theta \,\mathrm{d}\lambda = v^\mathsf{T}\nabla_\theta\widetilde{Z}.$$

The absolute-integrability requirement is precisely integrability of the reference derivative. Substituting this control in the importance-draw version of (154) yields (158). Integrating its residual cancels Q_θ and returns $v^\mathsf{T}\nabla_\theta Z - \beta v^\mathsf{T}\nabla_\theta\widetilde{Z}$. Adding the displayed constant proves unbiasedness. Equality of target and reference in a neighbourhood makes their derivatives equal, so at $\beta = 1$ the residual vanishes for every draw. □

The same control applies to the resampled filter through $B_N = \gamma_T^N(c_\theta)$, whose unbiasedness was proved by induction. For a factorized reference, its density ratio $\widetilde{\pi}_{\theta,t}/\pi_{\theta,t}$ and complete score can be carried along each particle's genealogy using the corresponding reference state and tangent. Merely inserting the reference score $\widetilde{h}_\theta$ omits the density ratio and is wrong relative to (157). A poor reference can make this ratio volatile or give an infinite second moment. The variance theorem therefore requires its stated moment condition and a coefficient appropriate to the complete estimator. These identities alone do not justify a particular linearization or coefficient for a DSGE model.

Exact integration is preferable when part of the original model is conditionally tractable. The next result states precisely what such integration preserves and what variance comparison it permits.

Proposition 16 (Exact conditional integration)**.** *Partition the disturbances as $z = (a, b)$ on a product reference measure, and define $\overline{\pi}_\theta(a) = \int \pi_\theta(a, b; y)\,\mathrm{d}b$. Assume differentiation under this conditional integral is valid and $\overline{\pi}_\theta(a) > 0$ on its support. Then*

$$\nabla_\theta \log\overline{\pi}_\theta(a) = \mathbb{E}_\theta[h_\theta(a, B; y) \mid a, y]. \tag{159}$$

For a single importance draw (A, B) from $Q(a, b) = Q_A(a)Q_B(b \mid a)$ covering the target support, the scalar unnormalized derivative $G = v^\mathsf{T}\nabla_\theta\pi_\theta(A, B; y)/Q(A, B)$ satisfies

$$\overline{G}(A) := \mathbb{E}_Q[G \mid A] = \frac{v^\mathsf{T}\nabla_\theta\overline{\pi}_\theta(A)}{Q_A(A)}, \qquad \mathrm{Var}_Q(\overline{G}) \le \mathrm{Var}_Q(G), \tag{160}$$

provided G has finite second moment.

Proof. Differentiate the conditional integral, use $\nabla_\theta \pi_\theta = \pi_\theta h_\theta$, and divide by $\overline{\pi}_\theta$ to obtain (159). Conditional integration under the proposal cancels Q_B:

$$\mathbb{E}_Q[G \mid A = a] = \frac{1}{Q_A(a)} \int v^\mathsf{T} \nabla_\theta \pi_\theta(a, b; y)\, \mathrm{d}b = \frac{v^\mathsf{T} \nabla_\theta \overline{\pi}_\theta(a)}{Q_A(a)}.$$

The law of total variance, $\mathrm{Var}(G) = \mathrm{Var}(\mathbb{E}[G \mid A]) + \mathbb{E}[\mathrm{Var}(G \mid A)]$, proves the inequality. □

For a genuinely conditionally linear-Gaussian block, a Kalman calculation can evaluate $\overline{\pi}_\theta$ exactly. Replacing a nonlinear block by a Gaussian approximation changes that integral; it belongs instead in the corrected reference construction above. The variance inequality compares these two coupled single-draw estimators. It does not compare complete particle filters with different proposals and future resampling decisions.

Proposition 17 (A moving-support Gaussian check)**.** *Let $U \sim \mathcal{N}(0,1)$, $X = (U, \theta U)^\mathsf{T}$ and $Y = X + \varepsilon$ with independent $\varepsilon \sim \mathcal{N}(0, I_2)$. Put $d = 2 + \theta^2$ and $b = y_1 + \theta y_2$. The observed-data score is*

$$\partial_\theta \log Z(\theta; y) = -\frac{\theta}{d} + \frac{y_2 b}{d} - \frac{\theta b^2}{d^2} = \mathbb{E}[U(y_2 - \theta U) \mid Y = y]. \tag{161}$$

Proof. The state lies on a moving line, yet its observation covariance is $\Sigma_\theta = I_2 + aa^\mathsf{T}$, $a = (1, \theta)^\mathsf{T}$. Its determinant is d and $\Sigma_\theta^{-1} = I_2 - aa^\mathsf{T}/d$. Hence

$$\log Z = -\log(2\pi) - \tfrac{1}{2}\log d - \tfrac{1}{2}(y_1^2 + y_2^2) + \frac{b^2}{2d}. \tag{162}$$

Using $d' = 2\theta$ and $b' = y_2$ gives the first expression in (161). Alternatively, completing the square in $u^2 + (y_1 - u)^2 + (y_2 - \theta u)^2$ gives $U \mid y \sim \mathcal{N}(b/d, 1/d)$. The complete disturbance score is $h_\theta(u; y) = u(y_2 - \theta u)$, so its posterior expectation is $y_2 b/d - \theta(1/d + b^2/d^2)$, the same expression. □

This example checks both the moving support and the total path derivative. It also supplies a limiting case for the control variate: using this exact Gaussian model as its own reference makes the $\beta = 1$ derivative residual zero. The normalized ratio with a still-random likelihood denominator need not be exact. The likelihood can instead be evaluated analytically in this particular example.

Corollary 1 (What the proposed method does and does not establish)**.** *Under the assumptions above, disturbance proposals and the estimator pair $(\widehat{Z}_N, \widehat{D}_N)$ preserve the declared degenerate model and give an exact unnormalized likelihood/derivative identity. They do not establish a finite-N unbiased normalized score, low variance for long horizons, global differentiability across DSGE regime switches, or an exact HMC force.*

Proof. The first statement is Proposition 9, Proposition 10, and Proposition 12. The second follows from the ratio counterexample in Proposition 13; from the fact that Assumption 1 is local and excludes unhandled regime-boundary terms. None of these expectation identities bounds variance as T grows or equates a realised noisy score with the derivative of a specified finite likelihood program. □

An exact gradient and an exact Metropolis acceptance calculation are different requirements. For a differentiable deterministic force, momentum and position updates in a symmetric leapfrog composition are triangular shears with unit Jacobian determinant; the momentum flip reverses that composition. An exact endpoint Metropolis calculation can therefore correct such a proposal even when its force is approximate. That fact does not make the force exact. A noisy score alone does not specify the auxiliary-variable proposal or acceptance law needed for a valid sampler. Those constructions and their efficiency are outside the result proved here.

9.3 Using both past and future information

Younis and Sudderth's smoother suggests a complementary proposal design. Their equation (18) draws from a mixture of forward and backward predictive approximations, allowing either set of observations to nominate a state. Their equation (19) retains a generative correction, including an auxiliary reference density; equation (20) replaces its numerator with a learned discriminative weight [Younis and Sudderth, 2024, Section 4]. The distinction matters here. A learned state predictor is not automatically a model posterior, and multiplying two posterior approximations can count prior information twice unless the appropriate reference-density factor is included.

For transition parameters, the score contains functions of (X_{t-1}, X_t), so single-time smoothing marginals alone are insufficient. A Younis-inspired smoother must supply adjacent-state or path information and the original model correction. Its most direct role is therefore an evaluable proposal for the expectation in (121), followed by model-based weighting, rather than replacement of that expectation by the paper's supervised state-prediction loss. A learned proposal would require its own target-specific training protocol and downstream validation.

10 Selective mixture gradients and control variates

The model-score recursion and the choice of mixture-gradient estimator are separate decisions. Fisher's identity does not require differentiation of every resampling draw. Mixture expectation derivatives may nevertheless be needed for proposal learning, sensitivity calculations, or a separately defined finite program. In those settings, using IWSG for every continuous movement can introduce avoidable variance.

Consider a single component $Z = \mu + h\varepsilon$, with $\varepsilon \sim \mathcal{N}(0,1)$ and fixed $h > 0$. For the affine function $\phi(z) = az + b$, the exact derivative of $\mathbb{E}\phi(Z)$ with respect to μ is a. The location-score estimator and the pathwise estimator are

$$G_{\mathrm{IW}} = (a\mu + b + ah\varepsilon)\frac{\varepsilon}{h}, \qquad G_{\mathrm{PW}} = a. \tag{163}$$

Both have mean a. Using $\mathbb{E}\varepsilon^2 = 1$, $\mathbb{E}\varepsilon^3 = 0$, and $\mathbb{E}\varepsilon^4 = 3$ gives

$$\mathrm{Var}(G_{\mathrm{IW}}) = \frac{(a\mu + b)^2}{h^2} + 2a^2, \qquad \mathrm{Var}(G_{\mathrm{PW}}) = 0. \tag{164}$$

The constant part of the integrand, which has zero true derivative, is responsible for the diverging term. Subtracting the detached baseline $\phi(\mu)$ from the score-function term produces $a\varepsilon^2$, whose variance is $2a^2$. No bias was removed; a needless source of variance was removed. Figure 1 makes the bandwidth effect explicit.

This example isolates one smooth component. Younis's argument concerns an additional difficulty: implicit mixture reparameterizations may move samples between widely separated modes and have large variance. The example does not refute that finding. It motivates treating continuous motion within a component differently from a change in component probability.

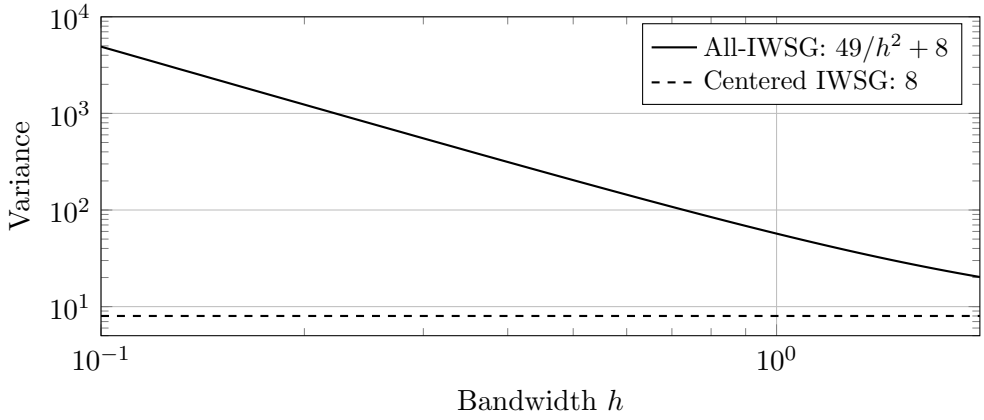


Figure 1: A narrow component can make an unbiased importance-weight derivative noisy. For $a = 2$, $\mu = 3$, and $b = 1$, the uncentered variance grows as $49/h^2 + 8$, while the centered variance stays at 8. The pathwise derivative has zero variance and therefore does not appear on the logarithmic axis. These curves are the exact calculation in (164), not filtering benchmark results.

Let $m_\theta(z) = \sum_i w_i(\theta) k_{i,\theta}(z)$, sample $I \sim \mathrm{Cat}(w)$, and represent a component sample by $Z = T_{I,\theta}(\varepsilon)$ with parameter-independent base noise. Assume positive component weights and sufficient regularity and integrability to differentiate each component expectation. Differentiating their sum gives

$$\begin{aligned} J(\theta) &= \sum_i w_i \, \mathbb{E}_\varepsilon[\phi_\theta(T_{i,\theta}(\varepsilon))], \\ \nabla_\theta J &= \sum_i (\nabla_\theta w_i) \, \mathbb{E}_\varepsilon[\phi_\theta(T_{i,\theta}(\varepsilon))] + \sum_i w_i \, \mathbb{E}_\varepsilon\left[\frac{d}{d\theta}\phi_\theta(T_{i,\theta}(\varepsilon))\right]. \end{aligned} \tag{165}$$

For a baseline c independent of the current component and noise, a resulting estimator is

$$G_{\text{hybrid}} = \frac{d}{d\theta}\phi_\theta(T_{I,\theta}(\varepsilon)) + (\phi_\theta(Z) - c)\nabla_\theta \log w_I. \tag{166}$$

The first term holds I fixed and includes both the explicit derivative of ϕ and movement of $T_{I,\theta}$. The second accounts for changing component probabilities. Its baseline has zero expectation because $\sum_i w_i \nabla \log w_i = \nabla \sum_i w_i = 0$. A component-dependent baseline does not have this cancellation unless its compensating term is retained. The baseline may depend on θ or past information, but it is held fixed within this gradient-estimation operation.

The categorical term can be averaged over its conditional component responsibilities, or components can be enumerated and sampled with a stratified allocation. Such changes have different costs and covariances with the pathwise term. Reducing the variance of one term does not automatically rank the complete estimator. A baseline fitted from the same sample also requires a justified leave-one-out or independent-fit construction; otherwise the claimed zero-mean property can fail.

The official Younis code contains an `ImportanceImplicitHybrid` branch that separates derivatives of component locations/bandwidths from derivatives of weights [Younis, 2023]. Its continuous part uses implicit mixture reparameterization. Equation (166) instead uses a componentwise pathwise derivative and is a distinct proposal. Neither the presence of that branch nor the single-Gaussian calculation establishes benefit for the full BayesFilter recursion.

Finally, the identity being estimated must remain explicit. A hybrid may estimate the same mixture expectation derivative as IWSG while differing sample by sample. Substituting it into a

fixed-anchor finite program and claiming the same derivative would require a new argument. The finite program, the expected stochastic objective, and the underlying model score cannot share a name merely because their estimators agree in a small example.

10.1 What a control variate can accomplish

For a baseline score estimate G and a control C with known mean c, define

$$G_{\mathrm{cv}} = G - \beta(C - c), \qquad \mathbb{E}G_{\mathrm{cv}} = \mathbb{E}G. \tag{167}$$

The equality requires fixed β, or suitable independence from the current estimating sample. A vector control may use a coefficient matrix. A useful correlation can reduce variance and hence MSE, but the baseline bias is retained. An independently estimated c can be used when its expectation is correct and its additional uncertainty is included. Merely naming a KDM score as the control does not provide its mean.

A useful distinction is between a KDM estimate of the model score and the score of the normalized KDM density itself. The latter does have a known center. This gives a concrete control that can be tested alongside LEDH. Its construction uses the mixture-density derivative in the IWSG identity with integrand $F = 1$; the application as an LEDH control is a local deduction, not an improvement theorem from the Younis paper.

Proposition 18 (A centered KDM density-score control)**.** *Condition on a pilot mixture with fixed positive weights π_j summing to one, means μ_j, and positive definite covariances B_j. Define*

$$m_{a,s}(z) = \sum_{j=1}^{M} \pi_j \mathcal{N}(z; \mu_j + a, e^{2s} B_j), \qquad C(z) = \nabla_{(a,s)} \log m_{a,s}(z)\big|_{a=0,s=0}. \tag{168}$$

For $Z \sim m_{0,0}$, $\mathbb{E}[C(Z) \mid \textit{pilot}] = 0$. Let a baseline vector score G use any coupling with Z that preserves these marginals. If a coefficient matrix $\boldsymbol{\beta}$ is fixed, or fitted on calibration randomness independent of the evaluation randomness conditional on the pilot, then

$$\mathbb{E}[G - \boldsymbol{\beta} C(Z) \mid \textit{pilot,calibration}] = \mathbb{E}[G \mid \textit{pilot,calibration}]. \tag{169}$$

Assume the required second moments exist when comparing variances.

Proof. Differentiating the normalized finite Gaussian mixture under its integral is valid for translation and scale in a neighborhood of the fixed positive definite covariances. Thus

$$\mathbb{E}C(Z) = \int m_{0,0}(z) \frac{\nabla_{(a,s)} m_{a,s}(z)\big|_{0,0}}{m_{0,0}(z)} \,\mathrm{d}z = \nabla_{(a,s)} \int m_{a,s}(z) \,\mathrm{d}z \bigg|_{0,0} = 0.$$

Conditioning on the independent pilot and calibration makes $\boldsymbol{\beta}$ fixed and leaves the evaluation mixture law unchanged. Linearity of conditional expectation gives the second assertion. □

Writing $r_j(z)$ for the mixture responsibilities, the translation control is $\sum_j r_j(z) B_j^{-1}(z - \mu_j)$, and the scale control is $\sum_j r_j(z)\{(z - \mu_j)^\top B_j^{-1}(z - \mu_j) - d\}$. These expressions differentiate the density at fixed z. They do not differentiate a sampled point along its generating path. For example, draw $A \sim \mathrm{Categorical}(\pi)$ independently of $\varepsilon \sim \mathcal{N}(0, I)$ and set $Z = \mu_A + \mathrm{chol}(B_A)\varepsilon$. Reusing ε in LEDH initialization preserves both marginal laws and may produce useful covariance. Averaging several such controls retains the zero center.

The coupling matters. If instead G is measurable with respect to a cloud $\mathcal{F}$ and additional KDM sampling satisfies $\mathbb{E}[C \mid \mathcal{F}] = 0$, then $\mathbb{E}[(G - \mathbb{E}G)C^\top] = \mathbb{E}[(G - \mathbb{E}G)\mathbb{E}(C^\top \mid \mathcal{F})] = 0$. Adding independent conditional mixture noise cannot reduce the variance of that already-computed cloud score through a fixed linear control. Shared estimating randomness, a correct center, and independent coefficient fitting are therefore separate requirements. Even when the resulting covariance is useful, Proposition 18 preserves the baseline's bias relative to the model score.

The earlier residual decomposition is still an exact algebraic identity:

$$L_0^N = A_h + \left(L_0^N - A_h\right), \qquad \mathrm{d}L_0^N = \mathrm{d}A_h + \mathrm{d}\left(L_0^N - A_h\right). \tag{170}$$

Dropping the residual changes the target. Computing both terms exactly, however, gives the original calculation back and supplies no automatic variance or cost reduction. The useful additional ingredient would be a cheap, accurately integrable approximation and a residual whose expectation can be estimated with less error or work.

For example, let $\widetilde{p}_\theta(x, y)$ be a tractable approximation to the joint density, with known integral $\widetilde{Z}(\theta)$. For a proposal q covering the support of the density difference,

$$Z(\theta) = \widetilde{Z}(\theta) + \mathbb{E}_q\left[\frac{p_\theta(X, y) - \widetilde{p}_\theta(X, y)}{q(X)}\right], \tag{171}$$

$$\nabla_\theta Z(\theta) = \nabla_\theta \widetilde{Z}(\theta) + \mathbb{E}_q\left[\frac{\nabla_\theta p_\theta(X, y) - \nabla_\theta \widetilde{p}_\theta(X, y)}{q(X)}\right]. \tag{172}$$

The second equality assumes fixed q and valid differentiation under the integral. If the approximation is close, the residual may be easier to integrate. The ratio of the resulting estimates still need not be an unbiased score, and a signed residual estimate can make the likelihood estimate negative. It is therefore not automatically eligible for pseudo-marginal inference. The residual formulation deserves a separate comparison if a tractable approximation can be constructed cheaply; it is not what the previous integrated KDM experiments implemented.

11 Other options and their place in the investigation

Analytic marginalization should come before additional approximation when the model permits it. Section 6 gives the one-step Gaussian example. A conditionally linear-Gaussian state block can similarly be integrated rather than sampled, provided its conditional model is retained exactly. A Gaussian approximation to a nonlinear block is a different choice and needs its own error assessment. Neither a good fit to state observations nor an appealing proposal density establishes that the downstream score is accurate.

More particles, paired random designs, and randomized quasi-Monte Carlo are important equal-compute alternatives. They can improve integration without changing the scientific target, but they cannot restore a missing derivative or correct a filtering approximation with persistent bias. The comparison must distinguish a better estimator from simply spending more work on it. Sparse mixtures, low-rank density approximations, and approximate backward sums likewise require separate bias and cost measurements; they are not algebraically equivalent to the full mixture merely because they produce finite values.

The literature audit identifies several named comparators that should be added before the score study is treated as complete. Nemeth, Fearnhead, and Mihaylova use kernel density approximation and Rao–Blackwellisation for a linear-cost score and observed-information estimator [Nemeth et al., 2016]. This is the closest published precedent for the KDM row in the present program. Its

bandwidth, kernel, and regular-transition assumptions must be carried into the experiment; a positive-bandwidth estimate is not an exact finite-particle score. For additive complete-data terms, the sequential smoother of Fearnhead, Wyncoll, and Tawn [Fearnhead et al., 2010] and the PaRIS recursion of Olsson and Westerborn [Olsson and Westerborn, 2017] provide explicit linear-cost alternatives to a generic "backward pair" label. PaRIS's number of backward draws and its mixing conditions are part of the method, not implementation details.

A qualitatively different regular-model comparator is the coupled conditional particle smoother of Jacob, Lindsten, and Schön [Jacob et al., 2020]. Rhee–Glynn debiasing of coupled CPF chains gives an unbiased smoothing expectation under meeting and moment assumptions; the authors explicitly note that Fisher's identity then yields an unbiased score when the transition density is tractable. The construction has random cost and does not make a singular or intractable DSGE transition score exact. It should be tested as a separate debiasing arm rather than folded into a variance- minimising linear combination of two biased estimates.

The continuous-likelihood econometric literature, including Malik–Pitt and DeJong et al. [Malik and Pitt, 2011, DeJong et al., 2013], is also a required comparator for the motivation behind differentiable resampling. A continuous particle likelihood can remove a resampling discontinuity while still defining a different finite-particle measure, so its derivative requires the same target and normalization audit used here. When a transition can be simulated but its density is unavailable, iterated filtering [Ionides et al., 2011] supplies a separate artificial-parameter-noise approximation with an explicit bias–variance–mixing trade-off. It is the natural simulation-only comparator for the DSGE branch, but it is not an exact finite-N score.

Twisted particle filters [Whiteley and Lee, 2014] and multilevel particle filters [Jasra et al., 2017] belong in proposal and discretization variance studies. Twisting preserves a likelihood through a change-of-measure correction, while multilevel estimators telescope coupled discretization levels; neither paper supplies a score identity. A score-level telescope or coupling must therefore be proved before either can support an unbiased-score claim. Finally, variational particle objectives and learned smoothers remain a target-boundary issue: an ELBO or a learned conditional objective cannot be reported as the observed-data score without a separate measure identity.

Bandwidth or particle-count extrapolation is another possible bias-reduction strategy, but it requires a justified expansion. A presumed h^2 smoothing bias or $1/N$ score bias cannot be used across every nonsmooth, constrained, or resampling model without evidence. Randomized telescoping is more general. For coupled levels S_l and an independent random truncation L,

$$\widehat{S}_{\mathrm{tel}} = S_0 + \sum_{l=1}^{L} \frac{S_l - S_{l-1}}{\Pr(L \geq l)}, \qquad \mathbb{E}\widehat{S}_{\mathrm{tel}} = \lim_{l\to\infty} \mathbb{E}S_l, \tag{173}$$

when absolute integrability permits exchanging sum and expectation. The expectation equality follows because each retained increment has inclusion probability $\Pr(L \geq l)$. The limit must first be shown to equal the model score. Finite expected work and finite variance impose additional conditions on the coupling and truncation tail; the displayed equality supplies neither. This makes literal unbiasedness a distinct research problem rather than a promised property of the next mixture prototype.

The original proposal-force use remains valid in a different role. A deterministic position-only field may generate a reversible, volume-preserving kick–drift–kick proposal, with acceptance computed from the declared endpoint Hamiltonian. Each kick and drift is a shear with unit Jacobian determinant. Reversing the step size reverses the sequence, and a momentum flip turns the symmetric sequence into an involution. The ordinary Metropolis ratio therefore corrects this proposal for the endpoint density; the force need not be its exact gradient. If the endpoint uses

a fixed finite-particle likelihood, it preserves that approximate target, not the exact state-space posterior. Exact pseudo-marginal inference instead needs a valid nonnegative unbiased likelihood estimate and the auxiliary randomness in the extended target. A new random score at each leapfrog step is not automatically a reversible proposal.

The BayesFilter HMC interface already distinguishes an exact score from a frozen proposal field. A future raw-coordinate field must use the typed endpoint-corrected binding with `tune_hmc_kernel`; the fixed-transport tuner is for a genuine frozen coordinate transport with its Jacobian-corrected target. This document does not change an HMC consumer or claim posterior readiness. The interface and capability registry were read to keep the proposed downstream use consistent with the actual repository.

For models with regular transition densities, a reference study can check model identity and complete initialization, establish a corrected mixture/Fisher reference, compare selective gradient estimators where needed, and then investigate scalable ancestor approximations or learned proposals. For degenerate DSGE transitions, the first unresolved task is instead a score derivation that respects the deterministic dynamics and parameter dependence of their support. Control variates, analytic integration, and increased integration effort should be evaluated alongside that sequence. Further structural DSGE implementation remains deferred while the existing repository models are checked; the support derivations below are retained because they explain which model extensions will be valid.

12 Structural support and deferred extensions

Section 9.1 explains why the proposed ordinary ancestor recursion is excluded for the degenerate DSGE target. The following examples separate that obstruction from the support of a filtering marginal and from possible coordinate-based constructions.

The relevant support belongs to the distribution being approximated. Deterministic directions in a transition conditional on one ancestor do not, by themselves, imply that the predictive or filtering marginal lies on a lower-dimensional surface. For example, consider the state $x_t = (m_t, m_{t-1})$ of an AR(2) process with independent standard normal innovations ε_t, so that

$$x_t = Ax_{t-1} + G\varepsilon_t, \qquad A = \begin{bmatrix} \phi_1 & \phi_2 \\ 1 & 0 \end{bmatrix}, \quad G = \begin{bmatrix} \sigma \\ 0 \end{bmatrix}, \quad [G, AG] = \begin{bmatrix} \sigma & \phi_1\sigma \\ 0 & \sigma \end{bmatrix}. \tag{174}$$

Conditional on x_{t-1}, the transition has rank-one covariance and fixes $x_{t,2} = x_{t-1,1}$. Starting from a known initial state, the covariance after two independent shocks is $GG^{\mathsf{T}} + AGG^{\mathsf{T}}A^{\mathsf{T}}$. It is positive definite when $\sigma \neq 0$, because the displayed matrix has determinant σ^2. Multiplication by a strictly positive Gaussian observation likelihood does not reduce that marginal support. Earlier uncertainty can therefore fill directions that receive no new shock at the current time.

For finitely many fixed ancestors, however, the conditional mixture in this example lies on parallel lines with different offsets $x_{t,2} = x^i_{t-1,1}$. These components do not have one common affine support. A shared tangent basis alone cannot justify evaluating all their densities at every ambient sample as though their offsets agreed. Nor does a reset of the filtering marginal necessarily retain a particular old ancestor: a constraint on the two-slice pair (x_{t-1}, x_t) must not be imposed without that conditioning. Consequently, support must be checked separately for the transition factor, the KDM insertion distribution, and the reset output.

When the distribution to be approximated does have a common affine support, a constrained construction injects noise through its stochastic coordinates:

$$u = G_\theta L_\beta \varepsilon, \qquad B_\theta = G_\theta H_\beta G_\theta^{\mathsf{T}}, \qquad \varepsilon \sim N(0, I). \tag{175}$$

For a linear support constraint $Dx = c$, the kernel must satisfy $DG_\theta = 0$. For a nonlinear manifold, a chart or retraction $x = \rho_\theta(v, \varepsilon)$ is required, together with the appropriate coordinate-space density and Jacobian. When B_θ is rank deficient, there is no ordinary full-dimensional Lebesgue density. The implementation must evaluate the mixture in innovation or chart coordinates rather than pretending that B_θ is a full SPD ambient covariance.

This constrained kernel is an extension motivated by the DSGE target, not a claim from the Younis papers. Its first tests are rank, constraint residual, and finite-difference tests for the G_θ and H_β tangents. A positive bandwidth that leaves the support is a hard failure even if its numerical score looks smoother.

The Phase 2 diagnostic implements the fixed-chart special case: a shared orthonormal basis $U \in \mathbb{R}^{d\times r}$ is frozen, the Gaussian mixture is evaluated in $U^\mathsf{T}x$ coordinates, and the orthogonal residual is checked for both values and tangents. This gives a rank-aware density with respect to the chart measure for a fixed linear support. It does not yet differentiate a parameter-dependent G_θ, chart, or retraction. Moreover, a moving support requires more than a density Jacobian. A fixed ambient sample need not remain on the support at neighboring parameter values, so the fixed-ambient IWSG ratio used in the full-rank reference may cease to exist.

An exact example makes the missing term explicit. Let $U \sim N(0,1)$, $X_\theta = (U, \theta U)$, and $Y = X_\theta + V$, where $V \sim N(0, I_2)$ is independent. The state lies on a line that rotates with θ, while the observation has covariance

$$C_\theta = \begin{bmatrix} 2 & \theta \\ \theta & 1+\theta^2 \end{bmatrix}, \qquad C'_\theta = \begin{bmatrix} 0 & 1 \\ 1 & 2\theta \end{bmatrix}. \tag{176}$$

The Gaussian score is $\frac{1}{2}\{y^\mathsf{T}C_\theta^{-1}C'_\theta C_\theta^{-1}y - \operatorname{tr}(C_\theta^{-1}C'_\theta)\}$, which equals $1/2$ at $\theta = 0$ and $y = (1,1)$. A sample $(u, 0)$ anchored at zero lies outside the perturbed line for every $u \neq 0$ and $\theta \neq 0$. The two state laws are mutually singular, so the perturbed law has no importance density with respect to the anchor law. The chart's arc-length factor is $J_\theta = \sqrt{1+\theta^2}$; its logarithmic derivative is zero at the anchor and cannot account for the nonzero observation score.

Keeping the innovation u fixed instead gives a differentiable integral, where ϕ is the standard normal density:

$$p_\theta(y) = \int \phi(u)\,\mathcal{N}(y; (u, \theta u), I_2)\,\mathrm{d}u, \tag{177}$$

$$\frac{\partial p_\theta(y)}{\partial \theta} = \int \phi(u)\,\mathcal{N}(y; (u, \theta u), I_2)u(y_2 - \theta u)\,\mathrm{d}u. \tag{178}$$

At zero, $E[U \mid Y = y] = y_1/2$, recovering the score $y_1 y_2/2$. The extra term comes from movement of the state inside the observation factor, even though the innovation density is unchanged.

For a regular chart $x = \rho_\theta(v)$ on a fixed coordinate domain, let $m_\theta(v)$ be the coordinate mixture density and $F_\theta(x)$ the downstream likelihood integrand. The corresponding differentiation rule is

$$I(\theta) = \int F_\theta(\rho_\theta(v))m_\theta(v)\,\mathrm{d}v, \tag{179}$$

$$\partial_\theta I = \int \Big[(\partial_\theta F_\theta)(x) + \nabla_x F_\theta(x)^\mathsf{T}\partial_\theta \rho_\theta(v) + F_\theta(x)\partial_\theta \log m_\theta(v)\Big]\, m_\theta(v)\,\mathrm{d}v. \tag{180}$$

This requires the usual integrability conditions for differentiating under the integral. An anchored proposal in v can provide the raw mixture ratio, but it cannot remove the chart-motion term. If a surface-density convention is used, its volume factor must be included consistently in the density

and measure. Component-dependent supports require an explicitly defined common measure or a mixed discrete and continuous formulation.

The affine specialization gives an explicit finite calculation in which all these terms can be checked. Suppose every component uses the same injective chart $x = a_\theta + G_\theta v$, where $G_\theta \in \mathbb{R}^{d\times r}$ has full column rank. Let v_j be fixed coordinate samples and let $q_0(v_j) > 0$ be their frozen proposal density. With coordinate means c_i, SPD bandwidths B_i, and normalized positive weights α_i, define

$$m_\theta(v) = \sum_i \alpha_i \mathcal{N}(v; c_i, B_i), \qquad x_j = a_\theta + G_\theta v_j, \qquad \mathrm{d}x_j = \mathrm{d}a_\theta + (\mathrm{d}G_\theta)v_j, \tag{181}$$

$$b_j = \frac{m_\theta(v_j)}{N q_0(v_j)}, \qquad \mathrm{d}\log b_j = \mathrm{d}\log m_\theta(v_j). \tag{182}$$

Here d denotes any one parameter-direction differential; multiple directions obey the same equations. All mixture components contribute. Writing $z_{ji} = B_i^{-1}(v_j - c_i)$, the complete component and mixture differentials are

$$\eta_{ji} = \frac{\mathrm{d}\alpha_i}{\alpha_i} + z_{ji}^\mathsf{T}\mathrm{d}c_i + \frac{1}{2}\left[z_{ji}^\mathsf{T}(\mathrm{d}B_i)z_{ji} - \mathrm{tr}(B_i^{-1}\mathrm{d}B_i)\right], \tag{183}$$

$$\gamma_{ji} = \frac{\alpha_i \mathcal{N}(v_j; c_i, B_i)}{m_\theta(v_j)}, \qquad \mathrm{d}\log m_\theta(v_j) = \sum_i \gamma_{ji}\eta_{ji}, \tag{184}$$

$$\mathrm{d}\gamma_{ji} = \gamma_{ji}\left(\eta_{ji} - \mathrm{d}\log m_\theta(v_j)\right). \tag{185}$$

No coordinate-sample differential appears because the v_j are fixed. The ambient state differential in (181) generally remains nonzero.

The surface-volume factor clarifies why it must not be added again to the importance ratio. Set $M = G_\theta^\mathsf{T} G_\theta$ and $J_\theta = \sqrt{\det M}$. Then

$$\mathrm{d}\log J_\theta = \tfrac{1}{2}\,\mathrm{tr}(M^{-1}\mathrm{d}M), \qquad \mathrm{d}M = (\mathrm{d}G_\theta)^\mathsf{T} G_\theta + G_\theta^\mathsf{T}\mathrm{d}G_\theta. \tag{186}$$

At the moving point x_j, the surface densities of the target and the proposal pushed through the *current* chart are respectively $m_\theta(v_j)/J_\theta$ and $q_0(v_j)/J_\theta$. Their ratio is $m_\theta(v_j)/q_0(v_j)$: the common volume cancels. The log target surface density has differential $\mathrm{d}\log m_\theta(v_j) - \mathrm{d}\log J_\theta$, while the log proposal surface density has differential $-\mathrm{d}\log J_\theta$. This construction uses a moving ambient proposal generated by fixed coordinates; it does not assert that the perturbed law has a density relative to the frozen ambient anchor law in the rotating-line counterexample.

The same chart can carry covariance marks when those marks are defined in its coordinates. For SPD coordinate marks P_i^v, define

$$\widetilde{P}_j^v = \sum_i \gamma_{ji} P_i^v, \qquad \mathrm{d}\widetilde{P}_j^v = \sum_i \left[(\mathrm{d}\gamma_{ji})P_i^v + \gamma_{ji}\mathrm{d}P_i^v\right], \tag{187}$$

$$\widetilde{P}_j^x = G_\theta \widetilde{P}_j^v G_\theta^\mathsf{T}, \tag{188}$$

$$\mathrm{d}\widetilde{P}_j^x = (\mathrm{d}G_\theta)\widetilde{P}_j^v G_\theta^\mathsf{T} + G_\theta(\mathrm{d}\widetilde{P}_j^v)G_\theta^\mathsf{T} + G_\theta \widetilde{P}_j^v (\mathrm{d}G_\theta)^\mathsf{T}. \tag{189}$$

The ambient mark is allowed to be singular. These equations specify the transport of marks defined in this common chart; they do not infer a full DSGE UKF covariance lifecycle from a singular process covariance.

To expose the state-motion term at a consumer, take an observation $y \mid x \sim \mathcal{N}(H_\theta x + o_\theta, R_\theta)$, with y fixed and R_θ SPD. The finite log normalizer and its total differential are

$$\widehat{L}(\theta) = \log \sum_j b_j g_\theta(y \mid x_j), \qquad \pi_j = \frac{b_j g_\theta(y \mid x_j)}{\sum_\ell b_\ell g_\theta(y \mid x_\ell)}, \tag{190}$$

$$\mathrm{d}\widehat{L} = \sum_j \pi_j \big[\mathrm{d}\log m_\theta(v_j) + \mathrm{d}\log g_\theta(y \mid x_j)\big]. \tag{191}$$

There is no subtraction of $\mathrm{d}\log \sum_j b_j$; that would differentiate a self-normalized finite value. With $e_j = y - H_\theta x_j - o_\theta$ and $s_j = R_\theta^{-1} e_j$, the observation term is explicitly

$$\mathrm{d}\log g_\theta(y \mid x_j) = s_j^{\mathsf{T}} \big[(\mathrm{d}H_\theta)x_j + H_\theta \mathrm{d}x_j + \mathrm{d}o_\theta\big] + \tfrac{1}{2}\Big[s_j^{\mathsf{T}}(\mathrm{d}R_\theta)s_j - \mathrm{tr}(R_\theta^{-1}\mathrm{d}R_\theta)\Big]. \tag{192}$$

The term $H_\theta \mathrm{d}x_j$ is exactly what a zero outgoing state tangent would omit. Differentiating this finite sum needs no exchange of derivative and integral. Relating it to a limiting likelihood still needs an importance sampling argument and appropriate integrability conditions. Its derivative is neither the unchanged atom-program derivative nor, at finite N, the exact model score.

Support preservation by the reset is a separate question. On the parabola $x = (u, u^2)$, a convex barycentre with weights λ_i obeys

$$\bar{x}_2 - \bar{x}_1^2 = \sum_i \lambda_i u_i^2 - \left(\sum_i \lambda_i u_i\right)^2 = \mathrm{Var}_\lambda(u). \tag{193}$$

Thus even exact barycentric averaging leaves this curve whenever the weighted variance is positive. Contract–E adds residual injection and affine moment restoration, so barycentric failure alone does not prove its final residual; the actual reset must be evaluated. On a common affine subspace, ambient ridge and residual injection can likewise introduce normal-direction variation. Projecting the result or performing the reset in chart coordinates changes the specified finite reset and requires its own derivation; it cannot silently count as the existing Contract–E program.

The existing subspace kernel rejects points outside the rotating line, and the independent observation-score check recovers $1/2$ and its finite difference. The affine equations above now have a diagnostic implementation with a Gaussian observation consumer. Its two-direction tests perturb each mixture, chart, mark and observation input separately and jointly. The largest absolute difference from an independent central-difference calculation is 6.11×10^{-11} on these fixtures. An executable wiring check follows that consumer to the existing complete mixture evaluator. Deliberately zeroing its outgoing state tangent changes the computed normalizer derivative while leaving the value unchanged.

The reset probes are untuned CPU/float64 references, not measurements of production filtering accuracy. They use eight particles, Sinkhorn $\epsilon = 0.2$, 20 iterations plus five balance iterations, and ridge 10^{-5}, followed by the actual diagonal and pairwise correction with both caps enabled. On the line $x_2 = 0$, the maximum absolute constraint residual is 0.00374 after Contract–E and 6.52×10^{-7} after correction. On $x_2 = x_1^2$, the corresponding residuals are 0.918 and 1.187. Both correction calls return numerical validity. That flag therefore does not certify either of these support constraints. These counterexamples concern prescribed common supports; they do not impose an old ancestor's conditional support on every filtering marginal.

The shared finite LEDH executor still factors a full-rank process covariance and uses full-rank Gaussian PF–PF factors. A target-specific innovation-coordinate flow, reset, density recurrence, and their analytical differentials must be specified together before an end-to-end DSGE implementation

can be claimed. Its initial state and covariance tangents are also set to zero: a parameter-dependent initial law requires explicit derivatives at that entry point, whereas the completed reference campaigns held those inputs fixed.

13 Implementation history and current replication status

13.1 What the October source closure establishes

The 14 October replication result closes the bounded controlled-SMC and released 25-particle bearings MDPF/A-MDPF source checks. Its 283 checks concern evidence, provenance and wiring; they are not 283 new numerical experiments. The result also records agreement of eight numerical runtime files with their saved evidence. Full-paper reproduction, population-level trained equivalence, original-iAPF replication and the LEDH enhancement experiments remain outside that closure. The immediate next task is to verify the integration and target identities before comparing proposal quality or fixed-law score estimators. No new LEDH improvement is established by the source closure itself.

13.2 The September LEDH–KDM implementation snapshot

The remainder of this section describes the September snapshots, including their then-observed gaps. These call-chain claims have not been revalidated against every current consumer endpoint in this document audit. The reported numerical results belong to research commit `804616e3`; the comparison checkout inspected then was `5cc59cfa`. The analytical function and legacy batch wrapper are the two functions named in Section 2, with the source-route initialization in `bayesfilter/highdim/ledh_pfpf_genut_initial_rqmc_tf.py`. The existing prior-weight sidecar captures a corrected pre-observation cloud, but it does not implement the Younis IWSG mixture gradient through the integrated LEDH–OT–GenUT reset. It must not be relabelled as that method.

The registry call-chain repair is complete. Phase 1 is now implemented as the diagnostic module `bayesfilter/highdim/ledh_younis_kdm_tf.py`. Its route ID is

`ledh_younis_kdm_algebra_diagnostic_v1`

Its global and conditional mixture kernels expose the all-pairs density and complete cloud, weight, and covariance tangents. The source-matched fixed-proposal IWSG kernel has no sample-location tangent and keeps the proposal density at its supplied anchor. The conditional kernel is labelled as a proposal-density evaluator, not a model-score estimator. The separate anchored `MODEL-IS` PF–PF kernel contains every value term in (79)–(80) and requires an explicit per-particle certificate that the forward map is invertible; a finite log determinant alone is not accepted as that certificate. Its tangent excludes proposal and selection derivatives because their sampling law is frozen at the anchor. The module is diagnostic-only and is not in the canonical registry or call chain.

The bounded Phase 1 test suite passes its complete-tangent, rank, anchor, proposal, and XLA-smoke checks. Phase 2A adds

- the controlled one-step linear-Gaussian normalizer `make_linear_gaussian_kdm_normalizer_kernel`, whose positive branch is `KDM-FINITE` and whose explicit zero branch is `ATOM-FINITE`; and
- an opt-in `return_trace=True` surface on the analytical endpoint, used to build the sidecar from the actual post-flow cloud and weights under the Contract–E/dual-cap settings.

The Phase 2A finite-difference and endpoint tests pass, and the Phase 2B fixed-chart support tests pass. Phase 3 now provides `canonical_linear_gaussian_kdm_auxiliary`. It reads the actual analytical trace, reconstructs the zero-bandwidth value and score from (14), and reports a separately labelled positive-bandwidth functional without feeding it into the reset. In particular, it uses $\bar{w}_t$, not w_t^+; using w_t^+ would apply the current observation twice.

Phase 4A is now implemented in `bayesfilter/highdim/ledh_younis_kdm_integrated_tf.py`. The route `ledh_younis_kdm_integrated_observation_weighting_v1` calls the same internal finite-program executor as the registered canonical wrapper and substitutes only the observation factor. The code implements (43), feeds the resulting weights and tangents through Contract–E and both correction caps, and returns the actual multi-step trace. Its fixed-shape factory defaults to XLA compilation.

The implementation audit also repaired three pre-existing total-derivative gaps in the shared analytical executor: generic Gaussian transition and observation fallbacks now include direct covariance-density tangents; a model may supply the total tangent of its observation Jacobian; and every resulting $\mathrm{d}H$ term enters the LEDH flow. The flow log determinant now uses an XLA-compatible QR/triangular-solve identity rather than an unsupported matrix determinant/inverse pair. Rebuilt-model finite differences test these terms.

Phase 4A is a correct total derivative of its declared `KDM-FINITE` scalar; it is wrong if described as the derivative of `ATOM-FINITE`. The current one-cell experiment gives no evidence that it reduces model-score error, and the all-bandwidth inspection indicates that its small variance reduction is offset by additional bias. The complete rows, manifest, and source hashes are recorded under `docs/benchmarks/artifacts/ledh_younis_kdm_phase4_20260908/campaign-attempt05-n32t5-all-rho-f32-current/`.

Phase 4B is no longer blocked by an unspecified mixture or ancestry rule: Equations (53)–(63) define the source-matched raw mixture ratio, the BayesFilter covariance marks, the insertion point after Contract–E, and the two-pass anchor/replay rule. The exact N-by-N operation is implemented in `bayesfilter/highdim/ledh_younis_kdm_resampling_tf.py`. Its anchor and replay endpoints call the shared canonical executor after Contract–E and both correction caps, enforce one common full-rank Gaussian bandwidth at each time, and expose both raw and self-normalized ratio diagnostics with complete tangents. The repaired route carries raw ratios divided by N, not self-normalized ratios, into the next PF–PF normalizer. The responsibility-mean and fixed-label covariance-mark policies are separate, explicit routes. One-at-a-time and joint finite differences, exact anchor replay, canonical no-hook parity, and isolated two-step state/weight/covariance wiring tests pass. Bounded float64 and float32/no-TF32 GPU/XLA smokes of the earlier self-normalized route are superseded for derivative certification. On 9 September, four fresh smokes of the repaired raw-IWSG program passed for both precisions and both covariance mark policies at $D = 2, N = 8, T = 2$. These checks establish implementation consistency for `RESKDM-IWSG-FINITE`. The subsequent matrix campaign supplies the separate negative model-score result reported above. The conditional `MODEL-IS`

proposal remains an extension and is not a substitute for this combined program. The canonical trace now retains, rather than discards, higher-moment validity, the off-diagonal target mask, pairwise pre/post-cap displacement, pairwise cap scale, and coordinate-cap activity. The new matrix Kalman recursion and fixed-stream bootstrap comparator pass analytical-versus-finite-difference tests. A terminal audit reproduced both campaign summaries from the raw rows and verified source hashes, split counts, validity flags, and complete correction diagnostics. Its receipts are retained under `docs/benchmarks/artifacts/ledh_younis_kdm_phase4b_20260909/campaign01/`. The campaign completed, but its planned power requirement was not met. The affine-chart diagnostic in `bayesfilter/highdim/ledh_younis_kdm_affine_chart_reference_tf.py` implements (181)–(192), including two-direction and heterogeneous-coordinate-mark tests. All 35 focused CPU/float64 reference checks pass. It is not wired into the multi-step LEDH executor and has not been validated on GPU/XLA. Further DSGE implementation is deferred. The five-adapter checks below establish a useful starting point for current model support. Before those models support any new score-quality conclusion, their initial laws and precise observation and transition targets must be resolved and the complete consuming filter tested under fresh model-specific calibration. An existing model that the current executor cannot represent must remain explicitly untested; it must not be replaced by a different full-rank model to fill a results table.

The first cross-model audit exposes why component fidelity is not enough. The generalized-SV adapter evaluates the actual heteroskedastic likelihood, but its flow also depends on the process covariance and on the observation map. Write its parameters as $\theta = (a_s, a_h, \log\sigma_s, \log\sigma_h, \log\beta)$ and perturb them in direction v. The process covariance and flow observation map obey

$$Q = \operatorname{diag}(\sigma_s^2, \sigma_h^2), \qquad \mathrm{d}Q = \operatorname{diag}(2\sigma_s^2 v_3, 2\sigma_h^2 v_4), \tag{194}$$

$$H = [\beta, 0], \qquad \mathrm{d}H = [\beta v_5, 0], \tag{195}$$

$$\mathrm{d}(Hx) = H\,\mathrm{d}x + (\mathrm{d}H)x. \tag{196}$$

Here parameter components are numbered from one. The adapter previously omitted $\mathrm{d}Q$, $\mathrm{d}H$, and the second term in the last line. Correct differentiation of the likelihood at a supplied state cannot restore those missing derivatives of the state produced by the flow. The KSC adapter had the same problem with its flow observation offset: the differential of $h + \mu_{\mathrm{mix}} + 2\log\beta$ is $\mathrm{d}h + 2\mathrm{d}\log\beta$, not just $\mathrm{d}h$. Finite differences that rebuild both adapters at the perturbed parameters expose these omissions. They are implementation errors relative to the total-derivative claim, not evidence against KDM. The KSC mixture must also remain distinct from exact transformed SV: replacing log-chi-square noise by seven Gaussian components changes the observation density, so an observation-transform Jacobian does not imply equal scores.

After these repairs and a graph-construction repair for Austria SIR, the first cross-model batch passes 39 checks. All five existing adapters—diagonal LGSSM, native generalized SV, KSC, predator–prey, and the current Austria SIR recurrence—pass coordinate-by-coordinate and mixed-direction finite differences through the two-step canonical and raw-IWSG replay endpoints. The largest scaled discrepancy is 2.50×10^{-8}. These are CPU/float64 reference tests with fixed initial clouds and covariances. The executor still initializes their tangents to zero, whereas a stationary SV initial law depends on its persistence and innovation scale. Its total model-score derivative therefore needs additional initialization terms. The continuous SIR recurrence also omits the susceptible clipping in the repository simulator and its latent-preclip representation. Its derivative test does not establish either model identity. Both discrepancies must be resolved before those models enter the score-accuracy comparisons; the remaining repository models are still untested by this batch.

Fresh Phase 4A endpoint calibration after the covariance-carry repair passes for float64 and for float32 without TF32. Its float32 TF32 arm still fails the declared graph/XLA and atom-identity

tolerances, so TF32 remains unadmitted for that diagnostic route. Phase 4B has so far been checked only in float64 and float32 without TF32. The batch implementation has changed since the earlier limitation was written. In the inspected main checkout, `ledh_canonical_batch_fused_tf.py` now calls the single-cloud analytical executor and forwards Contract–E, higher-moment, pairwise-cap, and coordinate-cap settings. It uses nested `tf.map_fn` calls over rows and parameter directions. This is a row-mapped scalar implementation; despite the filename and its description, it does not satisfy the repository's requirement for a batch-native NeuTra training target. The older `ledh_canonical_batch_tf.py` wrapper also maps rows and does not itself forward a Contract–E reset selection, so its default invocation remains the diagnostic reset-free slice.

The shared main-checkout score executor now reaches `batched_higher_moment_shape_jvp` in `ledh_unified_correction_tf.py` through a batch-axis adapter. This source change means the old experiment hashes cannot certify the current shared numerics. Source wiring was inspected for this revision; numerical parity of that later dependency chain was not rerun. The integrated observation and raw-IWSG source files match the research snapshot, but their shared dependency has changed. Implementation reuse is therefore distinct from renewed numerical certification.

The new marginal proposal, ancestor-averaged Fisher recursion, and selective component gradient in Sections 6–10 are derived proposals. They are not integrated, tested runtime candidates in either snapshot. The existing anchored `MODEL-IS` kernel is a one-step diagnostic and supplies only part of that future implementation. A useful model-score estimator could differ from the derivative of (10); its value would be established against the underlying model score and through its own implementation checks. The present results establish neither HMC readiness nor a change to the canonical default.

13.3 Checks on the existing finite-program endpoints

The existing TensorFlow diagnostics reconstruct the Younis mixture algebra with analytical tangents. The proposal-corrected LEDH arm is a separate extension, not a source theorem. The evaluator must expose cloud, weight, and bandwidth derivatives and provide a small all-pairs reference. Any integrated claim requires the consuming endpoint to call the evaluator with compatible shapes, dtypes, and derivatives. The proposed model-score routes may have their own endpoints; a standalone density helper does not establish integration with any complete filter.

The finite-program checks have the following distinct purposes:

1. For Phase 4A, at zero bandwidth, value and score match the canonical fixed-stream program within the declared numerical tolerance.

2. The Phase 4A zero-bandwidth branch is an atom calculation; no Cholesky factor or inverse of a zero covariance is used to manufacture the limit. Phase 4B makes no zero-bandwidth parity claim.

3. At positive bandwidth, the result records $\overline{L}_h^N - L_0^N$ and is not labelled value-preserving.

4. Finite differences of the declared L_h^N agree with its complete analytical tangent when state, observation matrix, process and observation covariances, bandwidth, and model parameters are perturbed separately and jointly.

5. Before any future degenerate DSGE extension is admitted, its fixture must have zero support violation and a correct rank-aware density calculation. That extension is deferred while existing repository models are tested.

6. Any route claiming linear cost needs a scaling check with its stated assumptions; an all-pairs N^2 operation is incompatible with that claim. The all-pairs implementation remains diagnostic.

7. On a linear-Gaussian model, score error is compared with the Kalman score over paired paths and independent fixed streams. Bias and variance are reported separately.

8. For a `MODEL-IS` arm, the proposal-density identity is checked separately from the post-reset finite value; the complete mixture denominator, support, and forward Jacobian must all be present.

9. For Phase 4B, every anchor sample is replayed exactly, its forward importance ratio is one, every component contributes to the marginalized density, and the N^2 responsibility and covariance-mark tangents agree with finite differences.

10. The sequential Phase 4B endpoint is tested at $T \geq 2$ so that the post-reset KDM state, weight, and covariance marks demonstrably affect a later normalizer. A one-step density helper is not integration evidence.

11. The next PF–PF step consumes the raw IWSG log weights and their uncentered tangents from (64); executable ablations must detect either one being discarded or prematurely normalized.

12. The score-quality fixture has at least two state dimensions. Its executed trace must contain a nonzero off-diagonal pairwise target mask, a finite nonzero pairwise correction displacement, and both pairwise and coordinate-cap diagnostics. Merely setting nonzero options in a scalar model does not execute the pairwise algorithm.

14 Backward information as a proposal, not a replacement score

The first construction below keeps one LEDH particle cloud, the existing per-particle UKF covariance recursion, OT, Contract–E–Chol and the GenUT dual-cap correction. Future observations inform where to propose particles; they are not appended to the observation likelihood. The returned score is the analytical total derivative of the returned finite log normalizer. This choice differs from the two-cloud Fisher-score construction: a Fisher estimate of the model score need not differentiate a finite particle likelihood. Neither construction has established lower model-score error. The final subsection develops a separate composition with the existing identity/global/local density-mixture proposal. Its moment-restoring reset is distinct from this first construction's Contract–E–Chol implementation.

14.1 What travels backward

Suppose the whole observation sequence is already available. Write $f_\theta(x \mid z)$ for the transition density and $g_t(x)$ for the observation density at time t. All densities in the following proposition are with respect to fixed dominating measures, and the conditioning normalizers are positive and finite. Future information is the function $h_t(x) = p_\theta(y_{t+1:T} \mid X_t = x)$, not a sampled trajectory.

Proposition 19 (Backward information and the smoothing proposal)**.** *With $h_T = 1$,*

$$h_{t-1}(z) = \int f_\theta(x \mid z) g_t(x) h_t(x) \, \mathrm{d}x, \tag{197}$$

$$p_\theta(x_t \mid x_{t-1} = z, y_{t:T}) = \frac{f_\theta(x_t \mid z) g_t(x_t) h_t(x_t)}{h_{t-1}(z)}. \tag{198}$$

If h_t is constant, it has no effect on the normalized proposal.

Proof. Condition on $X_t = x$ in $p(y_{t:T} \mid X_{t-1} = z)$ and use the Markov property and conditional independence of observations. This gives the first identity. Bayes' rule gives the second; a constant factor cancels between numerator and denominator. □

This is the state-space backward-information argument of Heng et al. [2020, eqs. (9)–(10), Proposition 4.1]. Their approximate dynamic programming fits backward policy corrections using pilot parent–child pairs. It is not the same operation as following surviving ancestral trajectories. A fitted function may supply useful future information without reconstructing any full smoothing path.

14.2 A precisely defined, frozen-guide proposal

We first restrict the proposed implementation to full-rank additive Gaussian transitions $f_\theta(x \mid z) = \mathcal{N}(x; a, Q)$, where $a = m_\theta(z)$ and $Q = Q_\theta \succ 0$. This excludes singular transitions. A pilot produces a fixed schedule of guide coefficients η before the evaluated finite program starts. These coefficients, any fit reference parameter, the observation sequence and base Gaussian draws are fixed when that program is differentiated. Re-fitting at each evaluated parameter and then ignoring the fit derivative would compute a different quantity.

For each incoming particle, let a guide evaluator return symmetric $H \succeq 0$ and b, possibly depending smoothly on its current anchor a. At this anchor the local proposal factor is $\exp(-x^\top Hx/2 + b^\top x + c)$. The additive constant c need not be known because it cancels on normalization. There is no extra observation factor in the importance numerator.

Proposition 20 (Gaussian proposal and its total tangent)**.** *The normalized product of the Gaussian transition and this local factor is $q^0 = \mathcal{N}(m, V)$, where*

$$P = Q^{-1}, \qquad K = P + H, \qquad V = K^{-1}, \qquad m = V(Pa + b). \tag{199}$$

For any parameter direction, dots denote total directional derivatives, including dependence through the incoming state. Then

$$\begin{aligned} &\dot P = -P\dot Q P, && \dot K = \dot P + \dot H, && \dot V = -V\dot K V, \\ &\dot m = V(\dot P a + P\dot a + \dot b - \dot K m). \end{aligned} \tag{200}$$

For fixed $\xi \sim \mathcal{N}(0, I)$, put $U = m + L\xi$ with $L = \mathrm{chol}(V)$. Its tangent is $\dot U = \dot m + \dot L\xi$, where $\dot L = L\Phi(L^{-1}\dot V L^{-\top})$ and Φ retains the lower triangle, halves the diagonal and sets the upper triangle to zero.

Proof. Expand the Gaussian exponent, collect its quadratic coefficient $P + H$ and linear coefficient $Pa + b$, and complete the square. Since $P \succ 0$ and $H \succeq 0$, $K \succ 0$; thus Q, K, V, L are invertible. Explicitly,

$$\begin{aligned} \dot P Q + P\dot Q &= 0, \\ \dot K V + K\dot V &= 0, \\ \dot K m + K\dot m &= \dot P a + P\dot a + \dot b. \end{aligned}$$

Multiplication by the appropriate inverse gives each displayed tangent. Differentiating $LL^\top = V$ and imposing lower triangular $\dot L$ gives the stated Cholesky formula. The base draw is constant, giving the last identity. □

For a controlled-SMC quadratic policy $\psi(x) = \exp(-x^\top Ax - \beta^\top x - c)$, the adapter is $H = 2A$, $b = -\beta$ when $A \succeq 0$. The sign and factor of two agree with the released Lorenz implementation's shifted Gaussian precision. This adapter borrows a proposal factor; it does not claim to execute the complete controlled-SMC twisted-potential algorithm. Policies depending on the current observation may still be corrected as proposals, but only a future-only policy can support the specific lookahead interpretation above.

Proposition 21 (Exporting future information from a fitted scalar policy)**.** *Fix a pilot reference transition $z \mid x \sim \mathcal{N}(\alpha_\star x, Q_\star)$ with $Q_\star > 0$. Suppose its fitted next-time policy is $\widehat{\psi}_{t+1}(z) = \exp(-a_{t+1}z^2 - \beta_{t+1}z - c_{t+1})$, where $a_{t+1} \geq 0$. Write $D_{t+1} = 1 + 2Q_\star a_{t+1}$. The future-only factor $\widehat{h}_t(x) = M^\star_{t+1}\widehat{\psi}_{t+1}(x)$ has coefficients*

$$H_t = \frac{2\alpha_\star^2 a_{t+1}}{D_{t+1}}, \qquad b_t = -\frac{\alpha_\star \beta_{t+1}}{D_{t+1}}, \qquad H_T = b_T = 0. \tag{201}$$

These coefficients are frozen when differentiating the evaluation model. For a scalar linear Gaussian observation model, a backward quadratic fit starting from the zero policy recovers the exact pilot backward information in exact arithmetic if every regression design has full column rank and the precision projection is inactive.

Proof. The Gaussian integral exists because $D_{t+1} > 0$. With $a = a_{t+1}$, $\beta = \beta_{t+1}$, $c = c_{t+1}$ and $D = D_{t+1}$, completion of the square gives

$$\begin{aligned}
\widehat{h}_t(x) &= \frac{1}{\sqrt{2\pi Q_\star}} \int_{\mathbb{R}} \exp\left[-\frac{(z - \alpha_\star x)^2}{2Q_\star} - az^2 - \beta z - c\right] dz, \\
\log \widehat{h}_t(x) &= -\frac{1}{2}\log D - c + \frac{Q_\star \beta^2}{2D} - \frac{\alpha_\star^2 a}{D}x^2 - \frac{\alpha_\star \beta}{D}x.
\end{aligned}$$

Comparison with $-\frac{1}{2}H_t x^2 + b_t x$ proves the formula. The terminal factor is one because there is no subsequent observation.

For the exact-fit statement, write the scalar observation model as $y_t = Cx_t + \varepsilon_t$, $\varepsilon_t \sim \mathcal{N}(0, R)$, with $R > 0$. If the future factor has precision J_t and linear coefficient r_t, then the current-and-future policy satisfies

$$-\log \psi_t(x) = \frac{1}{2}(J_t + C^2/R)x^2 - (r_t + Cy_t/R)x + \text{constant}.$$

At the terminal time this is a quadratic, with $J_T = r_T = 0$. The integral just derived preserves the quadratic form at the preceding time. Starting from zero policy, the replicated controlled-SMC backward regression fits precisely the negative log current likelihood plus the negative log integral of the newly fitted next-time policy. Its design columns are $(x^2, x, 1)$; full column rank therefore gives the unique exact coefficients. Backward induction proves the assertion. □

This construction uses the next fitted policy, not the current one: the current policy already contains y_t. When $\alpha_\star = 0$, the future observations supply no information about x_t and both exported coefficients vanish. A mismatched pilot still defines an importance-corrected proposal, but its guide represents the pilot model's future information rather than the evaluation model's exact backward information. Floating-point regression conditioning and any active precision projection must be checked separately.

14.3 What a kernel mixture can contribute

A separate optional representation is a positive frozen Gaussian mixture $\widehat{h}(x) = \sum_k \alpha_k \mathcal{N}(x; c_k, S_k)$ with $\alpha_k > 0$, $\sum_k \alpha_k = 1$, and $S_k \succ 0$. Multiplication of $\widehat{h}$ by a positive constant has no effect on the following guide. A normalized mixture is only a hypothesis for the shape of backward information; backward information need not itself be integrable as a function of state. No claim of universal representability is made. Unlike sampling a component label, evaluating this mixture introduces no categorical discontinuity. Its use here is a new local proposal construction, not the IWSG estimator of Younis and Sudderth [2023].

Proposition 22 (Mixture-informed local Gaussian guidance)**.** *At the anchor a, define $\Lambda_k = S_k^{-1}$ and*

$$r_k = \frac{\alpha_k \mathcal{N}(a; c_k, S_k)}{\widehat{h}(a)}, \qquad v_k = \Lambda_k(c_k - a), \qquad \bar{v} = \sum_k r_k v_k,$$
$$H = \sum_k r_k \Lambda_k, \qquad b = \sum_k r_k \Lambda_k c_k. \tag{202}$$

Then $H \succ 0$ and the local quadratic has the same spatial gradient as $\log \widehat{h}$ at a, since $b - Ha = \bar{v}$. For fixed mixture coefficients,

$$\dot{r}_k = r_k(v_k - \bar{v})^\top \dot{a}, \qquad \dot{H} = \sum_k \dot{r}_k \Lambda_k, \qquad \dot{b} = \sum_k \dot{r}_k \Lambda_k c_k. \tag{203}$$

Proof. The gradient of a Gaussian log density is v_k at a; differentiation of the log-sum-exp gives $\bar{v}$. In particular, $\dot{\log} r_k = v_k^\top \dot{a} - \bar{v}^\top \dot{a}$ and $\dot{r}_k = r_k \dot{\log} r_k$, which gives the claimed tangent. Differentiate the finite sums to obtain $\dot{H}$ and $\dot{b}$. A positive weighted sum of positive-definite matrices is positive definite, and substitution gives $b - Ha = \sum_k r_k \Lambda_k (c_k - a)$. □

This is gradient matching, not Hessian matching: $\nabla^2 \log \widehat{h}(a) = -H + \mathrm{Cov}_r(v_k)$. Discarding the covariance term defines the proposal approximation explicitly; it does not justify treating a multimodal mixture as log concave. Nor does a local Gaussian retain all mixture modes. The omission is not a hidden stabilizer for the physical likelihood; the proposal density is corrected and the change in finite-particle behavior still requires evaluation.

14.4 The corrected finite likelihood and its derivative

Generate the pre-flow particle from q^0, not from the unmodified transition. Apply the existing LEDH flow using its physical prediction and current observation. Write its output as $X = F(U)$ and the log-Jacobian quantity computed by the existing flow as j. Its incoming normalized weight is W. The new pre-reset log weight is defined by

$$\lambda = \log W + \log f_\theta(X \mid z) + \log g_t(X) + j - \log q^0(U). \tag{204}$$

In particular, subtracting $\log f_\theta(U \mid z)$ instead of $\log q^0(U)$ is wrong for this proposal. The guide is not multiplied into g_t. Initialization is unchanged: this bounded implementation does not twist the initial law.

The shared flow evaluates the observation and its Jacobian along a separate auxiliary trajectory initialized at the physical prediction. This trajectory does not depend on the current proposal draw U. A nonlinear observation can therefore give an affine map of U after conditioning on the incoming cloud. The distinction matters: the coefficients still depend on θ, including through earlier resets, and their parameter derivatives must be retained.

Proposition 23 (Actual Jacobian of the auxiliary-localized flow)**.** *Condition on the incoming cloud, guide and current observation. Suppose the predicted covariance P and observation covariance R are positive definite, and all auxiliary evaluations are finite. Fix $S \geq 1$ uniform Euler steps, put $\epsilon = 1/S$ and $\tau_s = (s+1)\epsilon$, and let H_s be the observation Jacobian evaluated at the auxiliary point at step s. The shared flow uses*

$$A_s = -\tfrac{1}{2} P H_s^\top (\tau_s H_s P H_s^\top + R)^{-1} H_s, \qquad M_s = I + \epsilon A_s, \qquad x_{s+1} = M_s x_s + \epsilon b_s, \qquad x_0 = U,$$

where b_s, like H_s, is independent of U. Then $F(U) = x_S$ is an affine bijection of $\mathbb{R}^d$, with

$$D_U F = M_{S-1} \cdots M_0, \qquad j = \log\det D_U F = \sum_{s=0}^{S-1} \log\det M_s. \tag{205}$$

On a differentiable parameter neighborhood satisfying these conditions,

$$\dot{j} = \sum_{s=0}^{S-1} \operatorname{tr}\left(M_s^{-1} \epsilon \dot{A}_s\right),$$

where $\dot{A}_s$ is the total derivative, including the auxiliary trajectory, P, R and the observation Jacobian.

Proof. The auxiliary recurrence starts from the physical prediction and uses its own previous point, so induction makes every H_s, A_s and b_s independent of U. Differentiating the affine recurrence with respect to U gives the product in (205).

To check invertibility rather than assume it, write $P = LL^\top$ and $C_s = R^{-1/2} H_s L$. Then

$$L^{-1} M_s L = I - \tfrac{\epsilon}{2} C_s^\top (I + \tau_s C_s C_s^\top)^{-1} C_s.$$

For a singular value σ of C_s, the corresponding eigenvalue of the subtracted matrix before multiplication by $\epsilon/2$ is $\sigma^2/(1+\tau_s\sigma^2) < 1/\tau_s$; any remaining eigenvalues are zero. Consequently, every eigenvalue of $L^{-1} M_s L$ is strictly greater than $1 - \epsilon/(2\tau_s) \geq 1/2$. Each M_s is invertible with positive determinant. Their product is invertible, proving the global affine bijection and the sum of log determinants. Finally, Jacobi's formula gives $\mathrm{d}\log\det M_s = \operatorname{tr}(M_s^{-1}\mathrm{d}M_s)$ and $\dot{M}_s = \epsilon \dot{A}_s$ because the step schedule is fixed. This proves the stated total derivative. □

Proposition 24 (Conditional importance identity and its limitation)**.** *Condition on the incoming cloud and guide. If q^0 is positive on $\mathbb{R}^d$, F is a differentiable bijection of $\mathbb{R}^d$ and $j = \log|\det D_U F|$ is its actual Jacobian, then, whenever the right-hand integral is absolutely finite,*

$$\mathbb{E}_{U\sim q^0}\left[\varphi(F(U)) \frac{f_\theta(F(U) \mid z) g_t(F(U)) e^j}{q^0(U)}\right] = \int \varphi(x) f_\theta(x \mid z) g_t(x)\,\mathrm{d}x.$$

Proof. Cancel q^0 against the sampling density and substitute $x = F(u)$. The absolute Jacobian converts $\mathrm{d}u$ into $\mathrm{d}x$. □

Proposition 23 establishes the bijection and actual-Jacobian conditions for this auxiliary-localized flow under its stated covariance and finiteness assumptions. Localizing instead at the transported particle would change $D_U F$ and would require another argument. The deterministic OT/Contract-E/GenUT reset is not multinomial resampling and does not inherit an unbiased full-filter normalizer from this one-step identity.

Proposition 25 (Total derivative of the retained finite program)**.** *Fix base draws, guide coefficients, iteration counts, residual design and all non-parameter controls. On an open neighborhood where each executed operation is differentiable, Cholesky factors exist and branch choices are unchanged, define*

$$\widehat{\ell}_\eta(\theta;\xi) = \sum_{t=1}^{T} \log \sum_i \exp(\lambda_t^i), \qquad w_t^i = \frac{\exp(\lambda_t^i)}{\sum_j \exp(\lambda_t^j)}.$$

Propagating all input tangents gives

$$\begin{aligned} \dot{\lambda} &= \log\dot{W} + \log\dot{f} + \log\dot{g} + \dot{j} - \log\dot{q}^0, \\ \dot{\widehat{\ell}}_\eta &= \sum_t \sum_i w_t^i \dot{\lambda}_t^i, \qquad\qquad \dot{w}_t^i = w_t^i \left(\dot{\lambda}_t^i - \sum_j w_t^j \dot{\lambda}_t^j \right). \end{aligned} \tag{206}$$

This is the total directional derivative of this same finite scalar.

Proof. For $q^0 = \mathcal{N}(m, V)$, put $e = U - m$. Direct differentiation gives

$$\log\dot{q}^0(U) = -\tfrac{1}{2}\operatorname{tr}(V^{-1}\dot{V}) - (V^{-1}e)^\top(\dot{U} - \dot{m}) + \tfrac{1}{2}e^\top V^{-1}\dot{V}V^{-1}e.$$

Use Proposition 20 for all its arguments and, when applicable, Proposition 22 for the moving anchor. The chain rule gives $\dot{\lambda}$ and differentiation of log-sum-exp gives the remaining expressions. Induct over time, carrying state and covariance tangents through the existing UKF, flow and reset. In the reset, if $Y = \mathcal{T}(X, w)$ and $E = \mathcal{R}(X, w, Y)$, its tangent is $\mathcal{R}_X\dot{X} + \mathcal{R}_w\dot{w} + \mathcal{R}_Y(\mathcal{T}_X\dot{X} + \mathcal{T}_w\dot{w})$, with any declared ridge/design derivatives as well. Differentiating only Y omits direct source-moment terms. Apply the same chain rule to GenUT and both caps. This completes the induction, assuming the invoked component tangents are correct on that neighborhood. □

The proposition does not equate this finite derivative with the exact model score. It also does not differentiate the pilot fit: if $\eta = \eta(\theta)$ is recomputed, the omitted term is $(\partial\widehat{\ell}/\partial\eta)\dot{\eta}$.

Proposition 26 (No automatic score improvement)**.** *Even exact sampling from a posterior, with constant importance weights, does not imply minimal variance of a posterior score-functional estimate.*

Proof. On three states let the posterior be uniform and let its complete-data score functional be $(-1, 0, 1)$. Its expectation is zero. The asymptotic variance of a self-normalized importance mean is $\sum_i \pi_i^2 H_i^2/q_i$. Choosing $q = \pi$ gives $2/3$; choosing $q = (0.45, 0.10, 0.45)$ gives $40/81 < 2/3$, despite nonconstant weights. These scores can be realized by the exponential family proportional to $\exp(\theta H_i)$ at $\theta = 0$. Thus even an ideal distributional guide does not establish optimal score error. No ranking of finite LEDH derivatives follows from likelihood ESS. □

14.5 Executable order and scientific scope

The bounded implementation is an optional single-cloud proposal extension, not an alternative LEDH filter. Its order is:

1. Freeze a validated time-indexed guide. Its last future-only factor is constant. Fix the existing randomness and numerical controls.
2. Predict physical UKF moments and compute each transition anchor and its total tangent from the current reset state.

3. Evaluate $H, b, \dot{H}, \dot{b}$; generate $U, \dot{U}$ from the guided Gaussian. With guidance disabled use the original transition draw.
4. Run the shared LEDH flow and its analytical tangent. Evaluate the unchanged physical transition and observation densities and the actual guided Gaussian denominator in (204).
5. Accumulate the finite log normalizer and derivative; update physical UKF covariances. Execute the existing OT, Contract E and GenUT dual-cap reset with all tangents. These particles are the next parents.

An OT barycentre has no unique sampled ancestor. Neither its transport matrix nor the coefficients of a kernel mixture are thereby a model backward-smoothing kernel. No ancestral tracing or Fisher-score substitution is part of this implementation.

The first evidence is engineering evidence: disabled-guide parity, Gaussian square-completion checks, moving-anchor mixture tangents, and finite differences of the complete same-value recursion. The development comparator uses $\epsilon = 1$ and five Sinkhorn iterations; balancing counts, ridge, correction and cap settings are reported independently. These are untuned settings. The scalar Gaussian reference now fits a quadratic policy through the replicated controlled-SMC forward and backward endpoints, exports its future-only factor by (201), and supplies those coefficients to the shared analytical LEDH consumer. The closure checks compare the fitted factor with an independent Gaussian backward recursion. This is a test of actual pilot integration on that restricted model, rather than mere acceptance of coefficient arrays; it does not identify a future factor for an arbitrary nonlinear model. One-component KDM conversion is a representation check, not a trained mixture guide. Equal-compute comparisons on the nonlinear targets, scope-specific tuning, batch-native consumer coverage and scientific or default promotion remain subsequent work. A bounded GPU/XLA Gaussian reference experiment, even when it completes, cannot by itself establish those claims.

The completed scalar fitted-guide pilot contains 624 evaluations, but the tested LEDH candidates fail the conditional comparison with simpler particle methods in every condition. A subsequent plain-LEDH Gaussian diagnostic completed 255 of 280 planned evaluations before a transport-validity rejection. On two six-coordinate fixtures, the analytical score agrees with finite differences of its own finite likelihood program to a maximum scaled error of 2.46×10^{-9}. That agreement does not establish accuracy for the model likelihood score: persistent-condition errors remain large when the flow resolution increases from 48 to 192 steps. The observed error averages are descriptive; they do not support a statistical ranking of stochastic methods.

A CPU reconstruction of the rejected case isolates a terminal transport-column total-variation residual of 2.7055×10^{-4}, above the unchanged 10^{-4} validity threshold. Both XLA and non-XLA replays reject the case. The failed GPU random tensors were not archived, so exact identity with that reconstruction has not been checked. Separately, on completed cases the reset restores its weighted input mean and variance to machine precision, yet the weighted variance is already too small before the first reset. The following two calculations distinguish the transport failure from this earlier proposal problem. Neither derivative parity nor moment restoration alone is sufficient evidence for accurate model-score estimation.

14.6 Why more balancing does not remove an additive mass error

Consider the entrywise positive kernel matrix $K \in \mathbb{R}^{N \times N}$ used to construct the transport, the desired row masses $a_i = 1/N$, and source weights $w \in \mathbb{R}^N$ with $w_j > 0$ and $\sum_j w_j = 1$. The shared implementation adds a fixed number δ to both scaling denominators. This prevents division by zero, but changes the equations being solved.

Proposition 27 (Marginal deficit under additive scaling)**.** *Suppose positive vectors $u, v \in \mathbb{R}^N$ are a fixed point of*

$$u_i = \frac{a_i}{(Kv)_i + \delta}, \qquad v_j = \frac{w_j}{(K^\mathsf{T} u)_j + \delta}, \qquad \delta \geq 0. \tag{207}$$

For $C = \operatorname{diag}(u) K \operatorname{diag}(v)$, the row and column masses are respectively $a_i - \delta u_i$ and $w_j - \delta v_j$. When $\delta = 0$ they equal the requested marginals. When $\delta > 0$, normalizing each row of C need not recover the requested column masses.

Proof. The row sum is $u_i(Kv)_i = u_i[a_i/u_i - \delta] = a_i - \delta u_i$; the column calculation is identical. The row-normalized transport satisfies $T_{ij} = C_{ij}/(a_i - \delta u_i)$. Its induced source mass is therefore $\sum_i a_i C_{ij}/(a_i - \delta u_i)$, which does not in general equal w_j. For a concrete positive-kernel counterexample, take $a = w = (1/2, 1/2)$, $\delta = 1/4$, $K = \left(\begin{smallmatrix} 5 & 1 \\ 1 & 1 \end{smallmatrix}\right)$, and $u = v = (1/4, 1/2)$. Both fixed-point equations hold. The coupling is $C = \left(\begin{smallmatrix} 5/16 & 1/8 \\ 1/8 & 1/4 \end{smallmatrix}\right)$, so its row-normalized transport is $T = \left(\begin{smallmatrix} 5/7 & 2/7 \\ 1/3 & 2/3 \end{smallmatrix}\right)$. Its induced source masses are $(11/21, 10/21)$ rather than $(1/2, 1/2)$. □

The fixed-point calculation alone does not locate the error after a finite number of updates. A frozen-input comparison does. In the reconstructed rejection, increasing the terminal count from 32 to 256 reduces column total variation only from 2.7055×10^{-4} to 2.5292×10^{-4}; both fail the unchanged 10^{-4} test. An independent log-domain calculation matches the existing $\delta = 10^{-7}$ transport to machine precision. At the same $5 + 32 = 37$ updates, setting $\delta = 0$ reduces the rejected cloud's residual to 4.45×10^{-11}.

This is an untuned FP64 CPU/XLA diagnostic, not production TF32 validation. An optional zero-δ setting in the shared implementation passes mass checks on all 18 frozen clouds and four new-noise full-consumer fixtures. Analytical reset tangents agree with finite differences to a maximum scaled error of 1.34×10^{-8}; the full-consumer maximum is 3.30×10^{-8}. However, 13 of the 17 previously accepted clouds exceed the predeclared 10^{-6} state-change tolerance, with a largest change of 4.67×10^{-6}. Thus this candidate is rejected as an interchangeable repair under that test. The default remains unchanged. The result does not reject unperturbed scaling as a separately calibrated numerical method.

14.7 A conditional proposal can be narrower than its flow covariance

The first-step discrepancy needs a different explanation because no reset has yet occurred. Consider the scalar model $X = \alpha Z + \eta$, $Y = HX + \varepsilon$, with $Z \sim N(\mu_0, P_0)$, $\eta \sim N(0, Q)$ and $\varepsilon \sim N(0, R)$ mutually independent, where $Q, R > 0$ and $P_0 \geq 0$. The predictive UKF variance is $P = \alpha^2 P_0 + Q$. Conditional on a sampled ancestor $Z = z$, however, the physical proposal is $X_0 = a + \eta$, where $a = \alpha z$, and its variance is Q, not P.

Proposition 28 (Conditional spread under the scalar Gaussian flow)**.** *Hold a, P, H, R fixed while integrating the continuous affine LEDH flow whose linear coefficient is*

$$A_\lambda = -\frac{PH^2}{2(R + \lambda P H^2)}, \qquad 0 \leq \lambda \leq 1, \tag{208}$$

and whose affine term is $b_\lambda = (1 + 2\lambda A_\lambda)[(1 + \lambda A_\lambda) PHy/R + A_\lambda a]$. Applied to $X_0 \mid z \sim N(a, Q)$, the endpoint has mean and variance

$$m_F = a + \frac{PH}{R + PH^2}(y - Ha), \qquad V_F = \frac{QR}{R + PH^2}. \tag{209}$$

The exact physical conditional $X \mid z, y$ instead has mean $m_c = a + QH(y - Ha)/(R + QH^2)$ and variance $V_c = QR/(R + QH^2)$. Consequently

$$\frac{V_F}{V_c} = \frac{R + QH^2}{R + PH^2} \leq 1, \tag{210}$$

with strict inequality when $H\alpha \neq 0$ and $P_0 > 0$.

Proof. The sensitivity of the flow to its initial point solves $\dot{M}_\lambda = A_\lambda M_\lambda$, $M_0 = 1$. Integration gives

$$M_\lambda = \exp\left[-\frac{1}{2}\log\frac{R + \lambda PH^2}{R}\right] = \sqrt{\frac{R}{R + \lambda PH^2}}.$$

Thus $\mathrm{Var}(X_1 \mid z) = M_1^2 Q$. For the mean, substitute $m_\lambda = a + \lambda PH(y - Ha)/(R + \lambda PH^2)$ into the ODE: both $\dot{m}_\lambda$ and $A_\lambda m_\lambda + b_\lambda$ equal $PHR(y - Ha)/(R + \lambda PH^2)^2$, and $m_0 = a$. For the physical conditional, completing the square in

$$-\frac{(x-a)^2}{2Q} - \frac{(y - Hx)^2}{2R} = -\frac{1}{2}\left(Q^{-1} + H^2/R\right)x^2 + (a/Q + Hy/R)\,x + \text{constant}$$

gives $V_c = (Q^{-1} + H^2/R)^{-1}$ and $m_c = V_c(a/Q + Hy/R)$, which simplify to the stated expressions. Dividing the two positive variances and substituting $P = \alpha^2 P_0 + Q$ proves the stated ratio and strictness condition. □

For $\alpha = 0.9$, $P_0 = 1$, $Q = 0.09$, $R = 0.25$, $H = 1$, the ratio is $0.34/1.15 \simeq 0.296$. These are conditional proposal variances, not the marginal filtering variance. In the saved persistent fixture, the latter is approximately 0.1957, the sampled-ancestor conditional mixture has variance 0.1920, and the weighted child cloud has variance 0.0453. Increasing flow resolution from 48 to 192 moves the affine proposal closer to the continuous calculation but does not remove the observed concentration. The independent prior, proposal, observation-density and weight identities agree to 1.5×10^{-14}. Hence these checks support a proposal-coverage explanation rather than an omitted Gaussian density factor. They do not prove that every finite-sample realization has the same error.

This distinction concerns the single-flow consumer tested above. The existing mixture of identity, global and local maps already uses the conditional covariance Q in its local bridge, so the calculation does not diagnose that mixture as having the same defect. A positive-semidefinite quadratic guide reduces the pre-flow covariance to $(Q^{-1} + J)^{-1} \leq Q$ in this scalar case, so it cannot repair the current-observation conditional spread merely by further contraction through the same affine map. Future conditioning can legitimately require a smaller variance; the statement is not a rejection of future information. Rather, controlled-SMC backward information and KDM approximations must be evaluated after composition with the actual proposal maps. A useful guide before the flow need not remain useful after it. We therefore turn to the three-branch mixture already developed for this purpose. Its separate reset does not replace the UKF and Contract–E construction above or establish conformance with it.

14.8 Backward guidance in the identity/global/local density mixture

The three choices are transformations of a transition draw: leave it alone, apply a common global map, or apply an ancestor-specific local map. A particle chooses one transformation. Averaging transformed positions would define a different proposal density. This distinction also determines where backward information belongs: it changes the global and local maps while preserving the unchanged transition as a defensive component.

Fix the incoming equal-weight cloud $z_1, \dots, z_N$ and an additive Gaussian transition $U \mid j \sim \mathcal{N}(m_j, Q)$, where $m_j = f_\theta(z_j)$ and Q is positive definite. The predictive density represented by that cloud is

$$p_N^-(x) = \frac{1}{N} \sum_{j=1}^{N} \varphi(x; m_j, Q). \tag{211}$$

The maps below are computed from this cloud, the current observation, and a frozen future guide before drawing the new branch, ancestor or innovation. They may depend on θ and on the incoming cloud; freezing a guide's coefficients does not freeze these dependencies.

A controlled-SMC quadratic future message supplies a positive-semidefinite precision J_t and natural vector r_t, representing $\psi_t(x) \propto \exp(-x^T J_t x/2 + r_t^T x)$. For a frozen Gaussian mixture $\psi_t(x) = \sum_k \pi_{tk} \varphi(x; c_{tk}, S_{tk})$, define responsibilities $\rho_k(a) = \pi_{tk} \varphi(a; c_{tk}, S_{tk})/\psi_t(a)$ at a deterministic anchor a. The local quadratic used by the maps has coefficients

$$J_t(a) = \sum_k \rho_k(a) S_{tk}^{-1}, \qquad r_t(a) = \sum_k \rho_k(a) S_{tk}^{-1} c_{tk}. \tag{212}$$

Indeed $r_t(a) - J_t(a)a = \nabla \log \psi_t(a)$, by differentiating the mixture sum and dividing by $\psi_t(a)$. Its precision is positive definite when the component covariances are positive definite. It matches the spatial gradient at the anchor; it is not the mixture's exact negative Hessian or exact Gaussian conditioning on the mixture. The omitted score-covariance term in that Hessian is the reason these interpretations differ.

Proposition 29 (Mixture information and omitted uncertainty)**.** *For the positive Gaussian mixture in* (212)*, put* $s_k(a) = S_{tk}^{-1}(c_{tk} - a)$ *and* $\bar{s}(a) = \sum_k \rho_k(a) s_k(a)$*. Then*

$$-\nabla^2 \log \psi_t(a) = J_t(a) - \sum_k \rho_k(a)(s_k(a) - \bar{s}(a))(s_k(a) - \bar{s}(a))^T. \tag{213}$$

Thus J_t *exceeds the negative log-message Hessian by a positive-semidefinite matrix. In one dimension, suppose all component variances equal* $h^2 > 0$*. For* $S > 0$*, multiplying the message by the same Gaussian* $\varphi(x; a, S)$ *used by the global construction gives component variances and means*

$$C_0 = (S^{-1} + h^{-2})^{-1}, \qquad b_k = C_0(S^{-1}a + h^{-2}c_k), \qquad \alpha_k = \frac{\pi_k \varphi(a; c_k, S + h^2)}{\sum_j \pi_j \varphi(a; c_j, S + h^2)}.$$

The exact normalized product therefore has variance

$$V_{\text{product}} = C_0 + \sum_k \alpha_k (b_k - \bar{b})^2, \qquad \bar{b} = \sum_k \alpha_k b_k, \tag{214}$$

whereas the covariance in (221) *is* C_0*. The two covariances coincide for one component; distinct component means with positive weights give a strictly positive gap in one dimension.*

Proof. Differentiating the normalized responsibilities gives $\nabla \rho_k = \rho_k(s_k - \bar{s})$, while $\nabla s_k = -S_{tk}^{-1}$. Hence differentiating $\nabla \log \psi_t = \sum_k \rho_k s_k$ gives $\nabla^2 \log \psi_t = \sum_k \rho_k s_k s_k^T - \bar{s}\bar{s}^T - J_t$, which proves (213). Completing the square in $\varphi(x; a, S)\varphi(x; c_k, h^2)$ gives a Gaussian with moments (b_k, C_0) and integrated mass $\varphi(a; c_k, S + h^2)$. Normalizing these masses gives α_k. The law of total variance now gives (214). The omitted term is a variance: it is nonnegative, and vanishes exactly when all component posterior means with positive weight agree. □

This distinction matters even when the fitted message is accurate as a density. With equal kernel variances, the information used by the consumer is h^{-2} regardless of how far apart the kernel centers lie. A smaller bandwidth can therefore narrow the Gaussian map without representing the uncertainty across centers. The exact product here is only the product with the current-observation Gaussian approximation, not the exact filtering or smoothing distribution. Nor does the result justify replacing J_t by the negative Hessian: the latter can be indefinite. It identifies a mechanism to test before changing the proposal.

The global map can retain this uncertainty without using an indefinite Hessian. At a fixed time, write $R_k = S_{tk}$, $c_k = c_{tk}$ and let $\pi_k > 0$ be the fixed normalized mixture weights. Multiplying each component by the current-observation Gaussian is tractable in every state dimension. The mixture remains non-Gaussian; only its first two moments determine the common affine proposal map.

Proposition 30 (Gaussian-product moments and their total derivatives)**.** *Let S and every R_k be positive definite. The normalized product of $\varphi(x; a, S)$ and $\sum_k \pi_k \varphi(x; c_k, R_k)$ is a mixture with component covariances, means and weights*

$$\Lambda = S^{-1}, \qquad C_k = (\Lambda + R_k^{-1})^{-1}, \qquad b_k = C_k(\Lambda a + R_k^{-1} c_k), \tag{215}$$

$$B_k = S + R_k, \qquad \alpha_k = \frac{\pi_k \varphi(a; c_k, B_k)}{\sum_j \pi_j \varphi(a; c_j, B_j)}. \tag{216}$$

Its mean and covariance are

$$b = \sum_k \alpha_k b_k, \qquad V = \sum_k \alpha_k \{C_k + (b_k - b)(b_k - b)^T\}. \tag{217}$$

In particular, V is positive definite. These moments include uncertainty within components and uncertainty about which component generated the state.

Hold π_k, c_k, R_k fixed and let a dot denote any parameter direction through a, S. With $n_k = \Lambda a + R_k^{-1} c_k$ and $u_k = B_k^{-1}(a - c_k)$, their derivatives satisfy

$$\dot\Lambda = -\Lambda \dot S \Lambda, \qquad \dot C_k = -C_k \dot\Lambda C_k, \tag{218}$$

$$\dot n_k = \dot\Lambda a + \Lambda \dot a, \qquad \dot b_k = \dot C_k n_k + C_k \dot n_k,$$

$$\eta_k = -u_k^T \dot a + \tfrac{1}{2}\{u_k^T \dot S u_k - \operatorname{tr}(B_k^{-1} \dot S)\}, \qquad \dot\alpha_k = \alpha_k \Big(\eta_k - \sum_j \alpha_j \eta_j\Big). \tag{219}$$

Put $\delta_k = b_k - b$ and $M_k = C_k + \delta_k \delta_k^T$. Then

$$\begin{aligned} \dot b &= \sum_k (\dot\alpha_k b_k + \alpha_k \dot b_k), \\ \dot\delta_k &= \dot b_k - \dot b, \\ \dot V &= \sum_k \left[\dot\alpha_k M_k + \alpha_k \{\dot C_k + \dot\delta_k \delta_k^T + \delta_k \dot\delta_k^T\}\right]. \end{aligned} \tag{220}$$

These are total derivatives of the stated moments under the frozen-message assumption, including the changing mixture weights.

Proof. Completing the square in each product gives

$$\varphi(x; a, S)\varphi(x; c_k, R_k) = \varphi(a; c_k, S + R_k)\varphi(x; b_k, C_k).$$

Integration over x gives its component mass and hence (216). Conditional expectation gives b; the law of total covariance gives V. For nonzero z, $z^T V z = \sum_k \alpha_k \{z^T C_k z + (z^T \delta_k)^2\} > 0$ because every C_k is positive definite.

Differentiating $S\Lambda = I$ gives the first inverse derivative. Differentiating $(\Lambda + R_k^{-1})C_k = I$ and $b_k = C_k n_k$ gives (218). For the mixture mass, differentiate

$$\log \varphi(a; c_k, B_k) = -\tfrac{d}{2}\log(2\pi) - \tfrac{1}{2}\log\det B_k - \tfrac{1}{2}(a - c_k)^T B_k^{-1}(a - c_k).$$

Since $\dot{B}_k = \dot{S}$, $\partial \log\det B_k = \operatorname{tr}(B_k^{-1}\dot{S})$ and $\partial B_k^{-1} = -B_k^{-1}\dot{S}B_k^{-1}$, this derivative is η_k. Differentiating the normalized exponential weights gives the centered expression for $\dot{\alpha}_k$. Finally, the ordinary product rule applied to each term of (217) yields (220). □

The optional implementation uses (b, V) for the global map and propagates $(\dot{b}, \dot{V})$ through the same Cholesky recoloring and subsequent score recursion. Its TensorFlow routine accepts a batch of Gaussians in arbitrary state dimension; the shared filter calls it for the current global Gaussian. Checked factorizations reject nonfinite, asymmetric or relatively singular covariances. They introduce no ridge into accepted results. With an inactive future message the input moments and derivatives pass through unchanged. The local maps continue to use the positive information in (222), and the actual mixture proposal density still enters the importance denominator. Thus the construction changes a proposal, not the likelihood being estimated. Exactness of its product moments does not make the current-observation Gaussian exact or prove a reduction in finite-particle score error.

Proposition 31 (Guided global and local affine maps)**.** *Let $(\bar{m}, P)$ be the predictive cloud moments, including Q, and let (a, S) be the current-observation quadrature update of these moments. Assume P, S, Q are positive definite. Evaluate the future information at a. Multiplying the current-observation Gaussian by the local quadratic message approximation gives moments*

$$C = (S^{-1} + J_t(a))^{-1}, \qquad b = C\{S^{-1}a + r_t(a)\}. \tag{221}$$

The optional product-moment construction in Proposition 30 replaces these two moments when the future message is represented as a Gaussian mixture. Writing $L_V L_V^T = V$ for a Cholesky factorization, the common affine map $T_G(u) = b + L_C L_P^{-1}(u - \bar{m})$ sends a distribution with moments $(\bar{m}, P)$ to one with moments (b, C).

For ancestor j, linearize the current observation as $H_j x + o_j$, with Gaussian guide covariance R. Evaluate the future information at m_j and set

$$B_j = H_j^T R^{-1} H_j + J_t(m_j), \qquad v_j = H_j^T R^{-1}(y_t - o_j) + r_t(m_j). \tag{222}$$

The local Gaussian bridge has moments $C_j(\lambda) = (Q^{-1} + \lambda B_j)^{-1}$ and $b_j(\lambda) = C_j(\lambda)(Q^{-1}m_j + \lambda v_j)$. The existing finite affine integration of this bridge defines T_{Lj}. Its actual finite map, rather than a continuous-time endpoint approximation, defines the proposal density.

Proof. Adding the Gaussian log density with mean a and covariance S to the future quadratic yields $-x^T(S^{-1} + J)x/2 + x^T(S^{-1}a + r) + \text{constant}$. Completing the square proves (221). The affine image has mean b and covariance $L_C L_P^{-1} P L_P^{-T} L_C^T = C$. This is a moment statement; the incoming mixture need not itself be Gaussian.

For the local bridge, raise the current linearized Gaussian likelihood and future quadratic to power λ and multiply by $\mathcal{N}(m_j, Q)$. Collecting quadratic and linear terms gives precisely $Q^{-1} + \lambda B_j$

and $Q^{-1}m_j + \lambda v_j$. Differentiating these moments gives $\dot{b}_j = C_j(v_j - B_j b_j)$ and $\dot{C}_j = -C_j B_j C_j$. Thus the affine velocity

$$F_j = -\tfrac{1}{2} C_j B_j, \qquad d_j = \dot{b}_j - F_j b_j$$

has the stated Gaussian moment evolution, since $F_j C_j + C_j F_j^T = -C_j B_j C_j$. Composing the finite Euler steps $u \leftarrow (I + \Delta\lambda F_j)u + \Delta\lambda d_j$ gives an affine map $T_{Lj}(u) = A_{Lj}u + c_{Lj}$. The runtime checks its covariance for loss of rank. No equality between a finite Euler map and the limiting moments is needed for the density calculation that follows. □

For example, with a scalar linear observation and a quadratic future message, the limiting local conditional variance is $(Q^{-1} + H^2/R + J_t)^{-1}$. The predictive cloud variance does not replace Q in this formula. Setting $J_t = r_t = 0$ recovers the unguided maps. For nonlinear or non-Gaussian observations these maps guide the proposal; the actual observation density still determines the importance weight.

Proposition 32 (Complete density correction and defensive support)**.** *Let $T_{bj}(u) = A_{bj}u + c_{bj}$, for $b \in \{0, G, L\}$, be nonsingular fixed maps conditional on the incoming cloud and guide. Let $A_{0j} = I, c_{0j} = 0$. Draw a branch with frozen probabilities β, an independent uniform ancestor, and an independent Gaussian innovation. Then*

$$q_b(x) = \frac{1}{N}\sum_j \varphi(x; A_{bj}m_j + c_{bj}, A_{bj}QA_{bj}^T), \qquad q_\beta(x) = \sum_b \beta_b q_b(x). \tag{223}$$

The correct weight for the empirical predictive update is

$$W(x) = \frac{g_\theta(y_t \mid x)p_N^-(x)}{q_\beta(x)}. \tag{224}$$

If $\beta_0 > 0$, then $q_\beta \geq \beta_0 p_N^-$ and $W(x) \leq g_\theta(y_t \mid x)/\beta_0$. For N conditionally independent draws and finite second moment,

$$\mathrm{Var}(\widehat{Z} \mid \textit{cloud,maps}) = \frac{1}{N}\left\{\int \frac{[g_\theta(y_t \mid x)p_N^-(x)]^2}{q_\beta(x)}\,dx - Z_N^2\right\}, \qquad Z_N = \int g_\theta(y_t \mid x)p_N^-(x)\,dx. \tag{225}$$

Proof. An invertible affine image of a Gaussian has the mean and covariance in (223). Marginalizing the uniform ancestor and then the branch gives q_β. Multiplying it by (224) leaves exactly $g_\theta(y_t \mid x)p_N^-(x)$, so its integral is Z_N. The identity branch has density p_N^-, proving the lower bound and the weight bound. Integrating $W^2 q_\beta$ gives the displayed second moment; independence divides its centered variance by N. □

Future likelihood is not multiplied into the numerator a second time. The formula also explains how to choose β without an oracle normalizer: for fixed maps minimize the integral in braces before $-Z_N^2$, using a separate pilot with a known sampling density. That pilot must evaluate the guided maps and densities actually used; an unguided calibration does not automatically calibrate the guided mixture. Its Hessian has quadratic form $2\int [gp_N^-]^2(\sum_b u_b q_b)^2/q_\beta^3\,dx \geq 0$ wherever the derivatives are integrable. The pilot problem is convex. A normalized multi-context pilot objective need not have the same optimizer as one unnormalized single-context integral. Freeze its selected β before the score evaluation. The conditional variance identity does not establish smaller model-score error, and it needs modification for dependent SQMC draws or fixed branch counts.

Proposition 33 (Analytical total derivative of the guided finite program)**.** *Fix guide coefficients, β, observations and all random inputs. On a region where the finite program is differentiable and all its validity checks pass, differentiating the maps, full densities, normalized weights and the same moment reset gives the total derivative of its returned finite log normalizer. Mixture responsibilities must be differentiated through their moving anchors even though the guide coefficients are frozen.*

Proof. For a Gaussian mixture guide, let $s_k(a) = S_{tk}^{-1}(c_{tk} - a)$ and $\bar{s} = \sum_k \rho_k s_k$. Differentiating the normalized positive mixture weights gives

$$d\rho_k = \rho_k(s_k - \bar{s})^T da, \qquad dJ = \sum_k d\rho_k S_{tk}^{-1}, \qquad dr = \sum_k d\rho_k S_{tk}^{-1} c_{tk}.$$

For the global product, write $K = S^{-1} + J$. Differentiate $KC = I$ and $Kb = S^{-1}a + r$ to obtain

$$\begin{aligned} dC &= -C(dS^{-1} + dJ)C, \\ db &= C\{dS^{-1}a + S^{-1}da + dr - (dS^{-1} + dJ)b\}, \qquad dS^{-1} = -S^{-1}(dS)S^{-1}. \end{aligned} \tag{226}$$

The existing solve and Cholesky recurrences propagate these differentials through the global recolouring and every local affine step. The branch and ancestor selected by fixed uniforms do not change with θ, because their probabilities are frozen. In contrast, the mixture density has parameter-dependent responsibilities $\omega_b = \beta_b q_b / q_\beta$, so $d \log q_\beta = \sum_b \omega_b \, d \log q_b$. Consequently

$$d \log W_i = d \log g_i + d \log p_N^-(x_i) - d \log q_\beta(x_i), \qquad d \log \widehat{Z}_t = \sum_i \bar{W}_i \, d \log W_i.$$

Each differential includes the particle's motion. Propagating both the weighted-cloud moment differentials and transport differentials through the implemented reset gives the next cloud differential. Induction over time and summation of the increment derivatives prove the claim. □

An execution can therefore be written without ancestor tracing or a sampled smoothing path:

1. Select guide settings using separate calibration data. For the observation sequence being evaluated, fit its future-only messages at a fixed parameter using independent pilot randomness, then freeze the coefficients. Freeze independently calibrated branch probabilities before scoring.

2. At each observation, propagate the incoming cloud to conditional transition means and form the unchanged identity branch.

3. Evaluate the frozen guide at the global updated mean and the local transition means. Build the guided global and local affine maps and their analytical differentials before drawing new innovations.

4. Select one branch and one ancestor per particle, draw the transformed Gaussian, and evaluate all three marginal component densities at that draw.

5. Apply (224), accumulate the finite log increment and its analytical derivative, and normalize the weights.

6. Apply the same five-step OT calculation with $\epsilon = 1$, followed by the existing Cholesky moment restoration and any declared dual-cap correction; propagate all corresponding differentials and validity checks.

The runtime entry is the existing `covariance_proposal_tf.make_filter` with an optional frozen guide. Its reset remains the optional mixture candidate's moment-restoring reset. The fixed $(1, 5)$ setting is the owner's comparison baseline, not a tuned optimum. Finite-program derivative agreement establishes this computation's internal derivative, while comparison with exact Gaussian model scores and untouched nonlinear references remains a separate empirical task.

14.9 What the first nonlinear fitted comparison establishes

The 17 October 2026 KSC comparison uses the seven-component Gaussian observation approximation, process variance one, a predict-first $\mathcal{N}(0, 1)$ initial state, two observations and 32 particles. The coordinates are $(\Phi^{-1}(\gamma), \log \beta) = (1.5, 0)$. It compares ordinary, negative-future-tail and positive-future-tail observations separately. These are development comparisons with the optional mixture consumer, not canonical LEDH admission.

Of 120 development fits, no quadratic configuration was eligible in all conditions: sixteen otherwise valid controlled-SMC fits had nonpositive guide precision and four fits were invalid. The selected positive-kernel fit used 256 design points, sixteen transition replicates and bandwidth factor 0.5. Selection used independent validation cross-entropy before freezing the setting for the final comparison. This local density fit is not original KDM training.

The final comparison preserves 1,920 valid evaluations and 384 explicitly ineligible quadratic cells. Eight independent fitting clusters each have eight paired clouds per condition. Neither kernel arm passes the conditional heuristic comparison. Bonferroni simultaneous 95% Student-t intervals, retaining all 24 planned contrasts and seven degrees of freedom, support increased MSE for the global kernel arm in three comparisons: ordinary $\log \beta$, and both coordinates in the negative-future-tail condition. No available interval supports improvement. The other nine available intervals include zero; twelve quadratic contrasts are unavailable. With only eight clusters, the interval calculation relies materially on an approximate normality assumption and is conditional on these fixed datasets and the frozen selection.

The independent numerical audit verifies references, paired clouds, unchanged source files and twelve frozen-guide finite-difference checks. Its largest derivative discrepancy is 1.392×10^{-8}. Correct differentiation of this finite program therefore coexists with poor model-score estimation. This motivated checking whether the uncertainty omitted in Proposition 29 explains the consumer's behavior. The completed comparison rejects the tested fitted candidates; it does not establish that fitting capacity is the cause or that backward guidance itself cannot help. Detailed results and executable provenance are in the repository's 17 October fitted-KSC result note.

A subsequent saved-fit calculation checks this mechanism without refitting or using the final scores to select a repair. Across all 24 saved kernel fits, using the first paired cloud of each fitting cluster, the exact product with the same current-observation Gaussian has variance between 2.45 and 6.18 times the consumer covariance. The median ratios are 5.78 in the ordinary condition, 4.93 in the negative future tail, and 2.84 in the positive future tail. The corresponding exact seven-component future-message controls have median ratios 1.30, 1.19 and 1.10. These ratios compare local Gaussian-product moments; they are not ratios of score errors or of exact smoothing variances. The shared global map reproduces the stated consumer formula, and the omitted between-component variance accounts for the homoscedastic product-covariance gap to numerical precision.

At 252 of the 792 inspected fitted-kernel anchors, the negative log-message Hessian is negative. Substituting that Hessian directly into a positive-information bridge would therefore require a new numerical design. Proposition 30 instead supplies a positive-definite covariance from the full Gaussian product. Its optional global consumer has now been evaluated with new fitting and particle-cloud seeds.

14.10 Score evidence for the product-moment consumer

The product-moment consumer improves four conditional comparisons against the old fitted global consumer, but neither repaired arm passes the simple-method comparison. In particular, no simultaneous interval supports improvement over unguided global proposals. This distinction matters: repairing the treatment of a fitted message can help without making that message useful relative to the current-observation proposal alone.

The comparison keeps the selected 256-component kernel fit, 16 transition replicates and bandwidth factor 0.5 fixed. Each of the three known datasets has eight independent new fits and eight paired particle clouds per fit. Twelve arms give 2,304 valid evaluations. They retain $N = 32$, $T = 2$, the same branch probabilities, FP64 GPU/XLA execution and the untuned OT pair $(1, 5)$. Twenty focused tests, two extended map checks and the independent terminal audit pass; all 24 two-step finite-difference checks pass, with largest absolute discrepancy 7.512×10^{-7}. The finite-program score therefore remains numerically consistent with its analytical derivative on these fixtures.

Table 1 reports descriptive score MSE. Paired squared-error differences are first averaged over clouds within a fit, then compared using the predeclared Student-t intervals with seven degrees of freedom and Bonferroni coverage over all 24 contrasts. Four intervals exclude zero, all for the repaired global consumer minus the old fitted global consumer. For the ordinary condition they are $[-0.004678, -0.001086]$ for $\Phi^{-1}(\gamma)$ and $[-0.249588, -0.007418]$ for $\log \beta$; for the negative future tail they are $[-0.004168, -0.000065]$ and $[-0.332686, -0.040739]$, respectively. The other 20 intervals include zero. With eight fitting clusters, coverage relies materially on approximate normality. These conditional results do not establish an overall ordering or performance on new datasets.

Condition	Score	Old fitted/global	Product fitted/global	Unguided/global
Ordinary	$\Phi^{-1}(\gamma)$	0.003160	0.000278	0.000333
	$\log \beta$	0.164397	0.035894	0.028721
Negative future tail	$\Phi^{-1}(\gamma)$	0.002596	0.000480	0.000519
	$\log \beta$	0.240727	0.054015	0.063579
Positive future tail	$\Phi^{-1}(\gamma)$	0.036836	0.055990	0.047481
	$\log \beta$	1.548788	0.797663	0.558655

Table 1: Conditional score MSE on fresh fit/cloud seeds for the three fixed KSC datasets. The product consumer changes only global moment conditioning. These descriptive MSEs require the paired uncertainty analysis in the text.

The repaired global and equal-mixture arms have seven and 21 descriptive losses, respectively, against the six predeclared simple alternatives across conditions and score coordinates. These losses prevent promotion under the stated criterion; they do not establish statistical harm or invalidate the computation. Both arms remain numerically viable and the runtime default is unchanged. Because the repair changes the product mean as well as covariance, the improvements cannot be attributed to between-component variance alone.

The exact seven-component and fitted future messages have since been compared under the same product-moment consumer, alongside the old-consumer and unguided controls. Across the three fixed datasets, this comparison contains 2,688 evaluations; all 36 predeclared simultaneous intervals for score squared-error differences include zero. The positive-tail error persists with the exact future message. Thus fitting error is not the only remaining source of error, and increasing fitting capacity is not yet the justified next repair. This comparison does not separate the current-observation Gaussian approximation, the particle-flow maps and the moment-restoring reset.

Two subsequent diagnostics examine particle-count sensitivity in the positive future tail. The first uses 32 and 64 particles, with 768 evaluations; all 14 simultaneous contrasts remain unresolved. The second uses fresh particle clouds at 64 and 128 particles, conditional on eight saved message fits and the fixed observations $(0.2, 5)$ at horizon two. Each fit has twelve paired cloud replications and eight proposal arms, giving 1,536 evaluations. These are distinct cloud cohorts, not a single nested 32/64/128 experiment. All 9,216 trace checks pass, and sixteen finite-difference checks have maximum error 4.506×10^{-8}. Those derivative checks concern the finite program, not equality of its score estimate to the model score.

Proposal arm	$N = 64$	$N = 128$
Unguided identity	5.417606	1.599848
Unguided global	0.307492	0.080886
Unguided local	0.715379	0.220078
Unguided equal mixture	1.006312	0.162202
Gaussian-future global	0.244775	0.081583
Gaussian-future equal mixture	0.655549	0.122387
Fitted-product global	0.309736	0.098673
Exact-product global	0.317615	0.100010

Table 2: Conditional MSE for the $\log \beta$ score coordinate in the final positive-tail particle-count diagnostic. Both counts use the same saved fits and nested paired clouds within this diagnostic. The entries are descriptive; the simultaneous contrasts below determine which differences are supported.

For the final diagnostic, the uncertainty analysis pairs cloud replications within each saved fit and uses the eight fit-cluster means, with a Student t_7 reference and Bonferroni-adjusted 95% simultaneous intervals for fourteen contrasts. Four support a conditional gain: each product arm at 128 particles has lower squared error than its own 64-particle arm and than unguided local at 128 particles. For the count increases, the fitted and exact differences are -0.211064 and -0.217606, with intervals $[-0.404694, -0.017433]$ and $[-0.423695, -0.011517]$, respectively. No interval establishes improvement over unguided global or Gaussian-future global.

Both product arms have higher observed MSE than those two global alternatives at 128 particles. These four descriptive losses fail the predeclared simple-method comparison and prevent promotion; they do not establish statistical harm or invalidate the numerical computation. The supported count effects are conditional on the saved fits and fixed observations. They establish neither particle-count convergence nor improvement on new fits or datasets, and they are not equal-compute comparisons. The next discriminating diagnostic should separate the current-observation Gaussian and flow-map approximation from the moment-restoring reset, rather than first enlarging the future-message fit. None of these diagnostics changes the runtime default or establishes equivalence of this reset to canonical Contract E.

14.11 SIR transfer with fixed transport settings

The SIR comparison holds the entropic transport parameter and number of Sinkhorn iterations at $(\epsilon, L) = (1, 5)$. It asks whether a frozen approximation to future information improves the likelihood-score estimate. The unguided, quadratic-guided and kernel-guided arms use the same three-density proposal, equal mixture probabilities, observations, particle counts and paired random numbers. Prior-only, defensive global and defensive local proposals provide simpler comparisons. The current consumer is the optional covariance-mixture implementation; these results do not establish conformance of the canonical UKF/dual-cap/Contract-E implementation.

Let $x_0 \sim N(m_0, I_{18})$, $x_{t+1} \mid x_t \sim N(f_{\theta_\star}(x_t), I_{18})$, and let the observation covariance at the frozen fitting parameter $\theta_\star = 0$ be $100I_9$. The function f is the existing SIR transition, including its documented author-code discretization. To preserve the initial-state timing, the controlled-SMC fit has $T+1$ stages, indexed $0, \ldots, T$, and potential $g_0 = 1$. Thus it samples the actual Gaussian x_0 before the first transition; it does not replace the generally non-Gaussian predictive law of x_1 by a Gaussian initial distribution.

Proposition 34 (Integrating the next fitted SIR policy)**.** *Suppose the frozen controlled-SMC policy at time $t+1$ is $\psi_{t+1}(z) = \exp(-z^\top A_{t+1} z - b_{t+1}^\top z - c_{t+1})$, with symmetric A_{t+1}, and $Q^{-1} + 2A_{t+1} \succ 0$. Write $m = f_{\theta_\star}(x)$, $S = (Q^{-1} + 2A_{t+1})^{-1}$ and $v = Q^{-1}m - b_{t+1}$. Then the future-only message obtained from this policy is*

$$h_t(x) = \int N(z; m, Q)\psi_{t+1}(z)\, dz, \quad t < T, \qquad h_T(x) = 1, \tag{227}$$

$$\log h_t(x) = \tfrac{1}{2}\log|S| - \tfrac{1}{2}\log|Q| - c_{t+1} + \tfrac{1}{2}v^\top S v - \tfrac{1}{2}m^\top Q^{-1} m. \tag{228}$$

This identity integrates the fitted policy exactly; it does not assert that the fitted policy equals the true future likelihood.

Proof. Combining the Gaussian exponent and the policy gives $-\frac{1}{2}z^\top S^{-1} z + v^\top z - \frac{1}{2}m^\top Q^{-1} m - c_{t+1}$. Completing the square replaces its first two terms by $-\frac{1}{2}(z - Sv)^\top S^{-1}(z - Sv) + \frac{1}{2}v^\top S v$. The Gaussian integral contributes $(2\pi)^{18/2}|S|^{1/2}$, which cancels the corresponding normalization in $N(z; m, Q)$ and gives (228). At T there is no later observation. The next policy includes information from time $t+1$ onward; multiplying the resulting proposal by the physical observation density at t therefore does not duplicate that observation. □

One backward regression pass uses the replicated full-quadratic controlled-SMC implementation with centered QR. An independent forward pilot under that fitted policy supplies weighted means and covariances for the message-fitting design. Gaussian training and validation locations are drawn independently from those design distributions. No evaluation particle or score error enters the fit. Offline controlled SMC uses its ordinary ancestor resampling; the subsequent guided LEDH evaluation needs only the frozen coefficient arrays and does not trace smoothing ancestors.

Proposition 35 (Positive-information quadratic approximation)**.** *Suppose regression gives $\log h_t(x) \approx -\frac{1}{2}x^\top H x + \ell^\top x - c$. For a design center μ, choose a positive-semidefinite approximation H_+ and define $\ell_+ = \ell + (H_+ - H)\mu$. The two quadratic approximations have the same spatial gradient at μ. If $H_+ = H$, all coefficients except the irrelevant additive constant can remain unchanged.*

Proof. The new gradient at μ is $-H_+\mu + \ell + (H_+ - H)\mu = -H\mu + \ell$. An additive constant can also match the values at μ. This establishes only local value and gradient matching, not equality away from μ. □

The implementation preserves a well-conditioned positive H exactly. Otherwise it clips its eigenvalues at the explicit roundoff floor $64ud\|H\|_2$, where u is FP64 machine epsilon and $d = 18$. The floor protects reconstruction of zero eigenvalues; clipping negative curvature changes the fitted message. The number of projections and the heldout errors before and after projection are therefore retained. This is a positive-information proposal approximation, not a claim that future SIR log likelihoods are globally concave.

The alternative representation fits positive coefficients in $\widetilde{h}_t(x) = \sum_{k=1}^{32} a_{tk} \exp[-\frac{1}{2}(x - \mu_{tk})^\top C_t^{-1}(x - \mu_{tk})]$. Here C_t is the pilot design covariance multiplied by a bandwidth squared.

The bandwidth is selected from $\{1/2, 1, 2\}$ by independent message validation error. A fitted kernel message is active only when it improves on a constant message on those validation locations. Coefficient normalization is immaterial because a common positive factor cancels from local responsibilities. This local positive-kernel fit is KDM-inspired; it is not the replicated KDM neural training algorithm.

Proposition 36 (Frozen guidance and the evaluation derivative)**.** *Let η denote either frozen coefficient array and let $\widehat{\ell}(\theta; \eta, \omega)$ be the finite consumer's log-likelihood estimate for fixed random design ω. On a region where all validity checks pass and all discrete component selections stay fixed, analytical recursion through its maps, exact proposal densities, weights and reset computes $\partial_\theta \widehat{\ell}(\theta; \eta, \omega)$ when every state dependence is propagated. No derivative of the offline fit is needed for this stated target.*

Proof. Each fitted coefficient is constant with respect to θ in this evaluation. Apply the ordinary chain rule to each finite recursion step. For a mixture guide, responsibilities still depend on the moving state; their derivatives must be propagated even though centers, covariances and mixture coefficients are frozen. The consumer differentiates these responsibilities, the Gaussian maps, the mixture-density denominator and the moment-restoring reset. Induction over time then gives the derivative of the same scalar program. Refitting at each θ would define a different scalar program and require additional fit derivatives. □

The proposition concerns a finite-program derivative, not equality to the true model score. The SIR diagnostic checks it in all three parameter directions. Central differences at steps 10^{-4} and 5×10^{-5} exhibit truncation error in the quadratic-guided arm; halving the step reduces that error fourfold. Both finer steps, 2.5×10^{-5} and 1.25×10^{-5}, pass the unchanged 2×10^{-5} relative-error threshold, and their Richardson extrapolation passes 2×10^{-6}. Across the three arms the maximum extrapolated discrepancy is 1.81×10^{-9}. These checks change the numerical reference used to test the derivative, not the guided algorithm or its transport settings. Its saved Zhao–Cui reference is itself an approximate fitted score from importance-weighted path calculations, rather than an exact oracle.

14.12 Independent mixture calibration: what it can improve

A future message changes the global and local proposal maps. Giving each map probability $1/3$ isolates this change, but may allocate many particles to a poor map. We therefore consider a separate, frozen calibration of the three proposal probabilities. This changes neither the physical transition density nor the importance target. It also leaves OT at $(1, 5)$.

For context c, fix the incoming particle cloud and all three maps. Write $a_c(x) = g_\theta(y_c \mid x) q_{c0}(x)$ and $h_c(x) = (q_{c0}(x) + q_{cG}(x) + q_{cL}(x))/3$. Draw M pilot points X_{cm} independently from h_c, and set

$$r_{cmj} = \frac{q_{cj}(X_{cm})}{h_c(X_{cm})}, \qquad u_{cm} = \frac{a_c(X_{cm})}{h_c(X_{cm})}, \qquad \bar{u}_c = \frac{1}{M} \sum_{m=1}^{M} u_{cm}.$$

The implementation minimizes the following finite-pilot objective over a defensive simplex, with all pilot quantities held fixed:

$$\widehat{J}(\beta) = \sum_{c=1}^{C} \sum_{m=1}^{M} \frac{\lambda_{cm}}{\sum_j \beta_j r_{cmj}}, \qquad \lambda_{cm} = \frac{(u_{cm}/\bar{u}_c)^2}{CM}, \qquad \beta_0 \geq \delta, \quad \beta_j \geq 0, \quad \sum_j \beta_j = 1.$$

The normalization prevents contexts with large likelihood scales from dominating the fit. Because $\bar{u}_c$ is estimated from these same points, this is not an unbiased estimator of a deterministic normalized population objective. It is an explicitly defined empirical selection criterion.

Proposition 37 (Convex calibration and its certificate)**.** *Suppose every denominator is positive on the feasible simplex. Then $\widehat{J}$ is convex, with*

$$\nabla \widehat{J} = -\sum_{c,m} \frac{\lambda_{cm} r_{cm}}{(\beta^\top r_{cm})^2}, \qquad \nabla^2 \widehat{J} = 2 \sum_{c,m} \frac{\lambda_{cm} r_{cm} r_{cm}^\top}{(\beta^\top r_{cm})^3}.$$

If v minimizes $\nabla \widehat{J}(\beta)^\top v$ over the feasible simplex, the nonnegative gap $G(\beta) = \nabla \widehat{J}(\beta)^\top (\beta - v)$ bounds $\widehat{J}(\beta) - \min_b \widehat{J}(b)$ from above.

Proof. Differentiate each reciprocal affine denominator to obtain the displayed derivatives. Every Hessian summand is a nonnegative multiple of an outer product, so the Hessian is positive semidefinite. For a minimizer b_*, convexity gives $\widehat{J}(\beta) - \widehat{J}(b_*) \le \nabla \widehat{J}(\beta)^\top (\beta - b_*)$. The definition of v bounds the right-hand side by $G(\beta)$. □

At the population level, minimizing $J_c(\beta) = \int a_c(x)^2 / q_{c\beta}(x)\, dx$ reduces the conditional variance of the one-step importance estimate for fixed clouds and maps. Neither that statement nor the proposition establishes a reduction in the variance or mean squared error of the recursively differentiated log-likelihood. Changing β also changes later clouds, which the fixed-context objective does not model. The empirical gap certifies optimization, not score accuracy.

The diagnostic uses $C = 50$, $M = 256$ and $\delta = 0.1$. Separate prior-filter histories and mixture draws provide calibration and validation contexts. Each guide receives its own fitted β, frozen before fresh score-evaluation seeds are generated. An unguided arm at the same fitted β separates the effect of the future message from that of proposal allocation. A second unguided arm uses its own independently fitted β. Prior-only and defensive-local proposals remain inexpensive comparison methods. A smaller validation objective cannot substitute for the paired score-error comparison.

14.13 SIR evidence with fixed transport settings

The completed 19 October comparison does not show a score-estimation gain. It holds transport regularization at one and the number of Sinkhorn iterations at five, uses 256 particles over 50 observations, and evaluates eight paired particle seeds on each of two fixed SIR data sets. The quadratic and positive- kernel messages are fitted once per data set and then frozen. Table 3 reports the square root of the mean squared Euclidean score error against the saved approximate Zhao–Cui reference. Thus the three parameter errors enter each row jointly; the table does not rescale individual coordinates.

All four predeclared paired 98.75% bootstrap intervals for guided minus unguided squared error have positive lower endpoints. Under this conditional analysis, both guides make the score error worse on both data sets. The prior and defensive-local methods have much smaller descriptive errors than the complex proposals; every complex arm also fails the componentwise heuristic comparison. Prior versus local is not statistically ranked by this experiment. The intervals condition on the two observed data sets and their fitted guides, and do not propagate uncertainty in the approximate reference. They cannot establish a population-wide ranking of algorithms.

One defensive-global trajectory fails at observation four. An exact-seed replay reproduces covariance error 0.988952 and factorization margin 6.25×10^{-17}. This is covariance rank loss, not a harmless 10^{-13} discrepancy. The partial score is not a valid full-horizon score and is excluded from numerical ranking, while its failure remains reported.

Proposal	Data 26100831	Data 26100832
Unguided, equal mixture	1334.57	123.30
Quadratic guide, equal mixture	8524.21	1730.43
Positive-kernel guide, equal mixture	58237.43	606.03
Prior only	116.04	86.63
Defensive local	127.69	80.92
Defensive global	1445125.02	Invalid

Table 3: Conditional SIR score errors with fixed OT $(1, 5)$. Each valid entry uses all eight prescribed particle seeds. The invalid entry is not replaced by an average over its seven surviving seeds.

These results concern the optional three-density diagnostic consumer, not the canonical UKF/dual-cap/Contract-E LEDH implementation. The positive-kernel message is KDM-inspired rather than the replicated neural KDM learner. Analytical differentiation and finite-difference agreement establish which finite-program derivative is computed; they do not make that derivative an accurate model score. The following controlled comparison fits proposal allocation independently and includes unguided proposals at each guided arm's fitted allocation. That comparison tests whether equal allocation contributed to the failure, without changing the transport settings or treating a lower pilot objective as evidence of a better score.

14.14 Independent proposal allocation does not establish a general SIR gain

The second comparison keeps both fitted messages and OT $(1, 5)$ unchanged, but chooses proposal probabilities using independent pilot clouds. Each of the three message families has its own allocation on each data set. The six optimizations use no reference scores; all satisfy the relative duality-gap tolerance 10^{-7}. Their validation objectives are finite and lower than equal allocation, but this does not predict the accuracy of the likelihood derivative. Fresh particle seeds provide the score comparison.

To distinguish guidance from allocation, an unguided filter also uses each guided filter's fitted probabilities. This gives seven methods, each evaluated on eight paired seeds per data set. All 112 trajectories complete, and all 84 finite-difference and 42 Richardson checks pass. Table 4 uses the same score-error definition and approximate references as the first comparison. Calibrated unguided probabilities are effectively $(.1, 0, .9)$, so their equality with the defensive-local results is expected.

Proposal	Data 26100831	Data 26100832
Unguided, own calibrated allocation	94.62	77.70
Quadratic guide, own allocation	96.36	70.87
Positive-kernel guide, own allocation	84.51	65.45
Unguided at quadratic allocation	82.23	82.44
Unguided at kernel allocation	83.86	83.60
Prior only	82.19	83.89
Defensive local	94.62	77.70

Table 4: SIR score RMSE after independent proposal calibration, with fixed OT $(1, 5)$ and eight fresh paired seeds per entry. These descriptive errors are not themselves statistical rankings.

Two of the eight predeclared paired comparisons support a conditional gain. On data 26100832, quadratic guidance minus its matched-allocation unguided control has squared-error difference -1773.42, with nominal 99.375% bootstrap interval $[-3845.26, -400.55]$. The corresponding kernel

difference is -2705.81, with interval $[-7192.82, -102.72]$. Both matched-allocation intervals on data 26100831 include zero. All four comparisons against the independently calibrated unguided method also include zero. Thus neither guide satisfies the specified requirement of gains on both data sets against both comparator types.

The simple methods reveal a further limitation. On data 26100831, each guided method has larger error than prior-only proposals in every coordinate MSE. On data 26100832, the kernel has larger observation-noise-score MSE than all three simple comparators. These are the specified componentwise reasons not to promote the candidates, rather than statistically established component rankings. The quadratic guide passes that comparison on the second data set but not across both data sets.

The allocation repair therefore changes the evidence from broad conditional harm to a mixed result, not to a demonstrated improved LEDH method. The two stages use different particle seeds, so their numerical difference is not a paired estimate of calibration's causal benefit. The present intervals condition on one fitted guide per data set and omit reference uncertainty; with only eight seeds, their nominal bootstrap coverage is not exact. The optional three-density consumer and positive-kernel approximation retain the scope limitations described above.

The next discriminating question is whether current-observation proposal and reset errors obscure useful future information in SIR. That question requires an explicit decomposition and a checked connection to the canonical LEDH consumer, not another transport sweep or selection of probabilities on these final scores. The result leaves that research direction open while withholding a general accuracy claim for either present guide.

15 Learning guides for moments and scores without a posterior oracle

Empirical status, 23 October 2026. The $N = 64$ studies reported in this section are disqualified. Their results, trained selections and negative conclusions must not support scientific or performance decisions. The minimum particle count for fresh experiments is $N = 1008$; the propositions below do not establish the outcome of those experiments.

Contract E preserves specified moments of the weighted cloud presented to the reset. It cannot correct a cloud whose moments already differ from the desired posterior moments. We therefore keep the reset and its analytical derivative fixed and change the objective used to fit and select the upstream guide. The distinction is consequential: a small error in a backward-message regression, or small variability of importance weights, need not imply a small error in the parameter score. The proposal below trains against the quantities we wish to estimate, while avoiding an observed-score oracle.

The starting point is simulation. A simulated latent state is not a posterior mean, but it is a noisy label whose conditional mean is precisely that posterior mean. This observation gives an exact population-risk identity. Complete-data parameter scores provide an analogous label for the observed-data score. Neither identity asserts that a finite optimization finds its population minimum, or that improvement averaged over simulated datasets transfers to every particular observation sequence.

15.1 Why one simulated trajectory can supervise conditional moments

Let C be the conditioning information available to the estimator, and let $V = \Phi(X, C) \in \mathbb{R}^r$ be a vector of features of a simulated latent variable. For filtering moments $C = (\theta, Y_{1:t})$; for a

proposal informed by future observations it may instead be $(\theta, X_{t-1}, Y_{t:T})$. These are different conditional distributions and their labels must not be interchanged. Define $\mu(C) = \mathbb{E}[V \mid C]$. The estimator $A_\eta(C, U)$ uses guide settings η and algorithmic randomness U. The features can contain state coordinates, raw products $X_j X_k$, and selected nonlinear functions appearing in transition or observation scores. Raw products are labels for second moments; covariance is subsequently obtained by subtracting the outer product of the estimated mean.

Assumption 2 (Simulation labels and information separation)**.** *Training pairs (C, V) have the declared model law. Conditional on C, the particle randomness U is independent of V. For each fixed candidate η, A_η is measurable with respect to (C, U) and does not receive the latent label. Both V and A_η are square integrable. The symmetric weight matrix $W(C)$ is positive semidefinite and specified without access to the latent evaluation label beyond C; it is the same for every candidate. All displayed weighted second moments are finite. Learned weights and settings are treated as fixed when evaluating a fresh validation or test dataset.*

Proposition 38 (Moment supervision without known posterior moments)**.** *Under Assumption 2, with $\|v\|_W^2 = v^\top W v$,*

$$\mathbb{E}\|A_\eta - V\|_W^2 = \mathbb{E}\|A_\eta - \mu(C)\|_W^2 + \mathbb{E}\|V - \mu(C)\|_W^2. \tag{229}$$

Consequently the supervised population loss and the actual conditional-moment MSE have the same minimizers over any fixed candidate family.

Proof. Write $A_\eta - V = (A_\eta - \mu) - (V - \mu)$ and expand the square. The mixed term has conditional expectation

$$\mathbb{E}[(A_\eta - \mu)^\top W (V - \mu) \mid C, U] = (A_\eta - \mu)^\top W \, \mathbb{E}[V - \mu \mid C, U] = 0.$$

The last equality uses conditional independence and the definition of μ. Taking expectations gives the identity. Its second term is independent of η, proving the minimizer statement. □

For example, if $X \mid C$ is scalar normal with mean m and variance v, then $\mathbb{E}[(a - X)^2 \mid C] = (a - m)^2 + v$. Replacing X by X^2 gives a label for $m^2 + v$; its irreducible conditional variance is $2v^2 + 4m^2 v$. Higher-order features therefore bring additional label noise. We choose them because the score uses them, rather than assuming that matching every available moment must help. A moment-matching objective alone gives no theorem about the derivative of the finite LEDH program.

15.2 Complete-data labels target the actual LEDH score risk

Fix a parameter θ and a joint density $p_\theta(x, y)$ with a parameter-independent dominating measure. Suppose differentiation can pass under the integral defining $p_\theta(y)$, the relevant scores are square integrable, and $p_\theta(y) > 0$. Define

$$H_\theta(x, y) = \nabla_\theta \log p_\theta(x, y), \qquad s_\theta(y) = \nabla_\theta \log p_\theta(y). \tag{230}$$

The latent path is held fixed in H_θ. Differentiating the simulated path itself with common base noise generally computes a different quantity.

Proposition 39 (Score supervision and paired comparisons)**.** *Under the preceding regularity conditions, $\mathbb{E}[H_\theta(X, Y) \mid Y] = s_\theta(Y)$. For any estimator $\widehat{s}_{\theta,\eta}(Y, U)$ satisfying the separation and integrability conditions of Assumption 2,*

$$\mathbb{E}\|\widehat{s}_{\theta,\eta} - H_\theta\|_W^2 = \mathbb{E}\|\widehat{s}_{\theta,\eta} - s_\theta(Y)\|_W^2 + C_\theta, \quad C_\theta = \mathbb{E}\|H_\theta - s_\theta(Y)\|_W^2. \tag{231}$$

For two fixed candidates a, b, the expectation of their difference in supervised losses equals their difference in true score MSE.

Proof. For almost every y with positive marginal density,

$$\int H_\theta(x,y)p_\theta(x \mid y)\,\mathrm{d}x = \frac{1}{p_\theta(y)}\int \nabla_\theta p_\theta(x,y)\,\mathrm{d}x = \frac{\nabla_\theta p_\theta(y)}{p_\theta(y)}.$$

This is the stated conditional identity. Apply Proposition 38 with $C = (\theta, Y)$ and $V = H_\theta$. Subtracting the identities for a and b cancels C_θ. □

Here $\widehat{s}$ can be the analytical total derivative of the same frozen finite LEDH likelihood program used for evaluation. The result does not replace that derivative by a smoothing estimator: complete-data scores are training labels only. Nor does it require $\widehat{s}$ to be unbiased. The risk includes both squared bias and particle variance. If θ is drawn from a specified training distribution, integrating the identity over that distribution gives the corresponding average-risk statement. A fit at one θ establishes no coverage of other parameter regions.

The population identity does not make an in-sample loss difference an unbiased assessment of a selected candidate. Select settings using calibration and validation data, freeze them, and assess them on independent test sequences. For each sequence share its label and, where possible, particle seeds between candidates. Average particle replicates within a sequence before computing uncertainty across independent sequences. Reusing a seed to generate both the latent label and the particle approximation can invalidate the proof.

15.3 Exact labels for the SIR scope actually being computed

The active continuous SIR comparison has $X_0 \sim \mathcal{N}(m_0, I)$, $X_t \mid X_{t-1} \sim \mathcal{N}(f_\theta(X_{t-1}), I)$ and $Y_t \mid X_t \sim \mathcal{N}(BX_t, \sigma_\theta^2 I_9)$, where B extracts infectious coordinates and $\sigma_\theta = 10e^{\theta_3}$. The first two parameters are log scales of infection and removal coefficients in the existing RK4 transition. This is the continuous law used by the shared consumer, not an assertion that a simulator which clips susceptible states has the same joint density. The initial distribution is parameter independent in this scope.

Proposition 40 (Fixed-path SIR score labels)**.** *Let $r_t = X_t - f_\theta(X_{t-1})$ and $e_t = Y_t - BX_t$. The complete-data label in these three parameter coordinates is*

$$H_j = \sum_{t=1}^{T} r_t^\top \partial_{\theta_j} f_\theta(X_{t-1}), \quad j = 1, 2, \qquad H_3 = \sum_{t=1}^{T} (\|e_t\|^2/\sigma_\theta^2 - 9). \tag{232}$$

Proof. The transition log density contributes $-\frac{1}{2} r_t^\top r_t$ and a parameter-independent normalizer. At fixed adjacent states, $\partial_{\theta_j} r_t = -\partial_{\theta_j} f_\theta(X_{t-1})$, giving the first expression. The observation term is $-9\log\sigma_\theta - \|e_t\|^2/(2\sigma_\theta^2)$ plus a constant. Since $\partial_{\theta_3}\log\sigma_\theta = 1$ and BX_t is fixed, its derivative is the second expression. Sum over time; the initial law contributes zero. □

The implementation must reuse the consumer's transition and its analytical parameter tangent with zero incoming state tangent. This prevents a second, inconsistent SIR integrator from defining the labels. A separate fixed-path finite-difference check verifies the sum of joint log densities. For an alternative clipped model, one must instead use a correct mixed-measure density or a continuous pre-clipping augmentation with the correct observation and transition laws. Simply evaluating a Gaussian density on clipped states would violate the assumptions of Proposition 39.

15.4 Changing controlled SMC and KDM at their actual consumers

Controlled SMC supplies a useful initial policy through the backward least-squares recursion of Heng et al. [2020, Section 4.2, equations (20)–(21)]. We retain that recursion and evaluate settings such as basis, iteration count and guide strength by the moments or analytical scores produced downstream. The first implementation can select a finite, declared bank of such settings; continuous optimization of every control coefficient is a further method, requiring its own derivative and optimization checks. A smaller backward residual is an explanatory measurement, not the supervised objective.

For KDM, Younis and Sudderth [2023, Section 5, equation (18)] train density NLL and also describe subsequent refinement of the weighted mean by MSE; Appendix D.1, equation (23), defines that mean loss. Their released full-sequence trainer evaluates the chosen loss on latent-state labels. Replacing the mean feature by selected features gives Proposition 38; using the actual LEDH score and complete-data labels gives Proposition 39. These are adaptations. Our positive-RBF SIR message export is KDM-inspired and does not become original neural KDM training merely by changing its selection objective.

The consumer matters as much as the loss. If a Gaussian base is multiplied by a Gaussian-mixture message, each product component has mean m_k and covariance C_k, and normalized product weight α_k. Its moments are

$$\bar{m} = \sum_k \alpha_k m_k, \qquad \bar{C} = \sum_k \alpha_k \{C_k + (m_k - \bar{m})(m_k - \bar{m})^\top\}. \tag{233}$$

This follows by expanding $\mathbb{E}[(X - \bar{m})(X - \bar{m})^\top \mid k]$ and averaging over k. Averaging component precision matrices omits the displayed between-component dispersion. We can use $\mathcal{N}(\bar{m}, \bar{C})$ as the proposal while retaining all analytical derivatives of these moments. It is a moment-matched Gaussian, not a draw from the full product mixture. Consequently the importance denominator must be this Gaussian density, followed by the existing flow Jacobian correction. The original target density is unchanged.

Proposition 41 (Admissible quadratic guidance)**.** *Multiplying $\mathcal{N}(m, Q)$, $Q \succ 0$, by $\exp(-x^\top \Lambda x/2 + b^\top x)$ with symmetric Λ defines a normalizable Gaussian density if and only if $Q^{-1} + \Lambda \succ 0$.*

Proof. The exponent has quadratic precision $P = Q^{-1} + \Lambda$ and linear term $Q^{-1}m + b$. When $P \succ 0$, completing the square gives covariance P^{-1} and mean $P^{-1}(Q^{-1}m + b)$ and a finite Gaussian integral. If P has a negative eigenvalue, the integral grows exponentially along that eigendirection. If it is positive semidefinite and singular, integration along a null direction diverges whether the corresponding linear coefficient is zero or nonzero. These exhaust the symmetric cases. □

Thus $\Lambda \succeq 0$ is sufficient but unnecessarily restrictive. The optional unprojected quadratic candidate must pass the actual total-precision check at every consumed covariance. Failure rejects the candidate; it does not authorize clipping or silently changing the target. Product-moment and unprojected-quadratic settings are evaluated separately, so that changed representation and changed fitting objective can be distinguished.

15.5 Executable training and evaluation order

1. Declare the exact model law, parameter coordinates and training region; choose moment or score loss and its frozen scaling. Partition simulation seeds into calibration, validation and test sets before fitting.

2. Simulate (X, Y) and compute fixed-path labels. Pass only Y, the declared parameter and independent fit randomness to cSMC/KDM. Latent paths are retained solely in the label calculation.

3. Fit backward messages on observations; construct each declared guide candidate. For each candidate run the shared full analytical LEDH executor with independent particle noise, Contract E and OT $(1, 5)$. Include the unchanged and unguided comparators. Compute losses from the actual consumed proposal and actual final score, rather than a detached guide-only prediction.

4. Select guide settings on calibration/validation data, with numerical validity checked before loss. Freeze all choices and evaluate independent test sequences. Keep latent labels and particle randomness independent conditionally on the observations and parameter throughout.

5. Report paired score-loss differences and their uncertainty, separately from moment error and message fit. A finite bank implements supervised selection; it does not establish globally optimal controls, neural capacity training, or canonical tuning admission.

Offline fitting parameters remain fixed in the analytical score recursion. If a future implementation makes guide coefficients explicit functions of θ inside the value program, their derivatives must be included; a frozen-guide partial derivative must not be called that program's total derivative. Optimization over guide settings does not require differentiating the score: a finite candidate bank already supplies a valid first experiment. For gradient optimization, the required mixed derivatives concern training parameters and must be distinguished from the analytical model-score path.

15.6 The first SIR implementation and its limits

The first implementation selects a finite bank of guide settings using the analytical score produced by the shared LEDH executor. It includes the UKF covariance lifecycle, flow, Contract E reset and both diagonal and pairwise GenUT corrections. The kernel alternative uses the fitted positive-RBF message described above. It does not train a new neural KDM. Direct moment supervision is implemented as a loss, but the executed bank selection uses score loss; terminal first- and second-moment errors are explanatory only.

The short SIR experiments use 64 particles at $\theta = (0, 0, 0)$, two calibration sequences, two validation sequences and four untouched test sequences, each evaluated with two independent particle streams. OT remains $(1, 5)$, with 32 terminal balancing updates also held fixed. Computation uses double precision on the GPU as a diagnostic exception. These small experiments test the learning signal and the actual consumer, rather than establish settings for a longer horizon or a different parameter region.

At $T = 2$, the unprojected quadratic guide was initially rejected by an implementation check requiring $\Lambda \succeq 0$. Proposition 41 shows why that condition is unnecessarily restrictive. An explicit optional setting now checks positive total precision instead, while preserving the old default. Tests cover both an admissible indefinite guide and a nonnormalizable proposal. The failed rows are retained as implementation failures; they are not evidence against unprojected guidance.

After that repair, a fresh $T = 5$ experiment completed all 96 candidate runs with valid stage diagnostics. Each of its six candidates also passed a directional finite-difference check of the frozen finite program. Table 5 reports the scaled supervised loss $\sum_{j=1}^{3}((\widehat{s}_j - H_j)/a_j)^2$, where $a_j = \max\{1, \sqrt{\text{mean}_{\text{calibration}}\, H_j^2}\}$ is fixed before validation. Thus these entries include irreducible label noise; they are not measured squared errors against a known observed score.

Guide	Validation mean loss	Test mean loss
None	1653.53	65902.87
cSMC, half strength	4515.01	23443.86
cSMC, projected	3136.57	9575.05
cSMC, unprojected	3151.98	9454.93
Kernel, positive information	3328.31	15098.74
Kernel, product moments	3592.32	10847.56

Table 5: Descriptive $T = 5$, $N = 64$ supervised score losses. Particle replicates are averaged within each sequence, then independent sequences are averaged. The validation and test sets contain two and four sequences, respectively. No statistical ranking follows from this table.

Unguided LEDH has the lowest validation loss. Selection within each guide family nominates projected cSMC and positive-information kernel guidance, but neither nomination justifies replacing the unguided method. All guided test means are lower than the unguided test mean, yet every guided candidate has higher loss on one of the four test sequences. Most of the mean difference comes from the observation-noise score and a single sequence on which the unguided loss is very large. The separate validation and test comparisons therefore do not establish a reliable ranking. They also do not invalidate the population identity: a small, noisy sample need not order candidates by their population risk.

The next scientific comparison needs fresh simulations, more independent sequences and its own scope-specific calibration of the remaining LEDH and guide controls. The same fixed OT choice can be retained. More particle replicates alone would not resolve uncertainty across datasets. The implementation plan and full paired results are preserved in `docs/plans/ledh-supervised-guidance-20261019.md` and `docs/plans/artifacts/ledh-supervised-guidance-20261019/result.md`.

15.7 Why a valid future guide can lose its intended effect in the flow

The preceding risk identity supplies an objective; it does not establish that the current proposal family can reduce it. There is a further distinction between fitting a future message and applying that message in the coordinates where it was fitted. The backward message $h_t(x)$ is a function of the physical state after the current observation update. Our implemented adapter instead multiplies a Gaussian density before the LEDH transformation by a quadratic approximation to this message. This is the pre-flow algorithm specified in Section 14; its importance correction remains valid. It is generally different from tilting the distribution after the flow by the same future message.

Proposition 42 (Transporting the argument of a guide)**.** *Condition on an incoming cloud and one ancestor's fixed invertible affine flow $F(z) = Bz + c$. Let $r(z)$ be its unguided pre-flow density, and let $q_F(x) = r(F^{-1}(x))|\det B|^{-1}$. For a positive guide h with finite, nonzero normalizers, drawing Z from $r(z)h(z)/C_{\mathrm{pre}}$ gives*

$$q_{\mathrm{pre}}(x) = \frac{q_F(x)h(F^{-1}(x))}{C_{\mathrm{pre}}}, \qquad C_{\mathrm{pre}} = \int r(z)h(z)\,\mathrm{d}z. \tag{234}$$

To obtain $q_{\mathrm{post}}(x) \propto q_F(x)h(x)$ instead, the pre-flow guide must be $h(F(z))$. For symmetric Λ and $h(x) = \exp\{-\frac{1}{2}x^\top \Lambda x + b^\top x\}$, its coefficients in the pre-flow coordinates are

$$\widetilde{\Lambda} = B^\top \Lambda B, \qquad \widetilde{b} = B^\top (b - \Lambda c). \tag{235}$$

For $r = \mathcal{N}(m, Q)$ with $Q \succ 0$, this defines a normalizable Gaussian proposal when $Q^{-1} + \widetilde{\Lambda}$ is positive definite.

Proof. Changing variables from z to $x = F(z)$ in $r(z)h(z)/C_{\text{pre}}$ gives (234). Replacing $h(z)$ by $h(F(z))$ gives the stated post-flow tilt, with normalizer $\int r(z)h(F(z))\,\mathrm{d}z$. Expanding the quadratic yields

$$-\tfrac{1}{2}(Bz+c)^\top \Lambda(Bz+c) + b^\top(Bz+c) = -\tfrac{1}{2}z^\top B^\top \Lambda B z + z^\top B^\top(b - \Lambda c) - \tfrac{1}{2}c^\top \Lambda c + b^\top c.$$

The last two terms are constant in z. Adding the Gaussian log density leaves precision $Q^{-1} + B^\top \Lambda B$, proving the final assertion. □

This calculation concerns each ancestor conditional on the incoming cloud. The shared executor supplies the affine matrix from the actual auxiliary trajectory, as established in Proposition 23. Its nonlinear observation model therefore does not invalidate this argument. If B and c depend on θ, an aligned analytical score must include their derivatives in (235), even when the fitted Λ, b are held fixed. Alignment would reproduce the tilt of q_F; it would equal the exact smoothing conditional only if q_F were the appropriate exact current-observation conditional and h were exact. Gaussian moment closure introduces an additional approximation for mixture guides, so the exact-tilt statement is not a claim about that closure.

A scalar example shows that this distinction can matter even with a perfect message. Let one static latent state have prior $X \sim \mathcal{N}(0,1)$, and let Y_1, Y_2 be conditionally independent with $Y_j \mid X \sim \mathcal{N}(X, 1)$. After observing the first value 2, the posterior is $\mathcal{N}(1, 1/2)$. Its exact affine transport from the prior is $F(z) = 1 + z/\sqrt{2}$. If the second observation is 1, its exact message is $h(x) \propto \exp\{-(x-1)^2/2\}$ and the two-observation posterior is $\mathcal{N}(1, 1/3)$. Multiplying the prior by $h(z)$ first gives $\mathcal{N}(1/2, 1/2)$; applying F then gives $\mathcal{N}(1 + 1/(2\sqrt{2}), 1/4)$. The mean moves away from the correct value, although the unguided mean was already correct. In fact, $D_{\mathrm{KL}}(p_{\text{target}} \| q)$ increases from 0.03607 for the unguided proposal to 0.27283 for the unaligned guide. Applying $h(F(z))$ instead gives the exact target. This is a counterexample to a guaranteed benefit from the pre-flow construction, not a measurement of its causal contribution to the SIR errors.

There is also no general implication from likelihood accuracy to score accuracy. Write a positive differentiable likelihood approximation as $\widehat{Z}_\theta = Z_\theta(1 + e_\theta)$. Direct differentiation gives

$$\nabla_\theta \log \widehat{Z}_\theta - \nabla_\theta \log Z_\theta = \frac{\nabla_\theta e_\theta}{1 + e_\theta}. \tag{236}$$

For example, $e_\theta = \delta \sin(\theta/\delta^2)$, with $0 < \delta < 1$, has uniformly small amplitude but score error $1/\delta$ at $\theta = 0$. Lower weight variance in a separate controlled-SMC fit therefore cannot establish accuracy of the derivative of the LEDH program.

The saved SIR results expose this gap. Mean ESS in the separate 512-particle controlled-SMC pilot rises descriptively from about 181 to 505. Yet the guides in the consumer were selected from a small bank: their coefficients were not optimized against the supervised score objective. The kernel fits the already fitted cSMC future message, adding another approximation. In the $T = 5$ comparison, more than 99.3% of every method's validation and test loss comes from the scaled observation-noise coordinate. This fraction depends on the frozen calibration scales; it does not mean the other unscaled coordinate errors are small. Every guide loses to unguided LEDH on test sequence 261029508. An aligned guide and stronger supervision remain testable repairs, while neither better message fits nor this structural calculation establishes a score improvement. The derivation, consumer check, and exact arithmetic over the saved results are recorded in `docs/plans/artifacts/ledh-supervised-guidance-20261019/failure-review/review.md`.

15.8 Training guide coefficients against terminal moment loss

The moment-training implementation makes the simulated-moment proposal operational: guide coefficients change in response to the moment error of the full LEDH calculation. The latent state supplies the training label, while the guide itself receives observations only. This distinction permits supervision by simulation without requiring posterior moments for any observed dataset. The experiment uses the continuous 18-dimensional SIR model at $\theta = (0, 0, 0)$, $T = 5$, and $N = 64$ particles.

The conditioning set matters because the backward guides use future observations. At an intermediate time $t < T$, an estimate computed with all $Y_{1:T}$ would be supervised toward a smoothing moment conditional on $Y_{1:T}$, even if the output were named a filtering estimate. We therefore train the terminal cloud, where the available information is exactly the filtering information $C = (\theta, Y_{1:T})$. Training a proposal conditional on its parent and future observations would be a separate conditional-moment problem, as described in Proposition 38.

To compare susceptible and infectious coordinates on useful scales, we first simulate 256 independent calibration trajectories. Their terminal states determine a fixed center m, coordinate standard deviations $d_j > 0$, and feature standard deviations $s_j > 0$; standard deviations are floored at 10^{-6}. Put

$$z_j(x) = \frac{x_j - m_j}{d_j}, \qquad \phi(x) = \big(z(x), \mathrm{vech}\{z(x)z(x)^\top\}\big). \tag{237}$$

There are 18 first features and 171 second features. If the terminal equal weight cloud after Contract E and its higher-moment correction is $\{\widehat{X}_T^{(i)}\}_{i=1}^N$, its estimate is $A_\eta = N^{-1}\sum_i \phi(\widehat{X}_T^{(i)})$. A simulated terminal state X_T gives one noisy label $\phi(X_T)$. The implemented loss gives the two feature blocks equal total weight:

$$\ell_\eta = \frac{1}{2}\left[\frac{1}{18}\sum_{j=1}^{18}\left\{\frac{A_{\eta,j} - \phi_j(X_T)}{s_j}\right\}^2 + \frac{1}{171}\sum_{j=19}^{189}\left\{\frac{A_{\eta,j} - \phi_j(X_T)}{s_j}\right\}^2\right]. \tag{238}$$

Thus the much larger second-feature block does not dominate simply by having more entries. Centering also prevents the large susceptible-population level from obscuring variation around that level. The same calibration is used for every guide and every evaluation dataset.

Proposition 43 (The implemented loss estimates a fixed moment risk)**.** *Condition on the calibration sample and on the data used to learn and select η. On a fresh model trajectory, suppose the guide-fitting and particle randomness is conditionally independent of X_T given $Y_{1:T}$, and the required second moments are finite. The expectation of* (238) *equals the weighted MSE of A_η for $\mathbb{E}[\phi(X_T) \mid Y_{1:T}]$, plus a term independent of η. It is also a fixed quadratic risk in the first and raw second moments of the original state coordinates.*

Proof. Conditional on calibration, the diagonal weights in (238) are fixed and positive. Proposition 38 therefore applies to $V = \phi(X_T)$. To identify the moments in the original coordinates, expand a second feature:

$$z_j(x)z_k(x) = \frac{x_j x_k - m_j x_k - m_k x_j + m_j m_k}{d_j d_k}.$$

Consequently $\phi(x) = B\Phi(x) + c$ for a fixed matrix B and vector c, where $\Phi(x) = (x, \mathrm{vech}(xx^\top))$. The constant cancels in an estimation error, and its quadratic weight in raw coordinates is $B^\top W B$. This proves the asserted risk relation. Centering introduces cross terms between first- and second-moment errors; it does not change the conditioning information. □

For example, improving the estimated susceptible mean can change the centered second-moment loss even if the estimated raw second moment stays fixed. We therefore retain unscaled first- and raw-second-moment label errors as separate descriptive measurements. None of these losses is directly the MSE of a covariance estimate, which also contains the estimated mean's outer product.

The learned coefficients adapt two existing observation-fitted guide families. For a quadratic guide with precision P_t and linear coefficient b_t, let a_t be a log precision multiplier and let δ_t repeat one susceptible and one infectious displacement across the nine regions. The adapted coefficients are

$$P_t(\eta) = e^{a_t} P_t, \qquad b_t(\eta) = e^{a_t}(b_t + P_t \delta_t). \tag{239}$$

Indeed, expanding $e^{a_t} \log h_t(x - \delta_t)$ gives these coefficients, up to an x-independent constant. For the positive-RBF mixture, with weights π_{tk}, centers c_{tk} and covariances V_{tk}, the adaptation is

$$h_{t,\eta}(x) = \sum_k \pi_{tk} \mathcal{N}(x; c_{tk} + \delta_t, e^{-a_t} V_{tk}). \tag{240}$$

The mixture weights stay fixed. This covariance rescaling is not the same operation as raising the entire mixture density to a power. Both adaptations reduce to the original guide at $\eta = 0$, and future guidance is inactive at the terminal time. These RBF coefficients are a KDM-inspired message adapter; the experiment does not retrain the original neural KDM.

One candidate ties the three coefficients across the four active times; another gives each active time its own three coefficients. The resulting three- and twelve-parameter families test a limited form of temporal adaptation. Log multipliers stay within $[-\log 4, \log 4]$, and each displacement stays within two process-noise standard deviations. Region-specific adaptation and larger neural families remain outside this experiment.

Optimization evaluates the actual shared LEDH program, including its UKF covariance lifecycle, flow, Contract E and dual-cap GenUT correction. At each update it draws four training datasets and holds their particle randomness fixed while comparing η, $\eta + \rho u$ and $\eta - \rho u$ for a random unit direction u. The sign of the symmetric loss difference determines the descent direction. Up to three successively halved step lengths are tested on that same minibatch; a step is accepted only when it lowers the minibatch loss and all numerical checks pass. Fresh minibatches and particle streams are used at the next update. This is continuous coefficient optimization using moment loss. It does not require an observed score label or an autodifferentiated model-score computation.

The initial protocol uses 48 updates, $\rho = 0.1$ and initial step length 0.25, with two optimizer seeds for each family and capacity. Initialization and every sixteenth update are evaluated on validation data. Failure to make at least two accepted updates or to improve validation loss triggers a predeclared 96-update retry with $\rho = 0.025$ and step length 0.0625. All attempts are retained. The fixed analytical model-score recursion remains available for separate explanatory measurements; it never selects an update or a checkpoint.

Training uses 64 simulated datasets, validation uses 16, and final evaluation uses 64 further datasets. Calibration, data partitions, fitting randomness and particle streams have separate seed namespaces. Validation and final evaluation each use two particle replicates per dataset. Within each guide family, capacity, optimizer seed and checkpoint are frozen using validation moment loss before final evaluation. The comparison includes unguided LEDH, half-strength quadratic guidance and both original guides, all evaluated afresh with identical datasets, particle streams and fixed numerical controls. OT remains at $\epsilon = 1$ with five Sinkhorn iterations and 32 terminal balancing updates; all runs use GPU/XLA double precision as a scoped diagnostic.

The independent unit for uncertainty is the simulated dataset. We average its two particle replicates before forming paired differences. Four comparisons contrast each trained family with its

original guide and with unguided LEDH; 10,000 paired bootstrap resamples give nominal 98.75% two-sided intervals, corresponding to a Bonferroni family-wise level of 95%. Unknown posterior moments are unnecessary for this comparison, but label noise remains in a finite test sample and can make the intervals inconclusive. Low and high terminal-observation regimes, separated by the calibration median, also test whether a favorable pooled mean hides failure against a simple guide. Conditional means are descriptive; underperformance against any of the four simple comparators prevents promotion under the declared experiment plan.

15.9 Training completed; the independent comparison stopped on baseline invalidity

The experiment on 20 October 2026 executed the continuous optimization just described. All eight initial runs and two predeclared smaller-step retries completed. Of 576 proposed updates, 548 were accepted; no perturbation pair or trial step failed numerical validity. There was one coefficient-bound event. These observations establish that the coefficients were actually trained against moment loss, rather than merely selected from a fixed bank. They do not establish a reduction in population moment risk.

Validation selected the time-specific quadratic guide at update 16 of optimizer seed 262025001, and the pooled RBF guide at update 32 of the same optimizer seed. Their losses are shown in Table 6. Both coefficient arrays are nonzero, and both choices were frozen before generating test data. Because the same validation set selected these checkpoints, the decreases are selection results, not independent evidence of generalization.

Guide family	Initial validation loss	Selected validation loss
Quadratic controlled SMC	0.744142	0.707827
Positive RBF adapter	0.714976	0.689780

Table 6: Validation losses for the bounded SIR moment-training experiment. The RBF family adapts a KDM-inspired message; it is not original neural KDM retraining. These losses select coefficients and cannot certify their heldout benefit.

Independent evaluation stopped on the seventeenth dataset because the unguided comparator returned a nonfinite particle cloud. Sixteen datasets had completed all six methods and both particle replicates. Of the planned 768 records, 192 were valid and one was invalid; the remaining 575 were not evaluated. Dropping that baseline failure and reporting averages only over the surviving datasets would change the experiment. Accordingly, no paired confidence intervals or heldout ranking are reported.

An exact diagnostic replay reproduced the failure with identical observations, latent labels, particle randomness and the ten captured runtime source hashes. The first three filtering times remained finite. At time four, the UKF, transport and Contract E reset checks passed, but the subsequent higher-moment correction returned nonfinite values in all $64 \times 18 = 1152$ particle coordinates and their analytical directional tangents. Its recorded post-cap cloud was still finite. Further replay isolated the first nonfinite operation: the Cholesky factorization of the current covariance inside affine restoration. The largest importance weight rounded to one, although all 64 weights remained positive. The weighted source covariance had trace 4.77×10^{-29}, while the largest mean coordinate was about 433.68. The capped offsets from that mean still had covariance trace 2.35×10^{-29}. Adding the mean rounded all particles to the same stored FP64 vector. Recomputing their covariance therefore gave zero, as did the existing ridge proportional to its trace. Cholesky of

this zero matrix failed and contaminated the analytical tangents. The earlier pre-cap diagonal RMS of about 9.57×10^{39} indicates a severe shape correction, but it was not the first nonfinite operation. The failure concerns loss of representable spread, not whether an acceptance tolerance should reject an error of order 10^{-13}.

The repair delays addition of the common mean until after centering and affine restoration. This retains information already available in the calculation; it does not inject artificial particle variation. Write the pre-restoration particles as $p_i = m + o_i$, where m is the common translation and o_i are the retained offsets. Both may depend on the model parameters. Let bars denote uniform particle averages and let $\dot{}$ denote one parameter-direction derivative.

Proposition 44 (Translation-free evaluation of affine restoration)**.** *In real arithmetic, centering the offsets instead of the translated particles leaves the regularized affine-restoration map and its total directional derivative unchanged, wherever its covariance factors are positive definite. This statement includes the derivative of the existing trace-scaled ridge.*

Proof. Since $\bar{p} = m + \bar{o}$, the centered particles and their derivatives are

$$c_i = p_i - \bar{p} = o_i - \bar{o}, \qquad \dot{c}_i = \dot{p}_i - \dot{\bar{p}} = \dot{o}_i - \dot{\bar{o}}.$$

Thus the current covariance and its derivative can both be computed without adding and subtracting m:

$$C = \frac{1}{N}\sum_i c_i c_i^\top, \qquad \dot{C} = \frac{1}{N}\sum_i (\dot{c}_i c_i^\top + c_i \dot{c}_i^\top).$$

For the fixed existing ridge coefficient δ, the regularized covariance and derivative are $C_\delta = C + \delta \operatorname{tr}(C) I/d$ and $\dot{C}_\delta = \dot{C} + \delta \operatorname{tr}(\dot{C}) I/d$. They are therefore unchanged by the representation. With $L_C = \operatorname{chol}(C_\delta)$, target factor $L_\star$ and target mean $\mu_\star$ computed from the same weighted source cloud, restoration returns $\mu_\star + L_\star L_C^{-1} c_i$. Every argument of this map and its directional derivative is identical under the two representations. □

In floating-point arithmetic the order of evaluation matters: subtracting a mean cannot recover offsets already lost when that mean was added. The shared implementation now carries the offsets and their analytical tangents into restoration. The covariance ridge, OT settings $(1, 5)$ and balancing count remain unchanged. In the three saved pre-failure clouds, the largest scaled change in particles or tangents was 9.82×10^{-11}, below the declared 10^{-10} local non-harm tolerance. The failed endpoint and a separate healthy endpoint then returned finite states, tangents, values and all three score components on GPU/XLA. All twelve central-difference checks, using steps 10^{-4} and 10^{-5}, passed the declared normalized-error limit 10^{-3}; the largest error was 7.54×10^{-5}. These are numerical checks on the implemented finite calculation, not tests against a true score.

One limitation remains. The final addition of the target mean still collapses the exceptional cloud to one stored vector. Its materialized covariance is zero, and its standardized third and fourth moments are undefined. A tiny absolute covariance residual therefore hides a 100 percent loss of the target variance in this case. The calculation now explicitly reports that these shape diagnostics are unavailable; it neither replaces them with zero nor treats them as passing. Finite value and score computation is repaired, but complete moment fidelity and the stronger all-diagnostics-finite check have not been established.

The distinction matters scientifically. The simulated-label risk identity in Proposition 43 remains correct under its stated conditioning and independence assumptions. The implemented optimizer can reduce its minibatch objective and select nontrivial guides. Nevertheless, this interrupted experiment does not show that those guides improve heldout moments, still less that they improve

the likelihood score. The repair removes the identified factorization failure without resolving the lost physical spread. A wider comparison must first address that representation limit under a reviewed numerical scope, then use fresh independent test data. The failed comparison is preserved; no numerical controls or promotion criteria were relaxed to turn it into a successful experiment.

15.10 Why the proposal concentrated, and what a flow-aware guide must express

The restoration failure is downstream of a severe importance-weight imbalance. Replaying the failed sequence with the existing moment-descent safeguard enabled still produces zero materialized covariance at time four. The endpoint now rejects the unavailable standardized moments explicitly; previously it collected their availability flag without using it to reject the result. A second diagnostic measures covariance error relative to the target covariance itself, rather than to the maximum of that scale and one. It reports relative error one on the collapsed cloud. These changes expose the failure; they do not create missing particle spread.

To identify the preceding mechanism, fix one parent and write its transition mean as a. The SIR transition and observation at that step have the form

$$X \mid a \sim \mathcal{N}(a, Q), \qquad Y \mid X \sim \mathcal{N}(HX, R).$$

Here $Q = I_{18}$, $R = 100 I_9$ at the parameter used in the diagnostic, and H extracts the nine infectious coordinates. The UKF predictive covariance P is a different quantity: it also propagates uncertainty around the parent. The shared LEDH coefficients use P, whereas the zero-guide pre-flow draw and its importance-density correction use the conditional covariance Q. This is a proposal choice, not a missing Jacobian or an incorrect density evaluation. An invertible proposal can have a correct importance correction and still produce almost unusable weights.

For linear observations the implemented flow, conditional on its incoming cloud and covariance, is affine. Write it as $F(z) = b + Bz$ with nonsingular B. The actual zero-guide output is then $\mathcal{N}(b + Ba, BQB^\top)$. Completing the square in the conditional transition times the observation density gives

$$V = (Q^{-1} + H^\top R^{-1} H)^{-1}, \tag{241}$$

$$m = V(Q^{-1} a + H^\top R^{-1} y), \tag{242}$$

$$p(x \mid a) g(y \mid x) = \mathcal{N}(y; Ha, HQH^\top + R)\, \mathcal{N}(x; m, V). \tag{243}$$

This Gaussian is exact conditional on the one parent. It is not the exact nonlinear filtering distribution, which also averages over uncertain parents. It nevertheless supplies a decisive check on where the conditional proposal places its mass, without knowing any likelihood score.

At time four of the failed sequence, the mean trace of P across particles is 1038.57, compared with $\mathrm{tr}(Q) = 18$. The mean displacement of the flow's proposal mean from its parent transition mean is 32.81. Its mean conditional Gaussian KL divergence to $\mathcal{N}(m, V)$ is 529.98, and its realized ESS is one. Replaying only this fixed incoming cloud with Q in the flow coefficients gives conditional KL 8.13×10^{-9} and ESS 29.0407; the exact conditional proposal gives ESS 29.0408. This reference calculation does not replace the prescribed UKF lifecycle. It locates the mechanism: the actual flow moves too far for these conditional transition proposals. The winning particle's prior/proposal logit advantage is 69.784, while the observation contributes -0.808. Thus the immediate weight collapse is not caused by a more concentrated observation update.

The shared-flow replay agrees with saved children to 1.14×10^{-13}, proposal log densities to 6.04×10^{-14}, and the covariance carry to 3.46×10^{-16} relative error across both five-step fixtures.

The diagnostic therefore identifies a real proposal mismatch, not a different reimplementation accidentally being compared with the saved experiment.

Can a guide correct this mismatch without discarding the UKF flow? It must place pre-flow mass where that flow will carry it, rather than treating its input coordinates as if they were already physical output coordinates.

Proposition 45 (Gaussian preimage of the desired conditional proposal)**.** *Fix a, Q, m, V and an invertible affine map $F(z) = b + Bz$, with Q, V positive definite. If*

$$Z \sim \mathcal{N}(\mu_z, \Sigma_z), \qquad \mu_z = B^{-1}(m - b), \quad \Sigma_z = B^{-1}VB^{-\top},$$

then $F(Z) \sim \mathcal{N}(m, V)$. Relative to the original pre-flow density $\mathcal{N}(a, Q)$, the required multiplicative quadratic guide has precision and linear coefficient

$$\Lambda = B^\top V^{-1}B - Q^{-1}, \qquad \ell = B^\top V^{-1}(m - b) - Q^{-1}a.$$

The guide need not have positive semidefinite Λ, although the product density has positive definite precision $Q^{-1} + \Lambda$.

Proof. An affine Gaussian transformation has mean $b + B\mu_z = m$ and covariance $B\Sigma_z B^\top = V$. The log ratio of its preimage density to $\mathcal{N}(a, Q)$ is, up to a constant independent of z,

$$-\tfrac{1}{2}z^\top(\Sigma_z^{-1} - Q^{-1})z + z^\top(\Sigma_z^{-1}\mu_z - Q^{-1}a).$$

Substitution of $\Sigma_z^{-1} = B^\top V^{-1}B$ gives the displayed coefficients. Their sum with Q^{-1} is positive definite because B is invertible and V is positive definite. No corresponding sign restriction holds for their difference. Finally, change of variables gives $q_z(z)/|\det B| = \mathcal{N}(F(z); m, V)$. When m, V are the conditional posterior moments defined above, the corrected conditional weight is exactly $\mathcal{N}(y; Ha, HQH^\top + R)$. □

The saved failed step makes the capacity restriction concrete. The required Λ has a minimum eigenvalue of about -0.477. The trained quadratic adapter cannot represent this exact correction: its positive-information conditioning can only decrease the pre-flow covariance in the Loewner order, while this preimage requires expansion in some directions. The more general quadratic class has an optional indefinite-information switch, but the trained adapter does not supply the parent- and flow-dependent coefficients above. Merely flipping that switch therefore does not implement this repair.

The trained kernel-mixture consumer has a different covariance calculation. It uses Gaussian-mixture product moments, retaining the covariance between component means; that term can expand covariance. The negative eigenvalue therefore does not establish an expressiveness obstruction for this consumer. Whether its fitted components and restricted coefficient adapter can realize the desired preimage has not been checked. What both consumers lack is an explicit transformation of their proposal through the completed flow.

Applying the computed preimage samples through the actual shared flow recovers the desired samples within 4.55×10^{-13} on the failed sequence; its conditional weight identity holds within 1.08×10^{-12}. This verifies a fixed-cloud repair, not an integrated filter or a trained guide. The next implementation must express guides in the coordinates of the completed flow, differentiate both the map and the density through their parameter dependence, and then repeat independent moment evaluation. The UKF covariance lifecycle, Contract E and OT $(1, 5)$ need not be removed to test that design. The present results do not rank the learned guides, and they do not invalidate the simulated-label moment-risk identity.

15.11 Repairing the proposal in physical output coordinates

The failed cloud suggests a specific repair, rather than a stronger penalty on the same pre-flow guide. The UKF covariance describes uncertainty carried by the filter; the process covariance describes the distribution conditional on one parent. We retain the former in the canonical LEDH flow and use the latter when designing the conditional proposal. The proposal must be corrected by its actual density. Neither a plausible covariance nor a finite numerical score substitutes for that correction.

Fix a parent, the incoming particle cloud and the auxiliary flow construction. Write the completed shared affine flow as $F(z) = b + Bz$, with nonsingular B. The transition is $N(a, Q)$, where $a = f_\theta(x_{t-1})$. For a linear Gaussian observation $y = Hx + e$, $e \sim N(0, R)$, assume $Q \succ 0$ and $R \succ 0$. Then $S \succ 0$, so its inverse exists; Gaussian conditioning also gives $V_0 \succ 0$. Define

$$\begin{aligned} S &= HQH^\top + R, & K &= QH^\top S^{-1}, \\ m_0 &= a + K(y - Ha), & V_0 &= Q - KHQ. \end{aligned} \tag{244}$$

These are the moments of $p_\theta(x_t \mid x_{t-1}, y_t)$, not filtering moments pooled across parents. For nonlinear h, we instead use $H = Dh(a)$ and innovation $y - h(a)$. That construction is a local Gaussian proposal, not the exact conditional law. Its importance correction still uses the original observation density. SIR's linear Gaussian observation allows the exact identity to be tested without this additional approximation.

The controlled-SMC message represents future information. Its current-time observation factor must not be applied a second time. A quadratic message with coefficients A, c gives physical proposal moments

$$V = (V_0^{-1} + A)^{-1}, \qquad m = V(V_0^{-1} m_0 + c),$$

provided the total precision is positive definite. A positive kernel mixture instead conditions $N(m_0, V_0)$ by each component, then retains the weighted component means and covariances, including between-component variation. We draw from the Gaussian $N(m, V)$ having these product moments. Accordingly, the proposal density used below is that Gaussian, not the uncollapsed kernel mixture. This is the existing KDM moment consumer used in new coordinates; its moment matching remains an approximation to the future-informed law.

Proposition 46 (Cancellation and a genuine mixture augmentation)**.** *Let m, V be independent of the particular affine flow, with $V \succ 0$. Drawing $x = m + L\xi$, where $LL^\top = V$ and $\xi \sim N(0, I)$, and setting $z = B^{-1}(x - b)$ is equivalent to drawing from the preimage proposal and applying F. The resulting physical density is exactly $N(m, V)$ and does not depend on F. Thus this construction alone replaces, rather than improves, the LEDH proposal.*

Let q_L be the actual physical density of the unchanged LEDH proposal and $q_O = N(m, V)$. For a fixed $0 < \beta < 1$, draw an independent uniform U, use q_O if $U < \beta$ and q_L otherwise, and correct by

$$q_\beta(x) = (1 - \beta) q_L(x) + \beta q_O(x). \tag{245}$$

This is a genuine mixture retaining the LEDH proposal. For any integrable test function φ,

$$\mathbb{E}_{q_\beta}\left[\frac{f_\theta(x \mid x_{t-1}) g_\theta(y_t \mid x)}{q_\beta(x)} \varphi(x)\right] = \int f_\theta(x \mid x_{t-1}) g_\theta(y_t \mid x) \varphi(x)\, dx.$$

If q_O is the exact current-observation conditional, the importance weight is at most $p_\theta(y_t \mid x_{t-1})/\beta$.

Proof. The affine change of variables gives

$$q_z(z) = N(F(z); m, V) |\det B|, \qquad \frac{q_z(F^{-1}(x))}{|\det B|} = N(x; m, V).$$

Using the same ξ gives the stated pathwise equality. Independent component selection gives (245); cancellation of this full density inside the expectation proves the integral identity. Finally, $fg = p_\theta(y_t \mid x_{t-1})q_O$ and $q_\beta \geq \beta q_O$ prove the bound. Predictive likelihoods differ between parents, so this does not make all particle weights equal. The bound does not apply unchanged to a future-conditioned or locally linearized q_O. □

The mixture selects one draw; it does not average two positions. Its mixing weight is distinct from the existing identity/global/local covariance-design weights. Holding $\beta = 1/2$ is an explicit hypothesis for the present repair, not an optimized default. The $\beta = 1$ no-future conditional sampler is an essential cancellation control. If only that control works, we have evidence for replacing the proposal, not for a beneficial LEDH augmentation.

Proposition 47 (Analytical differentiation of the repaired proposal)**.** *Assume differentiable model quantities and flow coefficients, positive definite proposal covariances and nonsingular B in an open parameter neighborhood. Freeze guide coefficients, β and all exogenous random numbers for the finite-program derivative. For the preimage moments,*

$$\mu_z = B^{-1}(m - b), \qquad \Sigma_z = B^{-1}VB^{-\top}, \tag{246}$$

$$d\mu_z = B^{-1}(dm - db - dB\mu_z), \tag{247}$$

$$d\Sigma_z = B^{-1}dVB^{-\top} - B^{-1}dB\Sigma_z - \Sigma_z dB^\top B^{-\top}.$$

For $r = x - m$ and $P = V^{-1}$, the moving-point Gaussian density satisfies

$$d\log N(x; m, V) = -r^\top P(dx - dm) + \tfrac{1}{2}r^\top P(dV)Pr - \tfrac{1}{2}\operatorname{tr}(P\,dV). \tag{248}$$

At the selected point, set $\rho_j = \beta_j q_j(x)/q_\beta(x)$, with $(\beta_L, \beta_O) = (1 - \beta, \beta)$. Then

$$d\log q_\beta(x) = \rho_L d\log q_L(x) + \rho_O d\log q_O(x). \tag{249}$$

These are total derivatives, including movement of the selected particle, the incoming parent, the conditional moments and the completed flow.

Proof. Differentiate $B\mu_z = m - b$ and $B\Sigma_z B^\top = V$ to obtain (247). Differentiating $-\frac{1}{2}(r^\top V^{-1}r + \log\det V + d\log(2\pi))$, using $dV^{-1} = -V^{-1}(dV)V^{-1}$, gives (248). Differentiating the two-term density sum gives (249). The sampled component is constant as a function of model parameters because both U and β are fixed. There is no parameter-dependent discrete selection to differentiate. For $L = \operatorname{chol}(V)$, write $M = L^{-1}(dV)L^{-\top}$. Then $dL = L(\operatorname{tril}(M) - \frac{1}{2}\operatorname{diag}(M))$ and $dx = dm + dL\xi$ supply the sample tangent. All density terms are evaluated at that same moving point. □

For completeness, the conditional moments in (244) also move with the parameter. With the observation held fixed, let $e = y - h_\theta(a)$ and let $dh_\theta(a)$ include both the explicit parameter derivative and the derivative through a. Product differentiation gives

$$\begin{aligned} dS &= (dH)QH^\top + H(dQ)H^\top + HQ(dH)^\top + dR, \\ dK &= \big((dQ)H^\top + Q(dH)^\top - K\,dS\big)S^{-1}, \\ dm_0 &= da + (dK)e - K\,dh_\theta(a), \\ dV_0 &= dQ - (dK)HQ - K(dH)Q - KH(dQ). \end{aligned} \tag{250}$$

The second line follows by differentiating $KS = QH^\top$ and solving for dK; the other lines differentiate the definitions directly. If the frozen future message is quadratic, its coefficients A, c have zero parameter differential. Write $P_0 = V_0^{-1}$. Then

$$dP_0 = -P_0(dV_0)P_0, \qquad dV = -V(dP_0)V, \qquad dm = (dV)(P_0 m_0 + c) + V\big((dP_0)m_0 + P_0\, dm_0\big).$$

For the kernel product, each component obeys the same Gaussian product rule. Its normalized product weight also changes: if its unnormalized weight is w_k and $\alpha_k = w_k / \sum_j w_j$, then $d\alpha_k = \alpha_k(d\log w_k - \sum_j \alpha_j d\log w_j)$. Consequently both component-moment derivatives and weight derivatives enter the mixture's first and raw second moments before recovering its covariance. Holding these weights fixed would omit a required term.

In implementation, $F(a)$ and B come from the existing shared flow loop. The LEDH component density at any selected x is evaluated through $\delta = B^{-1}(x - F(a))$:

$$q_L(x) = N(\delta; 0, Q)/|\det B|, \qquad d\delta = B^{-1}(dx - dF(a) - dB\delta).$$

This avoids a second flow solver. Directly drawing the physical Gaussian is algebraically equivalent to the preimage-and-flow calculation while avoiding an unnecessary inverse/forward round trip. For nonlinear observations the conditional-moment tangent includes dH and $dh(a)$; dropping either when nonzero is wrong relative to the total-derivative claim. These derivatives establish the derivative of the finite estimator, not equality to the exact model score or differentiability through later offline guide refitting.

Algorithm and learning experiment. The following order separates proposal design from the filter's covariance lifecycle and moment-restoring reset.

1. Propagate each parent's state, tangent and UKF covariance using the unchanged canonical recursion. Compute a, Q and their tangents.

2. Run the shared LEDH flow once on the baseline process draw; retain $x_L, dx_L, F(a), dF(a), B, dB$ and its log determinant and tangent.

3. Form the current-observation conditional Gaussian in physical coordinates. Condition its moments with the frozen future-only cSMC or KDM message. Check positive definiteness and finite analytical tangents.

4. Draw x_O, dx_O from those moments. Select exactly one component using an independent, fixed uniform draw. Evaluate both densities and their total tangents at the selected point, including the full mixture denominator.

5. Form $\log f + \log g - \log q_\beta$ and its analytical derivative; combine with incoming ancestor weights. Record component counts, density validity and weight concentration without changing acceptance criteria.

6. Continue the shared UKF update, dual-cap GenUT correction and Contract E–Chol OT reset, including all direct moment and weight derivatives. The diagnostic experiment retains OT $(1, 5)$, terminal balance32 and $K = N$.

Offline guide adaptation still minimizes simulated-label moment risk. For $C = (\theta, Y_{1:T})$, U independent of X_T conditional on C, fixed calibration matrix $W \succeq 0$ and $\mu(C) = \mathbb{E}[\Phi(X_T) \mid C]$,

$$\mathbb{E}\|\widehat{\mu}_\eta(C, U) - \Phi(X_T)\|_W^2 = \mathbb{E}\|\widehat{\mu}_\eta(C, U) - \mu(C)\|_W^2 + \mathbb{E}\|\Phi(X_T) - \mu(C)\|_W^2.$$

The cross term vanishes by conditioning on (C, U). This justifies learning without posterior-moment or score labels. It does not make a particular adapter expressive or its optimizer successful. New calibration, training, validation and untouched evaluation partitions are required after the failed campaign; its exposed holdout cannot become a tuning set.

The comparison must distinguish three questions: whether the analytical implementation is correct, whether the physical conditional repair prevents the observed collapse, and whether future-trained guides reduce independent moment risk beyond the no-future repair. Plain LEDH, the cancellation control, the no-future mixture, untrained guides and trained guides answer different parts of that question. Prediction-only, observation-only and recursive Gaussian moment estimators provide cheap external checks in both low- and high-observation regimes. Heldout paired uncertainty, not training loss or ESS alone, is needed to establish improvement. None of these moment checks alone establishes exact model-score accuracy, HMC readiness or a new default.

Executed SIR comparison. The physical proposal repairs the exposed collapse, but the trained guides do not pass the independent moment comparison. In the integrated regression, the conditional-only, unguided half-mixture, cSMC and KDM physical proposals all remain valid on the previously failing cloud. Twelve analytical versus central-finite-difference checks on the healthy fixture pass, with maximum relative discrepancy 8.46×10^{-8}. These checks establish the tested density and derivative calculations; the exposed cloud is not independent evidence of improved estimation.

The subsequent experiment uses the 18-dimensional SIR model with five observations and 64 particles, in FP64 with GPU/XLA execution. Calibration, training, validation and evaluation simulations are disjoint. The adapter search compares pooled and time-specific coefficients, two optimizer seeds and two step sizes, followed by one extension per guide family. Validation selects pooled cSMC coefficients after eight plus 24 additional updates, and time-specific KDM-inspired RBF coefficients after eight updates. Both selections are frozen before evaluating 32 fresh datasets with two particle replications each. The two observation regimes use a threshold fixed by calibration and contain 16 datasets each. Scores are never training or selection labels.

Every method is numerically valid on all these fresh datasets, including plain LEDH. Table 7 reports the calibrated simulated-label loss. Its absolute level includes irreducible label variation; differences estimate differences in moment-estimation risk under the preceding identity.

Moment estimator	All datasets	Low observations	High observations
Plain LEDH	0.823548	0.920918	0.726179
Conditional only, $\beta = 1$	0.818726	0.951452	0.685999
Half-mixture, no future guide	0.993677	1.198801	0.788553
cSMC, untrained adapter	0.954779	1.145529	0.764029
cSMC, trained adapter	0.971912	1.189299	0.754524
RBF message, untrained adapter	0.947899	1.154907	0.740890
RBF message, trained adapter	0.951518	1.164091	0.738945
Prediction only	1.325386	1.648705	1.002068
Observation only	0.965693	1.208127	0.723259
Recursive Gaussian	0.626742	0.760924	0.492559

Table 7: Independent SIR moment-label losses after the physical-proposal repair. Lower values are favorable, but mean ordering alone does not establish a ranking. The Gaussian references use spherical-radial cubature and are separate moment estimators.

The recursive Gaussian estimator exposes the main failure. Define excess loss as trained-guide

loss minus comparator loss. Its pointwise paired 95% bootstrap intervals against that estimator are $[0.170771, 0.756844]$ and $[0.149226, 0.392242]$ for cSMC in the low and high regimes, and $[0.138101, 0.748221]$ and $[0.146892, 0.367340]$ for KDM. Both guides therefore fail the predeclared simple-method comparison in both regimes. Against the conditional-only proposal, pooled excess losses are 0.153186 with interval $[0.066461, 0.251363]$ for cSMC and 0.132792 with interval $[0.041363, 0.247269]$ for KDM.

Neither trained guide has an established pooled gain over its untrained adapter: the corresponding excess-loss intervals are $[-0.027241, 0.063483]$ and $[-0.004336, 0.013151]$. Nor is a gain over the no-future half-mixture established: $[-0.057102, 0.013251]$ and $[-0.092305, 0.001876]$. Each interval uses 2,000 paired bootstrap replicates, resampling datasets and keeping their particle replications together. These are pointwise comparisons in one short SIR experiment, not simultaneous evidence for a general ordering of methods.

The result separates a successful numerical repair from an unsuccessful trained candidate. The squared-error identity remains correct; it does not guarantee that this adapter family and optimizer find a useful guide. The descriptively larger loss of the unguided half-mixture than of the conditional-only proposal motivates examining component allocation and pre- versus post-reset moments before expanding training. That comparison does not yet identify the cause of the gap. Further tuning requires fresh partitions; these evaluation datasets must remain held out. Improved model-score accuracy has not been evaluated, and neither guide is promoted.

15.12 A neural conditional KDM proposal for SIR

The preceding RBF message was fitted from a controlled-SMC approximation and then adjusted by a few scalar coefficients. It did not train the replicated neural KDM filter. That replicated filter estimates a three-dimensional position-and-angle filtering distribution. SIR has eighteen state coordinates, and a filtering density is not a future-likelihood message. Substituting one for the other would change the stated conditional distribution. We therefore define an explicit SIR adaptation: a neural mixture used as an evaluable proposal inside the existing LEDH filter.

For a fixed parent particle a, let $m_t(a), C_t(a)$ denote the current-observation conditional Gaussian used by the physical proposal, and write $C_t = L_t L_t^\top$ with a positive-definite covariance. The observation sequence $Y = y_{1:T}$ is the network input. A network with parameters η supplies vectors $\delta_{t,k}(Y)$ and $s_{t,k}(Y)$, and we set

$$m_{t,k} = m_t + L_t \delta_{t,k}, \qquad B_{t,k} = L_t \operatorname{diag}(e^{s_{t,k}}), \qquad C_{t,k} = B_{t,k} B_{t,k}^\top, \tag{251}$$

$$q_\eta(x \mid a, Y) = \frac{1}{K} \sum_{k=1}^{K} \mathcal{N}(x; m_{t,k}, C_{t,k}), \qquad q_{\beta,\eta} = (1-\beta) q_{\mathrm{LEDH}} + \beta q_\eta. \tag{252}$$

Here $m_t, \delta_{t,k}, s_{t,k} \in \mathbb{R}^{18}$ and $L_t, B_{t,k}, C_{t,k} \in \mathbb{R}^{18 \times 18}$. The network returns two arrays of shape $T \times K \times 18$. Its standardized displacements and bandwidth multipliers are shared across parents; each parent's own $m_t(a)$ and $L_t(a)$ turn them into different component means and covariances. The implementation preserves the parent and component axes separately, with component means of shape $N \times K \times 18$. This restricts the learned family: the network does not receive a separate parent-state input. The current Gaussian anchors the proposal to the physical model; the learned displacements and bandwidths can adapt it to the observations. Setting both network outputs to zero recovers that Gaussian exactly. The mixture is sampled by selecting one component, not by averaging particle positions. Its complete density, including all components, enters the importance denominator.

This first adaptation fixes the inner component probabilities at $1/K$ and freezes β within each candidate. It trains every neural location and bandwidth parameter. These restrictions permit ordinary reparameterized training without omitting derivatives of learned categorical probabilities. They also limit the family and must be tested empirically. This differs from the original learned KDM posterior and its IWSG update [Younis and Sudderth, 2023, Section 4, equations (14)–(15)]. The original sequence NLL is also replaced by the terminal moment objective below; the adaptation is not a source-faithful SIR replication.

Proposition 48 (Physical correction of a future-informed proposal)**.** *Fix the incoming cloud and all proposal maps. Suppose $q_{\beta,\eta}(x \mid a, Y) > 0$ wherever $h_t(x, a) = f_\theta(x \mid a) g_\theta(y_t \mid x) > 0$. For any feature ϕ for which $\int |\phi(x)| h_t(x, a)\, dx < \infty$,*

$$\mathbb{E}_{q_{\beta,\eta}}\left[\frac{h_t(X, a)}{q_{\beta,\eta}(X \mid a, Y)}\phi(X)\right] = \int h_t(x, a)\phi(x)\, dx.$$

Thus future observations may inform the proposal without changing the unnormalized current filtering target.

Proof. Write the expectation as an integral against $q_{\beta,\eta}(x \mid a, Y)\, dx$ and cancel that density pointwise on the support of h_t. Integrability justifies the expectation. Summing this identity over parents with their incoming weights gives the corresponding finite-cloud predictive mixture identity. If parents are randomly selected, their selection probabilities must also appear in the joint denominator. The one-to-one consumer used here does not introduce that extra selection. □

This is ordinary proposal correction. It does not introduce controlled-SMC twisted intermediate targets or claim an unbiased normalized moment estimator at finite particle count. Contract E and the finite particle approximation remain part of the estimator whose error is measured.

Proposition 49 (Analytical model derivative of the neural proposal)**.** *Fix Y, η, β, all component-selection uniforms and all Gaussian draws. Assume the physical maps are differentiable, the relevant covariances are positive definite, and the LEDH affine maps are invertible. The network has no θ input in this experiment. A dot denotes a directional derivative with respect to θ. Then*

$$\dot{m}_{t,k} = \dot{m}_t + \dot{L}_t \delta_{t,k}, \qquad \dot{B}_{t,k} = \dot{L}_t \operatorname{diag}(e^{s_{t,k}}), \qquad \dot{C}_{t,k} = \dot{B}_{t,k} B_{t,k}^\top + B_{t,k} \dot{B}_{t,k}^\top.$$

For a selected Gaussian draw, $x = m_{t,k} + B_{t,k} z$ and $\dot{x} = \dot{m}_{t,k} + \dot{B}_{t,k} z$. If ℓ_j denotes the log density of any component of the full physical mixture, evaluated at this moving point, and π_j its fixed mixture probability, then

$$\dot{\log} q_{\beta,\eta}(x) = \sum_j r_j(x) \dot{\ell}_j(x), \qquad r_j(x) = \frac{\pi_j e^{\ell_j(x)}}{\sum_i \pi_i e^{\ell_i(x)}}.$$

For a Gaussian component with residual $v = x - m$, precision $P = C^{-1}$ and force $b = Pv$, the required moving-point derivative is

$$\dot{\ell} = -b^\top(\dot{x} - \dot{m}) + \tfrac{1}{2} b^\top \dot{C} b - \tfrac{1}{2} \operatorname{tr}(P\dot{C}).$$

Proof. Differentiating $C = LL^\top$ and multiplying by L^{-1} and $L^{-\top}$ gives $A = H + H^\top$, where $A = L^{-1}\dot{C}L^{-\top}$ and $H = L^{-1}\dot{L}$ is lower triangular. Hence H contains the strict lower triangle of A and half its diagonal, and $\dot{L} = LH$. Differentiating (251) now gives the displayed component derivatives. The selection probabilities are fixed, so a fixed uniform selects the same component during differentiation. Differentiating the log of the sum of weighted densities gives the responsibilities formula. Finally, $\dot{P} = -P\dot{C}P$ and $\dot{\log\det} C = \operatorname{tr}(P\dot{C})$ give the Gaussian expression. Both the point and density parameters move; neither term may be dropped. □

These formulas supply the proposal terms to the existing analytical LEDH recursion, including the direct source-moment and transport contributions to Contract E. Autodiff of neural training parameters does not replace that model-score calculation. Agreement with finite differences of this finite program checks its derivative, not accuracy against the true model score.

Proposition 50 (Training the corrected estimator with simulated labels)**.** *Let $C = (\theta_0, Y)$, let $\Phi(X_T)$ contain the fixed scaled first and raw second features, and let $\widehat{\mu}_\eta(C, U)$ be the features averaged over the actual final corrected LEDH cloud. Suppose particle randomness U is conditionally independent of the simulated latent path given C, all second moments are finite, and the scaling matrix W is fixed independently of the training examples. Writing $\mu(C) = \mathbb{E}[\Phi(X_T) \mid C]$,*

$$\mathbb{E}\|\widehat{\mu}_\eta - \Phi(X_T)\|_W^2 = \mathbb{E}\|\widehat{\mu}_\eta - \mu(C)\|_W^2 + \mathbb{E}\|\Phi(X_T) - \mu(C)\|_W^2.$$

If the finite estimator is almost-everywhere differentiable in η and a locally integrable bound permits interchange of differentiation and expectation, its reparameterized loss gradient is a gradient of the first term.

Proof. Expand the square after inserting $\mu(C)$. Conditional independence gives $\mathbb{E}[\Phi(X_T) - \mu(C) \mid C, U] = 0$, so the cross term vanishes. The second term contains no η. Fixed mixture probabilities make all selection uniforms independent of η; Gaussian draws have the same property. Under the stated regularity and domination assumptions, differentiate the finite estimator along those fixed draws and interchange derivative and expectation. This proves the final assertion. It does not establish those regularity assumptions across an inadmissible covariance or a failing reset. □

The trained loss must therefore be computed after the shared flow, complete importance correction, OT and Contract-E reset. Loss on the neural proposal alone would optimize a different estimator. Numerical validity, nonzero gradients to every trainable tensor, fresh held-out moments and a separate model-score reference are distinct checks. The reporting and provenance repairs of 20 October passed their regressions without changing healthy values or scores; they provide no evidence that this new learner improves either quantity. The neural adaptation requires its own execution results.

The first SIR experiment fixes $\theta = \theta_0$, uses five observation times and 64 particles, and learns from independent simulated paths. The network receives the standardized observations at all five times. Two hidden tanh layers produce the component displacements and log bandwidths at each time; all six weight and bias tensors are trainable. We compare two capacities, $(K, \text{width}) = (2, 16)$ and $(4, 32)$, the two fixed mixture probabilities $\beta = 0.5, 0.9$, two Adam learning rates, and two independent initializations. Each update averages losses from four newly simulated paths and independent particle draws. The original numerical filtering controls, including OT parameters $(1, 5)$, remain fixed for this diagnostic comparison.

Thirty-two separate validation paths select checkpoints after the initial 32 updates and the 128-update continuation; a 512-update continuation is conditional on the measured computational budget. Validation selects the moment loss above, never an unavailable model score. After selection, 64 untouched paths with four paired particle draws compare the trained network with the same untrained network, plain LEDH, the conditional-only proposal and the physical mixture without neural adaptation. Paired uncertainty is computed by resampling whole datasets, preserving their four particle draws. First- and raw-second-moment label losses are reported separately. Simple predictive, observation-only and recursive Gaussian estimates also test whether a learned proposal offers useful moment estimates in each observation regime and in the relative lower tail of compartment counts. A lower validation loss alone does not settle that comparison. These

fixed-parameter, short-horizon results will concern the moment estimator; model-score improvement requires its own independent reference comparison.

The distinction between label loss and posterior-moment error matters when interpreting a percentage reduction. For two estimators a, b, the proposition gives

$$\mathbb{E}[L_a - L_b] = \mathbb{E}\|\widehat{\mu}_a - \mu(C)\|_W^2 - \mathbb{E}\|\widehat{\mu}_b - \mu(C)\|_W^2.$$

Thus the paired loss difference estimates the difference in moment-estimation MSE without observing $\mu(C)$. A percentage reduction in the total label loss has a different denominator, because that loss also contains the irreducible conditional variance. It must not be reported as the same percentage reduction in posterior-moment MSE. A finite paired sample also retains uncertainty from its latent labels, which is why the independent comparison resamples datasets rather than treating particle replications as independent observations.

The observation regimes and latent-compartment regimes also require different interpretations. Let R denote a reported subgroup, let A_a, A_b be two moment estimators, and write $M_j = \|A_j - \mu(C)\|_W^2$ and $L_j = \|A_j - V\|_W^2$.

Proposition 51 (Risk differences within a selected subgroup)**.** *Under Assumption 2, for a subgroup of positive probability,*

$$\mathbb{E}[L_a - L_b \mid R] = \mathbb{E}[M_a - M_b \mid R] - 2\mathbb{E}[(A_a - A_b)^\top W(V - \mu(C)) \mid R].$$

If membership in R is determined by C, the last term vanishes. If membership depends on the latent label beyond C, it can be nonzero.

Proof. Expand both label losses around $\mu(C)$ and subtract. The common $\|V - \mu(C)\|_W^2$ term cancels, giving the displayed expression before taking conditional expectations. For R measurable with respect to C, condition first on (C, U); the residual $V - \mu(C)$ has zero conditional mean by Assumption 2. This argument need not hold after conditioning on an event that also reveals the latent label. □

For example, take $W = 1$, let C contain no information, let V take values $-1, 1$ with equal probability, and compare $A_a = 1$ with $A_b = 0$. The true conditional mean is zero and $M_a - M_b = 1$. Within the subgroup $R = \{V = 1\}$, however, $L_a - L_b = -1$. Thus the pooled and observation-defined comparisons retain the original moment-MSE interpretation. The latent-compartment comparisons measure prediction loss in selected latent situations and supply the predeclared conservative heuristic veto. They do not establish a posterior-moment MSE ranking against $\mu(C)$ in those subgroups.

15.13 The first independent neural comparison

The following is the historical account of the disqualified $N = 64$ comparison; it does not establish whether neural proposals help at the required particle count. The SIR neural proposal did not meet the improvement criterion in that comparison completed on 21 October. Recursive Gaussian filtering had lower observed label loss in both observation regimes and both latent strata. Training also failed to establish a gain over the same network at initialization or over plain LEDH. These findings concern the fitted candidate and finite filtering procedure; they do not contradict the population risk identity in Proposition 43.

All sixteen configurations completed 32 updates, and the two selected initializations completed their 128-update continuations. Validation selected the two-component, width-16 network with $\beta = 0.9$, Adam step size 10^{-3}, and 32 updates. Its validation loss was 0.678633. The first

optional 512-update continuation exceeded its time allowance after 362 valid updates. It produced no completed checkpoint and did not enter selection. All six neural tensors had finite nonzero gradients throughout the recorded continuation. A later recovery run completed 512 updates for this initialization, as described in Section 15.15. The independent comparison reported here still tests the original frozen 32-update candidate; the later checkpoints have only validation measurements.

Estimator	Total loss	First moments	Raw second moments
Trained neural proposal	0.770637	0.557711	0.983562
Same network, untrained	0.774066	0.559156	0.988976
Plain LEDH	0.765211	0.552860	0.977563
Conditional-only proposal	0.759526	0.547718	0.971334
Physical mixture, no network	0.774774	0.559207	0.990341
Predictive Gaussian	1.112856	1.056650	1.169062
Final-observation Gaussian	0.809329	0.638499	0.980160
Recursive Gaussian	0.533512	0.378388	0.688637

Table 8: Scaled terminal simulated-label losses on 64 independent SIR datasets, with four paired particle draws per particle method. Total loss equally weights the first and raw-second blocks. The entries include irreducible label variance; they are not absolute posterior-moment MSEs.

For the trained-minus-untrained loss difference, the estimate is -0.003430, with a paired 95% bootstrap interval $[-0.009510, 0.002454]$. The descriptive reduction is only 0.443%, below the required 10%, and the interval includes zero. Against plain LEDH, the difference is 0.005425, with interval $[-0.050125, 0.063136]$. Neither primary comparison supports a ranking. The 5,000 bootstrap draws resample whole datasets, keeping all four particle replications together. Source, numerical-validity and complete-pairing checks pass for all 1,472 required evaluation rows.

The simple recursive Gaussian estimator gives the more substantial negative result. Its low- and high-observation losses are 0.598323 and 0.472630, versus 0.833695 and 0.711399 for the trained proposal. These strata contain 31 and 33 datasets. The corresponding losses in the nearer-boundary and interior strata are $0.959331, 0.519776$ for the Gaussian estimator and $1.338364, 0.752323$ for the neural proposal. Only two datasets lie in the nearer-boundary stratum, so that comparison does not establish population-tail behavior. The pooled excess neural loss is 0.237124, with exploratory paired interval $[0.173759, 0.305246]$. Conditional intervals are not adjusted for multiple comparisons. The predeclared heuristic veto rejects the candidate on the observed conditional losses without using them for tuning.

This experiment repairs the earlier limitation to a few adapter scalars: the network parameters actually affect the corrected terminal loss and receive checked gradients. It nevertheless provides no evidence of useful independent moment improvement. Limited optimization, an unsuitable proposal family, and finite-particle correction or reset effects remain different possible explanations; this comparison does not identify their contributions. A broader claim requires a new protocol and fresh evaluation data. Model-score accuracy remains unevaluated, and these fixed-numerics results do not establish a new LEDH default.

15.14 Comparison with freshly fitted restricted proposals

The additional comparison uses quadratic cSMC-derived messages and positive-RBF messages, each fitted from observations on the same SIR datasets. These are restricted proposals with the same physical density correction, rather than a full twisted-target controlled SMC implementation or the

original neural KDM learner. Each family is evaluated both before and after fitting its moment adapter. Fitting uses 512 particles, 256 validation particles and 32 RBF components. The fitted messages are shared between the unadapted and adapted versions, so adapter changes do not also change the underlying message fit.

The adapter search compares three pooled coefficients with twelve time-specific coefficients, two random-direction seeds and step sizes $0.05, 0.15$. All eight configurations per family complete eight updates; the validation-selected trained configuration continues to 24 updates. The zero adapter remains eligible. Validation selects the 24-update pooled cSMC adapter and the 24-update time-specific RBF adapter, both at step size 0.15. All 160 updates are accepted, their losses remain finite and none reaches a coefficient bound. Final evaluation uses the same 64 datasets and four particle streams as Table 8, after both selections are frozen.

These comparisons have a narrower interpretation than an equal-budget test of the best available methods. The restricted proposals fix $\beta = 0.5$ and train with two simulated paths per update; the neural search considers two values of β and uses four paths per update. The restricted capacities and searches are baseline hypotheses, not established classical optima. Paired loss differences can describe these fitted procedures, but cannot isolate the effect of architecture or establish training efficiency.

All 1,024 additional evaluation rows are valid and paired, and their package sources match the neural experiment. Table 9 reports the completed comparison. Both adapters lower their observed mean loss, but the paired intervals include zero: the adapted-minus-unadapted difference is -0.007759, with interval $[-0.050665, 0.032717]$, for cSMC, and -0.002179, with interval $[-0.008090, 0.003676]$, for RBF. Neither comparison establishes a learning gain.

Restricted proposal	Total loss	First moments	Raw second moments
cSMC-derived, unadapted	0.871385	0.655728	1.087042
cSMC-derived, adapted	0.863626	0.644080	1.083172
Positive RBF, unadapted	0.875033	0.658915	1.091151
Positive RBF, adapted	0.872854	0.656278	1.089430

Table 9: Fresh restricted proposals on the same 64 SIR datasets as Table 8. Scaled simulated-label losses retain the same equal block weighting and irreducible-variance contribution.

Subtracting the adapted cSMC loss from the neural loss gives -0.092990. Its paired interval is $[-0.137859, -0.057682]$. Subtracting the adapted RBF loss gives -0.102217, with interval $[-0.140891, -0.068721]$. These exploratory intervals favor the neural proposal over the restricted fitted proposals. They condition on the frozen fits, use 5,000 dataset-cluster bootstrap draws, and are not adjusted for multiple comparisons. A favorable comparison with these fitted baselines does not reverse the failed neural comparison with plain LEDH or its own initialization. In particular, it does not establish that training the neural network caused the difference.

Recursive Gaussian filtering has lower observed loss than all four restricted arms in every required regime. In the low-observation stratum, the adapted cSMC and RBF losses are 0.964081 and 0.965729, versus 0.598323 for recursive Gaussian; in the high-observation stratum they are 0.769260 and 0.785607, versus 0.472630. In the two nearer-boundary datasets the adapted losses are 1.550776 and 1.673232, versus 0.959331; in the 62 interior datasets they are 0.841460 and 0.847035, versus 0.519776. Thus no learned candidate clears the predeclared heuristic comparison. The implementation and bounded comparison are complete, while useful moment improvement and independent model-score accuracy remain unestablished.

15.15 Continuing training after the interruption

The interrupted run left an engineering question: could the same optimization trajectory continue without losing accepted updates? The original runner saved parameters and Adam state only after completing a training stage and its validation. Although its log contained 362 accepted updates, its last saved state contained only 128. The repair therefore resumed that exact state and saved all neural parameters, Adam moments and iteration count, and the next simulation and particle seeds every eight updates. These intermediate saves permit recovery; only separately completed validation supplies a candidate's validation loss. The numerical training kernel, proposal, loss and random streams remained unchanged.

The continuation reached 512 updates. All 384 updates after the saved 128-update state were accepted, with finite losses and six finite nonzero gradient norms. For all 234 updates overlapping the interrupted run, the recorded loss, block losses, gradient norms and optimizer flags agreed exactly. The lost terminal tensors of the original run were unavailable for comparison. Separate interrupted-versus-uninterrupted tests checked restored parameters, Adam state and the next update, while the new validated saves agreed with their corresponding recovery states. These checks establish correct continuation of the implemented optimization procedure; they do not establish that its learned proposal improves estimation.

Accepted updates	Validation loss
32	0.678633
128	0.682256
192	0.682556
256	0.671551
384	0.682223
512	0.707064

Table 10: Validation along one SIR neural optimization trajectory, using the same 32 simulated datasets and two particle replications at each stage. The scaled simulated-label loss includes irreducible label variance.

Table 10 shows a lower observed validation loss at 256 updates, followed by increases at 384 and 512. Longer training thus did not give a monotone improvement on this validation set. Repeated use of this small set and the single optimization trajectory prevent a generalization ranking; the pattern alone does not identify overfitting, an unsuitable learning rate, or convergence. Both screened initializations completed 128 updates, but only this initialization reached 512. The other optional continuation required more time than the remaining campaign allowance under the recorded timing rule.

No later checkpoint was evaluated on the already exposed independent data. Consequently, the failed improvement criterion and recursive-Gaussian comparison in Section 15.13 still describe the original frozen candidate. Establishing a benefit from a later fit requires a frozen selection based on validation, sufficient replication, and a fresh independent comparison with the same baselines and conditional heuristic checks. Successful recovery does not supply that missing evidence or a model-score accuracy result.

16 Matching the physical parent and integrating the conditional mixture

The aggregate-moment and component-mixture investigations raise a more specific question than whether a flexible guide can fit a useful distribution. Which distribution does the flow actually transport? A Gaussian fitted to the whole predictive cloud describes uncertainty across parents. A child generated from one physical parent starts with the process covariance around that parent's transition mean. These distributions generally have different means and covariances. Applying a flow designed for the first to samples from the second can produce a poor proposal even when its density and importance correction are implemented correctly. The correction preserves the stated importance law; it does not make a poor proposal efficient.

This section derives a repair in the SIR setting, where the nonlinear dynamics are followed by a linear Gaussian observation. It connects the conditional proposal already introduced in Section 15.11 to exact integration of the current finite predictive mixture. The proposal itself is an existing option, not a newly discovered algorithm. The new investigation separates its remaining ancestor error from the extra error introduced by representing each conditional Gaussian with one child and then resetting the cloud. It also specifies what may be changed in the KDM construction without silently changing either the importance law or the differentiated scalar.

16.1 Why a covariance mismatch can become a mean error

Consider a scalar observation $y = x + \varepsilon$, with $\varepsilon \sim N(0, R)$. Suppose the flow is designed for the prior $N(m, P)$, but its input really follows $N(a, Q)$. The continuous affine Gaussian flow that transports its intended prior to its posterior has terminal map

$$F_{m,P}(x) = m + \frac{P}{P+R}(y-m) + \sqrt{\frac{R}{P+R}}(x-m). \tag{253}$$

Indeed, when $x \sim N(m, P)$, this map has the posterior mean $m + P(y-m)/(P+R)$ and variance $PR/(P+R)$. On the actual physical input, however, the mean and variance are

$$E[F_{m,P}(X)] = m + \frac{P}{P+R}(y-m) + \sqrt{\frac{R}{P+R}}(a-m), \tag{254}$$

$$\mathrm{Var}[F_{m,P}(X)] = \frac{RQ}{P+R}. \tag{255}$$

The desired parent-conditional Gaussian instead has mean $a + Q(y-a)/(Q+R)$ and variance $RQ/(Q+R)$. Setting $m = a$ removes the centering mismatch but leaves the wrong gain and variance when $P \neq Q$. Setting $P = Q$ is also insufficient if $m \neq a$: with $c = \sqrt{R/(Q+R)}$, the remaining mean error is $(c^2 - c)(m-a)$. Matching both quantities makes the continuous linear-Gaussian map exact. A finitely discretized flow still requires its own integration error check.

Consequently, a mean-dominated discrepancy does not show that covariance repair is irrelevant. The covariance controls both the gain and contraction, and therefore the output mean. For example, take $a = m = 0$, $Q = 1$, $R = 100$, and $y = 10$. The physical conditional mean is $10/101 \simeq 0.099$, with variance $100/101 \simeq 0.990$. A flow designed with $P = 100$ instead produces mean 5 and variance 0.5 on those same physical draws. Nothing in this example requires a failed Cholesky factorization or extreme floating-point rounding: it is a mismatch between the assumed and actual proposal input.

The R2 frozen-input contraction diagnostic supports this mechanism in a limited, descriptive sense. Replacing the guide covariance by $P_\gamma = Q + \gamma(P_{\mathrm{UKF}} - Q)$, while preserving its mean and

recomputing the proposal densities, reduced the observed mean conditional Gaussian KL from about 81.14 at $\gamma = 1$ to 0.002 at $\gamma = 0$ on the inspected stages. Those stages do not establish a general ranking or show that the remaining mean mismatch is always negligible. They motivate a cleaner test: condition the actual parent distribution directly.

16.2 The exact conditional law of the current finite mixture

Fix a time step and parameter θ. The incoming approximation consists of states x_i and normalized positive weights w_i, $i = 1, \dots, N$. Let $a_i = f_\theta(x_i)$ be the nonlinear transition mean. In this SIR model, the transition is Gaussian conditional on the parent, and the observation is linear:

$$X \mid i \sim N(a_i, Q), \qquad Y \mid X \sim N(HX, R), \qquad p_N(x) = \sum_i w_i \, \varphi(x; a_i, Q), \tag{256}$$

where $\varphi(\cdot; m, V)$ denotes a normalized Gaussian density. The state has 18 coordinates; H selects the nine infected coordinates. The physical covariances in the present implementation are $Q = I_{18}$ and $R = 100 \exp(2\theta_2) I_9$, where θ_2 is the observation-noise coordinate in the code's zero-based indexing. Thus Q is not the covariance of the whole predictive cloud and should not be replaced by that covariance when defining the conditional physical transition.

Define the innovation covariance and Kalman gain

$$S = HQH^\top + R, \qquad K = QH^\top S^{-1}. \tag{257}$$

Completing the square in the product of transition and observation densities gives

$$m_i = a_i + K(y - Ha_i), \qquad C = Q - KHQ, \tag{258}$$

$$e_i = \varphi(y; Ha_i, S), \qquad \varphi(x; a_i, Q)\varphi(y; Hx, R) = e_i \varphi(x; m_i, C). \tag{259}$$

The last equality includes its normalizing constant: integrating both sides over x gives the predictive likelihood e_i for parent i. Summing with the incoming weights then yields

$$Z_N = \sum_i w_i e_i, \qquad \alpha_i = \frac{w_i e_i}{Z_N}, \qquad \pi_N(x \mid y) = \sum_i \alpha_i \varphi(x; m_i, C). \tag{260}$$

This is exact conditioning of the finite mixture in (256). The incoming states remain an approximation to the previous filtering distribution. Therefore Z_N is not generally the true model predictive likelihood, and π_N is not an exact solution of the nonlinear recursive filter. Direct conditioning removes one current-step approximation while leaving the previous approximation visible.

16.3 What changes in sampling, and what does not

Use $q_i(x) = \varphi(x; m_i, C)$ for the child associated with parent i. Equation (259) gives the pointwise cancellation

$$\frac{\varphi(x; a_i, Q)\varphi(y; Hx, R)}{q_i(x)} = e_i. \tag{261}$$

With one child drawn from each parent, the unnormalized child weight is $w_i e_i$. There is no child-draw variability in this ratio. The parent evidences can nevertheless differ enormously, so the normalized weights α_i can still concentrate. This repair cannot recover a missing region of the incoming parent cloud.

The allocation law matters if one changes that one-child-per-parent design. If a parent is sampled with probability b_i and its child is sampled from q_i, the joint importance ratio is

$$\frac{w_i \varphi(x; a_i, Q)\varphi(y; Hx, R)}{b_i q_i(x)} = \frac{w_i e_i}{b_i}. \tag{262}$$

Choosing $b_i = \alpha_i$ makes that joint ratio constant, but a categorical choice based on parameter-dependent α_i makes the realized finite program piecewise discontinuous in θ. Between switching boundaries, the selected branch has an ordinary pathwise derivative; at a jump, that derivative does not describe passage across the boundary. It therefore does not establish the smooth finite target required by the present HMC design. Differentiating an expectation over the categorical choice is a separate question and must also account for the changing allocation probabilities. This allocation is now an implemented proposal default, as detailed in Section 16.8; its HMC smoothness limitation remains. Smooth deterministic transport is a different route; it needs its own finite-map derivative and reset analysis.

Likewise, replacing an ancestor density by a marginal mixture density requires a corresponding derivation of the sampling measure. A global KDM density cannot simply be inserted into the denominator of a parent-specific ratio while keeping an incompatible numerator or allocation weight. In the first repair experiment, parent association and the existing ancestor importance law remain fixed. The shared physical-conditional proposal already computes the original transition, observation and proposal densities at the same child; the algebraic cancellation is checked rather than assumed.

There is no double assimilation here. The observation enters the proposal, and the original target numerator still contains the observation likelihood; the proposal density in the denominator makes (261) hold. Applying another observation update to the conditional Gaussian without adjusting the proposal law would define a different calculation.

16.4 Integrate before blaming the child representation

The finite conditional mixture permits exact first and second moments without drawing a child. Its mean, raw second moment and covariance are

$$\mu_N = \sum_i \alpha_i m_i, \tag{263}$$

$$M_{2,N} = \sum_i \alpha_i (C + m_i m_i^\top), \tag{264}$$

$$V_N = \sum_i \alpha_i \{C + (m_i - \mu_N)(m_i - \mu_N)^\top\}. \tag{265}$$

The covariance expression separates within-parent uncertainty C from between-parent uncertainty. Keeping only the weighted conditional means would discard C and underestimate the uncertainty even when all parents coincide. If they do coincide, (265) reduces to the ordinary Gaussian conditional moments, a useful implementation check.

For the conditional proposal, the weights α_i are independent of the child draws. Conditional on the incoming cloud, the expectation of $\sum_i \alpha_i \phi(X_i)$ equals the corresponding integrated expectation for any integrable ϕ. Thus integration eliminates that conditional sampling variance for first and quadratic features. With independent children, the conditional variance of the sampled feature estimator is $\sum_i \alpha_i^2 \operatorname{Var}_{q_i}[\phi(X)]$.

There is also a precise squared-error statement. Write $\widehat{g} = \sum_i \alpha_i \phi(X_i)$ and $g_N = \sum_i \alpha_i E_{q_i}[\phi(X)]$. Conditional on the incoming cloud and observation, let $g_\star$ be a fixed reference feature vector and let

W be a fixed positive semidefinite loss matrix. Expanding the square and using $E[\widehat{g} - g_N] = 0$ gives

$$E\Big[(\widehat{g} - g_\star)^\top W(\widehat{g} - g_\star)\Big] = (g_N - g_\star)^\top W(g_N - g_\star) + \operatorname{tr}\left\{W \sum_i \alpha_i^2 \operatorname{Cov}_{q_i}[\phi(X)]\right\}. \tag{266}$$

Thus integration reduces expected squared error relative to these sampled, pre-reset conditional-proposal features, even if $g_\star$ is the true filtering expectation. The same identity applies to an independently generated latent-state label after conditioning on that label. It leaves the first term, the incoming approximation's error, untouched. This expectation over fresh child draws does not order individual realized losses, arbitrary self-normalized importance estimators, corrected clouds, or two recursive algorithms with different incoming clouds. The identity also concerns exact arithmetic; finite-precision departures from the cancellation must be measured.

The comparison becomes informative when all readouts are retained: integrated, weighted children, reset cloud and corrected cloud. If integrated moments are already poor on a fixed incoming cloud, changing the number of child draws cannot fix that conditional target; investigate incoming coverage and earlier propagation. If integration is accurate but sampled moments are poor, inspect allocation and within-component representation. If the discrepancy first appears after reset or correction, inspect those transformations. These are explanatory comparisons with the same incoming approximation, not competing definitions of the model posterior.

The canonical Contract-E reset restores the moments of its weighted source cloud. Feeding μ_N and V_N into that reset instead would change its target and therefore require a distinct reset contract and a new total derivative. The initial implementation consequently records integrated moments without using them to alter the next cloud. An integrated final readout can improve the reported estimator while leaving next-step ancestor coverage unchanged; both effects must be measured separately.

16.5 Differentiate the same conditioned mixture

For a parameter direction, write a dot for the total directional derivative. The parent means depend on both the transition parameter and the incoming states: $\dot{a}_i = \partial_\theta f_\theta(x_i)\dot{\theta} + D_x f_\theta(x_i)\dot{x}_i$. Incoming weights, previous resets and corrections also depend on the parameter. Holding these quantities fixed would answer a different derivative question.

To allow parameter-dependent H, Q, R, differentiate the innovation covariance and gain explicitly:

$$\dot{S} = \dot{H}QH^\top + H\dot{Q}H^\top + HQ\dot{H}^\top + \dot{R}, \tag{267}$$

$$\dot{K} = (\dot{Q}H^\top + Q\dot{H}^\top - K\dot{S})S^{-1}, \tag{268}$$

$$r_i = y - Ha_i, \qquad \dot{r}_i = -\dot{H}a_i - H\dot{a}_i, \tag{269}$$

$$\dot{m}_i = \dot{a}_i + \dot{K}r_i + K\dot{r}_i, \tag{270}$$

$$\dot{C} = \dot{Q} - \dot{K}HQ - K\dot{H}Q - KH\dot{Q}. \tag{271}$$

The observation y is held fixed during inference. Matrix solves implement these expressions without forming an explicit inverse. With $v_i = S^{-1}r_i$, the Gaussian log-evidence derivative is

$$\dot{\log} e_i = -v_i^\top \dot{r}_i + \tfrac{1}{2} v_i^\top \dot{S} v_i - \tfrac{1}{2}\operatorname{tr}(S^{-1}\dot{S}). \tag{272}$$

For normalized incoming weights, put $u_i = \dot{\log} w_i + \dot{\log} e_i$. Then

$$\dot{\log} Z_N = \sum_i \alpha_i u_i, \qquad \dot{\alpha}_i = \alpha_i \left(u_i - \sum_j \alpha_j u_j\right). \tag{273}$$

When the input consists of unnormalized log weights ℓ_i, replace $\dot{\log} w_i$ by $\dot{\ell}_i - \sum_j w_j \dot{\ell}_j$. This normalization term is necessary even when all displayed weights sum numerically to one.

Finally, let $B_i = C + m_i m_i^\top$. The readout derivatives are

$$\dot{\mu}_N = \sum_i (\dot{\alpha}_i m_i + \alpha_i \dot{m}_i), \tag{274}$$

$$\dot{M}_{2,N} = \sum_i \left[\dot{\alpha}_i B_i + \alpha_i (\dot{C} + \dot{m}_i m_i^\top + m_i \dot{m}_i^\top) \right]. \tag{275}$$

These derivatives include mixture weights as well as component moments. They can be evaluated with the analytical recursive tangents already carried by the shared executor. Finite differences test the total recursive program, including moving initial states and all previous resets. Agreement certifies that finite-program derivative on the tested cases, not agreement with the underlying model score or with a Zhao–Cui adapted-filter reference.

16.6 Consequences for a useful KDM repair

For a Gaussian mixture whose components approximate the predictive distribution, condition each component before combining it. Component k with predictive mean a_k and covariance Q_k has its own S_k, K_k, m_k, C_k and evidence e_k; update its weight proportionally to $w_k e_k$. Aggregating first loses this component-specific observation response. But merely creating more components cannot guarantee an improvement. For instance, the symmetric scalar mixture with means $\pm b$ and common variance $P - b^2$ matches the mean and variance of $N(0, P)$, while its fourth moment is $3P^2 - 2b^4$. Moment matching has not preserved the Gaussian law.

The physical-parent repair and a useful learned or UKF-updated KDM therefore answer different parts of the problem. Matching a_i, Q repairs the flow's local input mismatch. Integrating its conditional mixture removes current-step child noise from the chosen readout. Improving later incoming coverage may require a better component representation or smooth redistribution, but that step must preserve a derived sampling law and include the corresponding analytical derivatives. The first execution tests the existing conditional proposal with unchanged reset semantics and reports all four moment readouts. Only after that comparison identifies the remaining error is a more elaborate component or allocation mechanism justified.

The initial independent Gaussian-product check passed in FP32 and FP64; its FP64 full moment/evidence tangent discrepancy was below 6×10^{-10} on a three-parent fixture. That fixture held H and Q fixed and did not test the recursive endpoint. Its purpose is to check (259) and the moving-weight/readout algebra. Recursive, GPU and paired estimation results belong to the subsequent execution record; the fixture alone establishes no efficacy ranking.

16.7 What the first recursive comparison establishes

The first recursive experiment uses the 18-state SIR model, five observations, 1,008 particles, 16 newly simulated datasets and two particle replicates per dataset, at the nominal three-dimensional parameter vector. It compares the original LEDH baseline, the existing aggregate-moment candidate with $\gamma = 0$, and the physical-parent conditional proposal. The latter uses one Gaussian child per parent and retains the complete covariance, Contract-E reset and correction lifecycle. All three routes run through the same analytical executor. Integration supplies an additional readout; it does not change the cloud propagated to the next observation.

The loss is the equal-weight average of squared errors in two feature blocks: 18 standardized first moments and the 171 distinct standardized quadratic moments, evaluated against the simulated

terminal state. Feature scales were frozen using a separate 64-path calibration. Consequently, the numbers below measure a latent-label prediction loss, not distance to the exact filtering moments or likelihood. UKF, bootstrap filtering and the UKF prediction before the terminal observation provide simple comparators.

The numerical-reference run uses FP32 particles and densities, disables TF32, and retains the previously selected FP64 output standardization within the correction. It is therefore a mixed-precision run, not evidence for an all-FP32 implementation. Every one of its 96 full-filter cells passes the recorded validity checks. A separate CPU/FP64 two-observation fixture checks the total recursive derivatives of the likelihood and integrated and corrected moments by central differences at two step sizes, including dependence through the initial cloud and earlier resets.

Method and final readout	Mean standardized feature loss
UKF	0.566871
Bootstrap particle filter	0.602845
Aggregate-moment candidate, $\gamma = 0$, corrected	0.605266
Parent-conditioned proposal, weighted children	0.606323
Parent-conditioned proposal, reset cloud	0.606323
Parent-conditioned proposal, corrected cloud	0.606323
Parent-conditioned proposal, integrated	0.607334
UKF prediction before the terminal observation	0.656055
Original LEDH baseline, corrected	0.719388

These are descriptive means over datasets after averaging the two particle replicates. The parent-conditioned corrected loss minus the $\gamma = 0$ corrected loss is 0.001057, with a dataset-paired standard error of 0.000949. This screen does not establish an accuracy improvement over that existing candidate. The integrated loss minus the weighted-child loss is 0.001011, with a paired standard error of 0.000396. That realized difference does not contradict (266): the identity averages over fresh child draws conditional on each incoming cloud, whereas the table uses two particular draws and one latent label per dataset. The screen was specified as descriptive and selects no statistically supported winner.

The comparison with simple methods is consequential. The parent-conditioned integrated loss exceeds UKF by 0.040464 overall, with a paired standard error of 0.016877, and its observed loss is higher in each of eight predeclared low/high regime bins. Those bins split innovation, predictive spread, signal-to-noise ratio and distance from the boundary at thresholds frozen on earlier calibration data; they overlap and contain between five and eleven datasets. This is a promotion veto under the experiment's conditional heuristic screen, not a claim of a population ranking or eight independent replications.

The four readouts localize a different question. Across the 32 parent-conditioned runs and all five times, the largest coordinatewise absolute difference between sampled and integrated means is 0.4181; for covariance entries it is 5.0501. The corresponding reset-minus-sample maxima are 9.89×10^{-4} and 3.16×10^{-4}, while correction-minus-reset maxima are 7.60×10^{-5} and 9.09×10^{-5}. Thus reset and correction approximately preserve the moments of their sampled source in this reference run. These discrepancies measure agreement with that source, not error relative to the true filter. In particular, integrating the same incoming approximation has not closed its observed gap to UKF. Incoming coverage, the finite-parent representation and the chosen proposal family remain explanations to distinguish.

TF32 requires a separate numerical conclusion. Repeating the screen with identical saved data and random inputs leaves all 32 $\gamma = 0$ cells and all 32 parent-conditioned cells valid, but rejects all

32 original-baseline cells: 31 first fail at reset and one first fails at correction. The failed baseline cells have effective sample sizes between 1 and 3.03 at the failing time. Reset row and column residuals remain below their declared thresholds, so the recorded failures are not marginal-balance failures. The records locate the failing stage; they do not identify an individual failing factorization. An accuracy comparison against that baseline in TF32 would therefore be invalid.

The parent-conditioned cancellation is also more accurate without TF32. Across the reference screen, the largest absolute discrepancies between sampled importance and integrated formulas are 6.08×10^{-7} for a normalized weight, 3.06×10^{-5} for the cumulative log evidence and 6.49×10^{-5} for its tested directional derivative. With TF32 these grow to 6.61×10^{-4}, 1.82×10^{-3} and 1.43×10^{-2}, respectively. Internal validity flags consequently do not imply precision equivalence or HMC readiness.

The physical-parent mismatch now has a derived repair and a tested recursive implementation. Its integrated moments are exact for the stated finite conditional mixture, up to numerical error. Neither statement establishes that this incoming mixture adequately represents the nonlinear filtering distribution. The next scientific question is whether improving that representation or smooth allocation closes the remaining error; it is different from repeating the conditional Gaussian algebra. No Zhao–Cui adapted-filter oracle or HMC run was part of this experiment.

The complete commands, frozen controls, paired regime tables, failure census and source snapshots are recorded in the repository note `ledh-parent-conditioned-result-20261026.md`. The corrected no-TF32 and TF32 runs are identified there by timestamps `20261026T075252756468Z` and `20261026T075603594553Z`.

16.8 Conditional proposals and observation-weighted parents

The observation can improve a proposal in two distinct places. It can change where a child is drawn conditional on a particular physical parent, and it can change which parent receives that child. The UKF moments and the LEDH flow already use the observation to modify continuous proposal geometry. They do not, by themselves, replace a uniform allocation over physical parents by allocation proportional to those parents' predictive observation probabilities. This distinction explains why observation-weighted selection adds something even when the previous proposal was observation-informed.

For the SIR model considered here, the transition mean is nonlinear but the transition noise is additive Gaussian and the observation is linear Gaussian. Condition on the equal-weight incoming cloud $x_{t-1}^{1:N}$ after reset and write $a_i = f_\theta(x_{t-1}^i)$. Its predictive mixture is

$$p_N(x) = \frac{1}{N}\sum_{i=1}^{N} \varphi(x; a_i, Q), \qquad g(y \mid x) = \varphi(y; Hx, R). \tag{276}$$

Each component can therefore be conditioned exactly, without replacing the nonlinear transition by a globally linear transition. Define

$$S = HQH^\top + R, \qquad K = QH^\top S^{-1}, \tag{277}$$

$$e_i = \varphi(y; Ha_i, S), \qquad c_i = a_i + K(y - Ha_i), \qquad C = Q - KSK^\top, \tag{278}$$

$$Z_N(y) = \frac{1}{N}\sum_i e_i, \qquad \alpha_i = \frac{e_i}{\sum_j e_j}. \tag{279}$$

Here e_i measures how well the observation is predicted by parent i, c_i is that parent's observation-conditioned child mean, and C is its conditional covariance. In computation the equivalent Joseph

expression $C = (I - KH)Q(I - KH)^\top + KRK^\top$ avoids subtracting two nearly equal matrices. The implementation propagates the derivatives of Q, R, H, a_i, K, C and Z_N.

Uniform parent selection gives $q_{\mathrm{cu}}(x) = N^{-1} \sum_i \varphi(x; c_i, C)$. Observation-weighted parent selection instead gives

$$q_{\mathrm{cw}}(x) = \sum_i \alpha_i \varphi(x; c_i, C) = \frac{g(y \mid x) p_N(x)}{Z_N(y)}. \tag{280}$$

The last equality follows component by component from Gaussian conditioning, then summing $g(y \mid x)\varphi(x; a_i, Q) = e_i \varphi(x; c_i, C)$ over i. It both establishes the sampling law and provides an efficient marginal proposal density. Merely changing the parent draw while retaining the old uniform-mixture denominator would be wrong.

The new default replaces the global proposal branch by q_{cw} while retaining the defensive identity and local-flow branches. With their declared probabilities $\beta_0, \beta_1, \beta_2$, the actual proposal and weight are

$$q_{\mathrm{mix}}(x) = \beta_0 p_N(x) + \beta_1 q_{\mathrm{cw}}(x) + \beta_2 q_{\mathrm{local}}(x), \qquad \widetilde{w}(x) = \frac{g(y \mid x) p_N(x)}{q_{\mathrm{mix}}(x)}. \tag{281}$$

Thus every branch retains the same target numerator and uses the density of the full mixture. The original three-branch proposal and the intermediate conditional proposal with uniform parents remain explicit comparison choices. The conditional default is implemented once for affine Gaussian observations; unsupported observation laws require an explicit alternative policy.

16.9 What the ESS improvement establishes

For normalized importance weights W_i, the effective sample size is $\mathrm{ESS} = 1/\sum_i W_i^2$. It equals N for equal weights and approaches one when a single child carries nearly all the mass. Increasing ESS therefore reduces weight concentration within the represented cloud. On the saved low-observation-noise SIR failure case (seed 1104, $N = 1008$, $T = 2$), rerunning each complete filter from the same initial data gave the following terminal effective sample sizes. Each filter has its own intervening cloud, so this is an end-to-end comparison, not an insertion into an identical second-step cloud.

Proposal	Terminal ESS
Original three branches	2.404
Conditional global branch, uniform parents	6.495
Conditional global branch, observation-weighted parents	392.512
Conditional-only, observation-weighted parents	1008.000

The weighted conditional mixture raises ESS by about 163 times relative to the original three branches in this case. This is a substantial reduction in weight concentration and a useful robustness improvement. It does not imply an equally large reduction in likelihood or score error.

Indeed, if the conditional-only proposal is used, equation (280) makes every importance weight $Z_N(y)$, and ESS equals N up to roundoff. That statement holds even if the incoming cloud poorly approximates the filtering distribution. ESS measures weight balance among the sampled children; it does not measure the accuracy of the incoming mixture or the total likelihood derivative.

The first score comparison used eight paired streams at $T = 10$, $N = 1008$ and nominal SIR parameters. Componentwise RMSE relative to the saved, approximate Zhao–Cui reference was

Proposal	Infection score	Recovery score	Noise score
Original three branches	1353.19	590.64	802.52
Conditional, uniform parents	24.32	12.34	3.39
Conditional, weighted parents	41.08	9.48	4.43

All 24 streams passed their recorded validity checks. Conditioning the child proposal was descriptively favorable in this experiment. The additional parent weighting gave mixed score results: it reduced the recovery-score RMSE but increased the other two relative to uniform conditional parents. With eight streams, heavy tails and an uncertified reference, this table does not establish a statistical ranking. The separate six-stream conditional-only comparison likewise showed that ESS equal to N does not guarantee the smallest score error. The archived result is `ledh-parent-selection-score-result-20261028.md`.

The owner-selected default on 28 October 2026 is consequently a proposal and weight-concentration decision. It is not a claim that the score problem has been solved. Analytical recursive differentiation includes the continuous proposal, density and reset dependencies, but holds categorical parent indices locally fixed. Agreement with finite differences away from switching boundaries verifies that finite-program derivative; it does not establish a globally smooth HMC target or equality to the exact model likelihood score. The new comparison therefore evaluates likelihood and all score components separately at $T = 10, 20, 50$, using multiple SIR parameter points, paired streams, simple proposal controls and two independently fitted Zhao–Cui references. Reference importance overlap and disagreement between fits must be reported alongside any accuracy conclusion.

16.10 Likelihood and score comparison across SIR parameter points

The expanded experiment holds the observations fixed and evaluates the same likelihood at several parameter values. The three parameters are logarithms of multiplicative changes in the infection rate, recovery rate and observation noise scale. We use the first 10, 20 and 50 observations from one saved SIR dataset, with $N = 1008$ particles and paired random streams across proposals. Consequently, differences across parameter points describe a neighborhood of this dataset's likelihood; they do not describe performance across independently generated epidemics. The flow and reset controls are held fixed to isolate proposal changes, rather than tuned separately to make each method competitive. The calculation uses FP64 GPU/XLA as a precision comparison, not as evidence that the production TF32 route is ready for admission.

The comparison uses two previously fitted Zhao–Cui adapted smoothers, following the path-importance construction in Zhao and Cui [2024, eq. (26), Algorithm 4], with ranks 20 and 40 and different fit seeds. Each supplies $M = 100000$ complete paths for each horizon. Let θ_0 denote the parameter used to construct a saved proposal r, and let $X^{(m)}$ denote its sampled path. At another parameter θ, retaining the same proposal gives

$$\ell_m(\theta) = \ell_m(\theta_0) + \log p_\theta(X^{(m)}, y_{1:T}) - \log p_{\theta_0}(X^{(m)}, y_{1:T}), \tag{282}$$

$$\widehat{L}_r(\theta) = \frac{1}{M} \sum_m \exp\{\ell_m(\theta)\}, \tag{283}$$

$$\widehat{s}_r(\theta) = \sum_m \frac{\exp\{\ell_m(\theta)\}}{\sum_j \exp\{\ell_j(\theta)\}} \nabla_\theta \log p_\theta(X^{(m)}, y_{1:T}). \tag{284}$$

Here $\ell_m(\theta_0)$ already contains the saved proposal denominator. Thus the normalizer and score refer to the same importance calculation, and $\widehat{s}_r = \nabla_\theta \log \widehat{L}_r$ when the saved proposal and paths are held fixed. The analytical complete-data derivative is also checked against independent canonical-model finite differences. This provides a useful approximate reference; it does not turn a fitted tensor-train proposal into an exact likelihood oracle.

Reference reliability changes sharply with the evaluation point. The predeclared screening rule requires path ESS at least 1000 out of 100000 for both fits and agreement in the log likelihood and

each score component within three combined conditional jackknife standard errors. The nominal point and noise multiplier 0.8 pass at every horizon. Noise multiplier 1.25 passes at $T = 20, 50$ but fails at $T = 10$, where one fit has path ESS about 425. Every infection- or recovery-rate multiplier 0.9 or 1.1 gives path ESS near one and fails. Those runs cannot tell us which particle proposal is more accurate: the reference itself has insufficient overlap.

Four additional local points, multiplying either rate by 0.999 or 1.001, pass both reference screens at all three horizons. In total, 20 of the 33 parameter–horizon cells support the declared comparison. The failed wide perturbations remain reported; the local points do not replace them. Fresh parameter-specific Zhao–Cui fits are needed to assess the wide perturbations. The jackknife errors are conditional on each fitted proposal and its sampled support, so agreement between these two fits still cannot exclude a shared approximation error.

The six particle proposals use the same eight random-stream seeds at each parameter point. The three main proposals are the original mixture, conditional children with uniform parents, and conditional children with observation-weighted parents. Identity-only proposals, conditional-only uniform parents, and conditional-only weighted parents supply simpler comparisons. The last of these has constant incremental weights for its own incoming mixture, making it a particularly useful check on any inference from ESS to score accuracy.

For each usable reference and each of the four quantities, we report the root mean squared error across streams. A paired comparison uses the difference of squared errors from the same stream, rather than treating two runs with shared randomness as independent. An exploratory ranking requires a two-sided 95% Student-t interval excluding zero and an exact two-sided sign-test p-value no larger than 0.05, with the same favored proposal for both reference fits. All eight pairs must be valid. These are conditional comparisons against fitted references, without a correction for the many quantities and parameter points examined. Small differences and extreme-stream behavior therefore remain descriptive unless that criterion is met. The simple proposals are checked at each parameter and horizon; pooling cases would conceal precisely the conditions in which a more elaborate mixture is unnecessary or less accurate.

16.11 Observed accuracy and the limits of parent weighting

All 1584 requested filter measurements were completed: eleven parameter points, three horizons, eight streams and six proposals. None failed the recorded filter validity checks; the largest covariance-restoration error was 9.23×10^{-15}. The usable reference cells show a large reduction in observed score error relative to the original mixture. For each of the three score components, the weighted conditional mixture has lower RMSE against both references in all twenty usable cells. Its log-likelihood RMSE is lower in nineteen; the exception is infection multiplier 1.001 at $T = 10$. These counts describe the measured errors, not a probability of superiority.

Table 11 shows the nominal case against the rank-40 reference. At $T = 50$, the original infection-score RMSE is about 18647, whereas the weighted conditional mixture gives 41–44 across the two references. Recovery-score RMSE falls from about 7905 to 12–13, and noise-score RMSE from about 9594 to about 5. Log-likelihood RMSE changes much less, from about 0.854 to 0.654. The severe original score errors and the comparatively moderate likelihood errors illustrate why checking the normalizer alone cannot validate its derivative.

The direction is consistent across streams, but the uncertainty in mean squared error is substantial. At nominal $T = 50$, every one of the eight weighted-conditional score errors is smaller than its paired original error for each component and each reference; the two-sided sign-test value is 0.0078125. However, the paired squared-error intervals cross zero. For example, against the rank-40 reference the mean reduction in infection-score squared error is 3.48×10^8, with 95% interval $[-4.57 \times 10^8, 1.15 \times 10^9]$.

T	Proposal	Log likelihood	Infection	Recovery	Noise
10	Original	0.961	1,290.56	539.05	347.34
10	Conditional, uniform	0.788	30.54	12.06	4.92
10	Conditional, weighted	0.832	38.61	17.09	4.35
20	Original	0.894	11,371.11	4,871.67	3,488.04
20	Conditional, uniform	0.812	31.53	6.92	3.90
20	Conditional, weighted	0.687	41.28	12.91	3.98
50	Original	0.854	18,648.59	7,905.32	9,593.82
50	Conditional, uniform	0.750	32.76	7.23	3.85
50	Conditional, weighted	0.655	44.42	13.08	4.95

Table 11: RMSE across eight paired streams at nominal SIR parameters, $N = 1008$. Score columns differentiate with respect to log multipliers of the named parameter. Values use the rank-40, fit-2 Zhao–Cui adapted reference; all comparisons and uncertainty calculations also use the independent rank-20, fit-17 reference. These are descriptive errors against approximate references, not certified model-score errors.

A few extreme original errors make the mean squared error difficult to estimate with eight streams. No comparison between the weighted conditional mixture and the original meets the full predeclared interval-and-sign criterion. The observed reduction is large; a statistically supported MSE ranking requires more replication.

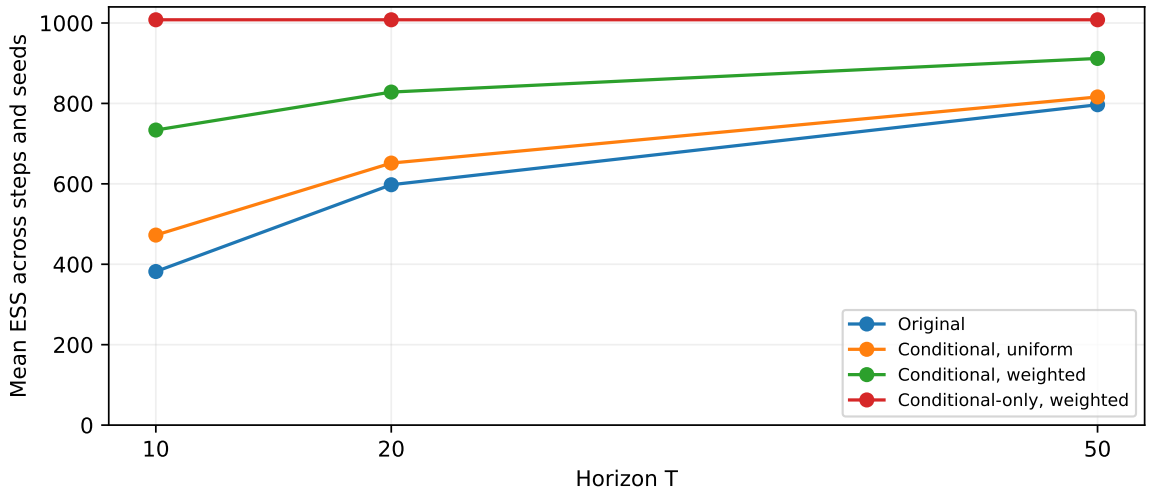


Figure 2: Nominal-case ESS, averaged across time steps and eight streams. The original, uniform conditional and weighted conditional mixtures have mean ESS about 382, 473 and 734 at $T = 10$, respectively, and 797, 816 and 912 at $T = 50$. The conditional-only weighted proposal has ESS 1008 up to roundoff. The rise with horizon includes later, easier observations; it is not a claim that extending a filter inherently improves its weights.

The ESS advantage extends beyond the nominal case. In each of the twenty parameter–horizon cells with usable references, the weighted conditional mixture has higher time-averaged ESS and higher minimum-over-time ESS than the uniform conditional mixture in all eight paired streams: 160/160 pairs for each measure. Averaging the time means over streams, the increase ranges from 6.7% to 102.7% across those twenty cells. The same direction holds in all 33 parameter–horizon cells, or 264/264 paired streams, including cells whose Zhao–Cui references fail the accuracy checks.

Comparing ESS between the two proposals does not require those references. These are descriptive comparisons of time means and minima; they do not establish that ESS is higher at every individual time step or in future independent runs.

The comparison with uniform conditional parents isolates the additional benefit, and cost, of parent weighting. Against both references, weighting reduces log-likelihood RMSE in fifteen of the twenty usable cells, but increases infection-score RMSE in thirteen, recovery-score RMSE in fifteen, and noise-score RMSE in thirteen. Other cells favor weighting or have an ordering that changes with the reference fit. Thus most of the score-error reduction relative to the original is already present after conditioning the children; redistributing children among parents does not produce a uniform further score improvement.

Two noise-score comparisons meet the exploratory paired criterion. With noise multiplier 0.8 at $T = 20$, weighting reduces RMSE from about 197.52 to 12.34–12.35. With noise multiplier 1.25 at $T = 50$, the direction reverses: weighting gives 2.85–3.31, compared with 1.08–1.10 for uniform parents. The first squared-error reduction has a 95% interval of approximately $[10183, 67544]$ for either reference. In the second, uniform parents reduce squared error by 6.95 and 9.76, with intervals $[4.38, 9.53]$ and $[6.84, 12.69]$. Each sign-test value is 0.0078125. These are exploratory, cell-specific findings without multiplicity adjustment.

Simpler proposals expose a further limitation. At noise multiplier 1.25, $T = 50$, the identity-only proposal has noise-score RMSE 1.16–1.21 and conditional-only uniform parents give 1.16, both below the new mixture's 2.85–3.31. At nominal $T = 50$, conditional-only weighted parents achieve ESS 1008 but infection-score RMSE 95.82–100.96, compared with 31.91–32.76 for the conditional mixture with uniform parents. Equal weights can coexist with a substantially less accurate score. These conditional failures block a claim that the new mixture is accuracy-optimal, even though the owner-selected default improves weight concentration.

Conditional and observation-weighted proposals remain the owner-selected engineering default for their improved weight balance, with the uniform-parent alternative retained as a competitive option for score estimation. The accuracy comparison does not establish that this default minimizes score error. It identifies the remaining scientific work: larger rate changes need fresh, parameter-specific Zhao–Cui fits; nominal and local comparisons need more paired streams to resolve heavy-tailed squared-error uncertainty. Per-scope tuning, independent datasets and the production precision require separate evaluation. The present analytical scores are derivatives of a finite particle calculation with categorical choices held locally fixed. Their agreement with local finite differences establishes that derivative calculation, while their distance from the approximate reference remains an empirical accuracy question.

The complete per-stream values, both-reference RMSEs, paired intervals, conditional heuristic comparisons and reference vetoes are preserved in `docs/plans/artifacts/observation-parent-sir-accuracy-20261028/analysis01/summary.json` and its adjacent `tables.md`. The plan and result note record commands, source hashes, numerical settings, review limitations and the compute budget.

16.12 The five-model comparison and the retained default

The completed comparisons answer two different questions. Conditioning a child on its parent's transition and the current observation changes where that child is drawn. Weighting the parents changes how many children are allocated to each part of the incoming cloud. The original three-branch proposal is the comparator for the first change; conditional proposals with uniform parents isolate the second. The conditional-mixture arms retain their defensive branches. Thus uniform parents do not mean an observation-blind proposal: their children already use the observation.

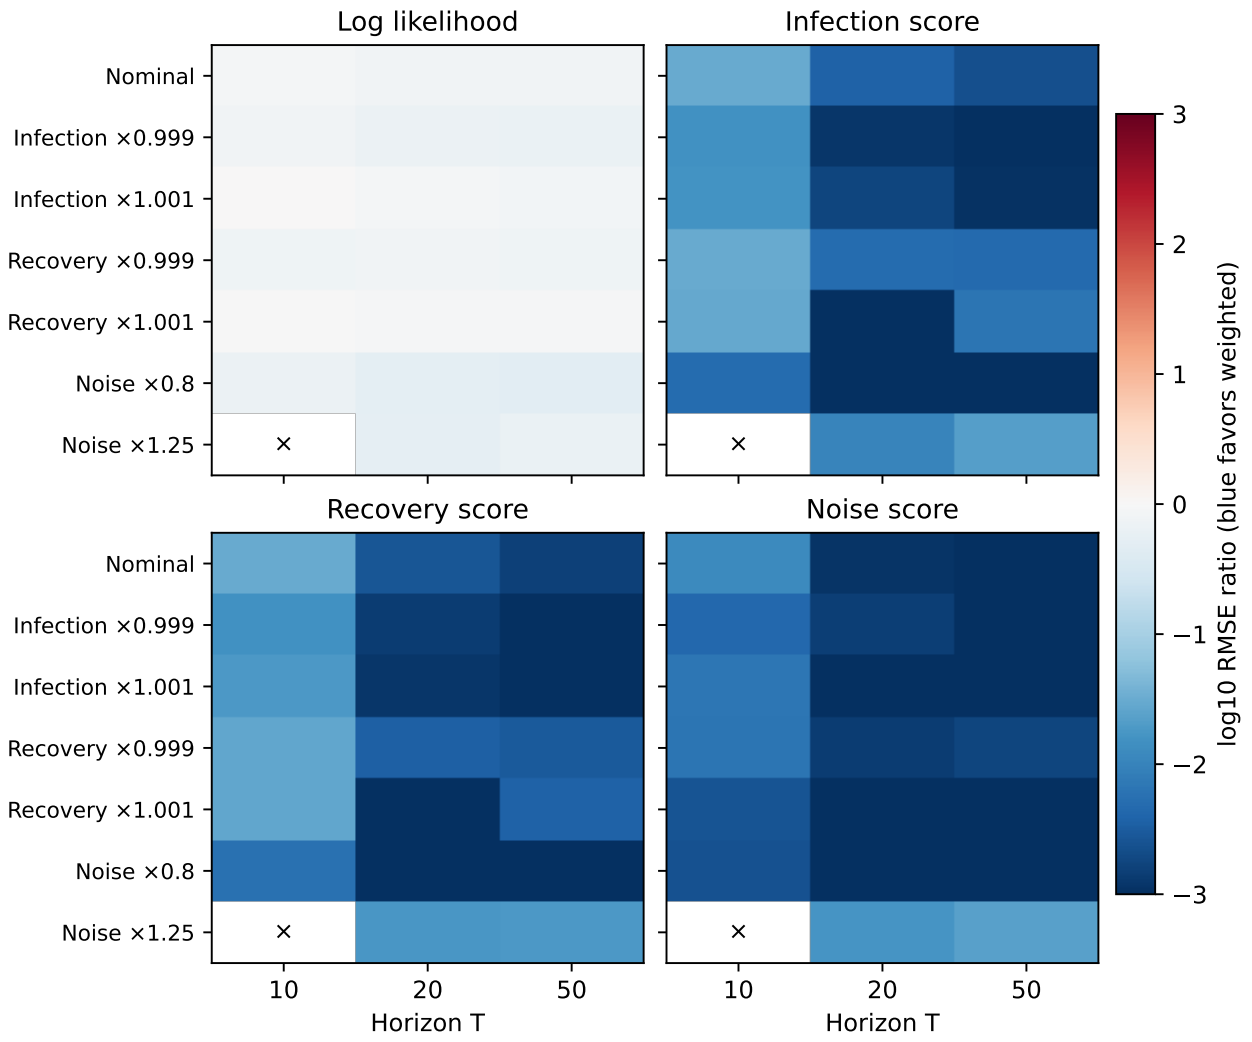


Figure 3: Weighted conditional versus original proposal: observed RMSE ratios. Color shows the mean across the two references of $\log_{10}(\mathrm{RMSE}_{\mathrm{weighted}} / \mathrm{RMSE}_{\mathrm{original}})$. Blue favors the weighted conditional mixture; color is saturated at ± 3. A cross marks an unusable reference. None of these comparisons meets the full exploratory paired MSE criterion. The twelve cells for rate multipliers 0.9 and 1.1 are omitted because all fail reference overlap; their measured values remain in the numerical record.

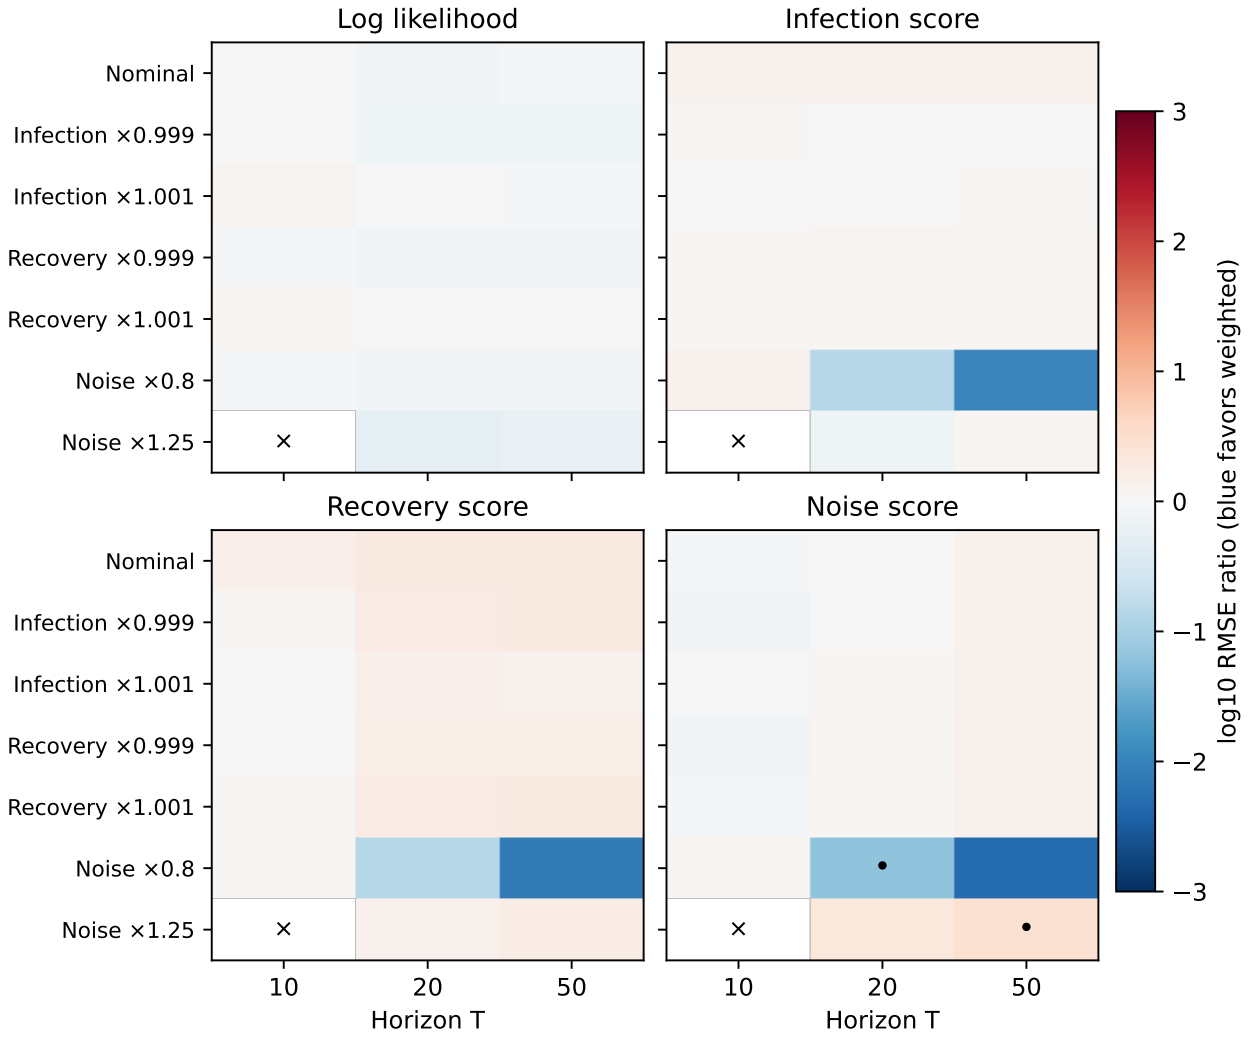


Figure 4: Weighted versus uniform conditional parents: observed RMSE ratios, with the same color scale and reference conventions as Figure 3. A dot marks a comparison meeting the exploratory paired criterion in the direction indicated by the color. The two dots favor opposite parent-allocation rules, depending on noise and horizon.

The five-model comparison uses $N = 1008$, eight paired random streams and the saved FP64 GPU/XLA diagnostic runs. Each model has one fixed dataset and parameter configuration; $T = 50$ except for range–bearing, where $T = 20$. The SIR row is the nominal $T = 50$ case, while the larger SIR campaign varies parameters and uses $T = 10, 20, 50$. These settings describe the completed experiment. They are not independently tuned defaults for every model or evidence for production-precision accuracy.

For a scalar quantity a with reference $a_\star$, the tables report

$$\overline{a} = \frac{1}{8}\sum_{r=1}^{8} \widehat{a}_r, \qquad \mathrm{RMSE}(a) = \left\{ \frac{1}{8}\sum_{r=1}^{8} (\widehat{a}_r - a_\star)^2 \right\}^{1/2}. \tag{285}$$

RMSE includes both displacement of the mean and dispersion across streams. For scores it is computed separately in the stated parameter coordinates; components with different units are not pooled. Likelihood entries are *log* likelihoods. An apparently close mean can conceal large errors in individual runs, which is why both mean and RMSE are shown.

Only the LGSSM reference is exact: it is the Kalman likelihood and score. The KSC reference is a refined grid for the implemented seven-component observation-mixture target, not the unapproximated stochastic-volatility model. The predator–prey reference averages two adapted Zhao–Cui local-score fits; support, fit and differentiation-radius errors remain unresolved. Range–bearing uses sixteen particle/Fisher reference replicates with 65,536 particles; score Monte Carlo standard errors are about 0.06502 and 0.02268, and finite-particle bias remains possible. The displayed SIR reference is the rank-40, fit-2 adapted Zhao–Cui calculation. Its separate rank-20, fit-17 check is retained when interpreting an ordering. These references must not all be described as exact model oracles.

Model (T)	Reference	Original	Uniform	Weighted
LGSSM (50)	-138.358	-138.377 (0.0513889)	-138.377 (0.0523155)	-138.377 (0.0525897)
KSC SV (50)	-111.975	-112.039 (0.206717)	-112.025 (0.135892)	-112.077 (0.115135)
Predator–prey (50)	-267.317	-267.328 (0.145348)	-267.317 (0.148873)	-267.335 (0.17887)
Range–bearing (20)	39.8555	39.6365 (0.331358)	39.6231 (0.349486)	39.7131 (0.231912)
SIR nominal (50)	-1669.09	-1669.27 (0.854424)	-1669.16 (0.750419)	-1669.19 (0.654556)

Table 12: Log-likelihood mean (RMSE) across eight paired streams. References have the model-specific limitations described in the text.

Parameter	Reference	Original	Uniform	Weighted
Transition	5.86731	5.87984 (0.0980073)	5.87915 (0.0993004)	5.86609 (0.0950208)
Log process variance	7.32385	7.32594 (0.0144067)	7.32557 (0.0149315)	7.32618 (0.0142106)
Log obs. variance	4.13012	4.13771 (0.0411005)	4.1381 (0.0414811)	4.14015 (0.0424457)
Initial mean scale	0.099617	0.100207 (0.00193968)	0.100258 (0.00201672)	0.100278 (0.00195216)

Table 13: LGSSM: score mean (component RMSE) across eight paired streams. Lower observed RMSE is descriptive; no cross-model score scale is imposed.

The SIR score reductions relative to the original proposal are substantial in the measured runs. At nominal $T = 50$, infection-score RMSE falls from about 18,649 to 32.76 with uniform conditional parents and 44.42 with weighted parents. The corresponding recovery values are 7905.32, 7.23 and

Parameter	Reference	Original	Uniform	Weighted
Persistence	-2.0026	-2.02203 (0.0744471)	-1.39563 (0.609442)	-1.59661 (0.407061)
Log obs. scale	-0.824124	-0.698378 (0.142015)	-0.436223 (0.389578)	-0.733437 (0.0944128)

Table 14: KSC SV: score mean (component RMSE) across eight paired streams. Lower observed RMSE is descriptive; no cross-model score scale is imposed.

Parameter	Reference	Original	Uniform	Weighted
r	-33.9911	-34.1748 (0.302258)	-34.2382 (0.353482)	-34.3073 (0.397328)
Carrying capacity	-0.769203	-0.782646 (0.0228249)	-0.783775 (0.0282161)	-0.834925 (0.0689603)
Half saturation	-0.00369203	-0.00375312 (0.00139447)	-0.00405471 (0.00150476)	-0.0051175 (0.00174575)
s	4.04338	3.94216 (0.240421)	3.98077 (0.168025)	4.47244 (0.459779)
u	-4.47828	-4.4094 (0.383359)	-4.35234 (0.423594)	-4.22303 (0.424911)
v	4.87586	4.79117 (0.468782)	4.72069 (0.51788)	4.60354 (0.495951)

Table 15: Predator–prey: score mean (component RMSE) across eight paired streams. Lower observed RMSE is descriptive; no cross-model score scale is imposed.

Parameter	Reference	Original	Uniform	Weighted
Log process scale	-0.334787	-0.304327 (0.634585)	-0.130327 (0.426624)	-0.252753 (0.502737)
Log obs. scale	-5.79515	-5.23519 (0.758656)	-5.45566 (0.715763)	-5.394 (0.817229)

Table 16: Range–bearing: score mean (component RMSE) across eight paired streams. Lower observed RMSE is descriptive; no cross-model score scale is imposed.

Parameter	Reference	Original	Uniform	Weighted
Log infection mult.	102.855	6338.21 (18648.6)	110.512 (32.7596)	131.782 (44.4186)
Log recovery mult.	-48.6029	-2996.01 (7905.32)	-53.6253 (7.23488)	-57.2394 (13.0812)
Log noise mult.	-30.3076	-5999.53 (9593.82)	-27.9792 (3.85256)	-25.5908 (4.94545)

Table 17: SIR nominal: score mean (component RMSE) across eight paired streams. Lower observed RMSE is descriptive; no cross-model score scale is imposed.

Model	Original	Uniform	Weighted
LGSSM	957.19	957.143	957.185
KSC SV	883.396	941.015	996.65
Predator–prey	972.369	936.209	972.323
Range–bearing	727.786	718.443	733.762
SIR nominal	796.728	816.117	911.872

Table 18: ESS averaged over time and eight streams, with $N = 1008$. ESS measures weight concentration rather than likelihood or score accuracy.

13.08; noise values are 9593.82, 3.85 and 4.95. The same dramatic statement does not transfer to every model. KSC persistence RMSE is 0.07445 for the original proposal, 0.60944 for uniform parents and 0.40706 for weighted parents. In predator–prey, weighted parents have larger observed RMSE than the original in all six score components. These are adverse accuracy results even though the runs pass their recorded numerical-validity checks.

Between the two conditional choices, uniform parents have lower observed score RMSE in both range–bearing components, five of six predator–prey components and all three nominal SIR components. Weighted parents have lower observed score RMSE in both KSC components and three of four LGSSM components. Weighted parents have lower log-likelihood RMSE in KSC, range–bearing and nominal SIR; uniform parents have lower values in LGSSM and predator–prey. These mixed comparisons make uniform parents a serious alternative when score accuracy is the priority.

Across the twenty SIR parameter–horizon cells with usable references, Table 19 requires the same RMSE ordering against both reference fits. A reference-dependent ordering is left unresolved. At nominal $T = 50$, the second reference score is $(108.57912, -50.42205, -30.38459)$ rather than $(102.85487, -48.60288, -30.30761)$; uniform parents have lower observed score RMSE in all three components against either fit.

Quantity	Uniform lower	Weighted lower	Reference dependent
Log likelihood	5	15	0
Infection score	13	3	4
Recovery score	15	2	3
Noise score	13	7	0

Table 19: Descriptive RMSE counts over twenty usable SIR cells. The counts do not constitute a statistical ranking or a probability of superiority.

Parent weighting has a more consistent benefit for weight balance in the SIR campaign. In every usable cell, its time-mean and time-minimum ESS exceed those of uniform conditional parents in all eight paired streams: 160/160 pairs for each summary. The increase in stream-averaged time-mean

ESS ranges from 6.7% to 102.7%. The direction also holds in all 33 executed cells, or 264/264 paired streams, including cells whose reference fails the accuracy screen. ESS can be compared there without relying on that reference. The KSC and range–bearing extensions also show higher time-mean ESS for weighted parents in all eight paired streams. This does not establish higher ESS at every time step or on every future dataset. In particular, the cross-model mean ESS values do not make either conditional proposal uniformly better than the original.

The retained default is therefore an engineering choice for improved weight balance: observation-conditioned proposals with observation-weighted parents. Uniform conditional parents remain an explicit, competitive alternative. The default is not an accuracy-optimality claim. Both choices are markedly more accurate than the original in the nominal SIR score experiment; the KSC and predator–prey counterexamples prevent extending that statement to all models and parameters.

All reported arms remain numerically viable under their saved checks. The five-model comparison establishes no statistical ranking. Eight streams on one dataset, approximate references and inherited controls limit its interpretation. The SIR analysis retains two exploratory componentwise findings that favor opposite parent rules, without a multiplicity correction; its large original-versus-conditional score differences do not pass the full paired mean-squared-error criterion. The next evidence for an accuracy choice is stronger references where needed, scope-specific calibration on disjoint data, and predeclared paired uncertainty across independent datasets.

The numerical source is the checked CSV and source-hash manifest under `docs/plans/artifacts/observation-parent-all-model-comparison-20261028/`. The accompanying result note retains the target definitions, per-stream checks, inference limits and links to each completed campaign. The tables here are generated directly from that CSV so that the research note and monograph report the same measurements.

16.13 What the failures teach about this score problem

The failures concern different mathematical quantities. A proposal can put particles in the wrong place, an importance correction can leave highly variable weights, and an accurately evaluated derivative can still estimate the model score poorly. Treating these as one problem obscures which repair an experiment has actually tested.

16.14 A correct flow applied to the wrong conditional distribution

A UKF describes predictive uncertainty using moments. An LEDH map then uses the observation to move particles. Neither fact guarantees that the map's reference covariance matches the distribution of the particles passed to it. The distinction is particularly consequential when the predictive spread comes mainly from differences between ancestors rather than process noise within one ancestor.

A scalar Gaussian calculation shows the issue without numerical flow error. Suppose a map is constructed for prior $\mathcal{N}(m, P)$ and observation $y = x + \varepsilon$, $\varepsilon \sim \mathcal{N}(0, R)$. An exact affine Gaussian transport is

$$F_{m,P}(x) = m + \frac{P}{P+R}(y-m) + \sqrt{\frac{R}{P+R}}(x-m). \tag{286}$$

If its input really has law $\mathcal{N}(m, P)$, the output has the correct posterior mean and variance. If the input is instead a particular parent's transition $X \sim \mathcal{N}(a, Q)$, direct substitution gives

$$\mathbb{E}[F_{m,P}(X)] = m + \frac{P}{P+R}(y-m) + \sqrt{\frac{R}{P+R}}(a-m), \tag{287}$$

$$\mathrm{Var}[F_{m,P}(X)] = \frac{RQ}{P+R}. \tag{288}$$

The desired conditional posterior has mean $a + Q(y - a)/(Q + R)$ and variance $QR/(Q + R)$. For $a = m = 0$, $Q = 1$, $P = 100$, $R = 100$ and $y = 10$, the map yields mean 5 and variance 0.5, whereas conditioning the actual transition yields approximately 0.0990 and 0.9901. The map is correct for its stated Gaussian input; using it as the exact conditional update for this different input is wrong.

This example identifies a mechanism, rather than measuring how much of a particular nonlinear run's error it explains. A proposal with this mismatch can still have a valid importance correction if its actual density is evaluated. But valid weights cannot guarantee that a finite sample covers the important region well. Parent-conditioned proposals address the within-parent mismatch; predictive-observation weighting addresses the allocation of children between parents. These are distinct repairs.

16.15 An exact update of an inaccurate incoming mixture

Even exact conditioning only updates the incoming particle approximation. If the previous cloud omits a region of the filtering distribution, the finite-mixture normalizer $N^{-1} \sum_j L_j(y)$ can differ from the true predictive likelihood. Exact conditional sampling cannot reconstruct ancestors that are absent. Transport and moment restoration also retain only specified properties of the cloud; preserving its first two moments does not determine its tails, multimodality or parameter sensitivity.

The familiar weight diagnostic

$$\mathrm{ESS} = \frac{1}{\sum_i \bar{w}_i^2} \tag{289}$$

measures concentration of normalized importance weights. With exact observation-weighted conditional sampling of the finite mixture, the incremental weights are constant and ESS is N. This does not make the incoming approximation exact, nor does it imply N independent informative ancestors after earlier resets. Higher ESS has practical value because less of the represented mass is carried by a few particles. It remains a measure of weight balance, not of distance to the model posterior or its score.

The SIR controls make this limitation observable. At nominal $T = 50$, the conditional-only weighted proposal attains ESS 1008, but its infection-score RMSE is 95.82–100.96 across the two references. The conditional mixture with uniform parents gives 31.91–32.76. At noise multiplier 1.25, $T = 50$, identity-only and conditional-only uniform proposals also have lower observed noise-score RMSE than the weighted conditional mixture. These controls prevent a claim of accuracy optimality. They do not remove the value of the measured reduction in weight concentration.

16.16 Differentiating the finite calculation is a different test

The model score is $s(\theta) = \nabla_\theta \log p_\theta(y_{1:T})$. The implemented analytical calculation differentiates the finite filter value $\widehat{\ell}_N(\theta; u)$ for fixed random design u, with sampled categorical labels held locally fixed. A finite-difference comparison away from selection boundaries checks that branchwise derivative. It does not test whether the derivative is close to $s(\theta)$, nor whether it equals the derivative after averaging over parameter-dependent selections.

A two-parent example makes the distinction explicit. Let U be uniform on $(0, 1)$, choose parent 1 if $U < \alpha(\theta)$ and parent 2 otherwise, and return fixed values a and b. For almost every fixed U, the selected value is locally constant in θ, so its branchwise derivative is zero. Yet

$$\mathbb{E}[h_\theta(U)] = \alpha(\theta)a + [1 - \alpha(\theta)]b, \qquad \frac{\mathrm{d}}{\mathrm{d}\theta}\mathbb{E}[h_\theta(U)] = \alpha'(\theta)(a - b). \tag{290}$$

The derivative of the expectation contains the change in selection probability. This example demonstrates why local derivative parity alone cannot settle a model-score claim. It does not prove

that every observed error in the full filter is caused by a missing selection contribution: the full calculation also differentiates densities, normalizations, state locations and resets, and some terms can cancel under particular identities. That causal claim requires an isolated comparison.

There is a second distinction even without categorical choices. If a positive likelihood estimator satisfies $\mathbb{E}[\widehat{Z}] = Z$, and differentiation may pass through the expectation, then $\mathbb{E}[\nabla \widehat{Z}] = \nabla Z$. It does not follow that

$$\mathbb{E}\left[\frac{\nabla \widehat{Z}}{\widehat{Z}}\right] = \frac{\nabla Z}{Z}. \tag{291}$$

The random denominator is correlated with the numerator. Correctness of an unnormalized derivative identity therefore does not remove finite-particle score bias. Nor does a small error in a likelihood value bound its derivative error. These are reasons to compare likelihood and score separately.

16.17 What the earlier score repairs did and did not solve

The observation-sidecar and kernel-mixture investigation exposed a target distinction before parent conditioning was introduced. An expected conditional log likelihood is generally different from the log marginal likelihood. For a fixed mixing measure, Jensen's inequality gives $\mathbb{E}[\log g_\theta(y \mid X)] \leq \log \mathbb{E}[g_\theta(y \mid X)]$; their derivatives need not agree. An unbiased gradient identity for the former cannot establish an unbiased model score for the latter. The research note derives the precise importance-weighted gradient identity and its normalization requirements.

The subsequent complete kernelized-observation recursion and all-components resampling reference corrected more of the finite calculation and passed their declared derivative checks. Nevertheless, the calibrated resampling construction had higher observed model-score MSE than the canonical comparator in both tested matrix-Gaussian scopes. That is a negative result for the tested construction, rather than evidence that the derivative check failed or that every kernel-mixture proposal must fail. The later simulation-supervised and neural-guide comparisons at $N = 64$ were withdrawn; they cannot support an accuracy ranking or rejection of guidance. The full derivations and scope-specific evidence are retained in the research note, rather than treating those discarded runs as support for the present default.

16.18 The model-specific failures still requiring explanation

KSC is a useful counterexample to an ESS-based score argument. Weighted parents raise mean ESS from about 883 to 997 and reduce log-likelihood RMSE, yet persistence-score RMSE increases from about 0.074 to 0.407. Because the conditional calculation is exact for the implemented seven-mixture observation target, a generic claim that all remaining error comes from an unconditioned child is inadequate. Recursive representation, selection sensitivity and inherited numerical controls remain possible causes; the completed experiment does not isolate their contributions.

In range–bearing, conditioning is locally Gaussian and the bearing residual is wrapped. Its conditional proposal is therefore an approximation to a nonlinear observation update. Weighted parents reduce the observed process-scale score RMSE relative to the original, but increase the observation-scale score RMSE; uniform parents have lower RMSE in both components than weighted parents. Reference Monte Carlo error limits the precision of this comparison. The experiment does not establish whether local linearization, allocation, or recursive sensitivity explains the remaining discrepancy.

Predator–prey is the clearest warning against a universal cross-model claim: all six weighted-parent score RMSEs exceed the original comparator's values. The adapted Zhao–Cui local fits are

themselves approximate, so better reference and support checks are needed before assigning the full gap to the particle proposal. LGSSM supplies the exact-oracle control: the small, mixed differences show no broad accuracy advantage for either parent rule. SIR supplies the opposite extreme, where conditioning the children removes very large observed score errors but additional parent weighting often trades score accuracy for ESS and likelihood accuracy.

The next discriminating experiment should hold the incoming cloud fixed, compare exact finite-mixture integration with conditional sampling, and separate local derivatives from derivatives of expectations over selection. Only after that distinction is resolved should independently calibrated recursive runs identify the effect of reset and allocation choices. The current evidence supports retaining weighted parents as the requested default and exposing uniform parents as a competitive option. It does not close model-score correctness, HMC readiness, or accuracy-optimality questions.

17 Subsequent discriminating comparisons

Section 16.11 now supplies the likelihood and analytical-score comparison for the conditional, observation-weighted proposal. Its large observed score-error reductions relative to the original proposal remain descriptive under the declared paired MSE criterion, while comparison with uniform conditional parents is mixed. Sections 16.12 and 16.13 extend that comparison to LGSSM, KSC, predator–prey and range–bearing, and distinguish demonstrated proposal mismatch from unresolved recursive and selection-sensitivity errors. Uniform parents remain a competitive score-estimation option; the weighted default expresses the preference for better weight balance. The next accuracy experiments therefore need fresh reference fits for the larger parameter changes and more paired streams where the existing references have adequate overlap. The earlier adapter and moment comparisons discussed below address separate questions.

Section 16 separated its proposal question into two parts: whether each child is drawn from the conditional distribution of its physical parent, and whether the incoming parents already represent the filtering distribution adequately. Exact integration removes child-sampling variance for that finite mixture, but the recursive comparison does not establish an accuracy improvement over the existing conditional-only candidate. The lower observed UKF loss in every tested regime makes incoming representation a necessary subject of the next comparison. The TF32 baseline failures require a separate numerical explanation; they cannot be counted as accuracy evidence for either candidate.

The restricted-adapter implementation trains continuous guide coefficients against simulated terminal moment labels through the shared LEDH calculation, as described in Section 15.8. Unlike the earlier finite-bank pilot in Section 15.6, its optimizer and validation selector use moment loss, not score loss. In the initial campaign, executable consumer checks passed and training completed, but the independent comparison stopped on a reproduced nonfinite unguided baseline. Section 15.9 now isolates and repairs that factorization failure, while showing why the exceptional cloud still loses its materialized variance. Section 15.10 traces the preceding weight collapse to a flow–conditional-proposal mismatch and verifies a Gaussian preimage repair on fixed clouds. Its required information matrix is indefinite, outside the trained quadratic adapter family; this does not prove the same limitation for the mixture-product consumer. Section 15.11 now integrates the physical-output repair and completes a fresh independent moment comparison. All methods are numerically valid on those datasets, but the trained quadratic and KDM-inspired RBF adapters have higher pooled moment-label loss than the conditional-only proposal and fail the recursive-Gaussian comparison in both observation regimes. No training gain over their untrained adapters is established. The repair therefore resolves the exposed numerical failure without establishing the proposed moment

improvement; model-score improvement remains unevaluated. Section 15.12 develops a different, explicit SIR neural proposal whose locations and bandwidths all train through the final corrected estimator. Its independent comparison in Section 15.13 uses fresh simulation partitions and passes numerical checks, but establishes no gain over initialization or plain LEDH and fails the recursive-Gaussian comparison. A later continuation reaches 512 updates for one initialization in Section 15.15; its validation loss rises after 256 updates, and no later checkpoint has an independent evaluation. Optimization adequacy remains unresolved. The fresh restricted-proposal comparison in Section 15.14 also establishes no adapter training gain and fails the recursive-Gaussian comparison. Neither the larger family nor the restricted adapters have demonstrated the required benefit at this scope; their failures do not identify a single cause or disprove the population moment-risk identity. The earlier comparisons below explain the route to that objective and retain their original, narrower consumer scope.

The earlier Gaussian localization concerns the single-flow consumer, not the identity/global/local mixture of Section 14.8. In that single-flow experiment, removing additive scaling restores transport mass accuracy but fails the stated interchangeable-repair test; its numerical default therefore remains unchanged. These results do not diagnose the existing mixture, whose local bridge already uses conditional covariance. Frozen future guidance is now composed with that mixture's global and local maps while retaining its physical importance numerator and full proposal density. Gaussian moment, density, wiring and finite-program derivative checks pass on the bounded fixtures. They establish neither improved model-score accuracy nor equivalence of the mixture's separate moment-restoring reset to canonical Contract E.

The optional product-moment consumer in Proposition 30 has now been evaluated on fresh fitting and particle-cloud seeds. Section 14.10 reports four conditional improvements over the old fitted global consumer, with none established over unguided global proposals; both repaired arms still fail the simple-method comparison. The subsequent comparison of exact seven-component and fitted future messages under the same product-moment consumer is complete: all 36 simultaneous contrasts are unresolved, and positive-tail error persists even with the exact future message. A further saved-fit diagnostic at 64 and 128 particles supports four conditional gains: each product arm improves over its own lower-count arm and over unguided local at 128 particles. Neither has an established gain over the strong unguided-global or Gaussian-future-global alternatives, and both still fail the simple-method comparison. That Gaussian diagnostic motivates separating the current-observation and flow-map approximation from the moment-restoring reset, not to assume a larger future-message fit will repair the error. These saved-fit, fixed-data comparisons do not replace confirmation with new fits and eventually new datasets, establish particle-count convergence, or justify a default change. The broader comparisons below follow that work. The completed SIR comparison with independently fitted allocation and matched-beta controls appears in Section 14.14, following the negative equal-mixture result in Section 14.13. It supports two conditional matched-beta gains on one data set, but neither guide meets the full accuracy criterion or the simple-method screen. This proposal augmentation retains the analytical derivative of its finite likelihood program; ancestor averaging is a separate research variant in the wider score-estimation program.

For models with regular transition densities, the reference question is whether model-corrected mixture proposals and ancestor averaging reduce model-score error at equal compute. This is a restricted comparison, not an implementation plan for degenerate DSGE transitions. A method intended for that target must first pass the conditional-support analysis in Section 9.1; more accurate results on full-rank Gaussian models cannot remove that obstruction. Proposal quality, score construction, and mixture-gradient variance must be separated. Otherwise a successful run could be attributed to the wrong mechanism, just as a passing derivative check previously obscured a changed scalar.

The smallest useful sequence begins with three calculations. First, compare (71) and (78) with direct Gaussian integration on a fixed incoming cloud. Second, compare the complete-data and backward-recursion scores with exact enumeration on a small finite-state model, including a parameter-dependent initial law. Third, compare IWSG, centered IWSG, and (166) for the same declared mixture expectation. These calculations test identities and failure mechanisms; their particle counts need only be large enough to exercise the operation being tested. They are not score-quality campaigns or reasons to select a production particle count.

The subsequent accuracy study should use a linear-Gaussian model with nondegenerate transitions and an independent Kalman score, a short Gaussian-mixture model with evaluable transition densities whose modes can be enumerated exactly, and a scalar nonlinear model with a regular transition density and a numerically converged quadrature score. Kalman checks the basic integration and complete derivatives. The mixture model tests the separated modes that motivate Younis's method. The nonlinear model tests how proposal approximation affects the result. A one-step or unimodal success cannot establish the latter two properties. Models with unresolved initialization or support identity must be repaired before their score results are interpreted.

For each model, change one mechanism at a time: ordinary ancestor sampling versus marginal mixture weights; a genealogical complete-data score versus the full ancestor average; and, where an expectation derivative is actually used, all-IWSG versus the selective estimator. Include the enhanced combination only after the component comparisons. The exact full-mixture reference remains necessary when evaluating a later sparse or sampled approximation.

The cheap alternatives are constructed from the model before claim data are examined. A bootstrap PF proposes from the physical transition and uses a proper complete-data score estimator. A locally adapted PF uses the current observation to guide each ancestor's proposal and keeps the exact importance weight. In nearly linear regimes, EKF and UKF approximate-likelihood scores test whether inexpensive Gaussian propagation already suffices; their derivatives must include the full declared Gaussian approximation. A fixed-setting LEDH filter with $\epsilon = 1$ and five Sinkhorn iterations supplies the current project development comparator. All other numerical controls must be declared and held fixed within a comparison. This temporary owner-selected setting does not replace the scope-specific tuning required before a confirmatory or default-readiness claim. The exact Kalman, mixture-enumeration, or quadrature solution supplies the oracle where it is available; an approximate reference must carry its own uncertainty. Neither a weak fixed-ancestry derivative nor this untuned LEDH baseline should stand in for all conventional particle-score methods.

Evaluate these comparisons conditionally. Weak and strong observations probe proposal concentration; overlapping and separated modes probe mixture gradients; low and high persistence probe loss of ancestor diversity; short and long horizons probe accumulation; near-zero and large score components probe the error scale. These situations must be defined from the model and research question before using validation data. Failure against a cheap alternative in a salient situation rejects promotion under the repository's sanity-check rule, even if the method wins an unconditional average. The adversaries are falsification checks, not extra tuning targets.

For dataset d and independent filter randomization r, denote the estimate by $\widehat{s}_{d,r}$ and the oracle by s_d. Replication within each fixed dataset estimates b_d and V_d from (3); the distribution over datasets measures generalization. Pair methods within datasets and respect this nesting in confidence intervals. A path bootstrap with only one filter realization per path cannot estimate each dataset's conditional bias. Freeze parameter coordinate scales before comparison, because a relative error divided by a nearly zero oracle score is unstable. Change N and T independently, and report both equal-particle and equal-measured-compute comparisons.

Before a serious run, choose a practically meaningful reduction δ and test a predeclared upper

confidence bound for

$$\Delta = \mathbb{E}\big[\|\widehat{s}_{\text{candidate}} - s\|_D^2 - (1-\delta)\|\widehat{s}_{\text{comparator}} - s\|_D^2\big], \qquad \|v\|_D^2 = v^{\mathsf{T}} D v, \tag{292}$$

where D is the fixed coordinate scaling and the expectation follows the specified sampling of datasets and filter randomizations. The upper bound must be below zero, subject to validity and conditional-comparison vetoes. The old ten percent criterion is not automatically a justified threshold for every new model. Its practical meaning, replication requirement, multiplicity handling, and total compute budget must be stated for the new study. A power pilot that requires more replications than the budget permits leads to an inconclusive study, not a forced ranking among viable candidates.

All material numerical choices need a provenance and failure explanation. The physical transition covariance comes from the model; proposal bandwidth, defensive-mixture fraction, covariance marks, chart, regularization, and ancestor-sampling precision are numerical hypotheses. The earliest checks should expose wrong support, missing proposal mass, large importance ratios, or a gradient dominated by inverse bandwidth. Calibration and validation must be disjoint for each bound model/horizon/particle/backend scope. The initial law is part of that scope. Retaining an old setting for comparability does not make it a tuned default, and a failed holdout cannot become the next calibration set.

Numerical validity is assessed before score ranking. Nonfinite values, incorrect density ratios, support violations, missing initial-law terms, an invalid reference, or an omitted sampling-law derivative invalidate the affected comparison. ESS, mode overlap, cap activity, tangent norms, bandwidth, memory, and runtime explain its behavior; they do not replace the model-score criterion. A valid candidate that loses is a candidate rejection. A later prespecified repair may continue unless the target, evidence, or total budget has become invalid.

BayesFilter implementation remains TensorFlow/TFP with analytical recursive scores. Autodiff and finite differences are independent diagnostics. The production direction remains GPU/XLA with the declared memory-growth and transport-chunk policies; the earlier float64 and no-TF32 tests are reference exceptions. New mixture evaluation must expose its pair count and memory behavior. Batch wrappers must preserve the mathematical calculation and, for NeuTra training, actually evaluate a batch rather than apply a scalar target independently to each row. None of the proposed new calculations is promoted by this document.

For the regular-transition comparison, the next evidence needed is correct model-density weights and complete initialization, an independently checked score recursion, and a powered comparison against simple alternatives. The strongest alternative explanation for any improvement is better proposal adaptation or more effective computation, rather than the gradient identity. The component comparisons distinguish those explanations. Loss to a tuned conventional score estimator at equal compute would overturn the practical priority of the new combination without invalidating its algebra.

A Source and experiment locations

The original Section 3.6 manuscript is `docs/papers/section_3_6_prior_weight_sidecar/section_3_6_prior_weight_sidecar.tex` in the retained worktree `.claude/worktrees/section-3-6-prior-weight-sidecar/`. The present manuscript is `docs/papers/ledh_younis_kdm_score/ledh_younis_kdm_score.tex`. The protected source for the September revision was recovered from commit `804616e320d940a5ea288ba25cc43bd21d267abb` on `kdm-total-score-continuation-20260909`. Its comparison checkout was `5cc59cfa26b8dec2b5a9e46497ef5639f2bfdb97`.

The October status update uses docs/plans/controlled-smc-kdm-source-closure-result-20261014.md and docs/plans/ledh-controlled-smc-kdm-integration-checkpoint-20261014.md from the recovered main integration worktree. The linked manuscript was audited in the separate shared surrogate-hmc checkout; the manuscript at the same path in that main worktree was older and was not silently replaced. Audit scope, exact checkout locations, the protected baseline and build checks are recorded in docs/plans/ledh-kdm-manuscript-audit-20261014.md. The controlled-SMC citation was checked against the locally retained published paper, Sections 4.2–4.3, and the source-closure record; the local author source is under .localresources/code/heng-controlled-smc/.

The October 16 continuation ran in the LEDH worktree on branch ledh-refactor-with-policy-fix. The refreshed master is docs/plans/younis-kdm-score-master-program-2026-09-14.md. The fitted-guide result is retained in docs/plans/artifacts/ledh-fitted-guide-20261016/result.md; the subsequent Gaussian diagnostic, CPU validity localization, source hashes, commands and regression checks are in docs/plans/artifacts/ledh-gaussian-score-error-20261016/. Those dated records preserve the then-incomplete grid; the active master records subsequent completion and the retired roundoff concern.

The October 17 nonlinear fitted comparison and its independent terminal audit are in docs/plans/artifacts/ledh-ksc-fitted-guides-20261017/result.md. The subsequent saved-fit mechanism calculation, input and source hashes, four focused tests, and MathDev reports are in docs/plans/artifacts/ledh-ksc-information-20261017/. The added proposition states its assumptions and proof explicitly. MathDev verifies its scalar variance algebra, while its implementation-proof parser remains inconclusive; this is not an automated certificate of the full proposition or implementation.

The October 18 optional product-moment implementation, fresh conditional comparison, source closure and independent terminal audit are preserved in docs/plans/artifacts/ledh-mixture-product-20261018/. MathDev verifies the scoped scalar mean and covariance derivative identities. Its full implementation audit does not certify Proposition 30: all 19 proof obligations remain parser-inconclusive. The aggregate lexical mismatch concerns document words and LaTeX tokens absent from Python identifiers, not a refuted mathematical identity. The required operations are present, shape evidence is supported and code contracts are consistent. The explicit proof and independent multidimensional moment, tangent and shared-consumer tests supply the checked local evidence; automated certification of the general proof remains open.

Phase 4A records are under docs/benchmarks/artifacts/ledh_younis_kdm_phase4_20260908/; the corrected all-bandwidth diagnostic is campaign-attempt05-n32t5-all-rho-f32-current/. Phase 4B records are under docs/benchmarks/artifacts/ledh_younis_kdm_phase4b_20260909/campaign01/. These paths describe the research snapshot and retained research worktree; their absence from another checkout is not evidence that the experiment did not run. The recovered numerical evidence and primary-source ledger are in docs/plans/artifacts/younis-score-recovery-20260911/. The accompanying scientific analysis is docs/plans/younis-model-score-analysis-2026-09-11.md.

The derivations imported from the literature were checked at the following locations: Younis and Sudderth (2023), Section 4, equations (14)–(15), and the official resampling code; Younis and Sudderth (2024), Sections 2.3 and 4, including the generative and learned smoother weights; Lai et al. (2022), Algorithm 2, Theorem 2, equations (9)–(13), and the author's full-mixture importance weights; Poyiadjis et al. (2011), Section 2.2, Algorithm 2, equations (20) and (22); Ścibior and Wood [2021, Section 4.2, equations (24)–(25)]; and Olsson and Westerborn, Section 3.1, Algorithm 2, and Section 3.2.4, Theorem 10 with its mixing assumptions. Local paper copies are retained under .localresources/papers/. These sources support the component constructions; their combination

with the proposed BayesFilter model-score comparison remains to be evaluated.

The September 14 literature-gap audit added local technical copies and source checks for Nemeth et al. (kernel-density/Rao–Blackwell score), Fearnhead et al. (sequential smoothing), Jacob et al. (coupled conditional-particle debiasing), Ionides et al. (iterated filtering), Whiteley and Lee (twisted particle filters), and Jasra et al. (multilevel particle filters). Their algorithms and assumptions are summarized in `docs/plans/artifacts/particle-filter-score-literature-gap-audit-20260914/`. The audit treats these methods as regular-model comparators or proposal and discretization controls unless a separate target identity is proved. It found no generic theorem that makes ambient Gaussian KDM or PaRIS valid for a deterministic or singular DSGE transition.

The revision's protected baseline, source archive, equation-preservation review, exact arithmetic examples, implementation wiring inspection, and PDF build records are retained under `docs/plans/artifacts/younis-manuscript-update-20260911/`. That September revision added analysis and exposition, and ran document and reference checks. It launched no new particle-filter experiment.

References

Adrien Corenflos, James Thornton, George Deligiannidis, and Arnaud Doucet. Differentiable particle filtering via entropy-regularized optimal transport. In *Proceedings of the 38th International Conference on Machine Learning*, pages 2100–2111, 2021.

D. N. DeJong, R. Liesenfeld, G. V. Moura, J.-F. Richard, and H. Dharmarajan. Efficient likelihood evaluation of state-space representations. *The Review of Economic Studies*, 80(2):538–567, 2013. doi: 10.1093/restud/rds040.

Paul Fearnhead, David Wyncoll, and Jonathan Tawn. A sequential smoothing algorithm with linear computational cost. *Biometrika*, 97(2):447–464, 2010. doi: 10.1093/biomet/asq013.

Jakob Foerster, Gregory Farquhar, Maruan Al-Shedivat, Tim Rockt"aschel, Eric P. Xing, and Shimon Whiteson. DiCE: The infinitely differentiable monte carlo estimator. In *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 1529–1538. PMLR, 2018. URL `https://proceedings.mlr.press/v80/foerster18a.html`.

Pieralberto Guarniero, Adam M. Johansen, and Anthony Lee. The iterated auxiliary particle filter. *Journal of the American Statistical Association*, 112(520):1636–1647, 2017. doi: 10.1080/01621459.2016.1222291.

Jeremy Heng, Adrian N. Bishop, George Deligiannidis, and Arnaud Doucet. Controlled sequential monte carlo. *The Annals of Statistics*, 48(5):2904–2929, 2020. doi: 10.1214/19-AOS1914.

Edward L. Ionides, Anindya Bhadra, Yves Atchadé, and Aaron King. Iterated filtering. *The Annals of Statistics*, 39(3):1776–1802, 2011. doi: 10.1214/11-AOS886.

Pierre E. Jacob, Fredrik Lindsten, and Thomas B. Schön. Smoothing with couplings of conditional particle filters. *Journal of the American Statistical Association*, 115(530):721–729, 2020. doi: 10.1080/01621459.2018.1548856.

Ajay Jasra, Kengo Kamatani, Kody J. H. Law, and Yan Zhou. Multilevel particle filters. *SIAM Journal on Numerical Analysis*, 55(6):3068–3096, 2017. doi: 10.1137/17M1115533.

Jinlin Lai. VMPF author implementation. `https://github.com/lll6924/VMPF`, 2022. Commit 7c5970d11ffb63c5231965d9ceb8f0df70292003, inspected 11 September 2026.

Jinlin Lai, Justin Domke, and Daniel Sheldon. Variational marginal particle filters. In *Proceedings of the 25th International Conference on Artificial Intelligence and Statistics*, volume 151 of *Proceedings of Machine Learning Research*, pages 875–895, 2022. URL `https://proceedings.mlr.press/v151/lai22a.html`.

Yunpeng Li and Mark Coates. Particle filtering with invertible particle flow. *IEEE Transactions on Signal Processing*, 65(15):4102–4116, 2017.

Sheheryar Malik and Michael K. Pitt. Particle filters for continuous likelihood evaluation and maximisation. *Journal of Econometrics*, 165(2):190–209, 2011. doi: 10.1016/j.jeconom.2011.07.006.

Lawrence M. Murray, Emlyn M. Jones, and John Parslow. On disturbance state-space models and the particle marginal Metropolis–Hastings sampler. *SIAM/ASA Journal on Uncertainty Quantification*, 1(1):494–521, 2013. doi: 10.1137/130915376. Author manuscript dated 25 October 2018.

Christopher Nemeth, Paul Fearnhead, and Lyudmila S. Mihaylova. Particle approximations of the score and observed information matrix for parameter estimation in state space models with linear computational cost. *Journal of Computational and Graphical Statistics*, 25(4):1138–1157, 2016. doi: 10.1080/10618600.2015.1093492.

Jimmy Olsson and Johan Westerborn. Efficient particle-based online smoothing in general hidden Markov models: The PaRIS algorithm. `https://arxiv.org/abs/1412.7550`, 2014. Section 3.1, Algorithm 2, and Section 3.2.4, Theorem 10.

Jimmy Olsson and Johan Westerborn. Efficient particle-based online smoothing in general hidden markov models: The PaRIS algorithm. *Bernoulli*, 23(3):1950–1999, 2017. doi: 10.3150/16-BEJ801.

George Poyiadjis, Arnaud Doucet, and Sumeetpal S. Singh. Particle approximations of the score and observed information matrix in state space models with application to parameter estimation. *Biometrika*, 98(1):65–80, 2011. doi: 10.1093/biomet/asq062.

Adam Ścibior and Frank Wood. Differentiable particle filtering without modifying the forward pass. `https://arxiv.org/abs/2106.10314`, 2021. Version 2, 19 October 2021.

Nick Whiteley and Anthony Lee. Twisted particle filters. *The Annals of Statistics*, 42(1):115–141, 2014. doi: 10.1214/13-AOS1167.

Ali Younis. Mdpf neurips 2023 reference implementation. `https://github.com/asyounis/mdpf_neurips_2023`, 2023. Commit b0e2fd54db7b6c36d70e8e701ddc6a3f3d5dee18, accessed 8 September 2026.

Ali Younis and Erik B. Sudderth. Differentiable and stable long-range tracking of multiple posterior modes. In *Advances in Neural Information Processing Systems*, volume 36, pages 42799–42829, 2023. doi: 10.52202/075280-1855.

Ali Younis and Erik B. Sudderth. Learning to be smooth: An end-to-end differentiable particle smoother. In *Advances in Neural Information Processing Systems*, volume 37, 2024. doi: 10.52202/079017-0228.

Yiran Zhao and Tiangang Cui. Tensor-train methods for sequential state and parameter learning in state-space models. *Journal of Machine Learning Research*, 25(244):1–51, 2024. URL `https://jmlr.org/papers/v25/23-0743.html`.