

คณะวิศวกรรมศาสตร์ มหาวิทยาลัยหอการค้าไทย

ผศ.เฉลิมชนม์ ไวศยดำรง

- **NL344** เทคโนโลยีสารสนเทศและนวัตกรรมด้านโลจิสติกส์

Description CLASSICI TORTELLONIALLA RICOTTA E SPINACI	
Article Code RAG040	Weight 250g
GTIN number 09012348410268	N° Pck 2
Production date 16/02/10	Lott no 012345
 (01)09012348410268(15)100816(10)012345	

โหลดเอกสารและไฟล์ที่ใช้ในการสอนที่ Subject -> NL344

[Link](#)

<https://github.com/chalermchonvis/UTCC-Engineering-Subjects/tree/main>

[Libre Barcode 39](#)

Relative cell references

B2		✖ ✓ <i>fx</i>	=C2*B2			
	A	B	C	D	E	F
1	Trainers	Price	Pokeballs	Cost		
2	Iva	2	2	=C2*B2		
3	Liam	2	5			
4	Pablo	2	10			
5	Jenny	2	7			
6	Iben	2	6			
7	Kasper	2	3			
8						

Absolute cell references (\$, \$)

C2		<i>fx</i>	=\$B\$11			
	A	B	C			
1	Trainers	Pokeballs	Cost			
2	Iva		2	=B\$11		
3	Liam		5			
4	Pablo		10			
5	Jenny		7			
6	Iben		6			
7	Kasper		3			
8						
9						
10						
11	Price	2				

Lab1.1

B2 ✖ ✓ *fx* =C2*B2

	A	B	C	D
1	Trainers	Price	Pokeballs	Cost
2	Iva	2	2	=C2*B2
3	Liam	2	5	
4	Pablo	2	10	
5	Jenny	2	7	
6	Iben	2	6	
7	Kasper	2	3	
8				

	A	B	C	D	E
1	Trainers	Price	Pokeballs	Cost	TotalSum
2	Iva	2	2	4	4
3	Liam	2	5	10	14
4	Pablo	2	10	20	34
5	Jenny	2	7	14	48
6	Iben	2	6	12	60
7	Kasper	2	3	6	66

D3 ✖ ✓ *fx* =E2+D3

	A	B	C	D	E	F
1	Trainers	Price	Pokeballs	Cost	TotalSum	
2	Iva	2	2	4	4	
3	Liam	2	5	10	=E2+D3	
4	Pablo	2	10	20		
5	Jenny	2	7	14		
6	Iben	2	6	12		
7	Kasper	2	3	6		

Lab1.2

B2

✖

✓

fx

=B\$11*B2

	A	B	C	D
1	Trainers	Pokeballs	Cost	
2	Iva	2	=B\$11*B2	
3	Liam	5		
4	Pablo	10		
5	Jenny	7		
6	Iben	6		
7	Kasper	3		
8				
9				
10				
11	Price	2		

	A	B	C
1	Trainers	Pokeballs	Cost
2	Iva	2	4
3	Liam	5	10
4	Pablo	10	20
5	Jenny	7	14
6	Iben	6	12
7	Kasper	3	6
8			
9			
10			
11	Price	2	

Lab1.3

	A	B	C	D
1	Time	Time	Time	Hour
2	5:30	20:05	14:35	14.58
3			=B2-A2	
4	DateTime	DateTime	Hour	
5	1/1/2025 5:05	2/1/2025 1:08	20.05	
6			=(B5-A5)*24	

	A	B	C
1	DateTime	DateTime	Hours
2	1/1/2025 5:05	1/1/2025 15:08	10.05
3	1/1/2025 5:05	1/1/2025 10:08	5.05
4	1/1/2025 5:05	1/1/2025 11:08	6.05
5	1/1/2025 15:05	2/1/2025 1:08	10.05
6	1/1/2025 16:05	2/1/2025 2:08	10.05
7	1/1/2025 20:05	2/1/2025 1:08	5.05
8	1/1/2025 21:05	2/1/2025 2:08	5.05

Lab1.4

SUMIF, AVERAGEIF, and COUNTIF

	A	B	C	D
1				
2	1		8	=SUMIF(A2:A9,"> 3")
3	2			
4	3		2	=COUNTIF(A2:A9,"> 3")
5	4			
6	1		4	=AVERAGEIF(A2:A9,"> 3")
7	2			
8	3			
9	4			

หาค่า **OT** รวม ที่เกิน 8 ชั่วโมง
(ชั่วโมงละ 40 บาท)

	A	B	C
1	DateTime	DateTime	Hours
2	1/1/2025 5:05	1/1/2025 15:08	10.05
3	1/1/2025 5:05	1/1/2025 10:08	5.05
4	1/1/2025 5:05	1/1/2025 11:08	6.05
5	1/1/2025 15:05	2/1/2025 1:08	10.05
6	1/1/2025 16:05	2/1/2025 2:08	10.05
7	1/1/2025 20:05	2/1/2025 1:08	5.05
8	1/1/2025 21:05	2/1/2025 2:08	5.05

	B1		f_x	=LEFT(A1,5)
	A	B	C	
1	Learn Excel Easily	Learn		
2				

=Left(text, num_char)

	B1		f_x	=RIGHT(A1,5)
	A	B	C	
1	Learn Excel Easily	asily		
2				

=Right(text, num_char)

=FIND(find_text, within_text,[start_num])

	B1		f_x	=FIND("Easi",A1)
	A	B	C	D
1	Learn Excel Easily	13		
2				

Lab2.1

	B1		f_x	=MID(A1,7,5)
	A	B	C	
1	Learn Excel Easily	Excel		
2				

= MID(text, start_char, num_chars)

	B1		f_x	=LEN(A1)
	A	B	C	
1	Learn Excel Easily	18		
2				

= LEN(text)

=TEXT(1234.567,"0")
=TEXT(1234.567,"\$#,##0.00")
=TEXT(0.285,"0.0%")
=TEXT(1234,"0000000")
=TEXT(TODAY(),"MM/DD/YY")
=TEXT(TODAY(),"DDDD")
=TEXT(NOW(),"H:MM AM/PM")

=VALUE("10")
=VALUE("10.11")

Excel & Barcode

- Create Barcode 39 by Excel
- 128 Barcode
- Generate DataMatrix
- Power BI

Description CLASSICI
TORTELLONIALLA RICOTTA E SPINACI

Article Code
RAG040

Weight
250g

GTIN number
09012348410268

N° Pck
2

Production date
16/02/10

Lott no
012345



(01)09012348410268(15)100816(10)012345

GS1 Application Identifiers

AI	Description	Format
01	Global Trade Item Number (GTIN)	N2+N14
10	Batch or lot number	N2+X..20
15	Best Before date (YYMMDD)	N2+N6
17	Expiration date (YYMMDD)	N2+N6
21	Serial number	N2+X..20

UDI



(01)00884838047693(21)XX01234567

REF

989605386721

SVC HW A.1



2014-03-13

SN



XX01234567



Made in USA of Domestic and Foreign Components
Label PN 453561824762

123450036789



5 ตัว

รหัสสินค้า

ID

3 ตัว

จำนวน

Amount

4 ตัว

รหัสจัดส่ง

Shipment ID

(01) GTIN รหัสสินค้า

(17) วันหมดอายุ YYMMDD

(10) รหัสการผลิต

Lab2.2

A1				
	A	B	C	D
1		123450036789 5 ตัว รหัสสินค้า ID 3 ตัว จำนวน Amount 4 ตัว รหัสจัดส่ง Shipment ID		
2	ความยาว	5	3	4
3		ID	Amount	ShipmentID
4	123450036789	12345	003	6789
5		=LEFT(A4,5)	=MID(A4,6,3)	=RIGHT(A4,4)
6				
7		=LEFT(A8,\$B\$2)	=MID(A8,6,\$C\$2)	=RIGHT(A8,\$D\$2)
8	123450036789	12345	003	6789
9	912345003678	91234	500	3678
10	891234500367	89123	450	0367
11	789123450036	78912	345	0036

Lab2.3

	A	B	C	D	E	F
4	ความยาว		33	=LEN(A3)	LEN	
5	ตัดซ้าย 2 ตัว		01	=LEFT(A3,2)	LEFT	
6	รหัสสินค้า เริ่มตำแหน่งที่ 3 จำนวน 14 ตัว		35019315001974	=MID(A3,3,14)	MID	
7	วันหมดอายุ 6 ตัวระหว่าง ตำแหน่ง 19 ถึง 24		200315	=MID(A3,19,24-19+1)	MID	YYMMDD
8	รหัสการผลิต ดัดข้อความจากขวา 7 ตัว		1234567	=RIGHT(A3,7)	RIGHT	
9	ปี YY		2020	=2000 + LEFT(C7,2)	DD	
10	เดือน MM		03	=MID(C7,3,2)	MM	
11	วันที่ DD		15	=RIGHT(C7,2)	YY	
12	วันที่หมดอายุ		15/3/2020	=DATE(C9, C10, C11)	Date	


Lab3.1

Lab 3 รหัส

123450036789

5 ตัว รหัสสินค้า ID 3 ตัว จำนวน Amount 4 ตัว รหัสจัดส่ง Shipment ID

- การสร้างรหัส บาร์โค้ด
- การวิเคราะห์ข้อมูลในรหัสบาร์โค้ด

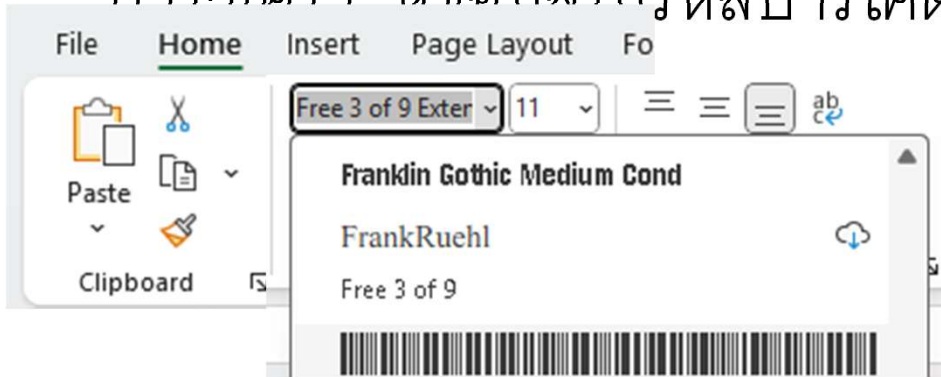



123450036789

= "*" & B2 & "*"

	A	B	C
1			
2		123450036789	*123450036789*

Lab3.1

Lab 5 การสร้างฟังก์ชัน VBA

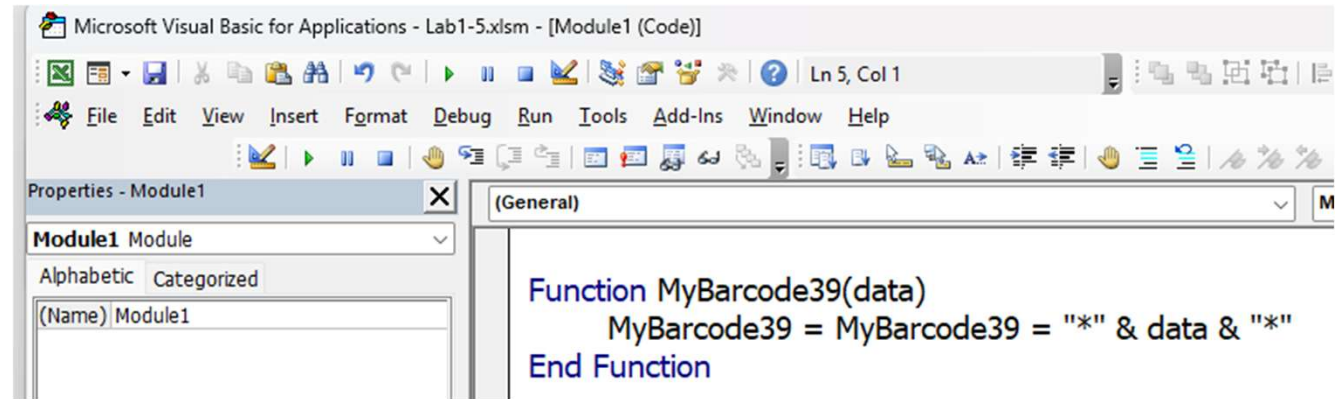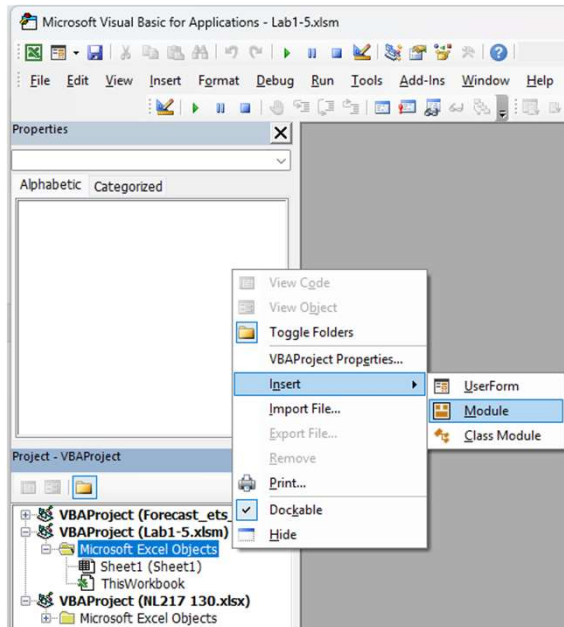

```
Function MyBarcode39(data)
    MyBarcode39 = MyBarcode39 = "*" & data & "*"
End Function
```

C3			=MyBarcode39(B2)
	A	B	C
1			
2		123450036789	*123450036789*
3			*123450036789*


```
Function MyABC_Grade(ByVal Percent As Double) As String
```

```
    Select Case Percent * 100
```

```
        Case Is < 80
```

```
            MyABC_Grade = "A"
```

```
        Case Is < 90
```

```
            MyABC_Grade = "B"
```

```
        Case Else
```

```
            MyABC_Grade = "C"
```

```
    End Select
```

```
End Function
```

- SUMIF, AVERAGEIF, and COUNTIF
- HLOOKUP and VLOOKUP and MATCH and INDEX
- Table
- **PivotTable & PivotChart**
- [Power Query](#)

VBA

Numeric Data Types



Type	Range of Values
Byte	0 to 255
Integer	-32,768 to 32,767
Long	-2,147,483,648 to 2,147,483,648
Single	-3.402823E+38 to -1.401298E-45 for negative values 1.401298E-45 to 3.402823E+38 for positive values.
Double	-1.79769313486232e+308 to -4.94065645841247E-324 for negative values 4.94065645841247E-324 to 1.79769313486232e+308 for positive values.
Currency	-922,337,203,685,477.5808 to 922,337,203,685,477.5807
Decimal	+/- 79,228,162,514,264,337,593,543,950,335 if no decimal is use +/- 7.9228162514264337593543950335 (28 decimal places).

Non-Numeric Data Types

Type	Range of Values
String (fixed length)	1 to 65,400 characters
String (variable length)	0 to 2 billion characters
Date	January 1, 100 to December 31, 9999
Boolean	True or False
Object	Any embedded object
Variant (numeric)	Any value as large as double
Variant (text)	Same as variable-length string

Operator	Description	Example
=	Checks if the value of the two operands are equal or not. If yes, then the condition is true.	(A = B) is False.
<>	Checks if the value of the two operands are equal or not. If the values are not equal, then the condition is true.	(A <> B) is True.
>	Checks if the value of the left operand is greater than the value of the right operand. If yes, then the condition is true.	(A > B) is False.
<	Checks if the value of the left operand is less than the value of the right operand. If yes, then the condition is true.	(A < B) is True.
>=	Checks if the value of the left operand is greater than or equal to the value of the right operand. If yes, then the condition is true.	(A >= B) is False.
<=	Checks if the value of the left operand is less than or equal to the value of the right operand. If yes, then the condition is true.	(A <= B) is True.

Operator	Description	Example
AND	Called Logical AND operator. If both the conditions are True, then the Expression is true.	$a \neq 0$ AND $b \neq 0$ is False.
OR	Called Logical OR Operator. If any of the two conditions are True, then the condition is true.	$a \neq 0$ OR $b \neq 0$ is true.
NOT	Called Logical NOT Operator. Used to reverse the logical state of its operand. If a condition is true, then Logical NOT operator will make false.	NOT($a \neq 0$ OR $b \neq 0$) is false.
XOR	Called Logical Exclusion. It is the combination of NOT and OR Operator. If one, and only one, of the expressions evaluates to be True, the result is True.	$(a \neq 0$ XOR $b \neq 0)$ is true.

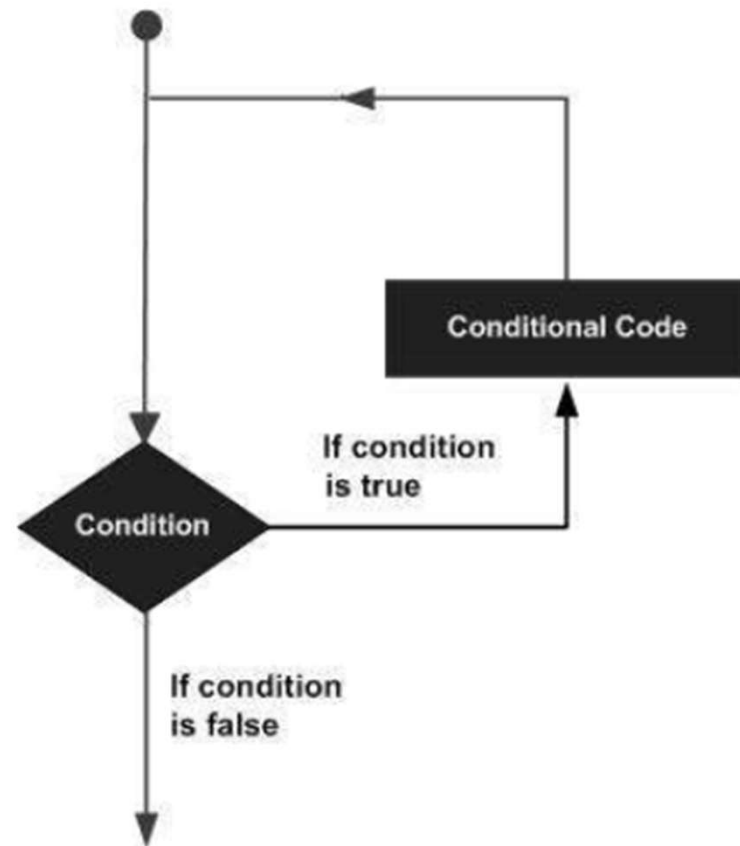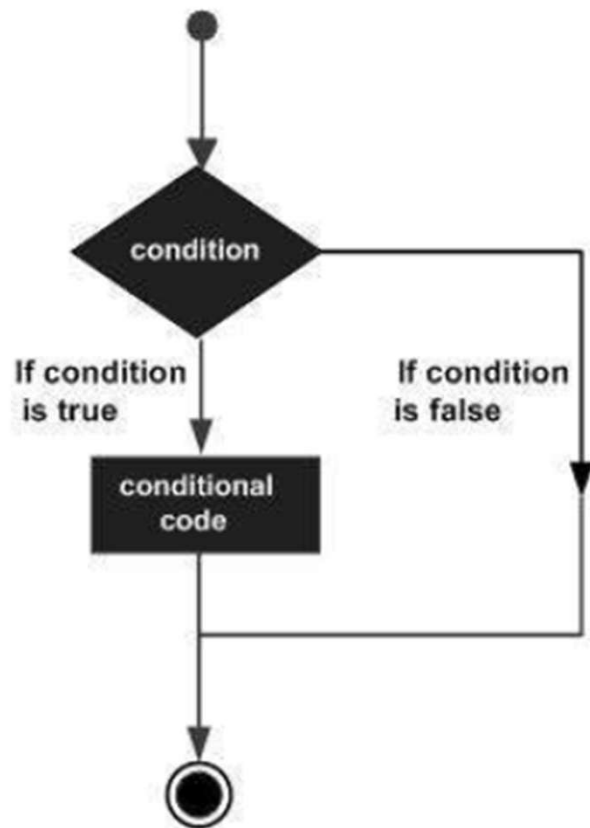

Sr.No.	Statement & Description
1	if statement An if statement consists of a Boolean expression followed by one or more statements.
2	if..else statement An if else statement consists of a Boolean expression followed by one or more statements. If the condition is True, the statements under If statements are executed. If the condition is false, the Else part of the script is executed.
3	if...elseif..else statement An if statement followed by one or more ElseIf statements, that consists of Boolean expressions and then followed by an optional else statement , which executes when all the condition become false.
4	nested if statements An if or elseif statement inside another if or elseif statement(s).
5	switch statement A switch statement allows a variable to be tested for equality against a list of values.

Sr.No.	Loop Type & Description
1	for loop Executes a sequence of statements multiple times and abbreviates the code that manages the loop variable.
2	for ..each loop This is executed if there is at least one element in the group and reiterated for each element in a group.
3	while..wend loop This tests the condition before executing the loop body.
4	do..while loops The do..While statements will be executed as long as the condition is True.(i.e.,) The Loop should be repeated till the condition is False.
5	do..until loops The do..Until statements will be executed as long as the condition is False.(i.e.,) The Loop should be repeated till the condition is True.

S.No.	Control Statement & Description
1	Exit For statement Terminates the For loop statement and transfers the execution to the statement immediately following the loop
2	Exit Do statement Terminates the Do While statement and transfers the execution to the statement immediately following the loop

str1 = "string" ' Only Alphabets

str2 = "132.45" ' Only Numbers

str3 = "!@#\$%*" ' Only Special Characters

Str4 = "Asc23@#" ' Has all the above

Name = "สมชาย"

Sname = "รักไทย"

MyName = Name & " " & Sname

Sr.No.	Function Name & Description
1	InStr Returns the first occurrence of the specified substring. Search happens from the left to the right.
2	InstrRev Returns the first occurrence of the specified substring. Search happens from the right to the left.
3	Lcase Returns the lower case of the specified string.
4	Ucase Returns the upper case of the specified string.
5	Left Returns a specific number of characters from the left side of the string.
6	Right Returns a specific number of characters from the right side of the string.
7	Mid Returns a specific number of characters from a string based on the specified parameters.

7	Mid Returns a specific number of characters from a string based on the specified parameters.
8	Ltrim Returns a string after removing the spaces on the left side of the specified string.
9	Rtrim Returns a string after removing the spaces on the right side of the specified string.
10	Trim Returns a string value after removing both the leading and the trailing blank spaces.
11	Len Returns the length of the given string.

10	Trim Returns a string value after removing both the leading and the trailing blank spaces.
11	Len Returns the length of the given string.
12	Replace Returns a string after replacing a string with another string.
13	Space Fills a string with the specified number of spaces.
14	StrComp Returns an integer value after comparing the two specified strings.
15	String Returns a string with a specified character for specified number of times.
16	StrReverse Returns a string after reversing the sequence of the characters of the given string.

- Function Functionname(parameter-list)
- statement 1
- statement 2
- statement 3
-
- statement n
- End Function

Function findArea(Length As Double, Optional
Width As Variant)

 If IsMissing(Width) Then

 findArea = Length * Length

 Else

 findArea = Length * Width

 End If

End Function

VBA - Sub Procedure

```
Sub Area(x As Double, y As Double)
```

```
    MsgBox x * y
```

```
End Sub
```

```
Function findArea(Length As Double, Width As Variant)
```

```
    Area Length, Width
```

```
End Function
```