

OS – SKILL 2

Building a simple shell — the main loop: display a prompt, read a command, and exit on "exit".

Wrote the shell's main loop in src/shell.c using nano — it displays a myshell> prompt, reads a command with scanf, and stops when the user types exit.


```
rishita@Rishitha:~$ nano skill2.c
rishita@Rishitha:~$ gcc skill2.c
rishita@Rishitha:~$ ./a.out
myshell> |
```

Compiled the program with gcc src/shell.c and started it with ./a.out — the myshell> prompt appears, ready for input.

```
rishita@Rishitha:~$ nano skill2.c
rishita@Rishitha:~$ gcc skill2.c
rishita@Rishitha:~$ ./a.out
myshell> rishitha
You typed: rishitha
myshell> os class
You typed: os
myshell> You typed: class
myshell> exit
Exiting shell...
rishita@Rishitha:~$ |
```

Tested the shell: typed rishitha and os class (each is echoed back), then exit, which prints "Exiting shell..." and ends the loop.

Control Flow Diagram

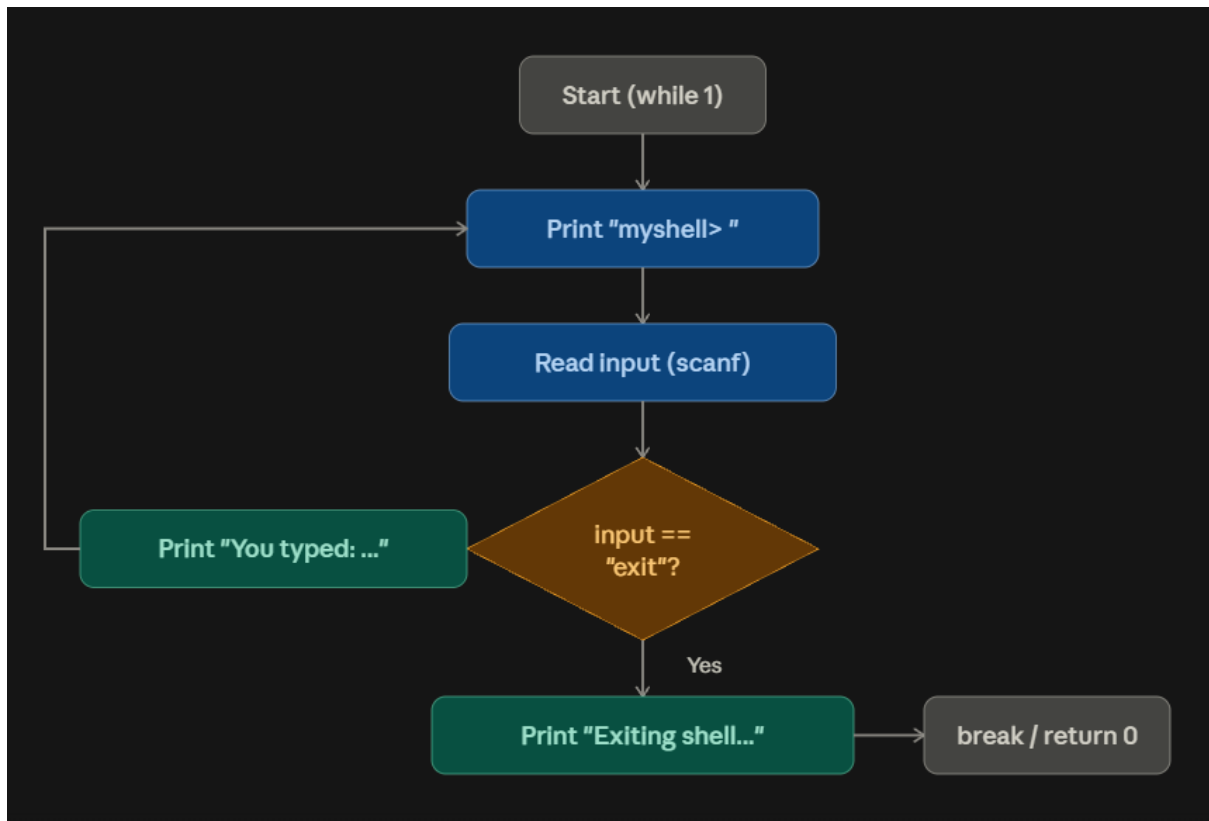

The shell repeats one loop: show the prompt, read the input, then either exit (if the command is exit) or echo the command and loop back.