


PRACTICAL-6

INPUT

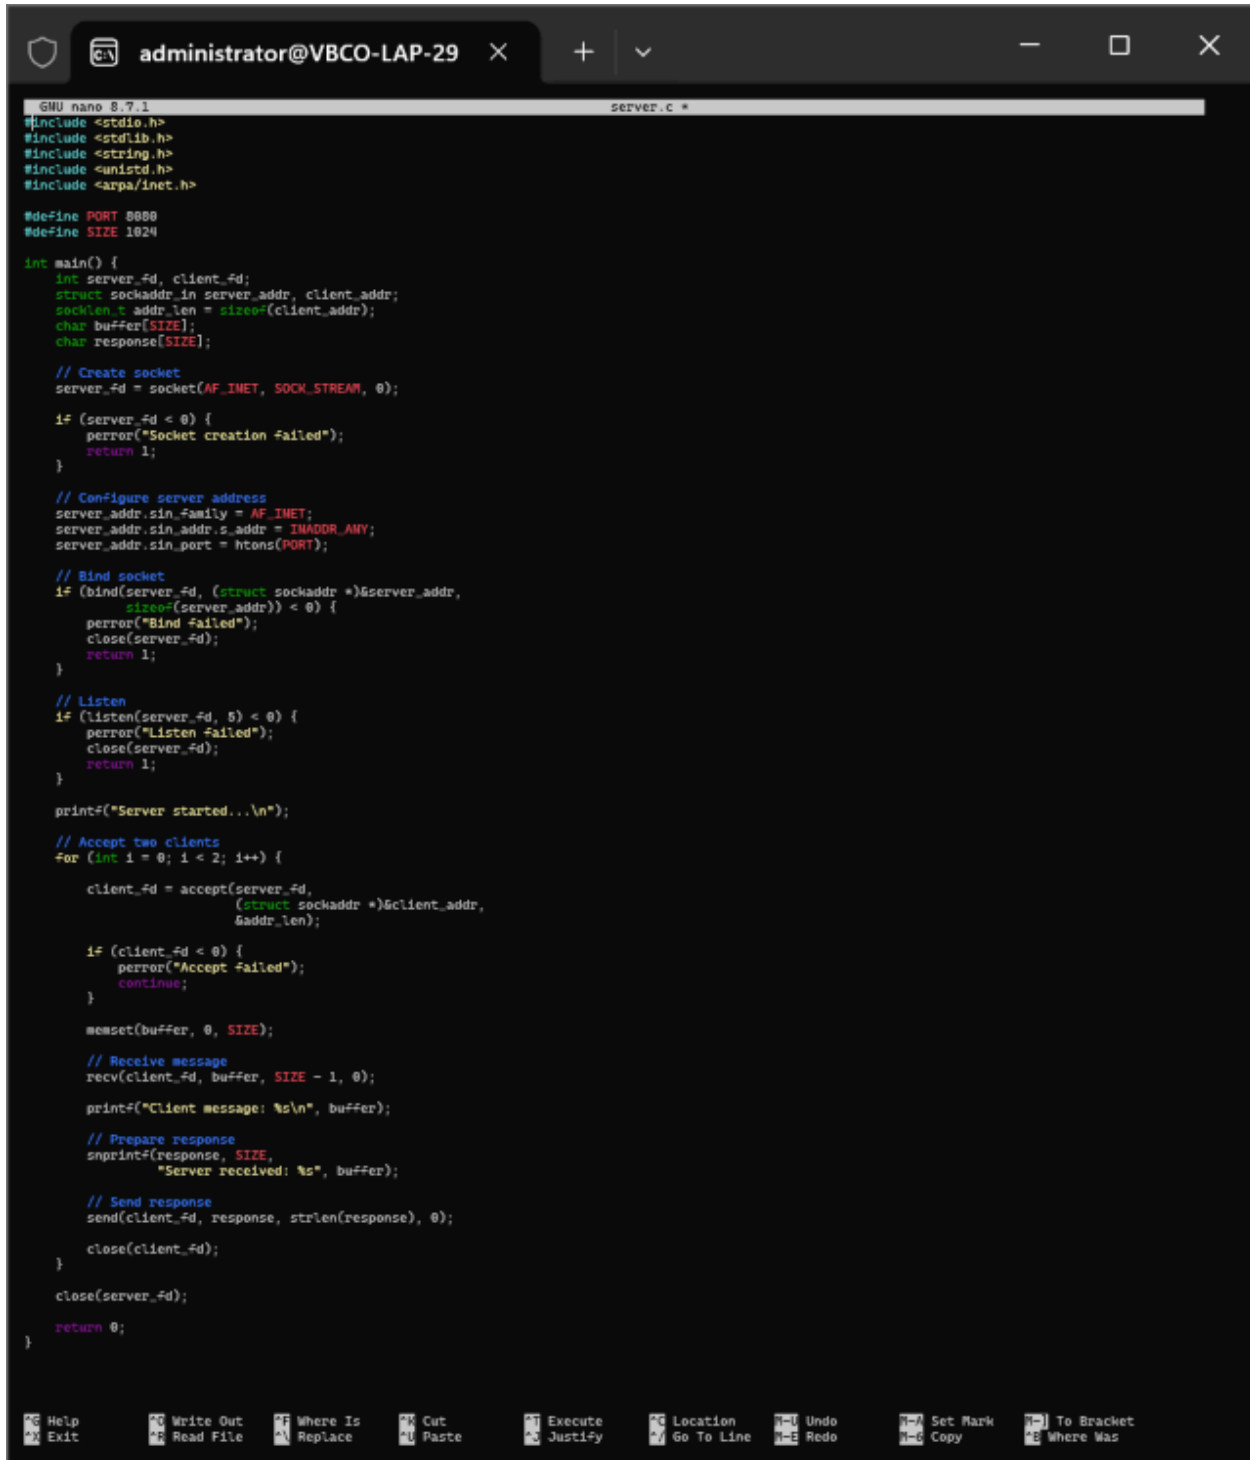

```
GNU nano 8.7.1 SERVER.C *
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>

#define PORT 8080
#define SIZE 1024

int main() {
    int server_fd, client_fd;
    struct sockaddr_in server_addr, client_addr;
    socklen_t addr_len = sizeof(client_addr);
    char buffer[SIZE];
    char response[SIZE];

    // Create socket
    server_fd = socket(AF_INET, SOCK_STREAM, 0);

    if (server_fd < 0) {
        perror("Socket creation failed");
        return 1;
    }

    // Configure server address
    server_addr.sin_family = AF_INET;
    server_addr.sin_addr.s_addr = INADDR_ANY;
    server_addr.sin_port = htons(PORT);

    // Bind socket
    if (bind(server_fd, (struct sockaddr *)&server_addr,
        sizeof(server_addr)) < 0) {
        perror("Bind failed");
        close(server_fd);
        return 1;
    }

    // Listen
    if (listen(server_fd, 5) < 0) {
        perror("Listen failed");
        close(server_fd);
        return 1;
    }

    printf("Server started...\n");

    // Accept two clients
    for (int i = 0; i < 2; i++) {
        client_fd = accept(server_fd,
            (struct sockaddr *)&client_addr,
            &addr_len);

        if (client_fd < 0) {
            perror("Accept failed");
            continue;
        }

        memset(buffer, 0, SIZE);

        // Receive message
        recv(client_fd, buffer, SIZE - 1, 0);

        printf("Client message: %s\n", buffer);

        // Prepare response
        sprintf(response, SIZE,
            "Server received: %s", buffer);

        // Send response
        send(client_fd, response, strlen(response), 0);

        close(client_fd);
    }

    close(server_fd);

    return 0;
}
```

Help Write Out Where Is Cut Execute Location Undo Set Mark To Bracket
Exit Read File Replace Paste Justify Go To Line Redo Redo Copy Where Was

administrator@VBCO-LAP-29

GNU nano 8.7.1client.c *

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <arpa/inet.h>

#define PORT 8080
#define SIZE 1024

int main() {
    int sock;
    struct sockaddr_in server_addr;
    char message[SIZE];
    char response[SIZE];

    // Create socket
    sock = socket(AF_INET, SOCK_STREAM, 0);

    if (sock < 0) {
        perror("Socket creation failed");
        return 1;
    }

    // Configure server address
    server_addr.sin_family = AF_INET;
    server_addr.sin_port = htons(PORT);
    server_addr.sin_addr.s_addr = inet_addr("127.0.0.1");

    // Connect to server
    if (connect(sock, (struct sockaddr *)&server_addr,
        sizeof(server_addr)) < 0) {
        perror("Connection failed");
        close(sock);
        return 1;
    }

    printf("Enter message: ");

    fgets(message, SIZE, stdin);

    // Remove newline
    message[strcspn(message, "\n")] = '\0';

    // Send message
    send(sock, message, strlen(message), 0);

    // Receive response
    memset(response, 0, SIZE);
    recv(sock, response, SIZE - 1, 0);

    printf("Server response: %s\n", response);

    close(sock);

    return 0;
}
```

^G Help
 ^O Write Out
 ^F Where Is
 ^K Cut
 ^T Execute
 ^C Location
 M-U Undo
 ^X Exit
 ^R Read File
 ^_ Replace
 ^U Paste
 ^J Justify
 ^_ Go To Line
 M-E Redo

OUTPUT

```
administrator@VBCO-LAP-29:~$ mkdir -p ~/practical6
administrator@VBCO-LAP-29:~$ cd ~/practical6
administrator@VBCO-LAP-29:~/practical6$ pwd
/home/administrator/practical6
administrator@VBCO-LAP-29:~/practical6$ nano server.c
administrator@VBCO-LAP-29:~/practical6$ nano client.c
administrator@VBCO-LAP-29:~/practical6$ ls
client  client.c  server  server.c
administrator@VBCO-LAP-29:~/practical6$ ./server
Server started...
Client message: Hello Server
```

```
administrator@VBCO-LAP-29:~$ cd ~/practical6
administrator@VBCO-LAP-29:~/practical6$ ls
client  client.c  server  server.c
administrator@VBCO-LAP-29:~/practical6$ dir
client  client.c  server  server.c
administrator@VBCO-LAP-29:~/practical6$ mkdir practical6
cd practical6
administrator@VBCO-LAP-29:~/practical6/practical6$ cd ~/practical6
administrator@VBCO-LAP-29:~/practical6$ ./client
Enter message: Hello Server
Server response: Server received: Hello Server
administrator@VBCO-LAP-29:~/practical6$
```