

Problem List

Submit

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted 113 / 113 testcases passed

VTU29055 submitted at Sep 11, 2026 21:24

₹583.25

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

3 ms | Beats 93.92%

Memory

42.86 MB | Beats 86.43%

Code | Java

Code

Java

Auto

```
1
2 class Solution {
3     public boolean halvesAreAlike(String s) {
4         int mid = s.length() / 2;
5         int countA = 0;
6         int countB = 0;
7
8         for (int i = 0; i < mid; i++) {
9             if (isVowel(s.charAt(i))) {
10                 countA++;
11             }
12         }
13     }
14 }
```

Saved

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

s =
"book"

Output

true

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

[Next Challenge](#)

✓ Test case 0

✓ Test case 1 

✓ Test case 2 

✓ Test case 3 

✓ Test case 4 

✓ Test case 5 

✓ Test case 6 

Compiler Message

Success

Input (stdin)

```
1 3
2 11 2 4
3 4 5 6
4 10 8 -12
```

[Download](#)

Expected Output

```
1 15
```

[Download](#)

Description Accepted x Editorial Solutions Submissions

Submit Ctrl Enter

All Submissions

Accepted 36 / 36 testcases passed

VTU29055 submitted at Sep 11, 2026 22:59

Analysis

Solution

₹583.25/mo
Save over 56%

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats 100.00%

Memory

46.64 MB | Beats 68.39%



Java Auto

```
1 class Solution {
2     public int[][] transpose(int[][] matrix) {
3         int m = matrix.length;
4         int n = matrix[0].length;
5
6         int[][] result = new int[n][m];
7
8         for (int i = 0; i < m; i++)
9             for (int j = 0; j < n; j++)
10                 result[j][i] = matrix[i][j];
11     }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

matrix =
[[1,2,3],[4,5,6],[7,8,9]]

Output

Congratulations

You solved this challenge. Would you like to challenge your friends?  

NextChallenge

✓ Test case 0

✓ Test case 1 

✓ Test case 2 

✓ Test case 3 

✓ Test case 4 

✓ Test case 5 

✓ Test case 6 

Compiler Message

Success

Input (stdin)

```
1 5 6 7
2 3 6 10
```

Download

Expected Output

```
1 1 1
```

Download

Congratulations

You solved this challenge. Would you like to challenge your friends?  

Next Challenge

- ✓ Test case 0
- ✓ Test case 1 
- ✓ Test case 2 
- ✓ Test case 3 
- ✓ Test case 4 
- ✓ Test case 5 
- ✓ Test case 6 

Compiler Message

Success

Input (stdin)

```
1 4 4 1
2 1 2 3 4
3 5 6 7 8
4 9 10 11 12
6 13 14 15 16
```

Download

Expected Output

```
1 2 3 4 8
```

Download

StatementHintsSubmissionsSolutionHelp

xyzxy are a few examples of lapindromes. Note that **abbaab** is NOT a lapindrome. The two halves contain the same characters but their frequencies do not match.
Your task is simple. Given a string, you need to tell if it is a lapindrome.

Input:

First line of input contains a single integer **T**, the number of test cases.
Each test is a single line containing a string **S** composed of only lowercase English alphabet.

Output:

For each test case, output on a separate line: "YES" if the string is a lapindrome and "NO" if it is not.

Constraints:

- $1 \leq T \leq 100$
- $2 \leq |S| \leq 1000$, where $|S|$ denotes the length of **S**

Sample 1:

Input	Output
6	YES
gaga	NO
abcde	YES
rotor	YES
xyzxy	NO

Java

Correct Answer

Submission ID: 1356277324

Sub-Task	Task #	Result (time)
1	0	Correct (0.08)
Subtask Score: 20%		Result - Correct
2	1	Correct (0.08)
Subtask Score: 20%		Result - Correct
3	2	Correct (0.08)
Subtask Score: 20%		Result - Correct
4	3	Correct (0.11)
Subtask Score: 20%		Result - Correct

Visualize Code

Run

Submit

DescriptionAccepted ×EditorialSolutionsSubmissions

← All Submissions

Accepted75 / 75 testcases passed
VTU29055 submitted at Sep 11, 2026 22:53

₹583.25/mo
Save over 96%


Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

1 ms | Beats 99.89%

Memory

47.73 MB | Beats 57.21%

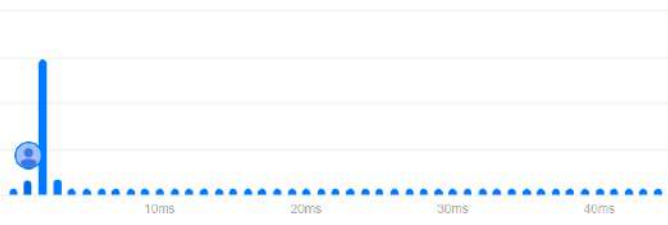

Code | Java

</> Code

JavaAuto

```
1 class Solution {
2     public void moveZeroes(int[] nums) {
3         int index = 0;
4
5         // Move all non-zero elements to the front
6         for (int num : nums) {
7             if (num != 0) {
8                 nums[index++] = num;
9             }
10        }
11    }
```

Saved

Testcase

Test Result

AcceptedRuntime: 0 ms

Case 1

Case 2

Input

nums =
[0,1,0,3,12]

Output

[1,3,12,0,0]

Congratulations

You solved this challenge. Would you like to challenge your friends? [Twitter](#) [LinkedIn](#)

[Next Challenge](#)

✓ **Test case 0**

✓ Test case 1 

✓ Test case 2 

✓ Test case 3 

✓ Test case 4 

✓ Test case 5 

✓ Test case 6 

Compiler Message

Success

Input (stdin)

1 07:05:45PM

[Download](#)

Expected Output

1 19:05:45

[Download](#)

All Submissions

Accepted 12 / 12 testcases passed

VTU29055 submitted at Sep 11, 2026 23:01

Analysis

Solution

583.25 / 1000
Save over 66%

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

6 ms | Beats 96.19%

Memory

46.60 MB | Beats 78.90%



Code | Java

```
1 class Solution {
```

Java Auto

```
31         prefix[r2 + 1][c2 + 1]
32         - prefix[r1][c2 + 1]
33         - prefix[r2 + 1][c1]
34         + prefix[r1][c1];
35     }
36 }
37
38     return answer;
39 }
40 }
```

Saved

Testcase Test Result

Accepted Runtime: 0 ms

Case 1

Case 2

Input

mat =
[[1,2,3],[4,5,6],[7,8,9]]

k =
1

Output

Problem List

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted 79 / 79 testcases passed

VTU29055 submitted at Sep 11, 2026 22:43

Analysis

Solution

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

17 ms Beats 88.20%

Memory

108.18 MB Beats 47.10%



Code | Java

1 import java.util.HashSet;

Code

Java

Auto

1 import java.util.HashSet;

2

3 class Solution {

4 public boolean containsDuplicate(int[] nums) {

5 HashSet<Integer> set = new HashSet<>();

6

7 for (int num : nums) {

8 if (set.contains(num)) {

9 return true;

10 }

11 set.add(num);

12 }

13 }

14 }

Saved

In 1, Co

Testcase

Test Result

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3

Input

nums =

[1,2,3,1]

Output

true

Expected