

Start coding or [generate](#) with AI.

```
import pandas as pd
df = pd.read_csv('ecommerce_customer_data_large.csv')
df.head()
```

```
-----
FileNotFoundError                                Traceback (most recent call last)
/tmp/ipykernel_699/3860589441.py in <cell line: 0>()
      1 import pandas as pd
----> 2 df = pd.read_csv('ecommerce_customer_data_large.csv')
      3 df.head()

----- 4 frames -----
/usr/local/lib/python3.12/dist-packages/pandas/io/common.py in get_handle(path_or_buf, mode, encoding, compression,
memory_map, is_text, errors, storage_options)
      871     if ioargs.encoding and "b" not in ioargs.mode:
      872         # Encoding
--> 873         handle = open(
      874             handle,
      875             ioargs.mode,

FileNotFoundError: [Errno 2] No such file or directory: 'ecommerce_customer_data_large.csv'
```

Next steps: [Explain error](#)

Recommendations

1. Offer loyalty rewards and exclusive perks to High Value customers to strengthen retention and encourage referrals.
2. Launch targeted discount or win-back campaigns for At Risk customers to prevent churn before they become inactive.
3. Send personalized re-engagement emails or surveys to Lost customers to understand why they stopped purchasing.
4. Use segment-specific marketing communication instead of one-size-fits-all messaging to improve engagement rates.
5. Investigate product categories with higher return rates and improve product descriptions/quality checks to reduce returns and boost customer satisfaction.

```
import pandas as pd
df = pd.read_csv('/ecommerce_customer_data_large.csv')
df.head()
```

	Customer ID	Purchase Date	Product Category	Product Price	Quantity	Total Purchase Amount	Payment Method	Customer Age	Returns	Customer Name	Age	Gender	Churn
0	44605	2023-05-03 21:30:02	Home	177	1	2427	PayPal	31	1.0	John Rivera	31	Female	0
1	44605	2021-05-16 13:57:44	Electronics	174	3	2448	PayPal	31	1.0	John Rivera	31	Female	0
2	44605	2020-07-13 06:16:57	Books	413	1	2345	Credit Card	31	1.0	John Rivera	31	Female	0
3	44605	2023-01-17	Electronics	396	3	937	Cash	31	0.0	John Rivera	31	Female	0

```
df.info()
df.isnull().sum()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 250000 entries, 0 to 249999
Data columns (total 13 columns):
#   Column                Non-Null Count  Dtype
---  -
0   Customer ID           250000 non-null  int64
1   Purchase Date         250000 non-null  object
2   Product Category      250000 non-null  object
3   Product Price         250000 non-null  int64
4   Quantity              250000 non-null  int64
5   Total Purchase Amount 250000 non-null  int64
6   Payment Method        250000 non-null  object
7   Customer Age          250000 non-null  int64
8   Returns               202618 non-null  float64
9   Customer Name         250000 non-null  object
10  Age                   250000 non-null  int64
11  Gender                250000 non-null  object
12  Churn                 250000 non-null  int64
dtypes: float64(1), int64(7), object(5)
memory usage: 24.8+ MB
```

	0
Customer ID	0
Purchase Date	0
Product Category	0
Product Price	0
Quantity	0
Total Purchase Amount	0
Payment Method	0
Customer Age	0
Returns	47382
Customer Name	0
Age	0
Gender	0
Churn	0

dtype: int64

```
df['Returns'] = df['Returns'].fillna(0)

df = df.drop_duplicates()

df.isnull().sum()
```

	0
Customer ID	0
Purchase Date	0
Product Category	0
Product Price	0
Quantity	0
Total Purchase Amount	0
Payment Method	0
Customer Age	0
Returns	0
Customer Name	0
Age	0
Gender	0
Churn	0

dtype: int64

```
import pandas as pd

df['Purchase Date'] = pd.to_datetime(df['Purchase Date'])
```

```
reference_date = df['Purchase Date'].max()+pd.Timedelta(days=1)

rfm = df.groupby('Customer ID').agg(
    Recency=('Purchase Date',lambda x:(reference_date-x.max()).days),
    Frequency=('Purchase Date','count'),
    Monetary=('Total Purchase Amount','sum')
).reset_index()

rfm.head()
```

```
-----
AttributeError                                Traceback (most recent call last)
/tmp/ipykernel_699/231449232.py in <cell line: 0>()
      1 import pandas as pd
      2
----> 3 df['Purchase Date'] = pd.to_datetime(df['Purchase Date'])
      4
      5 reference_date = df['Purchase Date'].max()+pd.Timedelta(days=1)

AttributeError: module 'pandas' has no attribute 'to_datetime'
```

Next steps: [Explain error](#)

```
import pandas as pd

df['Purchase Date'] = pd.to_datetime(df['Purchase Date'])

reference_date = df['Purchase Date'].max()+pd.Timedelta(days=1)

rfm = df.groupby('Customer ID').agg(
    Recency=('Purchase Date',lambda x:(reference_date-x.max()).days),
    Frequency=('Purchase Date','count'),
    Monetary=('Total Purchase Amount','sum')
).reset_index()

rfm.head()
```

	Customer ID	Recency	Frequency	Monetary
0	1	289	3	6290
1	2	73	6	16481
2	3	223	4	9423
3	4	442	5	7826
4	5	425	5	9769

Next steps: [Generate code with rfm](#) [New interactive sheet](#)

```
# Har metric ko 1-4 score do (quartiles ke basis pe)
rfm['R_score'] = pd.qcut(rfm['Recency'], 4, labels=[4,3,2,1])
rfm['F_score'] = pd.qcut(rfm['Frequency'].rank(method='first'), 4, labels=[1,2,3,4])
rfm['M_score'] = pd.qcut(rfm['Monetary'], 4, labels=[1,2,3,4])

rfm['RFM_Score'] = rfm['R_score'].astype(int) + rfm['F_score'].astype(int) + rfm['M_score'].astype(int)

def segment(score):
    if score >= 10:
        return 'High Value'
    elif score >= 7:
        return 'Loyal'
    elif score >= 4:
        return 'At Risk'
    else:
        return 'Lost'

rfm['Segment'] = rfm['RFM_Score'].apply(segment)

rfm.head(10)
```

	Customer ID	Recency	Frequency	Monetary	R_score	F_score	M_score	RFM_Score	Segment
0	1	289	3	6290	2	1	1	4	At Risk
1	2	73	6	16481	4	3	3	10	High Value
2	3	223	4	9423	2	2	2	6	At Risk
3	4	442	5	7826	1	2	1	4	At Risk
4	5	425	5	9769	1	2	2	5	At Risk
5	6	141	9	25428	3	4	4	11	High Value
6	7	142	8	17825	3	4	3	10	High Value
7	8	26	7	16245	4	4	3	11	High Value
8	9	141	7	24621	3	4	4	11	High Value
9	10	131	8	20672	3	4	4	11	High Value

Next steps:

[Generate code with rfm](#)[New interactive sheet](#)

```


import matplotlib.pyplot as plt
import seaborn as sns

# Segment distribution
plt.figure(figsize=(6,4))
sns.countplot(data=rfm, x='Segment', order=rfm['Segment'].value_counts().index)
plt.title('Customer Segment Distribution')
plt.show()

# Segment-wise average spending
plt.figure(figsize=(6,4))
sns.barplot(data=rfm, x='Segment', y='Monetary', estimator='mean')
plt.title('Average Spending by Segment')
plt.show()

# Recency distribution
plt.figure(figsize=(6,4))
sns.histplot(rfm['Recency'], bins=30, kde=True)
plt.title('Recency Distribution (Days Since Last Purchase)')
plt.show()

```

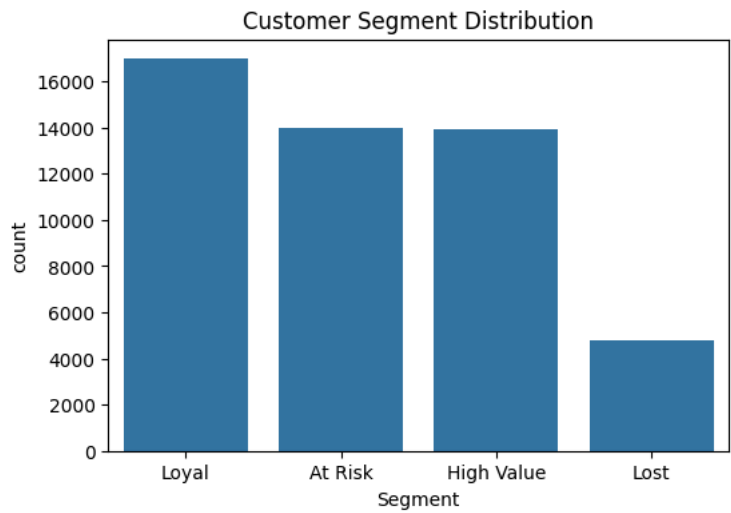

Average Spending by Segment