

ONBOARD360AI

ICMP Partner Onboarding — Agent Architecture Specification

MVP 1 · Version 2.0

Platform: iDocs Canvas · Runtime: Platform Specialist Agent on Tachyon SDK

Scope: 1 master agent · 8 sub-agents · 59 skills · 3-phase integration roadmap

MVP 1 is deliberately scoped. It is extensible with further skills and agents to make ICMP partner onboarding fully self-serviceable and workflow-driven.

1. Platform Context

iDocs Canvas is the enterprise document intelligence platform within which this architecture is authored and executed. Onboard360AI is not a standalone application — it is a configuration-defined agent hierarchy composed at runtime by the platform's Platform Specialist Agent.

1.1 Runtime layers

Layer	What it is	Behaviour
iDocs Canvas	Enterprise document intelligence platform	Hosts the Agent Admin UI where sub-agents and skills are authored declaratively. No code deployment is required to add or change an agent.
Platform Specialist Agent	Built on Tachyon SDK (enterprise-internal); a Google-SDK-style agent implementation runs in parallel	Instantiates sub-agents and skills from configuration at runtime. Exposes both local tools and MCP tools. Enforces multiple real-time contracts before and after every model execution and every tool execution.
Onboard360AI	Master Onboarding Agent — and itself a sub-agent of the Platform Specialist Agent	The entry point partners interact with for ICMP onboarding. Owns welcome, eligibility determination, routing, sequencing and journey state across the eight sub-agents. It is not the top of the tree: requests outside ICMP onboarding hand back to the Platform Specialist Agent.
Sub-agents	Goal-bearing units (8 defined)	Each has a terminal outcome that is either achieved or not. Carries goals and tool/function bindings.
Skills	Knowledge and procedure units (59 defined)	Carry system instructions, user instructions, reference material (.md), and sequential or conditional Q&A. Invoked by sub-agents; reusable across them.

1.2 The agent-versus-skill rule

If it has a goal — an outcome that is either achieved or not — it is a **sub-agent**. If it is procedural or explanatory knowledge with no terminal state of its own, it is a **skill** that a sub-agent invokes.

This mirrors the iDocs Canvas authoring model, where the two definition forms are nearly symmetric with two deltas: sub-agents add goals and tool/function binding; skills add reference materials.

Worked example — ICMP Foundations is pure explanatory knowledge with no terminal state, so it remains a skill. Postman Collection Generation produces an artifact that either exists or does not, so it is a sub-agent.

1.3 Where Onboard360AI sits

Onboard360AI holds two positions at once, and both matter for how it is configured:

- It is a MASTER AGENT over the eight ICMP onboarding sub-agents. It owns their sequencing, their gating, and the journey state passed between them.
- It is ITSELF A SUB-AGENT of the Platform Specialist Agent, which is built on Tachyon SDK and composes it at runtime from configuration.

The practical consequence: Onboard360AI is not the platform and is not the top of the hierarchy. A request outside ICMP onboarding scope — application design, security architecture, commercial matters — hands back to the Platform Specialist Agent rather than being attempted.

1.4 MVP 1 scope and extensibility

This is MVP 1. The architecture is deliberately scoped to what can be delivered and operated now, and is authored so that later additions are additive rather than structural.

- Further skills and agents will be added to make ICMP partner onboarding fully self-serviceable and workflow-driven.

- POC Assistance is intentionally shallow: each activity becomes its own skill invoked from the intake-free activity catalogue, without changing the sub-agent contract.
- Every instructions-first skill is authored so the instruction body and the eventual tool call are swappable, making a phase advance a configuration change rather than a rewrite.
- Where a partner asks for something beyond current scope, the agent says plainly that it is not yet covered and names what to do today instead — it does not improvise a workaround.

1.5 Runtime disclosure rule

Every agent and every skill must state, in its opening message, what is integrated today and what the next phase adds.

This is a mandatory opening behaviour, not a disclaimer. The partner must always know whether they are being LINKED to documentation, GUIDED through it, or TRANSACTED FOR, because that determines whether they still have work to do themselves after the conversation ends.

- State which systems the component can actually reach right now, and what that means in practice.
- State the capability that arrives when the component advances a phase.
- Keep it to one or two lines — it is orientation, not caveating.
- Never imply a system is integrated when it is not, and never present a phase-1 link-out as though the work has been done on the partner's behalf.

Implementation — each agent.json and skill.json in the import package carries this rule appended to its systemInstructions, together with a phase-specific paragraph stating that component's current mode and its next phase.


2. Architecture Diagram

Onboard360AI — ICMP Partner Onboarding Architecture

MVP 1

iDocs Canvas · Platform Specialist Agent on Tachyon SDK · Agent / Sub-agent / Skill composition with phased integration maturity

MVP1 scope — extensible with further skills and agents toward fully self-serviceable, workflow-driven onboarding

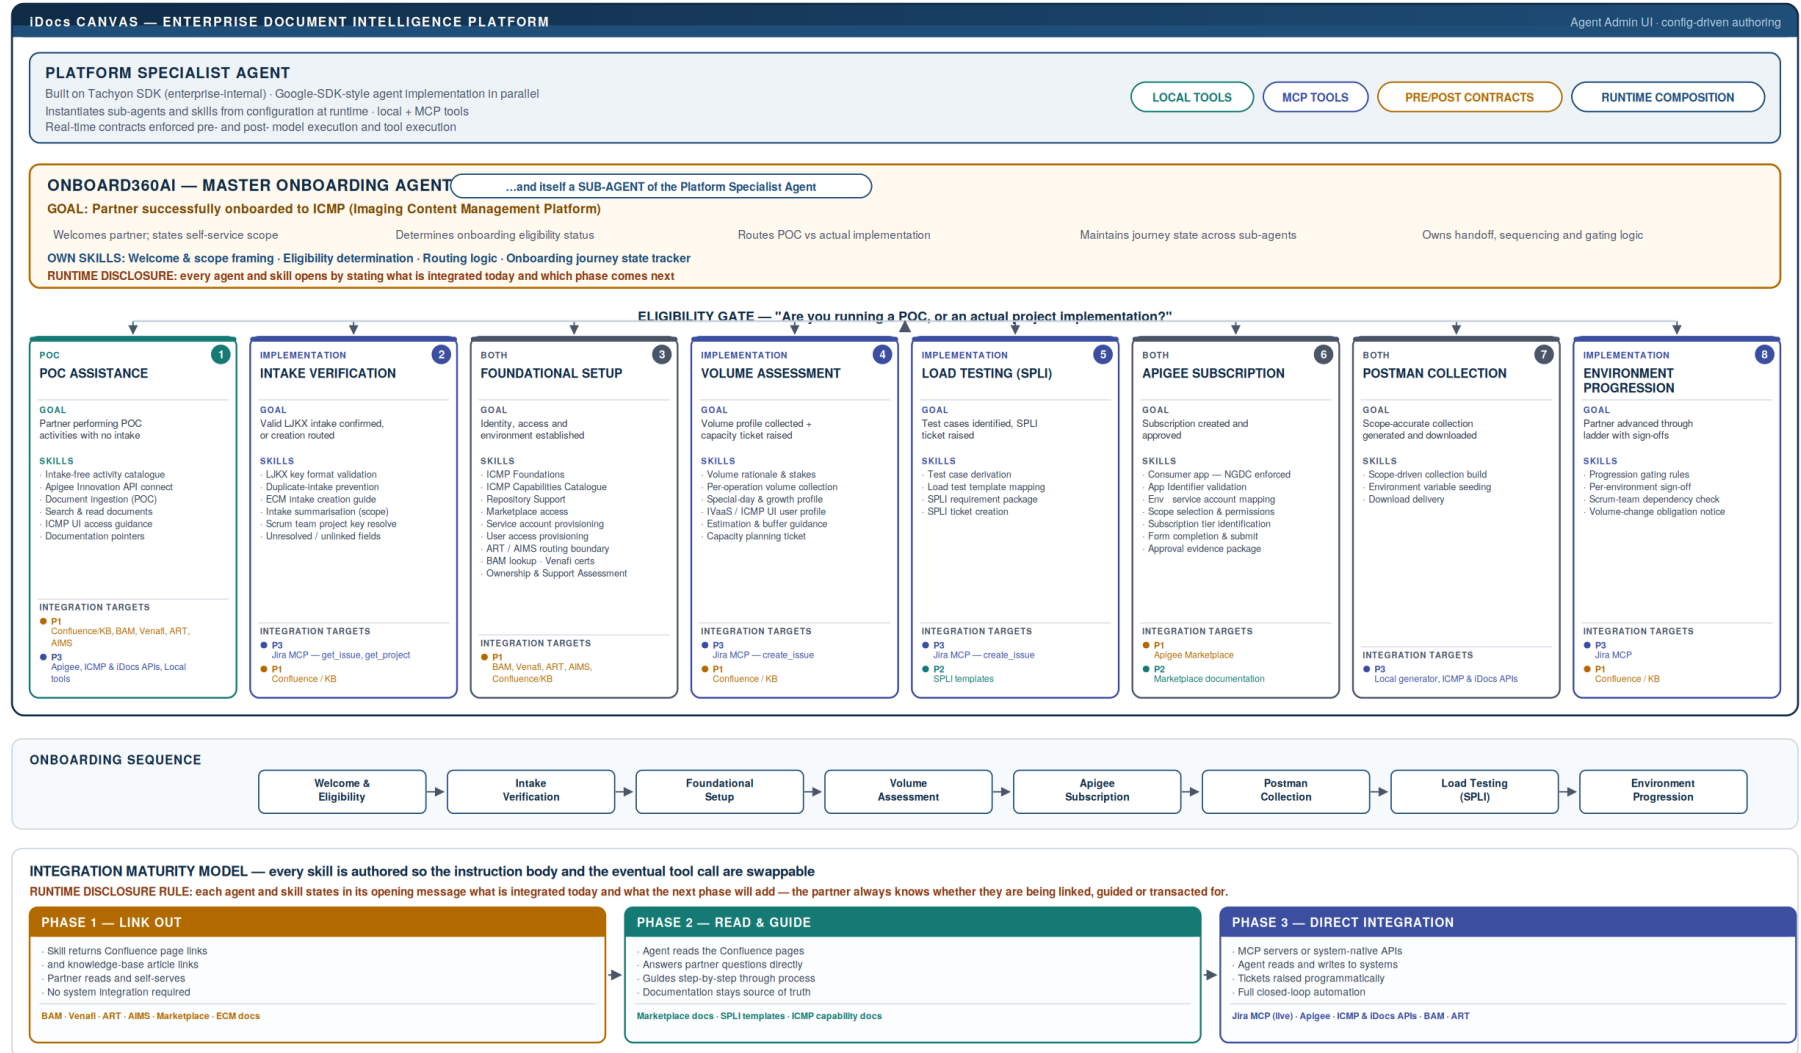

3. Master Agent — Onboard360AI

Attribute	Definition
Position	Master Onboarding Agent over the eight ICMP onboarding sub-agents, and itself a sub-agent of the Platform Specialist Agent within iDocs Canvas.
Goal	Partner successfully onboarded to ICMP (Imaging Content Management Platform).
Opening behaviour	Welcomes the partner — "Welcome to ICMP Partner Onboarding" / "Welcome to Onboard360, the dedicated ICMP partner onboarding self-service assistant" — then states that onboarding eligibility status must be determined before anything else.
Eligibility gate	Single branching question: POC, or actual project implementation? This determines every downstream path.
Own skills	Welcome & scope framing · Eligibility determination · Routing logic · Onboarding journey state tracker
Responsibilities	Routing to sub-agents · maintaining journey state · sequencing · enforcing gates between stages · consolidating summaries back to the partner
Invokes	All 8 sub-agents, conditionally on branch and on state

3.1 Branch A — POC

Stated to the partner explicitly and upfront:

- No intake required to the ECM team or the SSAT (Strategic Services & Advanced Technology) team
- No prioritisation by an LOB point of contact
- No scrum team assigned
- The partner runs the POC themselves — self-service, via this agent, chatbot, or existing documentation

Activities available without an intake:

- Connect to Innovation APIs via Apigee
- Ingest documents into ICMP
- Search and read documents
- General API usage
- ICMP UI — guidance on how to obtain access

Scope note — POC remains at this level in the base version. It will later expand into multiple levels, with each activity built as its own skill and invoked from inside the POC skill.

3.2 Branch B — Actual implementation

Partner state	Agent action
No intake submitted	Refer to ECM intake creation documentation and walk the partner through it.
Unsure whether an intake exists	Warn against creating duplicate onboarding requests. Instruct the partner to verify whether they, their team, or the ICMP team has already submitted one. Ask for the Jira intake number. If none exists, route into the new ECM intake process.
Intake exists	Ask for the intake number, validate its format, then hand to the Intake Verification sub-agent.

4. Sub-Agent Registry

#	Sub-agent	Branch	Goal	Tools / integrations	Produces
1	POC Assistance	POC	Partner performing POC activities with no intake	P1: Confluence/KB, BAM, Venafi, ART, AIMS · P3: Apigee, ICMP & iDocs APIs, Local tools	Intake-free activity list + documentation pointers
2	Intake Verification	Implementation	Valid LJKX intake confirmed, or partner routed into creation	Jira MCP — get_issue, get_project (live)	Onboarding intake summary
3	Foundational Setup	Both	Identity, access and environment established	BAM · Venafi · ART · AIMS · Confluence/KB	Service accounts, certificates, group membership, ownership record
4	Volume Assessment	Implementation	Volume profile collected and capacity planning ticket raised	Jira MCP — create (P3) · Confluence/KB	Volume profile + capacity planning Jira ticket
5	Load Testing (SPLI)	Implementation	Test cases identified and SPLI ticket raised	Jira MCP — create · SPLI templates (P2)	Test case set + SPLI Jira ticket
6	Apigee Subscription	Both	Subscription created and approved	Apigee Marketplace · marketplace documentation	Approved subscription with validated scope and tier
7	Postman Collection Generation	Both	Scope-accurate collection generated and downloaded	Local generator · ICMP & iDocs APIs	Downloadable Postman collection
8	Environment Progression	Implementation	Partner advanced through the ladder with sign-offs	Jira MCP · Confluence/KB	Per-environment sign-off record

4.1 Cross-agent dependencies

Producer	Consumer	Artifact passed
BAM lookup (Foundational Setup)	Consumer app creation, marketplace access	App ID, Remedy ID, application name
Service account provisioning	App Identifier validation (Apigee Subscription)	Service account name, per environment
Volume Assessment	Subscription tier identification	Volume profile — hard prerequisite; the tier skill cannot produce a defensible recommendation without it
Volume Assessment	Load Testing (SPLI)	Per-operation volumes, peaks, special-day scenarios
Scope selection (Apigee Subscription)	Postman Collection Generation, approval evidence package	Approved scope set
Intake summarisation	Environment Progression	Scrum team allocation, priority, sprint — determines whether the partner is gated to Innovation only
Environment Progression	Apigee Subscription	Which environment is unlocked for the next subscription

5. Skill Inventory

Type column — M: master skill with sub-skills · S: standard skill · Sub: sub-skill of the master immediately above it. Phase column indicates the integration maturity at which each skill reaches full capability.

5.1 Onboard360AI — master agent skills

Skill	Type	Purpose	Integration target	Phase
Welcome & scope framing	S	Greets the partner and states plainly what the self-service assistant does and does not cover	—	P1
Eligibility determination	S	Establishes onboarding eligibility status before any other activity	—	P1
Routing logic	S	Routes to the POC or implementation branch and selects the next sub-agent	—	P1
Onboarding journey state tracker	S	Maintains what has been completed, what is outstanding, and what is gated	—	P2

5.2 Sub-agent 1 — POC Assistance

Skill	Type	Purpose	Integration target	Phase
Intake-free activity catalogue	M	Lists everything a partner may do in POC without raising an intake	Confluence / KB	P1
Apigee Innovation API connectivity	Sub	How to connect to Innovation APIs through Apigee without an intake	Apigee · ICMP & iDocs APIs	P3
Document ingestion (POC)	Sub	Ingesting documents into ICMP during a POC	Confluence / KB	P2
Search & read documents	Sub	Search and retrieval operations available in POC	Confluence / KB	P2
ICMP UI access guidance	Sub	How to obtain ICMP UI access for POC purposes	Confluence / KB	P1
Documentation pointers	S	Directs the partner to the correct reference material for each POC activity	Confluence / KB	P1

Future extension — each POC activity becomes its own skill, invoked from within the POC master skill, giving per-activity depth without changing the sub-agent.

5.3 Sub-agent 2 — Intake Verification

Skill	Type	Purpose	Integration target	Phase
LJKX key format validation	S	Validates the Jira intake key against the ICMP format rules before any tool call is made	Local	P1
Duplicate-intake prevention	S	Guides the partner to verify no intake already exists for them, their team, or the ICMP team	Confluence / KB	P1
ECM intake creation walkthrough	S	Drives the partner through creating a new ECM intake when none exists	Confluence / KB	P2
Intake summarisation (scope interpretation)	S	Interprets the intake rather than reformatting it — identifies the actual onboarding scope, prioritisation, priority, sprint number and allocated scrum team, which vary per intake	Jira MCP	P3
Unresolved & unlinked field handling	S	Handles fields on the intake that are missing, incomplete or unlinked	Jira MCP	P3

Jira key validation rules

Rule	Valid examples	Invalid examples
Project key must be exactly LJKX · must contain a hyphen · must have a numeric value after the hyphen	LJKX-1234 LJKX-567 LJKX-1	1234 (no project key) ABZD1234 (wrong key, no hyphen) LJKX (no number) LJKX1234 (no hyphen) TEST-5678 (wrong project key)

Tool execution sequence

Step	Action	Outcome handling
1	Jira MCP → get_issue, passing the validated Jira key	On success, proceed to step 2.
2	Build the onboarding intake summary	Include intake number, summary, status, reporter/assignee, priority, description, and any unresolved element information.
Error	Jira MCP → get_project, passing the project key	If the project returns nothing, the likely causes are (a) the partner lacks access to that project, or (b) the project key is wrong. Report the diagnosis rather than a raw error.
Close	Present the consolidated summary	—

5.4 Sub-agent 3 — Foundational Setup

Skill	Type	Purpose	Integration target	Phase
ICMP Foundations	M	What ICMP is, what features exist, and how to use them. Per-feature sub-skills are optional and added only where a feature warrants depth.	Confluence / KB	P2
ICMP Capabilities Catalogue	S	Maintains the complete, current list of ICMP capabilities so partners can identify what they actually need	Confluence / KB	P2
Repository Support	M	Establishes unambiguously which ICMP repository the partner requires	Confluence / KB	P2
ICMP FileNet	Sub	Primary repository	Confluence / KB	P2
Documentum	Sub	Downstream repository	Confluence / KB	P2
DMS	Sub	Downstream repository	Confluence / KB	P2
MARS	Sub	Downstream repository	Confluence / KB	P2
Legacy repositories	Sub	Other legacy repository support	Confluence / KB	P2
Marketplace access	S	Obtaining Apigee marketplace access — a hard prerequisite to subscribing to ICMP APIs	Apigee Marketplace	P3
Service account provisioning	M	Why service accounts are required and how to obtain them	ART	P3
QAEnt service account	Sub	Non-production service account creation via ART	ART	P3
ADEnt service account	Sub	Production service account creation via ART	ART	P3
User access provisioning	M	Human user access to environments and LDAP groups	ART / AIMS	P3
QAEnt user access	Sub	Non-production user access — requested through ART	ART	P3
ADEnt user access	Sub	Production user access to LDAP groups — requested through AIMS	AIMS	P3
BAM lookup	S	Retrieves application name, Remedy ID and App ID from Business Application Management	BAM	P3
Venafi certificates	S	Obtaining application certificates for non-production and production	Venafi	P3
Ownership & Support Assessment	S	Collects the organisational metadata around the partner application, reused downstream	Confluence / KB	P2

Why service accounts are required

ICMP APIs are consumed by applications, not by individuals. Integrations therefore require accounts that are non-human, non-expiring, dedicated to the application, and not tied to any specific user. The service account carries:

- Application authentication
- API access
- Apigee consumer application association
- Security group membership
- Auditing
- Operational support

The service account must be added to the LDAP groups provided by ICMP resources during onboarding. Which groups apply depends on the access type required, the APIs in scope, and the operations to be performed — this is a determination made during onboarding, not a fixed list.

Access routing — ART versus AIMS

Request type	ADEnt (production)	QAEnt (non-production)
Service account creation and group addition	ART	ART
User access	AIMS	ART

All service accounts route through ART regardless of environment. The split is by request type, not by environment: only human user access to ADEnt LDAP groups goes through AIMS.

Certificate requirements

Certificates establish trust between partner applications and ECM / ICMP services.

Business rule — certificates are required when the partner needs any of:

- Kafka notification subscriptions — applications connecting to Kafka topics to consume ICMP request notifications or document notifications
- ICMP streaming services — for example document staging or document retrieval
- Any API involving streaming

Environment	Certificate subject
Non-Production	CN = EREP, OU = TESTAPP, OU = EREP, OU = ECS, O = Wells Fargo, C = US
Production	CN = EREP, OU = APP, OU = EREP, OU = ECS, O = Wells Fargo, C = US

The full certificate subject must be retained — no truncation. The only differentiator between environments is the second element: OU = TESTAPP for non-production, OU = APP for production. Both certificates are collected in a single agent prompt, and each accepts NOT AVAILABLE as a legitimate answer — the Venafi request then becomes a downstream action item rather than a hard stop.

ICMP capabilities catalogue

Content operations	Notification operations	Records operations
• Document ingestion / archival • Search and retrieval • Document download • Document export	• Request notification subscription • Document notification subscription • Package notification subscription • ICMP Viewer integration (IVaaS)	• Retention on new and DAU documents • Legal hold application • Legal hold removal • Retention event updates

The catalogue is extensible — this is the base set. It drives scope selection, group membership and certificate requirements downstream.

Ownership & Support Assessment — fields collected

Field	Used by
Primary support team	Email notification triggers · Production Release Transition page
Escalation team	Email notification triggers · Production Release Transition page
Production support team	Production Release Transition page
Architect	Approval and handoff points

Field	Used by
Project manager	Approval and handoff points
All application systems involved in the flow	Production Release Transition page
Owner of the end-to-end business flow	Approval and handoff points

5.5 Sub-agent 4 — Volume Assessment

Applies to net-new partners archiving documents into ICMP or downstream repositories, and equally to existing partners introducing additional document sets or volume — anything that increases total document volume or ICMP service/API call count.

Skill	Type	Purpose	Integration target	Phase
Volume rationale & stakes	S	Explains why volume is being collected and what happens if it is wrong — answered from the skill's own knowledge, not deferred	Confluence / KB	P1
Per-operation volume collection	M	Collects the volume profile separately for each operation rather than as a single aggregate	Local	P1
Special-day & growth profiling	S	Captures recurring deviations and projected growth separately from baseline	Local	P1
IVaaS / ICMP UI user profiling	S	Collects new user counts and minimum, average and peak concurrent users where the UI or Viewer service is used	Local	P1
Estimation & buffer guidance	S	Drives an educated estimate plus buffer where the partner has no concrete figures	Confluence / KB	P1
Capacity planning ticket creation	S	Populates and raises the capacity planning ticket for the assigned ICMP scrum member	Jira MCP — create	P3

Behavioural requirement

The sub-agent does not merely collect. Its skills must answer the partner's questions while collecting — both rationale questions (why is this being asked, what is it used for) and generic ICMP questions raised mid-collection, handled inline without losing collection state. This is the design difference from a plain form: partners abandon volume questionnaires they do not understand, so the skill carries the reasoning alongside the fields.

Fields collected per operation

Operations include ingestion, search, retrieval and any other operation in scope.

Field	Detail
Document volume per hour	—
Documents per request	—
Document size	Minimum / maximum / average, in KB or MB
Pages per document	Minimum / maximum / average
Peak volume	Hourly and daily
Concurrent users	Upstream system application, or ICMP UI
Traffic pattern	Batch (periodic) versus live / synchronous
Monthly total volume	—
Special-day scenarios	Recurring deviations — e.g. first day or first week of month at +20–30% over average, annual closing periods, other cyclical spikes
Projected growth	Anticipated volume increase over time
IVaaS / ICMP UI additions	New users onboarding · concurrent users at minimum, average and peak

Rationale content the skill must carry

- Volumes drive the load testing performed before the partner goes live in production
- ICMP handles millions of requests per day across all lines of business
- If actual volume exceeds what was declared and ICMP services degrade, the blast radius is enterprise-wide — every LOB and every upstream and downstream system on ICMP is affected, not only the partner who under-declared
- Required fidelity: peak volumes at hourly and daily granularity, plus the normal-business-hours profile
- Enforcement consequence: if volume exceeds what was approved and declared, the ICMP platform support team can disable the subscription

Handling "we do not know our volume"

Never accepted as a terminal answer. The skill pushes for a number:

- Educated estimate based on comparable systems or business projections
- Add a 20–30% buffer on top
- Confirm load testing is performed end-to-end, not ICMP-only

This applies equally to net-new businesses with no historical data — an estimate with buffer is always preferable to a blank.

Volume-change obligation

A forward-looking obligation communicated at collection time, not discovered later. If the partner's volume grows beyond what was previously submitted and approved, a new ICMP intake is required — to the LJKX project, the same as the original onboarding intake — before that volume is enabled.

- ICMP re-runs load testing with the additional volume layered on top of all existing volume across all operations. The test is never partner-isolated, because the risk is cumulative.
- An anticipated increase of roughly 5–10% over the declared baseline triggers the obligation; the exact trigger scales with the partner's overall volume.
- Uncertainty does not exempt the partner. If they do not know whether the increase is material, they still create the intake. ICMP evaluates and decides whether additional SPLI is required before enabling the volume — that judgement belongs to ICMP, not the partner.

This closes the obvious loophole: a partner who declares estimates upfront might otherwise treat those estimates as permanently sufficient. The agent makes the ongoing obligation explicit while the partner is paying attention. It is restated in the capacity planning ticket and referenced at Environment Progression sign-off.

5.6 Sub-agent 5 — Load Testing (SPLI)

System Performance Load Ingestion Testing. Promoted out of Volume Assessment because it does substantially more than transcribe volumes.

Skill	Type	Purpose	Integration target	Phase
Test case derivation	S	Identifies and derives test cases from the collected volume profile	Local	P2
Load test template mapping	S	Maps the required information into the load testing team's existing templates and defined use cases	SPLI templates	P2
SPLI requirement package	S	Assembles the complete package beyond volume that the load testing team requires	Confluence / KB	P2
SPLI ticket creation	S	Raises the load testing ticket with the full package attached	Jira MCP — create	P3

5.7 Sub-agent 6 — Apigee Subscription

Skill	Type	Purpose	Integration target	Phase
Consumer application creation / modification	S	Creating a new consumer application or modifying an existing one in the Apigee marketplace. All new consumer applications must be created in NGDC.	Apigee Marketplace	P3
App Identifier population & validation	S	Ensures the App Identifier holds the correct service account before submission	Apigee Marketplace	P3
Environment ↔ service account mapping	S	Maps the target environment to the correct service account and enforces the naming convention	Confluence / KB	P2
Scope selection & permission explanation	S	Drives scope selection and explains why scopes are permissions, not metadata	Marketplace docs	P2
Subscription tier identification	S	Recommends the volume-appropriate tier; excludes legacy tiers; flags restricted tiers	Marketplace docs	P2
Subscription form completion & submission	S	Answers the question set, fills and submits the subscription form	Apigee Marketplace	P3
Approval evidence package	S	Assembles the screenshot evidence required for approval	Confluence / KB	P1

Prerequisites

- Marketplace access — required before subscribing to ICMP APIs
- Consumer application — created new or modified from existing, in the Apigee marketplace
- All new consumer applications must be created in NGDC (Next Generation Data Center). Existing and legacy applications sit in the Heritage data center; new applications must not go there.
- BAM App ID — required. The Remedy ID threads through consumer application registration, application ownership identification, access provisioning, subscription management and operational support.
- Marketplace documentation is the source of truth. It changes over time, so this skill must always reflect the currently published documentation rather than hardcoded steps.

App Identifier rule

The API marketplace presents App Identifier as optional. For ICMP it is mandatory. It must hold the service account that will invoke the APIs, and must be populated correctly before the subscription is submitted for approval. Other applications may use a different convention for this field — ICMP does not.

Environment and service account mapping

Environment	Purpose	Service account
Innovation	Development and POC	QAEnt
Non-Prod	Integration testing, UAT, load testing	QAEnt
Production	Live	Production
ProdFix	Production replicate — ICMP-internal validation of code immediately before the production move	Production (ICMP internal only)

ProdFix is not open to partners. It exists for ICMP internal teams and does not appear in the partner-facing progression ladder. Service account names must encode the environment — innovation / non-prod / prod — so they are identifiable at a glance. Production accounts remain separate from innovation and non-prod accounts even though creation runs through the same tool (ART).

Scope selection rules

Mandatory and consequential. Wrong, unauthorised or unapproved scope selection leads to rejected subscriptions. ICMP enforces security validation against the approved scope at runtime — a partner cannot select one scope and use another later.

Failure modes the agent must state plainly: operation checks fail · API access denied · subscription approval rejected.

The agent must explain the reason: scopes are not metadata — they are permissions granted to the consumer application.

Subscription tiers

Tier category	Rule
Standard tiers	Recommended on the basis of the volume profile produced by the Volume Assessment sub-agent
Legacy tiers	Must not be selected for ICMP, even though they remain visible in the Apigee marketplace
Restricted tiers — Diamond, Emerald, Top Tier	Require special request, prior discussion and approval before use

Approval evidence requirements

The partner must supply two screenshots:

- Subscription details showing the App Identifier field with the QAEnt or ADEnt App ID value
- Selected scopes and the subscription configuration

Rationale the agent should convey — the onboarding and support partners granting approval have no visibility into these details themselves, so the screenshots are the only evidence available. The partner reviews them before submitting.

5.8 Sub-agent 7 — Postman Collection Generation

Skill	Type	Purpose	Integration target	Phase
Scope-driven collection build	S	Builds the sample collection from the approved scope, so it contains only what the partner is permitted to call	Local generator · ICMP & iDocs APIs	P3
Environment variable seeding	S	Seeds the collection with the correct environment, service account and endpoint values	Local generator · ICMP & iDocs APIs	P3

Skill	Type	Purpose	Integration target	Phase
Download delivery	S	Delivers the collection to the partner for download	Local tool	P3

Invoked after subscription approval. Consumes the approved scope selection as input — which is what makes it accurate rather than generic.

5.9 Sub-agent 8 — Environment Progression

Skill	Type	Purpose	Integration target	Phase
Progression gating rules	S	Enforces the environment ladder and prevents skipping	Confluence / KB	P2
Per-environment sign-off capture	S	Captures partner sign-off confirming successful connectivity before the next environment opens	Jira MCP	P3
Scrum-team dependency check	S	Determines whether a dedicated scrum team is assigned, which governs what the partner may subscribe to	Jira MCP	P3
Volume-change obligation notice	S	Restates the ongoing obligation to raise a new intake when volume grows beyond the declared baseline	Confluence / KB	P1

Progression rules

- Without a dedicated scrum team assigned, a partner may subscribe in Innovation only — not non-prod, not production
- For partners heading to production the order is fixed: Innovation → approval and partner sign-off confirming successful connectivity → Non-Prod → Production
- No environment may be skipped
- ProdFix sits outside the partner ladder — it is ICMP-internal

6. Integration Maturity Model

Every skill is authored so that the instruction body and the eventual tool call are swappable without rewriting the skill. This is what makes the phase progression a configuration change rather than a rebuild.

Phase	Mode	Agent behaviour	Systems at this phase
Phase 1	Link out	The skill returns Confluence page links and knowledge-base article links. The partner reads and self-serves. No system integration is required. This is the fastest path to a working agent.	BAM · Venafi · ART · AIMS · Apigee Marketplace · ECM intake docs
Phase 2	Read & guide	The agent reads the Confluence pages, answers partner questions directly, and guides step-by-step through the process. Documentation remains the source of truth. No write access to target systems.	Marketplace documentation · SPLI templates · ICMP capability and repository documentation
Phase 3	Direct integration	MCP servers or system-native APIs. The agent reads from and writes to systems, performs validation live, and raises tickets programmatically. Full closed-loop automation.	Jira MCP (live today) · Apigee · BAM · ART · AIMS · Venafi

Runtime disclosure: at every phase, the component states its current integration state and its next phase in its opening message. The phase model is visible to the partner, not only to the implementer.

6.1 Integration target register

System	What it provides	Current state	Target state
Jira	Intake retrieval, capacity planning tickets, SPLI tickets	MCP available — get_issue, get_project in use	Add create_issue for capacity planning and SPLI tickets
Apigee Marketplace	Consumer applications, subscriptions, scopes, tiers	No integration — instructions and links	MCP or API integration for subscription lifecycle
BAM	Application name, Remedy ID, App ID	No external integration — instructions	MCP or API integration
Venafi	Application certificates, non-prod and production	No integration — instructions	API integration
ART	Service account creation and group addition, both environments	No integration — instructions	API integration
AIMS	User access to LDAP groups in ADEnt	No integration — instructions	API integration
Confluence / KB	Source of truth for all documented procedure	Links returned (Phase 1)	Read and reason over pages (Phase 2)
Postman generator · ICMP & iDocs APIs	Scope-accurate collection build	Local tool, live	Local tool, live
ICMP & iDocs APIs	Direct document operations — ingest, search, retrieve, notifications, iDocs document services	Available (P3)	Extend coverage across the full capability catalogue
Local tools (Tachyon SDK)	Validation, payload assembly, journey state read/write	Available (P3)	Extend as new skills require

Recurring pattern across the architecture — BAM, Venafi, ART, AIMS, the marketplace and the approval process are all instructions-first, integration-later. Building the skills with a swappable instruction body is what keeps the eventual integration cheap.

7. Business Rules Register

ID	Area	Rule	Enforced by
BR-01	Intake	Jira intake key must be exactly LJKX, contain a hyphen, and have a numeric value after the hyphen	Intake Verification
BR-02	Intake	Partners unsure whether an intake exists must verify before creating one, to avoid duplicate onboarding requests	Intake Verification
BR-03	POC	POC requires no intake, no LOB prioritisation and no scrum team; it is entirely self-service	Onboard360AI · POC Assistance
BR-04	Consumer app	All new consumer applications must be created in NGDC, not the Heritage data center	Apigee Subscription
BR-05	Consumer app	Marketplace documentation is the source of truth and the skill must always reflect the current published version	Apigee Subscription
BR-06	App Identifier	Mandatory for ICMP even though the marketplace presents it as optional; must hold the service account and be populated before submission	Apigee Subscription
BR-07	Service accounts	ICMP APIs are consumed by applications, not individuals — accounts must be non-human, non-expiring, dedicated and not tied to a user	Foundational Setup
BR-08	Service accounts	All service account creation and group addition routes through ART, for both ADEnt and QAEnt	Foundational Setup
BR-09	User access	ADEnt user access to LDAP groups routes through AIMS; QAEnt user access routes through ART	Foundational Setup
BR-10	Service accounts	Service account names must encode the environment (innovation / non-prod / prod)	Foundational Setup
BR-11	Certificates	Required when the partner needs Kafka notification subscriptions, ICMP streaming services, or any streaming API	Foundational Setup
BR-12	Certificates	Two sets required — non-prod and production. The full certificate subject must be retained.	Foundational Setup
BR-13	Scope	Scope selection is mandatory. ICMP performs runtime security validation against the approved scope; a scope cannot be selected and then exceeded.	Apigee Subscription
BR-14	Tiers	Legacy tiers must not be selected for ICMP even though they remain visible in the marketplace	Apigee Subscription
BR-15	Tiers	Diamond, Emerald and Top Tier are restricted and require special request, prior discussion and approval	Apigee Subscription
BR-16	Approval	Two screenshots required — App Identifier with the QAEnt/ADEnt App ID value, and the selected scopes with subscription configuration	Apigee Subscription
BR-17	Progression	Without a dedicated scrum team, the partner may subscribe in Innovation only	Environment Progression
BR-18	Progression	Environment order is fixed — Innovation → sign-off → Non-Prod → Production. No environment may be skipped.	Environment Progression
BR-19	Volume	Volume must be declared per operation; "we do not know" is not accepted — an educated estimate plus a 20–30% buffer is required	Volume Assessment
BR-20	Volume	Exceeding approved and declared volume allows the ICMP platform support team to disable the subscription	Volume Assessment

ID	Area	Rule	Enforced by
BR-21	Volume	Anticipated growth of roughly 5–10% over the declared baseline requires a new LJKX intake before the volume is enabled; uncertainty does not exempt the partner	Volume Assessment · Environment Progression
BR-22	Volume	Load testing must be performed end-to-end, not ICMP-only	Load Testing (SPLI)
BR-23	Disclosure	Every agent and skill states in its opening message what is integrated today and what the next phase adds	All agents and skills
BR-24	Scope	MVP 1 is extensible; requests beyond current scope are named as not yet covered, with today's alternative given, rather than worked around	Onboard360AI

8. Glossary

Term	Expansion	Role in this architecture
ICMP	Imaging Content Management Platform	The platform partners are onboarding to
iDocs Canvas	—	Enterprise document intelligence platform hosting the agent architecture
Tachyon SDK	—	Enterprise-internal SDK the Platform Specialist Agent is built on
SSAT	Strategic Services & Advanced Technology	Team that would receive an intake for a non-POC engagement
LJKX	—	The Jira project key for all ICMP onboarding and volume-change intakes
Apigee	—	Google Cloud enterprise API management platform; hosts the API marketplace
BAM	Business Application Management	Source of application name, Remedy ID and App ID
Venafi	—	Certificate management — issues application certificates
ART	Access Request Tool	Service account creation and group addition, both environments
AIMS	Access and Identity Management System	User access to LDAP groups in ADEnt
ADEnt	—	Production environment
QAEnt	—	Non-production / QA environment
ProdFix	—	Production replicate for ICMP-internal pre-production validation; not partner-facing
NGDC	Next Generation Data Center	Where all new consumer applications must be created
Heritage DC	—	Legacy data center; new applications must not be created there
IVaaS	ICMP Viewer as a Service	ICMP Viewer integration offered as a service
SPLI	System Performance Load Ingestion Testing	Load testing performed before production go-live
DAU	—	Existing document population referenced in retention operations
MARS	—	One of the downstream repositories ICMP supports
LOB	Line of Business	Prioritisation and impact boundary
MVP 1	—	Current release scope; extensible with further skills and agents
IVaaS	ICMP Viewer as a Service	ICMP Viewer integration offered as a service; triggers user-concurrency collection at Volume Assessment

9. Open Items for Review

#	Item	Why it matters
1	Confirmation that CN = EREP is literal rather than an application placeholder	A malformed certificate subject fails at request time, and the failure is not obvious to the partner.
2	Population of the scrum team to Jira project key mapping page	Capacity planning and SPLI tickets are created in the allocated scrum team's project, resolved from the intake. Until the mapping exists, resolution falls through to asking the partner.
3	Full list of operations for per-operation volume collection beyond ingestion, search and retrieval	Determines the shape of the volume collection form and the derived SPLI test cases.
4	Whether the ICMP Foundations master skill needs per-feature sub-skills in MVP 1	Currently optional. Adding them later does not change the sub-agent, only the skill tree.
5	Exact volume-increase threshold per partner tier	Captured as roughly 5-10%; the trigger scales with overall volume and may warrant a stated table.
6	Confluence and knowledge-base URLs for all reference materials	Every referenceMaterials entry in the import package is a placeholder of the form <CONFLUENCE_URL:...> and must be replaced before import.
7	Which MVP 2 skills and agents complete the fully self-serviceable, workflow-driven target state	Determines whether the current sub-agent contracts hold, or whether any need widening before further build.

9.1 Closed since base version

Item	Resolution
Jira MCP write access	Confirmed available. create_issue is bound to Volume Assessment and Load Testing (SPLI). Project key is resolved per scrum team from the intake, never LJKX and never guessed.
ART / AIMS boundary	Resolved and encoded as a dedicated skill. The boundary is by request type, not environment: all service accounts through ART in both environments; human user access through ART for QAEnt and AIMS for ADEnt.
Load testing acronym	SPLI — System Performance Load Ingestion Testing.
Viewer service acronym	IVaaS — ICMP Viewer as a Service.
Platform naming	iDocs Canvas.
Onboard360AI position	Master Onboarding Agent, and itself a sub-agent of the Platform Specialist Agent.