

CI/CD and DevOps in 3 Weeks

Week 3

Revision 1.5 – 11/13/22

Tech Skills Transformations LLC / Brent Laster

Before you start: Make sure you did the "homework" from last week to setup your token and secret

Lab 9: Working with fast feedback and automatically reporting issues


Purpose: Learning how to get fast feedback and automatic failure reporting in our pipeline

1. Start out in the "greetings-ci" repository in GitHub under your primary GitHub userid, and in the main branch.
2. We're going to create a new workflow that will be able to automatically create a GitHub issue in our repository. And then we will invoke that workflow from our current workflow. The workflow to create the issue using a REST API call is already written to save time. It is in the main project under "extra/create-failure-issue.yml". You need to get this file in the .github/workflows directory. To do that, you can clone and move it. Or you can just do it via GitHub with the following steps.
 - a. In the repository, browse to the "extra" folder and to the "create-failure-issue.yml" file.
 - b. Take a few moments to look over the file and see what it does. Notice that:
 - i. it has a workflow_dispatch section in the "on" area, which means it can be run manually.
 - ii. It has two inputs - a title and body for the issue.
 - iii. The primary part of the body is simply a REST call (using the GITHUB_TOKEN) to create a new issue.
 - c. Click the pencil icon to edit it.




- d. In the filename field, change the name of the file. Use the backspace key to backspace over "extra/" making sure to backspace over the word. Then type in the path to put it in the


workflows ".github/workflows/create-failure-issue.yml". (Backspace over *extra/* and type in *.github/workflows/* where it was.)

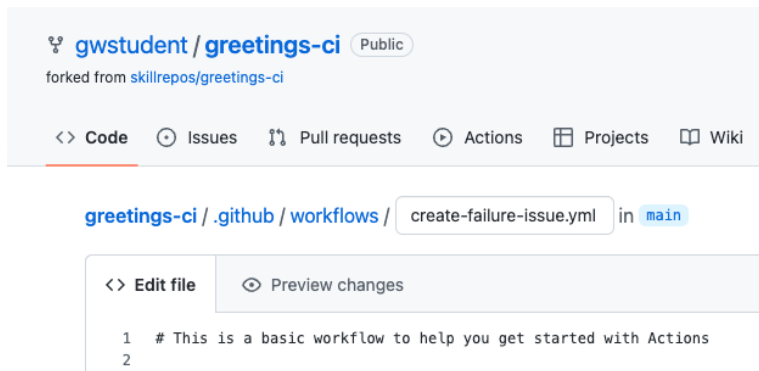


- e. To complete the change, scroll to the bottom of the page, and click on the green "Commit changes" button.

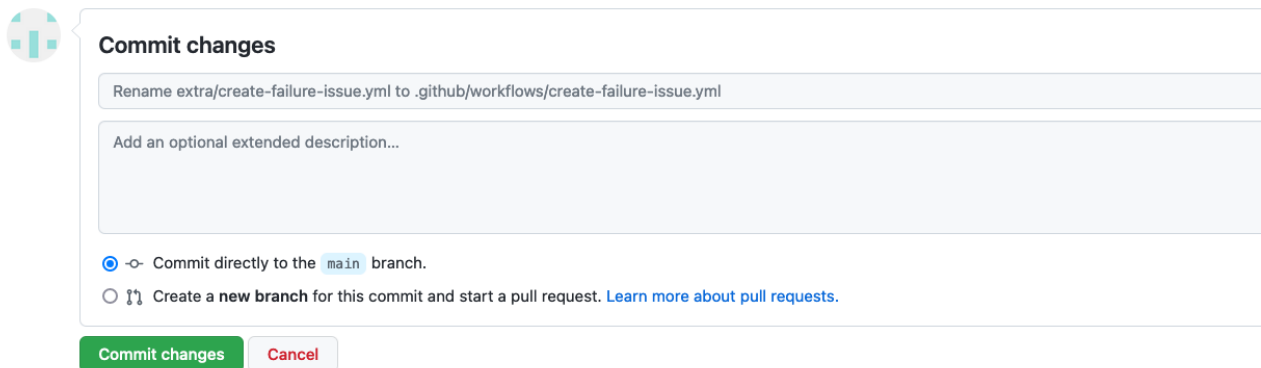

3. Go back to the Actions tab. You'll see a new workflow execution due to the rename. Also, in the Workflows section on the left, you should now see a new workflow titled "create-failure-issue". Click on that. Since it has a *workflow_dispatch* event trigger available, we can try it out. Click on the "Run workflow" button and enter in some text for the "title" and "body" fields. Then click "Run workflow".

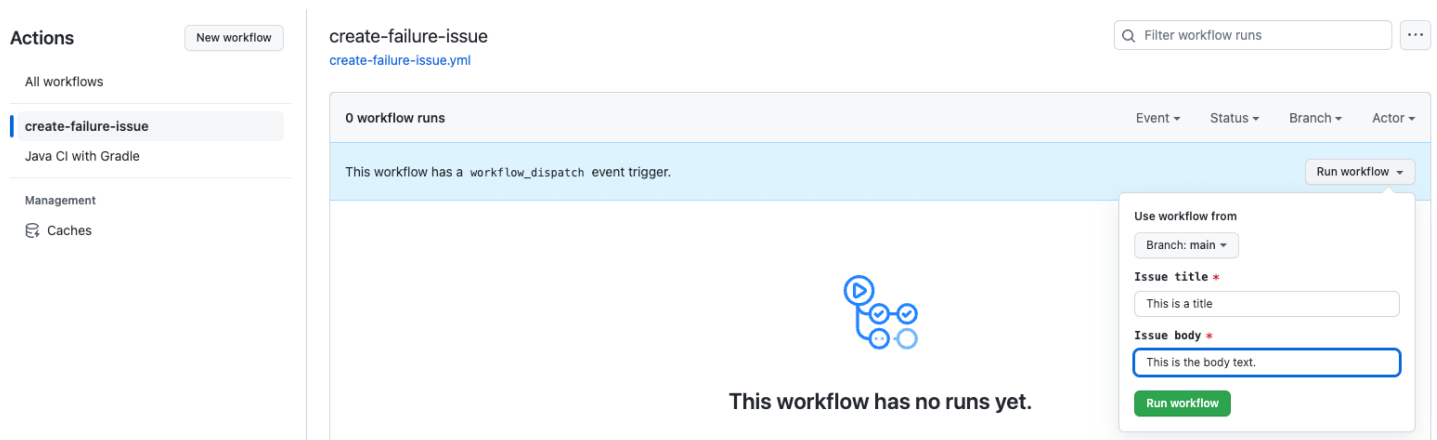

4. After a moment, you should see the workflow run start and then complete. If you now click on the Issues tab at the top, you should see your new issue there.

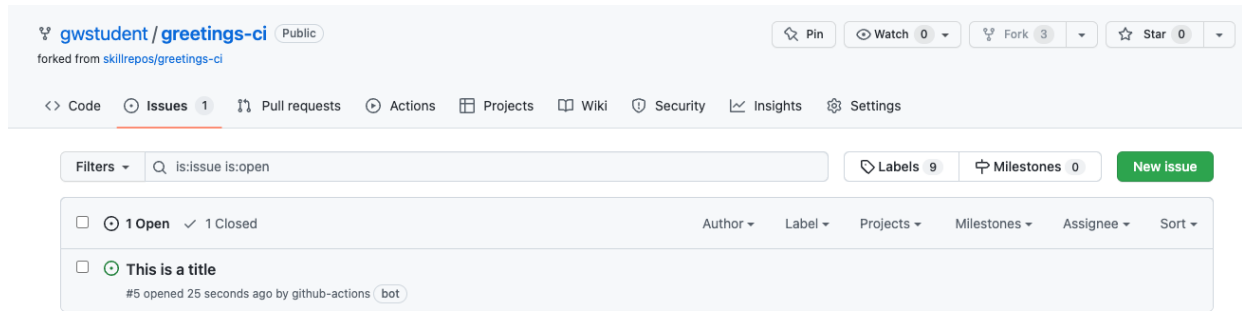

5. Now that we know that our new workflow works as expected, we can make the changes to the previous workflow to "call" this if we fail. Edit the *pipeline.yml* file and add the following lines as a new job and set of steps at the end of the workflow.

(For convenience, these lines are also in the file "extra/create-issue-on-failure.txt" if you want to copy and paste from there.)

The "create-issue-on-failure" job name should align with the "test-run" job name. See screenshot further down.

```
create-issue-on-failure:

  runs-on: ubuntu-latest
  needs: test-run
  if: always() && failure()
  steps:
    - name: invoke workflow to create issue
      run: >
        curl -X POST
        -H "authorization: Bearer ${ secrets.PIPELINE_USE }"
        -H "Accept: application/vnd.github.v3+json"
        "https://api.github.com/repos/${ github.repository }/actions/workflows/create-
        failure-issue.yml/dispatches"
        -d '{"ref":"main",
          "inputs":
            {"title":"Automated workflow failure issue for commit ${ github.sha }",
             "body":"This issue was automatically created by the GitHub Action workflow
** ${ github.workflow } **"}
          }'
```

```

57 |         name: greetings-jar
58 |         path: |
59 |             build/libs
60 |             test-script.sh
61 |
62 |
63 |     test-run:
64 |
65 |         runs-on: ubuntu-latest
66 |         needs: build
67 |
68 |         steps:
69 |         - name: Download candidate artifacts
70 |           uses: actions/download-artifact@v3
71 |           with:
72 |             name: greetings-jar
73 |
74 |         - name: Execute test
75 |           shell: bash
76 |           run: |
77 |             chmod +x ./test-script.sh
78 |             ./test-script.sh ${ needs.build.outputs.artifact-tag } ${ github.
79 |
80 |     create-issue-on-failure:
81 |
82 |         runs-on: ubuntu-latest
83 |         needs: test-run
84 |         if: always() && failure()
85 |         steps:
86 |         - name: invoke workflow to create issue
87 |           run: >
88 |             curl -X POST
89 |               -H "authorization: Bearer ${ secrets.PIPELINE_USE }}"
90 |               -H "Accept: application/vnd.github.v3+json"
91 |               "https://api.github.com/repos/${ github.repository }}/actions/workflows/${ github.workflow }/dispatches"
92 |               -d '{"ref": "main",
93 |                 "inputs":
94 |                   {"title": "Automated workflow failure issue for commit ${ github.sha }",
95 |                    "body": "This issue was automatically created by the GitHub Actions workflow"}'
96 |
97 |

```

- Commit your changes. After this is committed and the workflow runs, you can look at the output for the run and you'll see that the "create-issue-on-failure" job was skipped. That makes sense because we have the checks in the code and there was no failure on previous jobs.

feat: add create issue on failure Java CI with Gradle #38 Re-run all jobs ...

Summary

Jobs

- build
- test-run
- create-issue-on-failure

Triggered via push 7 minutes ago

gwstudent pushed 6e0a6b4 main **Success** 47s 1

pipeline.yml

on: push

```

graph LR
    build[build 25s] --> test-run[test-run 2s]
    test-run --> create-issue-on-failure[create-issue-on-failure 0s]

```

- To have this executed via the "if" statement, we need to have a failure. Let's try some different input with special characters that may not print out as expected. Go to the Actions menu, and then select our main "Java CI with Gradle" workflow. Click on the "Run workflow" button and enter text like

below: (that's two backslashes between the "de" and "f"). As long as you have two backslashes somewhere, this should fail.

abc de\\f ghi

The screenshot shows the GitHub Actions interface for a workflow named "Java CI with Gradle". On the left, a sidebar lists "All workflows" with a filter for "Java CI with Gradle" and a link to "create-failure-issue". The main area shows a list of 72 workflow runs. The first run is "Java CI with Gradle #72: Manually run by gwstudent2" with a green status. The second run is "fix: version 3" with a green status. The third run is "fix: version2" with a red status and a "main" branch label. The fourth run is "Java CI with Gradle" with a green status. A "Run workflow" button is visible in the top right corner of the workflow runs list.

- After the workflow run completes for this, there should be a failure in our testing. This will in turn, cause our other workflow to create an issue. You can verify the failure in testing by looking at the logs.

The screenshot shows the GitHub Actions interface for a workflow run named "Java CI with Gradle Java CI with Gradle #40". The "test-run" job is highlighted in the left sidebar. The main area shows the logs for the "test-run" job, which failed 3 minutes ago. The logs show the following steps: "Set up job" (2s), "Download candidate artifacts" (3s), "Execute test" (1s), and "Complete job" (0s). The "Execute test" step failed with the error message: "Error: Process completed with exit code 1." The logs also show the command "Run chmod +x ./test-script.sh" and the output "abc".

You can also verify the new issue got created as a result of the failure through the logs of that job and by looking in the Issues menu at the top.

<> Code Issues 5 Pull requests Discussions Actions Projects Wiki Security ...

Java CI with Gradle Java CI with Gradle #39 Re-run jobs ...

Summary

Jobs

- build
- test-run
- create-issue-on-failure**

create-issue-on-failure
succeeded 5 minutes ago in 1s

Search logs

> **Set up job** 0s

> **invoke workflow to create issue** 1s

```

1 Run curl -X POST -H "authorization: ***" -H "Accept: application/vnd.github.v3+json"
  "https://api.github.com/repos/gwstudent/greetings-ci/actions/workflows/create-failure-
  issue.yml/dispatches" -d '{"ref":"main",
2 curl -X POST -H "authorization: ***" -H "Accept: application/vnd.github.v3+json"
  "https://api.github.com/repos/gwstudent/greetings-ci/actions/workflows/create-failure-
  issue.yml/dispatches" -d '{"ref":"main",
3 "inputs":
4 {"title":"Automated workflow failure issue for commit
  3d1d1ca2a645955953cc2a6978aba577319dd2b7",
5 "body":"This issue was automatically created by the GitHub Action workflow **
  Java CI with Gradle **"}
6 }'
7 shell: /usr/bin/bash -e {0}
8 % Total % Received % Xferd Average Speed Time Time Time Current
9 Dload Upload Total Spent Left Speed
10
11 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
12 100 251 0 0 100 251 0 1024 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
13 100 251 0 0 100 251 0 1024 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

```

<> Code Issues 5 Pull requests Discussions Actions Projects Wiki Security ...

Automated workflow failure issue for commit 3d1d1ca2a645955953cc2a6978aba577319dd2b7 #7

Open github-actions bot opened this issue 4 minutes ago · 0 comments

github-actions bot commented 4 minutes ago

This issue was automatically created by the GitHub Action workflow **Java CI with Gradle**

Assignees

No one—assign yourself

Labels

None yet

Projects

None yet

Milestone

No milestone

Development

Create a branch for this issue or link a pull request.

Notifications

Customize

Write Preview H B I

Leave a comment

Attach files by dragging & dropping, selecting or pasting them.

Close issue Comment

Remember, contributions to this repository should follow our [GitHub Community Guidelines](#).

END OF LAB

Lab 10 – Securing inputs


Purpose: In this lab, we'll look at how to plug a potential security hole with our inputs.

1. Switch to the pipeline.yml file in the .github/workflows directory and look at the "test-run" job and in particular, this line in the "Execute test" step:

```
./test-script.sh ${ needs.build.outputs.artifact-tag || github.event.inputs.myVersion
}} ${ github.event.inputs.myValues }}
```

```
75
76 - name: Execute test
77   shell: bash
78   run: |
79     chmod +x ./test-script.sh
80     ./test-script.sh ${ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }} ${ github.event.inputs.myValues }}
81
82 create-issue-on-failure:
```

2. When we create our pipelines that execute code based on generic inputs, we must be cognizant of potential security vulnerabilities such as injection attacks. This code is subject to such an attack. To demonstrate this, use the workflow_dispatch event for the workflow in the Actions menu, put in a version and pass in the following as the arguments in the arguments field (NOTE: That is two backquotes around ls -la) ``ls -la``

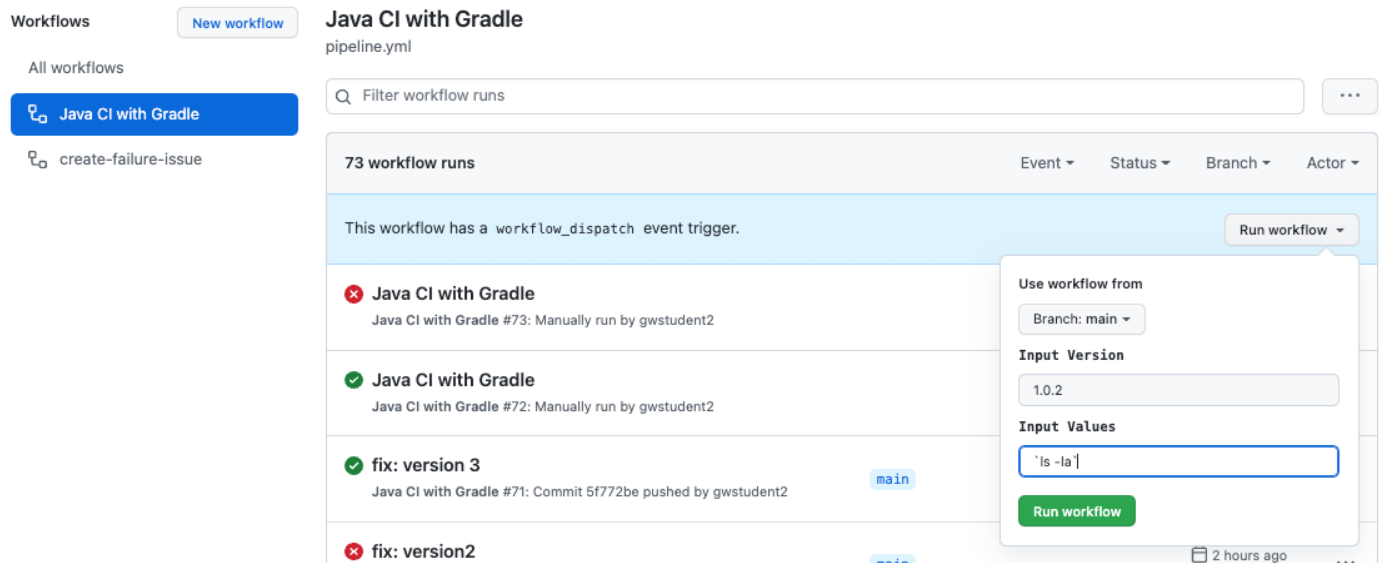

3. After the run completes, look at the output of the step. Notice that it ran successfully, but it has actually run the `ls -la` command directly on the runner system. The command was innocuous in this case, but this could have been a more destructive command.

Code Issues 6 Pull requests Actions Projects Wiki Security Insights

Java CI with Gradle Java CI with Gradle #46 Re-run all jobs

Summary

Jobs

- build
- test-run
- create-issue-on-failure

test-run
succeeded 1 hour ago in 2s

Search logs

- Set up job 1s
- Download candidate artifacts 0s
- Execute test 0s
 - Run `chmod +x ./test-script.sh`
 - total 16
 - drwxr-xr-x
 - drwxr-xr-x
 - drwxr-xr-x
 - 3
 - 3
 - 3
 - runner
 - runner
 - runner

- Let's fix the command to not be able to execute the code in this way. We can do that by placing the output into an environment variable first and then passing that to the step. Edit the *pipeline.yaml* file and change the code to look like the following (pay attention to how things line up):

```
env:
  ARGS: ${github.event.inputs.myValues}
run: |
  chmod +x ./test-script.sh
  ./test-script.sh ${needs.build.outputs.artifact-tag || github.event.inputs.myVersion} "$ARGS"
```

```
65 test-run:
66
67   runs-on: ubuntu-latest
68   needs: build
69
70   steps:
71   - name: Download candidate artifacts
72     uses: actions/download-artifact@v3
73     with:
74       name: greetings-jar
75
76   - name: Execute test
77     shell: bash
78     env:
79       ARGS: ${github.event.inputs.myValues}
80     run: |
81       chmod +x ./test-script.sh
82       ./test-script.sh ${needs.build.outputs.artifact-tag || github.event.inputs.myVersion} "$ARGS"
83
84   create-issue-on-failure:
85
86     runs-on: ubuntu-latest
87     needs: test-run
```

- Commit back the changes and wait till the action run for the push completes.
- Now, you can execute the code again with the same arguments as before.

Workflows New workflow **Java CI with Gradle**
pipeline.yml

All workflows

Java CI with Gradle

create-failure-issue

Filter workflow runs

75 workflow runs

Event Status Branch Actor

This workflow has a workflow_dispatch event trigger. Run workflow

- ✓ **fix: security update**
Java CI with Gradle #75: Commit 0f3f6df pushed by gwstudent2 main
- ✓ **Java CI with Gradle**
Java CI with Gradle #74: Manually run by gwstudent2
- ✗ **Java CI with Gradle**
Java CI with Gradle #73: Manually run by gwstudent2
- ✓ **Java CI with Gradle**

Use workflow from
Branch: main

Input Version
1.0.3

Input Values
`'ls -la'`

Run workflow

2 hours ago


7. Notice that this time, the output did not run the commands, but just echoed them back out as desired.

END OF LAB


Lab 11 – Separating out jobs into a separate action

Purpose: In this lab, we'll look at how to separate our testing job into a separate action.

- We're going to make our test script into a composite action. To do this, let's first create a new branch to work with called "test-action". In the "Code" tab, click on the branch dropdown that says "main". Then in the text area that says "Find or create a branch...", enter the text "test-action". Then click on the **"Create branch: test-action from 'main'"** link.

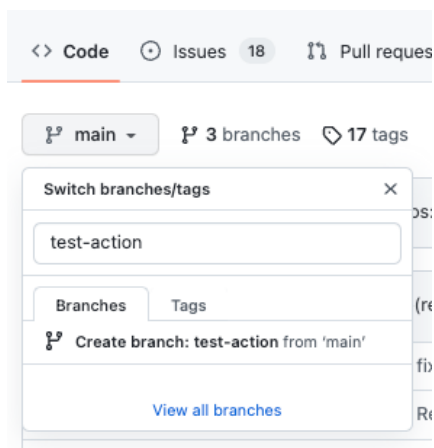

- You should now be on the "test-action" branch. The "test-script.sh" file will be the basis for our new composite action. So, let's move it to a separate local area for local actions. Select the test-script.sh file, edit it, and then add ".github/actions/test-action" to the path as shown below.

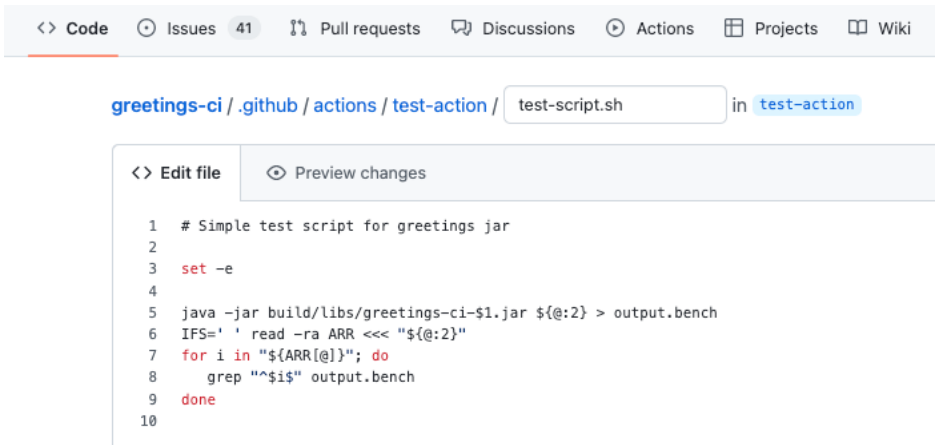


```
<> Code  Issues  41  Pull requests  Discussions  Actions  Projects  Wiki

greetings-ci / .github / actions / test-action / test-script.sh in test-action

<> Edit file  Preview changes

1  # Simple test script for greetings jar
2
3  set -e
4
5  java -jar build/libs/greetings-ci-$1.jar ${@:2} > output.bench
6  IFS=' ' read -ra ARR << "${@:2}"
7  for i in "${ARR[@]"; do
8      grep "^$i$" output.bench
9  done
10
```

3. Click on the green button to commit your changes. Notice that no workflows were kicked off because we don't have events defined in our workflow related to the "test-action" branch.
4. Now, let's create the action.yml file for our test action. You will need to create a new file in the path "greetings-ci/.github/actions/test-action" directory by going there, clicking on "Add file" and then clicking on "Create new file"

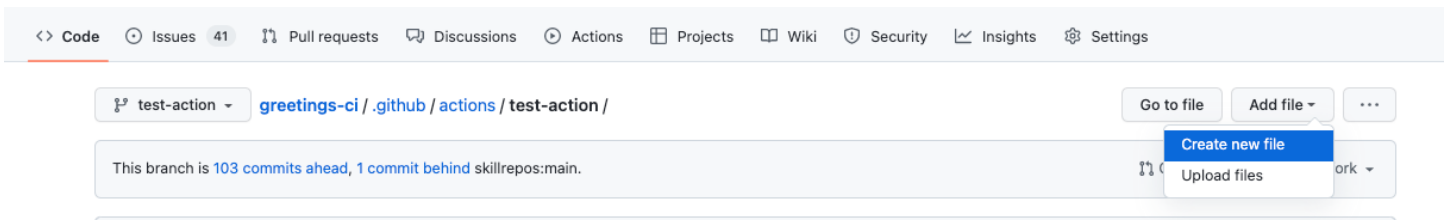

5. Name the new file "action.yml". For the file contents, you can either copy and paste from below or from the file at [extra/action.yml](#) Commit the file when done to the "test-action" branch.

```
name: 'Test Action'
description: 'Runs a simple execution to validate compiled built deliverable'
author: 'attendee'
inputs:
  artifact-version: # semantic version of the artifact from build
    description: 'built version of artifact'
    required: true
    default: '1.0.0'
  arguments-to-print: # rest of arguments to echo out
    description: 'arguments to print out'
runs:
  using: "composite"
  steps:
    - name: Download candidate artifacts
      uses: actions/download-artifact@v3
      with:
        name: greetings-jar
    - id: test-run
      env:
        ARGS: ${ inputs.arguments-to-print }
      run: |
        chmod +x ${ github.action_path }/test-script.sh
        ${ github.action_path }/test-script.sh ${ inputs.artifact-version } "$ARGS"
      shell: bash
```

greetings-ci / .github / actions / test-action / action.yml in test-action

<> Edit file Preview changes

```

1 name: 'Test Action'
2 description: 'Runs a simple execution to validate compiled built deliverable'
3 author: 'attendee'
4 inputs:
5   artifact-version: # semantic version of the artifact from build
6     description: 'built version of artifact'
7     required: true
8     default: '1.0.0'
9   arguments-to-print: # rest of arguments to echo out
10     description: 'arguments to print out'
11 runs:
12   using: "composite"
13   steps:
14     - name: Download candidate artifacts
15       uses: actions/download-artifact@v3
16       with:
17         name: greetings-jar
18     - id: test-run
19       env:
20         ARGS: ${ inputs.arguments-to-print }
21       run: |
22         chmod +x ${ github.action_path }}/test-script.sh
23         ${ github.action_path }}/test-script.sh ${ inputs.artifact-version } "$ARGS"
24       shell: bash
25
```

6. This is all we need for our basic composite action. Notice that we've essentially copied over a couple of steps into our composite action that were in the original workflow file. So, we can go back and modify the original workflow file to use our new action. Still in the "test-action" branch, edit the file "greetings-ci/.github/workflows/pipeline.yaml".

Replace the current steps of test-run, with the new set as shown below (checking alignment). Notice that we need to add a checkout action here to have the necessary pieces from our test-action directory present for the action to get to. Then we just call our new action passing in the parameters. **Commit the file when done.**


- uses: actions/checkout@v3
- name: run-test
 uses: ../.github/actions/test-action
 with:
 artifact-version: \${ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }
 arguments-to-print: \${ github.event.inputs.myValues }

```


65
66 test-run:
67
68   runs-on: ubuntu-latest
69   needs: build
70
71   steps:
72
73     - uses: actions/checkout@v3
74
75     - name: run-test
76       uses: ../.github/actions/test-action
77       with:
78         artifact-version: ${ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }
79         arguments-to-print: ${ github.event.inputs.myValues }
80
81 create-issue-on-failure:

```


7. Finally, let's merge in the "test-action" branch to the "main" branch. Click on the top-level "Pull requests" menu. You should see a yellow bar with text that indicates the "test-action" branch had recent pushes. Click on the green "Compare & pull request" button.

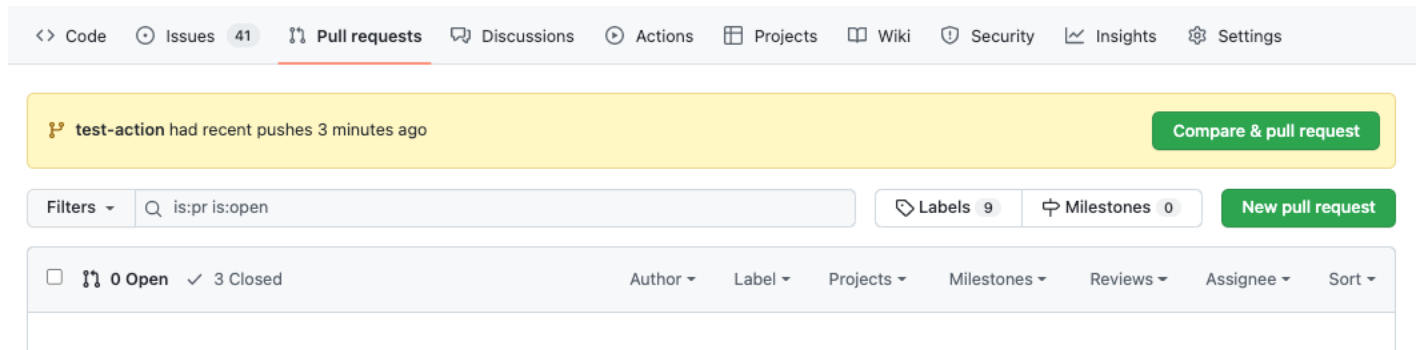


8. As we've done before, change the "base" portion to be the current repo. After this, it should show that you can merge from the "test-action" branch to the "main" branch. Fill in an appropriate comment and then click the green "Create pull request" button.

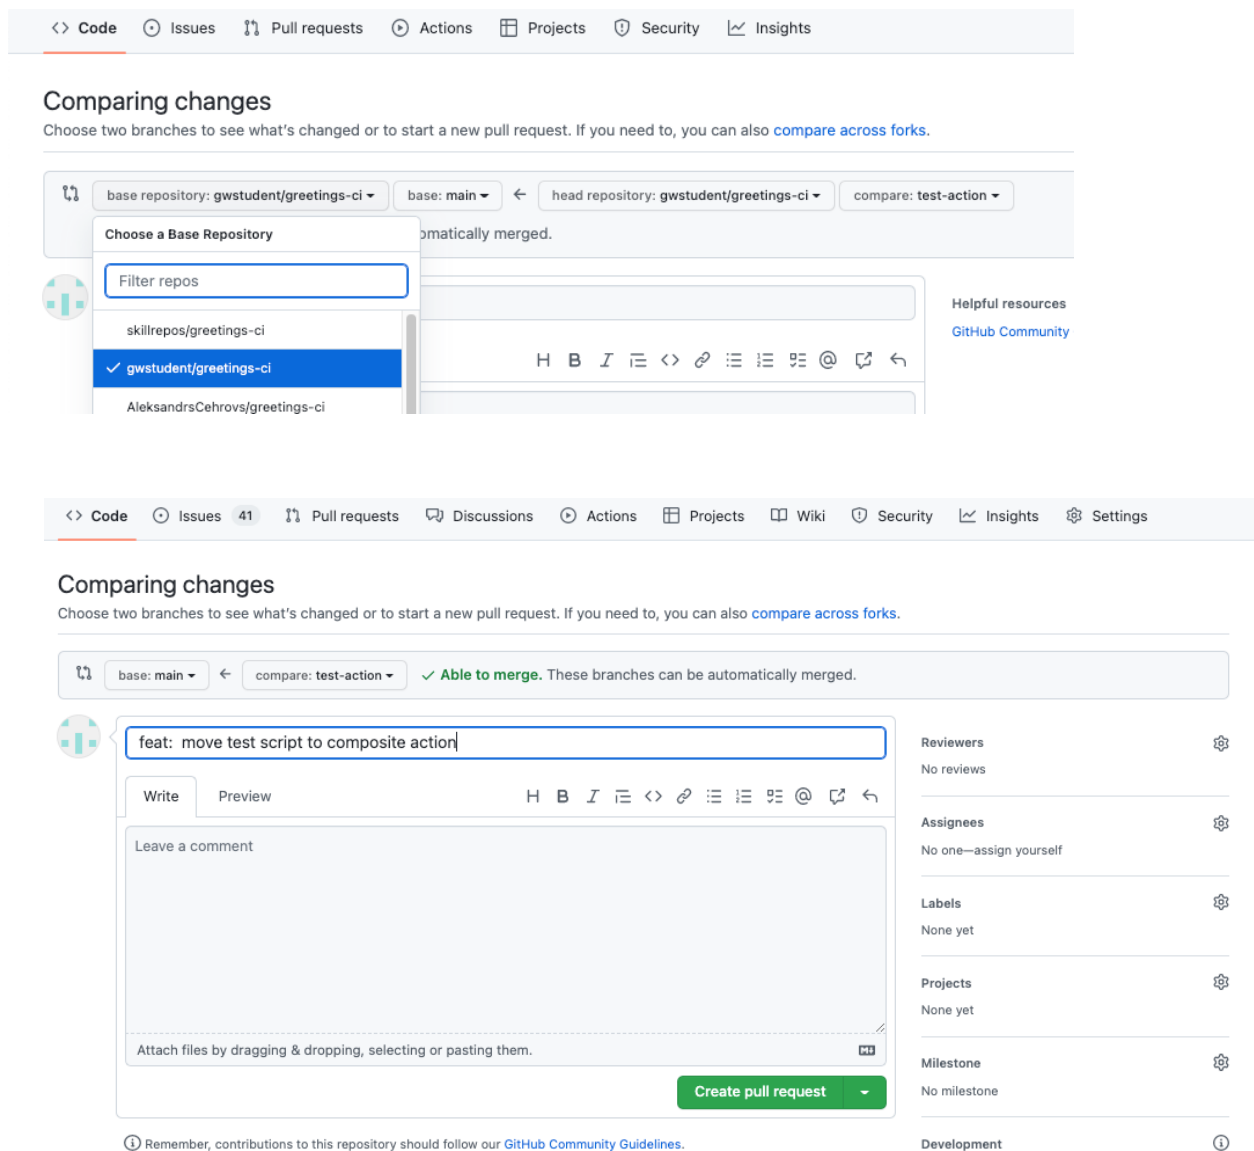

- With the Pull Request created, the automated merge checks should run and succeed. After that, you can click on the "Squash and merge" button to complete the merge. Confirm when asked. The merge should complete and the Pull Request should be closed.

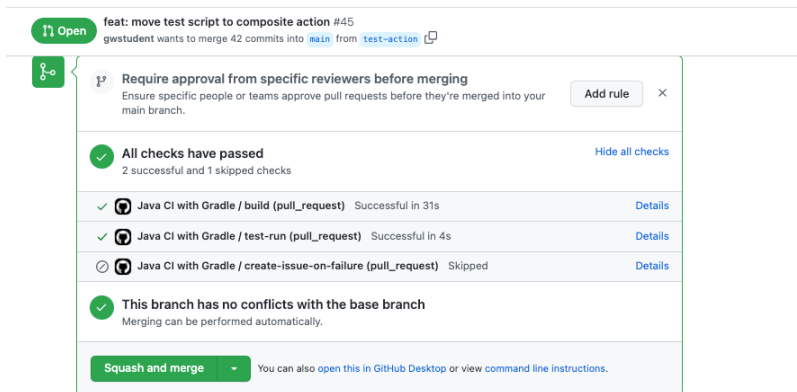

- A workflow run will have occurred because of the merge. But if you want to try out the merged code with the action more fully, you can do a manual workflow run as before.

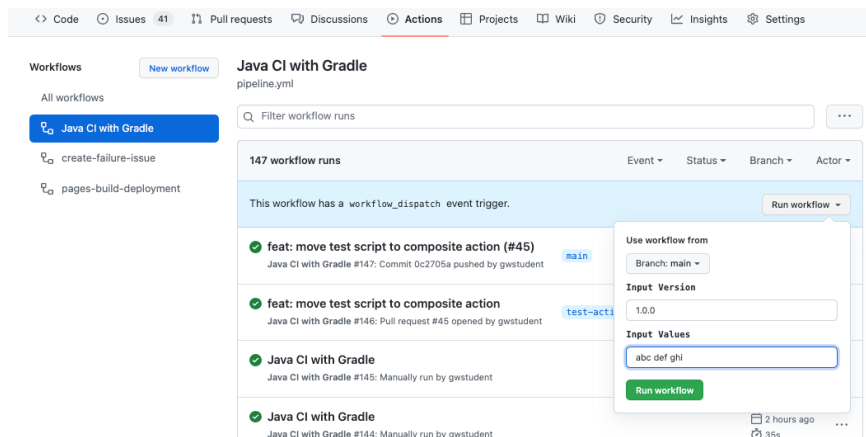


END OF LAB

Lab 12 – Adding Environments and Releases

Purpose: In this lab, we'll look at how to add staging (blue, green) and production environments and releases.

- Let's add some deploy jobs to our pipeline.yml file. Edit the .github/workflows/pipeline.yml file. For simplicity, we can just do this in the main branch.

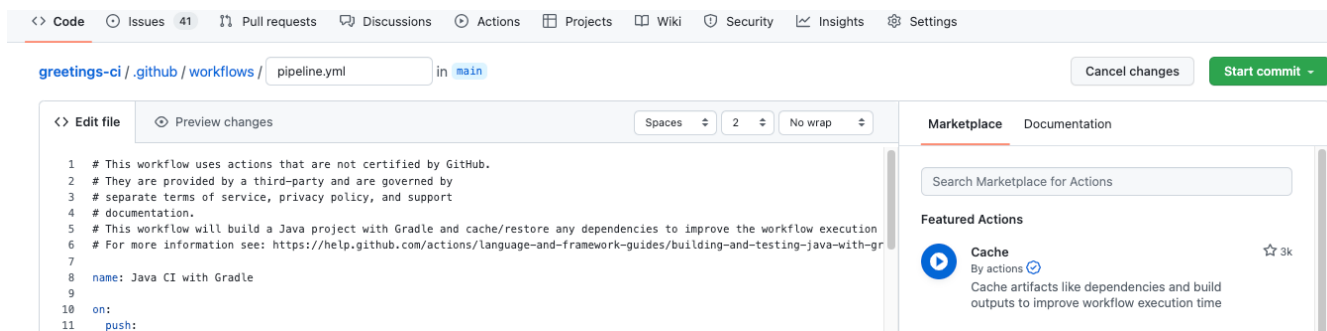

2. We can illustrate blue/green deployment with new branches such as "blue" and "green". So, let's modify the "on:" section first to run the workflow on a push to any of these. Modify the on: push: command to be like the following.

```
on:
  push:
    branches: [ "main", "blue", "green" ]
7
8   name: Java CI with Gradle
9
10  on:
11    push:
12      branches: [ "main", "blue", "green" ]
13    pull_request:
14      branches: [ "main" ]
```

3. You can also remove the "pull_request" portion.

```
9
10 on:
11   push:
12     branches: [ "main", "blue", "green" ]
13   workflow_dispatch:
14     inputs:
15       myVersion:
```

4. Now, let's add the job for deploying a "stage" environment/release. This job can be inserted between the "test-run" job and the "create-issue-on-failure" job. The code for this job is already done for you and can be copied from the file [extra/deploy-stage.txt](#) Just copy and paste.

(Note: You may need to add a space or two at the front of the first line of output once pasted to get it to line up correctly.)

This code essentially does the following:

- Waits for the build and test jobs to complete (line 79)
- Checks to see if the branch being pushed to is "blue" or "green" (line 80)
- Establishes an environment called "staging" (line 83)
- Sets the associated URL for the environment to the releases page (line 85)
- Checkouts the source code (line 87-90)
- Downloads the jar we built (line 92-95)
- Calls a GitHub Action to create a release that: (line 97-105)
 - is based on the tag we got from the build
 - is set as a draft and prerelease
 - includes the jar file we've built

```

66     steps:
67
68     - uses: actions/checkout@v3
69
70     - name: run-test
71       uses: ./github/actions/test-action
72       with:
73         artifact-version: ${ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }
74         arguments-to-print: ${ github.event.inputs.myValues }
75
76
77     deploy-stage:
78
79     needs: [build, test-run]
80     if: github.ref == 'refs/heads/blue' || github.ref == 'refs/heads/green'
81
82     runs-on: ubuntu-latest
83     environment:
84       name: staging
85       url: https://github.com/${ github.repository }}/releases/tag/v${ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }
86
87     steps:
88       - uses: actions/checkout@v3
89       with:
90         fetch-depth: 0
91
92       - name: Download candidate artifacts
93         uses: actions/download-artifact@v3
94         with:
95           name: greetings-jar
96
97       - name: GH Release
98         uses: softprops/action-gh-release@v0.1.14
99         with:
100           tag_name: v${ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }
101           prerelease: true
102           draft: true
103
104           name: ${ github.ref_name }
105
106           files: |
107             greetings-ci-${ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }.jar
108

```

- Now, let's add the job for deploying a "prod" (production) environment/release from a pull-request being merged into "main". This job can be inserted between the "deploy-stage" job and the "create-issue-on-failure" job. The code for this job is already done for you and can be copied from the file [extra/deploy-prod.txt](#) Just copy and paste.

(Note: You may need to add a space or two at the front of the first line of output once pasted to get it to line up correctly.)

This code essentially does the following:


- Waits for the build and test jobs to complete (line 114)
- Checks to see if we got here on the main branch (line 115)
- Establishes an environment called "production" (line 119)
- Sets the associated URL for the environment to the releases page (line 120)
- Checkouts the source code (line 123-125)
- Downloads the jar we built (line 127-130)
- Calls a GitHub Action to create a release that: (line 132-140)
 - is based on the tag we got from the build
 - is named as "Production"
 - includes the jar file we've built and the CHANGELOG

```

105
106     files: |
107         greetings-ci-`${{ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }}.jar
108
109
110
111
112     deploy-prod:
113
114         needs: [build, test-run]
115         if: github.ref == 'refs/heads/main'
116
117         runs-on: ubuntu-latest
118         environment:
119             name: production
120             url: https://github.com/${{ github.repository }}/releases/tag/v${{ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }}
121         steps:
122
123             - uses: actions/checkout@v3
124               with:
125                 fetch-depth: 0
126
127             - name: Download candidate artifacts
128               uses: actions/download-artifact@v3
129               with:
130                 name: greetings-jar
131
132             - name: GH Release
133               uses: softprops/action-gh-release@v0.1.14
134               with:
135                 tag_name: v${{ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }}
136                 generate_release_notes: true
137                 name: Production
138                 files: |
139                     CHANGELOG.md
140                     greetings-ci-`${{ needs.build.outputs.artifact-tag || github.event.inputs.myVersion }}.jar
141
142
143     create-issue-on-failure:

```

- Go ahead and commit your changes to the main branch. You can include a "feat" conventional commit message.

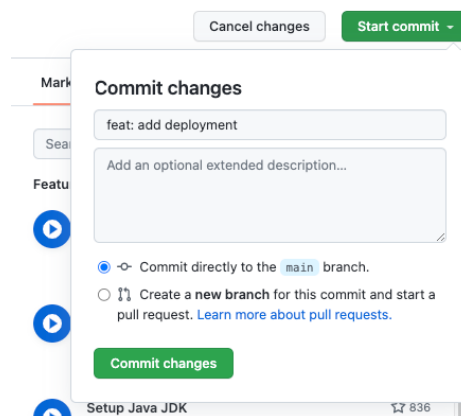

- This will kick off a new run of the workflow and will create an initial production deployment because of a change in main. After the run completes, you can click on the link in the deploy-prod job in the "Jobs" view to see the release.

← Java CI with Gradle

✓ feat: add deployment #30

Summary

Jobs

✓ build

✓ test-run

⌚ deploy-stage

✓ deploy-prod

⌚ create-issue-on-failure

Run details

⌚ Usage

Workflow file

Triggered via push 2 minutes ago

gwstudent pushed -o- 123d14c

main

Status

Success

Total duration

53s

Artifacts

1

pipeline.yml

on: push

✓ build

17s

✓ test-run

4s

✓ deploy-prod

5s

<https://github.com/gwstudent/greetings-ci>

⌚ deploy-stage

0s

⌚ create-issue-on-failure

0s

gwstudent / greetings-ci

Public

forked from skillrepos/greetings-ci

Pin

Watch 0

Fork 52

<> Code

Issues 2

Pull requests

Actions

Projects

Wiki

Security

Insights

Settings

Releases / v0.6.0

Production

Latest

Compare

github-actions released this 8 minutes ago

v0.6.0

7017919

What's Changed

Test action by @gwstudent in #7

Full Changelog: v0.5.1...v0.6.0

Contributors

gwstudent

Assets 3

CHANGELOG.md

1.15 KB

8 minutes ago

Source code (zip)

8 minutes ago

Source code (tar.gz)

8 minutes ago

END OF LAB

Lab 13 – Exercising the entire workflow


Purpose: In this lab, we'll see how to make a change in source code and have it processed through the pipeline.

1. In the example of using a "blue/green" environment, let's create a branch called "blue" from the "main" branch to make some changes on. Do this just as you've done before.

© 2022 Tech Skills Transformations, LLC & Brent Laster


Brent Laster

Page 17

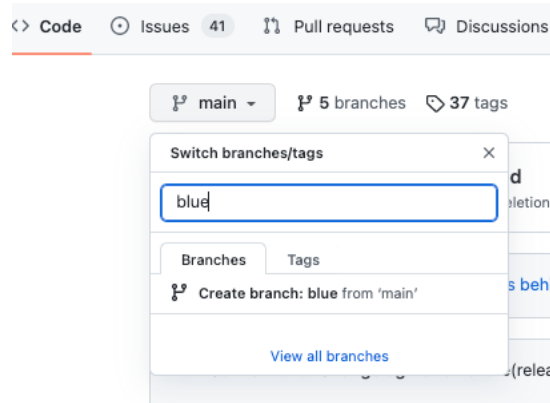


2. In the "blue" branch, edit the file `src/main/java/echoMsg.java`. Make a simple, non-breaking change like adding "blue" to the lines that print out "Greetings". See text and figure below.

```
if (value != null) {
    System.out.format("Greetings blue %s!\n",value);
} else {
    System.out.println("Greetings blue!");
}
```

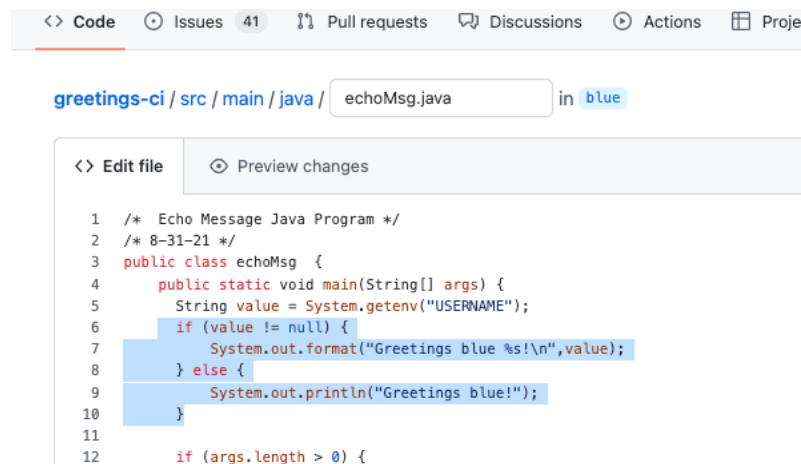

3. Commit the changes with an appropriate "fix: " conventional commit message.

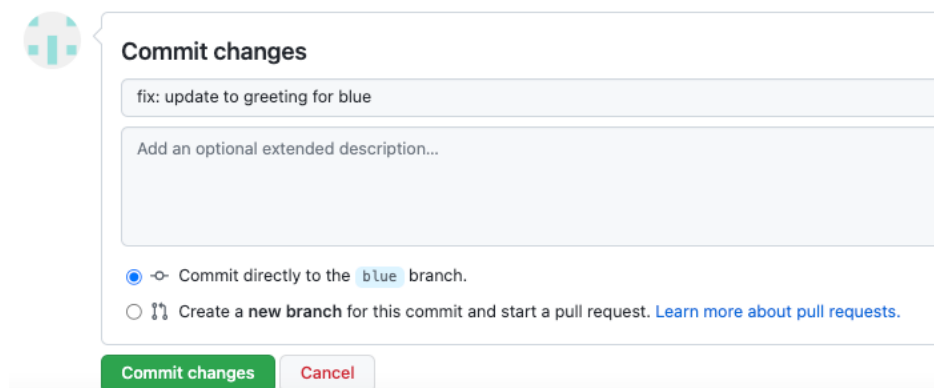

4. After the workflow run completes, you can click on the run and look at the job graph. You should be able to see that it executed the build and test pieces and then deployed it to the stage environment.

fix: update to greeting for blue Java CI with Gradle #170 Re-run all jobs

Summary

Jobs

- build
- test-run
- deploy-stage
- deploy-prod
- create-issue-on-failure

Triggered via push 2 minutes ago

Status: Success

Total duration: 52s

Artifacts: 1

pipeline.yml

on: push

```
graph LR
    build[build 15s] --> test-run[test-run 4s]
    test-run --> deploy-prod[deploy-prod 0s]
    test-run --> deploy-stage[deploy-stage 4s]
    test-run --> create-issue-on-failure[create-issue-on-failure 0s]
```

5. Now, click on the link in the "deploy-stage" box. This will take you to the tagged version of the source repo.

<> Code Issues 41 Pull requests Discussions Actions Projects Wiki Security Insights Settings

Releases Tags

Create release from tag Delete

v0.12.2
a5926b9

Compare

v0.12.2
tagged this 4 minutes ago

v0.12.2

Assets 2

- Source code (zip) 4 minutes ago
- Source code (tar.gz) 4 minutes ago

6. If you click on the "Releases" item next to "Tags", you can see the draft release that was created.

<> Code Issues 41 Pull requests Discussions Actions Projects Wiki Security Insights Settings

Releases Tags

Draft a new release Find a release

6 minutes ago

github-actions

v0.12.2
a5926b9

Compare


blue Draft

v0.12.2


v0.12.2

Assets 3


7. And, if you click on the main code page, in the lower right, you'll be able to see a new "Staging" environment. You can click on that to see a list of recent deployments there.

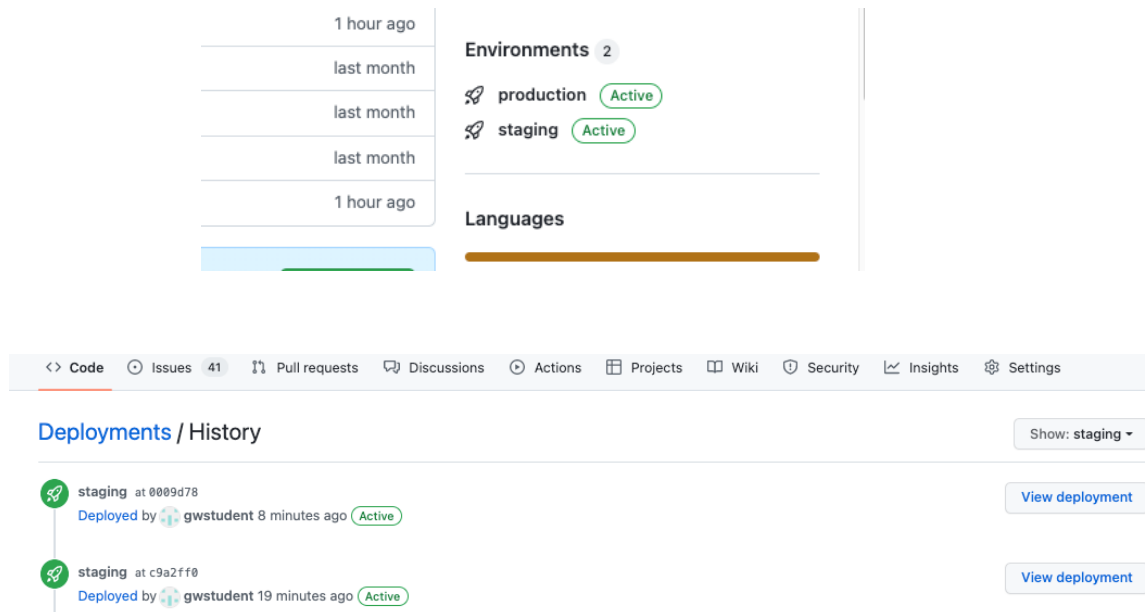


- Since everything built ok, we can deploy this change to the production environment. To merge the changes, we can just create a pull request to main and merge it. In the "Code" page for your repository, there may be a yellow bar that says "blue had recent pushes..." If so, click on the big green "Compare & pull request" button.

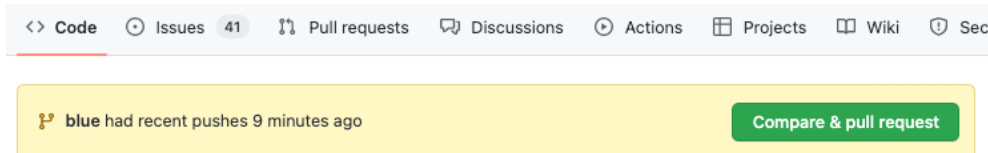

If not, got to "Pull requests" and then click on "New pull request" and "Create pull request".

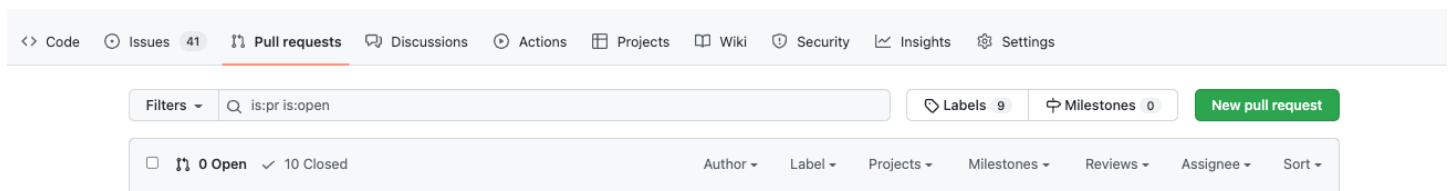


- Change the dropdown at the top to select the same repository so you are merging the "blue" branch into the "main" branch of your repository. Add a conventional commit message like "fix: greet blue". Then proceed to "Create pull request" by clicking the other green button.

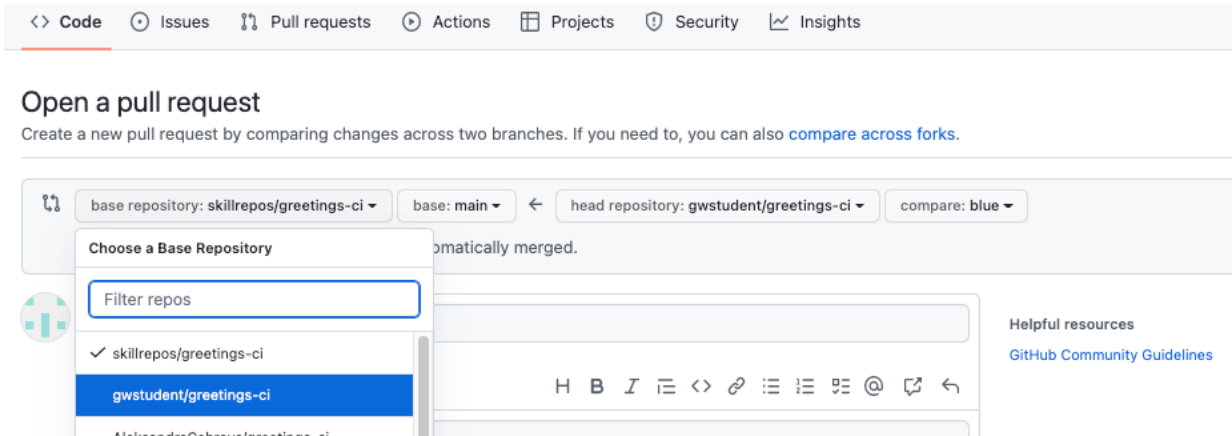


Comparing changes

Choose two branches to see what's changed or to start a new pull request. If you need to, you can also [compare across forks](#).

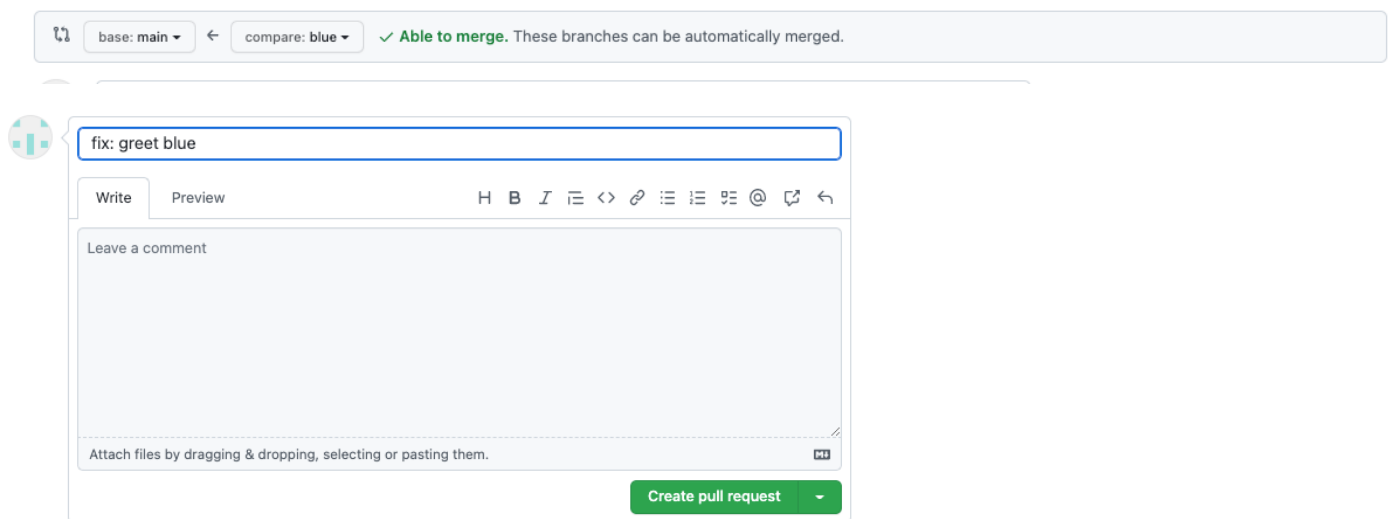


10. At this point, you can go ahead and click the "Squash and merge" button when available and confirm.

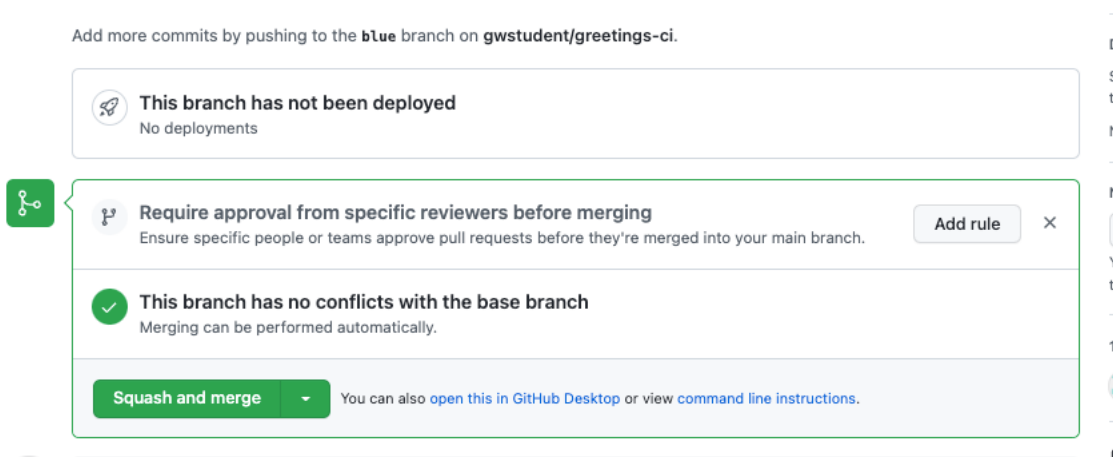

11. You can edit the main comment to have something like "fix: blue" in it and do what you want with the other commit messages. Then go ahead and click the "Confirm squash and merge" button.

Add more commits by pushing to the **blue** branch on **gwstudent/greetings-ci**.



fix: blue

Add an optional extended description...

Confirm squash and merge

Cancel

12. This should kick off another run of the action workflow in main. Because it runs in main, it should kick off the deploy-prod job.

✓ fix: blue Java CI with Gradle #185

Summary

Jobs

✓ build

✓ test-run

⌚ deploy-stage

✓ deploy-prod

⌚ create-issue-on-failure

Triggered via push 1 minute ago

gwstudent pushed · 56cb457 · main

Status

Success

Total duration

56s

Artifacts

1

pipeline.yml

on: push

✓ build 14s

✓ test-run 4s

✓ deploy-prod 10s

<https://github.com/gwstudent/greetings-ci...>

⌚ deploy-stage 0s


⌚ create-issue-on-failure 0s

13. After this completes, you can click on the link in the "deploy-prod" box to see the release it created.


Brent Laster

© 2022 Tech Skills Transformations, LLC & Brent Laster

Page 22

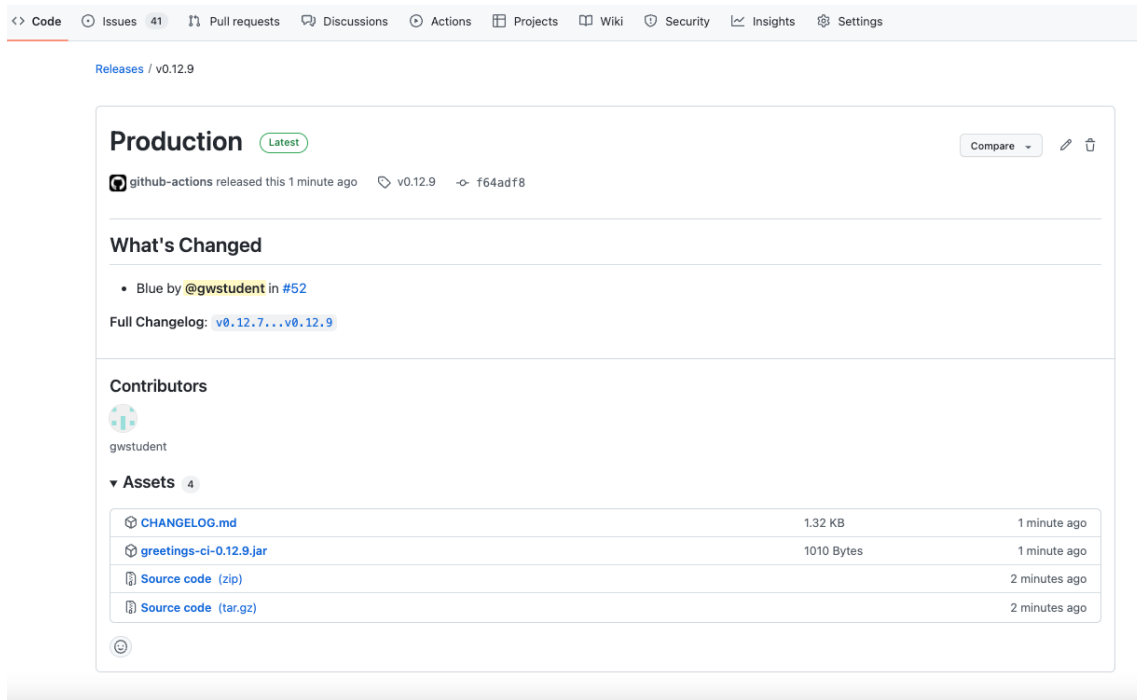

14. You can also now see a Production environment available from the main repo page. You can click on it and see the deployments to production. Clicking on "View deployment" will take you to the same kind of page as the previous step did.

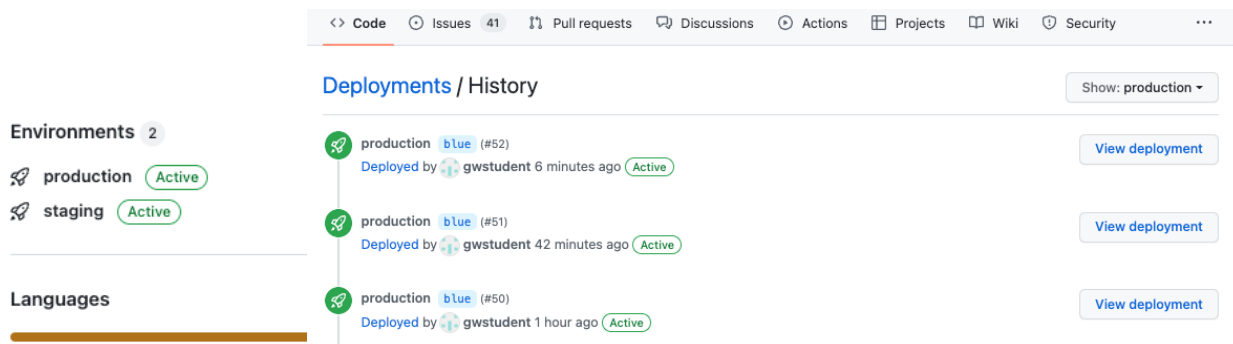

15. If you want, you can repeat the same exercise with a "green" branch to see how it works the same.

END OF LAB