

Cucumber Report

02-May-2023, 1:10:48 pm

Start : May 02, 1:10:45.545 pm

End : May 02, 1:10:47.849 pm

Duration : 2.304 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 0



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Deezer music page</u>	2.304 s	1	0	1	0	1	0	1	0

Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@dp-01	1	0	1	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Deezer music page</u>	1	0	1	0	2.304 s

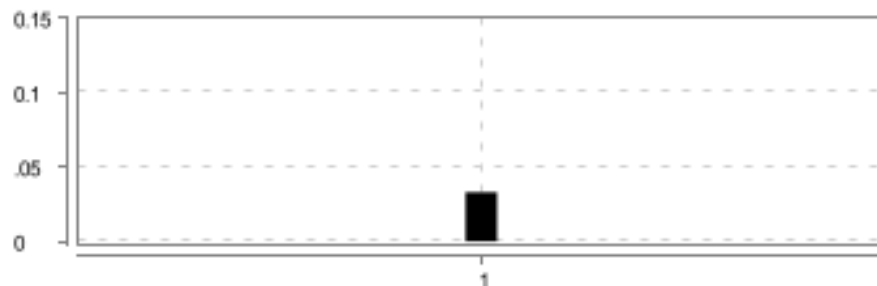



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Deezer music page</u>	<u>Update data on Deezer music page</u>	1	0	1	0	2.278 s

Deezer music page

FAILED	DURATION - 2.304 s	Scenarios		Steps	
/ 1:10:45.545 pm // 1:10:47.849 pm /		Total - 1		Total - 1	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

Update data on Deezer music page

<div>FAILED</div> <div>DURATION - 2.278 s</div>		<div></div>	<div>Steps</div> <div>Total - 1</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 0</div>	<div></div>
<div>/ 1:10:45.571 pm // 1:10:47.849 pm /</div>				
<div>Deezer music page</div>				
<div>@dp-01</div>				

#	Step / Hook Details	Status	Duration
1	<p>Given user is on Deezer Music Page</p> <p>io.cucumber.core.exception.CucumberException: class stepdefinitions.DeezerSteps doesn't have an empty constructor. If you need dependency injection, put cucumber-picocontainer on the classpath</p> <p>at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:136)</p> <p>at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:124)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)</p> <p>at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:64)</p> <p>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:104)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:71)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135)</p>	FAILED	0.033 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:234) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) Caused by: java.lang.NoSuchMethodException: stepdefinitions.DeezerSteps.<init>() at java.base/java.lang.Class.getConstructor0(Class.java:3585) at java.base/java.lang.Class.getConstructor(Class.java:2271) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:131) </pre>		
	AFTER - AppHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)	PASSED	0.182 s
	Update_data_on_Deezer_music_page		