

A pizza with mushrooms and basil leaves on a dark wooden background. The pizza is partially visible in the top right and bottom left corners. The background is a dark, textured wooden surface. Several fresh basil leaves are scattered around the pizza, including one large leaf in the top left, a small one near the center of the text, and two others in the bottom right.

PIZZA LOVERS

A Slice of Flavor & Culture

INTRODUCTION

The **Pizza Sales** dataset contains information about pizza orders, including order details, pizza types, sizes, prices, quantities, and order dates. The purpose of this SQL project is to analyze the sales data and extract meaningful business insights using SQL.



SQL QUERIES

BASICS

- Retrieve the total number of orders placed.
- Calculate the total revenue generated from pizza sales.
- Identify the highest-priced pizza.
- Identify the most common pizza size ordered.
- List the top 5 most ordered pizza types along with their quantities.



1. RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED

```
SELECT  
    COUNT(order_id)  
FROM  
    orders;
```

Result Grid		Filter
	count(order_id)	
▶	21350	



2. CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES.

SELECT

ROUND(SUM(o.quantity * p.price), 2) Amount

FROM

order_details o

JOIN

pizzas p ON o.pizza_id = p.pizza_id;

Result Grid

Amount

817860.05

3. IDENTIFY THE HIGHEST-PRICED PIZZA.

```
SELECT
    t.name, p.price
FROM
    pizzas p
    JOIN
    pizza_types t ON t.pizza_type_id = p.pizza_type_id
ORDER BY p.price DESC
LIMIT 1;
```

Result Grid |   Filter Rows:

	name	price
▶	The Greek Pizza	35.95

4. IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED.

```
SELECT
    p.size, COUNT(o.quantity) quantity
FROM
    pizzas p
    JOIN
        order_details o ON p.pizza_id = o.pizza_id
GROUP BY p.size
ORDER BY quantity DESC
LIMIT 1;
```

Result Grid			
	size	quantity	
▶	L	18526	

5. LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES.

```
SELECT
    t.name, COUNT(o.quantity) quantity
FROM
    pizzas p
    JOIN
    pizza_types t ON p.pizza_type_id = t.pizza_type_id
    JOIN
    order_details o ON o.pizza_id = p.pizza_id
GROUP BY t.name
ORDER BY quantity DESC
LIMIT 5;
```



Result Grid		Filter Rows:
	name	quantity
▶	The Classic Deluxe Pizza	2416
	The Barbecue Chicken Pizza	2372
	The Hawaiian Pizza	2370
	The Pepperoni Pizza	2369
	The Thai Chicken Pizza	2315



SQL QUERIES

Intermediate

- Join the necessary tables to find the total quantity of each pizza category ordered.
- Determine the distribution of orders by hour of the day.
- Join relevant tables to find the category-wise distribution of pizzas.
- Group the orders by date and calculate the average number of pizzas ordered per day.
- Determine the top 3 most ordered pizza types based on revenue.



6. JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.

```
• SELECT
    t.category, SUM(o.quantity) quantity
FROM
    pizza_types t
    JOIN
    pizzas p ON t.pizza_type_id = p.pizza_type_id
    JOIN
    order_details o ON o.pizza_id = p.pizza_id
GROUP BY t.category
ORDER BY quantity DESC;
```

Result Grid			Filter
	category	quantity	
▶	Classic	14888	
	Supreme	11987	
	Veggie	11649	
	Chicken	11050	

7. DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY.

```
SELECT
    HOUR(order_time) hour, COUNT(order_id) count
FROM
    orders
GROUP BY HOUR(order_time);
```

Result Grid			
	hour	count	
▶	11	1231	
	12	2520	
	13	2455	
	14	1472	
	15	1468	
	16	1920	
	17	2336	
	18	2399	
	19	2009	
	20	1642	
	21	1198	
	22	663	
	23	28	
	10	8	
	9	1	

8. JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

SELECT

category, COUNT(name) count

FROM

pizza_types

GROUP BY category

Result Grid				
	category	count		
▶	Chicken	6		
	Classic	8		
	Supreme	9		
	Veggie	9		

Japanese
Mayo Pizza

9. GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.


```
SELECT
    ROUND(AVG(quantity), 2) avg_qua
FROM
    (SELECT
        o.order_date, SUM(t.quantity) quantity
    FROM
        orders o
    JOIN order_details t ON o.order_id = t.order_id
    GROUP BY order_date) AS count_quan;
```



Result Grid	
	avg_qua
▶	138.47

10. DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE.

```
SELECT
    t.name, SUM(d.quantity * p.price) price
FROM
    order_details d
    JOIN
    pizzas p ON d.pizza_id = p.pizza_id
    JOIN
    pizza_types t ON t.pizza_type_id = p.pizza_type_id
GROUP BY t.name
ORDER BY price DESC
LIMIT 3;
```

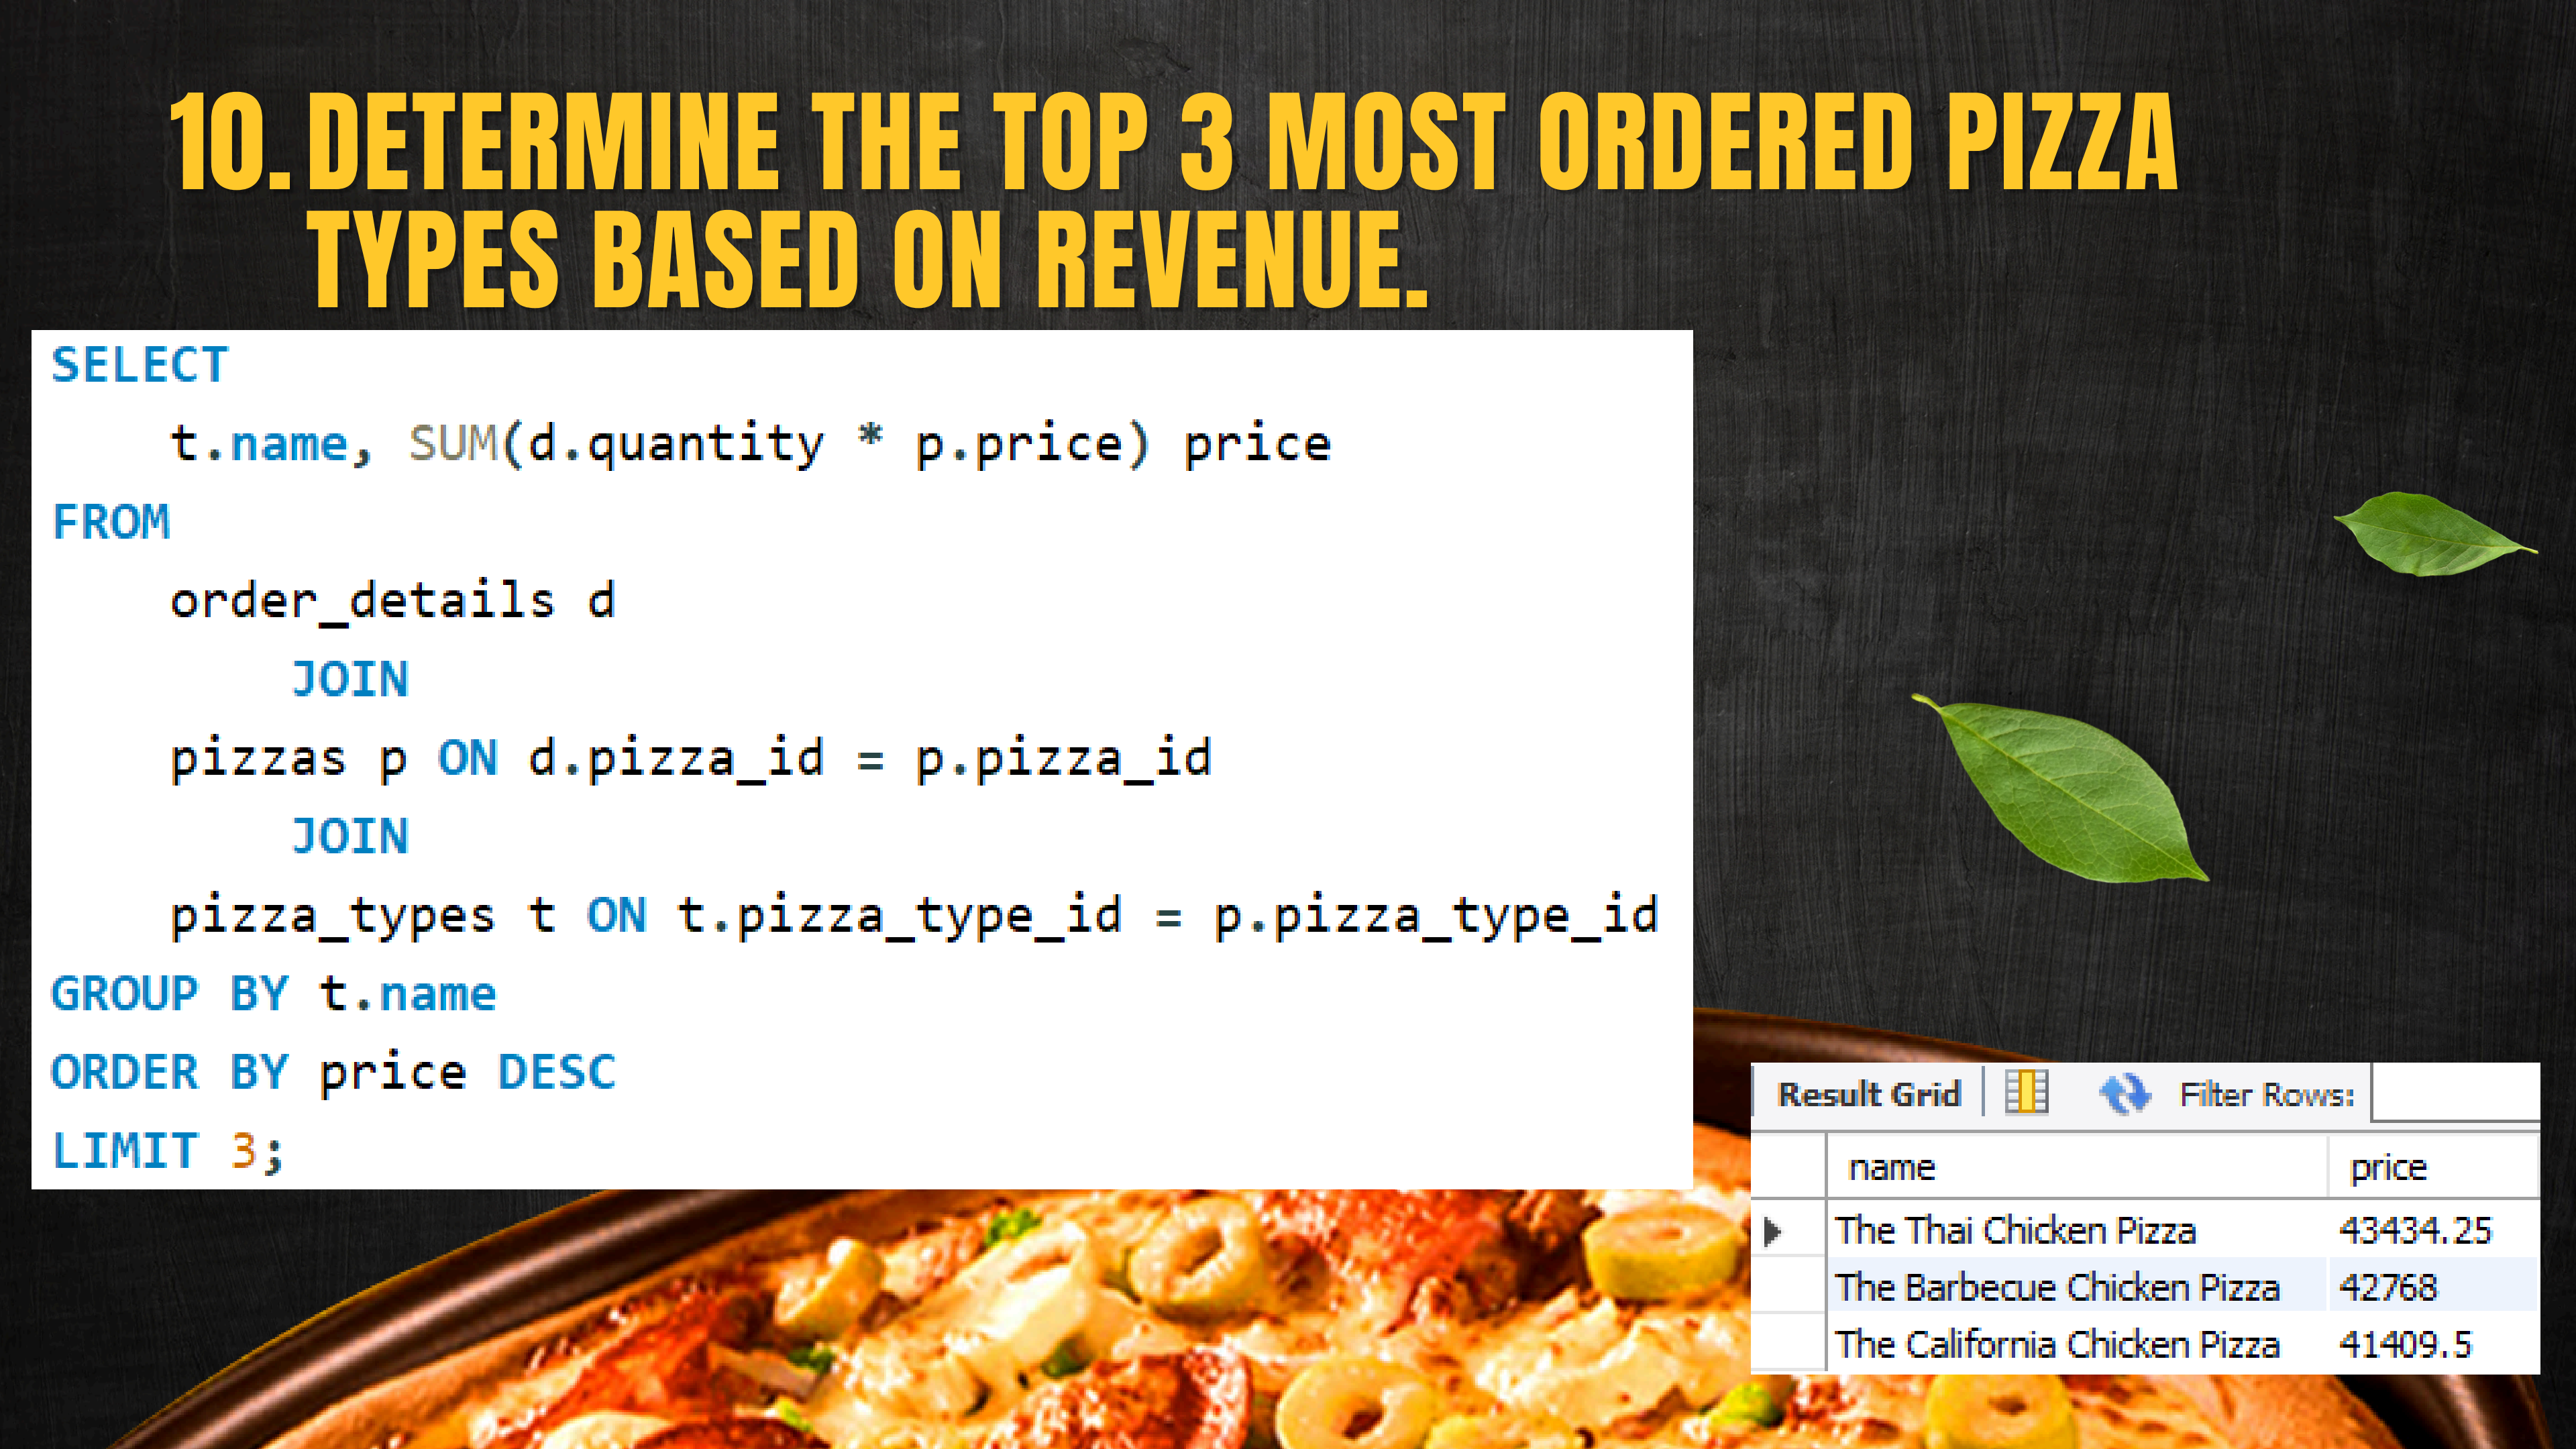


Result Grid				Filter Rows:
	name	price		
▶	The Thai Chicken Pizza	43434.25		
	The Barbecue Chicken Pizza	42768		
	The California Chicken Pizza	41409.5		

SQL QUERIES

Advance

- Calculate the percentage contribution of each pizza type to total revenue.
- Analyze the cumulative revenue generated over time.
- Determine the top 3 most ordered pizza types based on revenue for each pizza category.

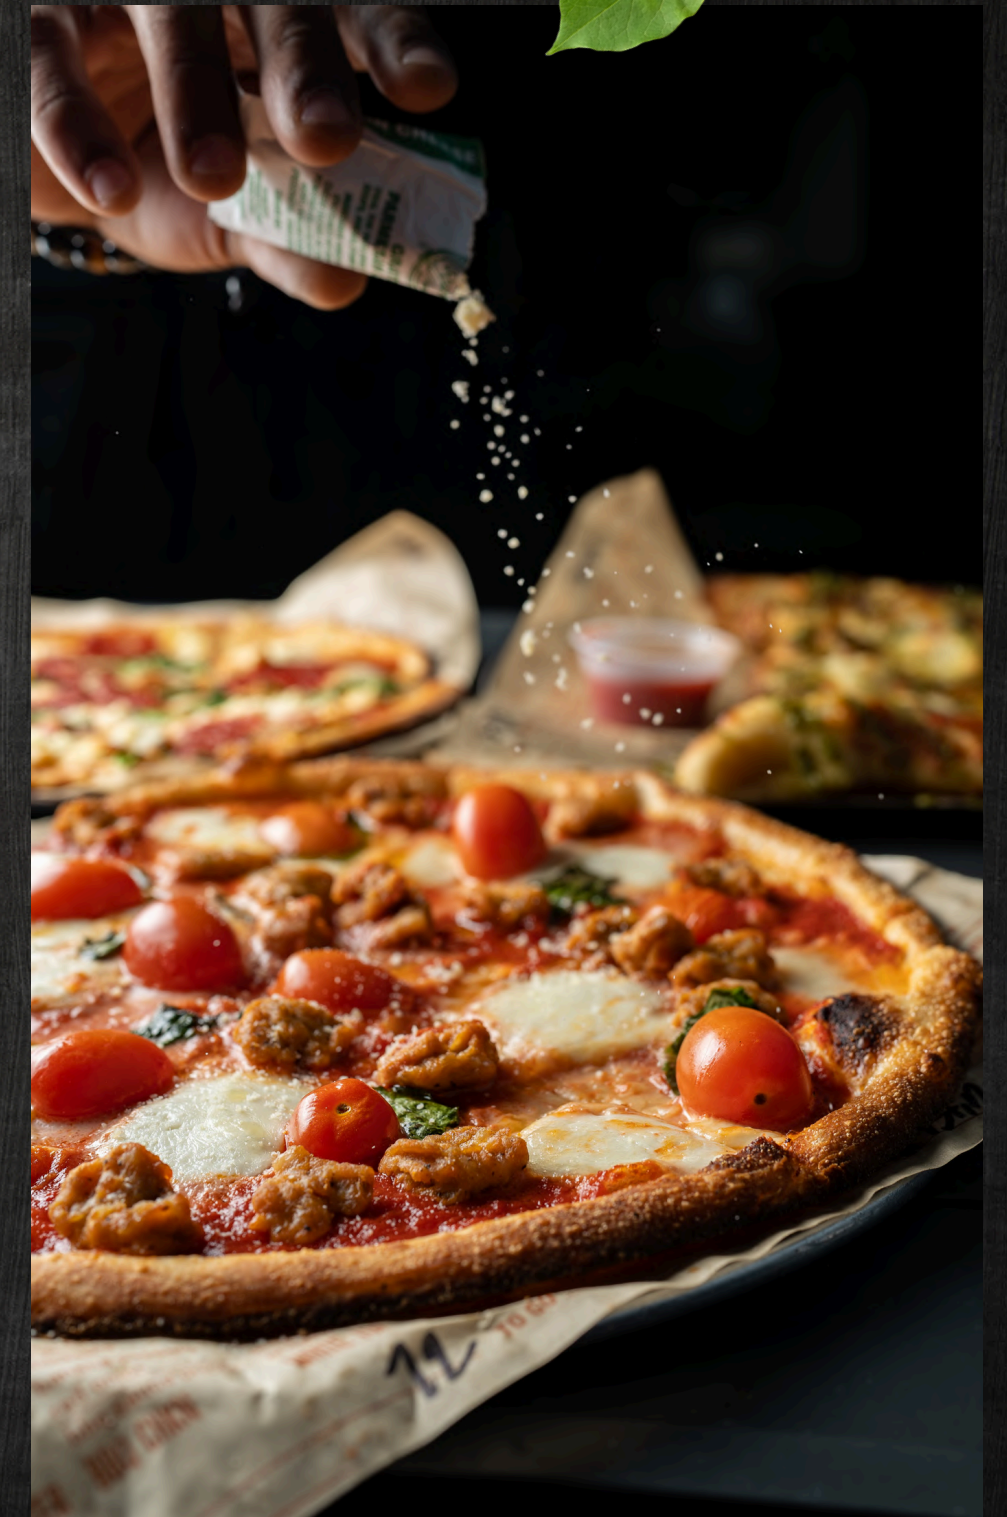

11. CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.

```
select t.category,  
       round(sum(d.quantity*p.price)/(select sum(o.quantity * p.price)  
                                         from order_details o  
                                         join pizzas p  
                                         on o.pizza_id = p.pizza_id)*100,2) revenue  
from order_details d  
join pizzas p  
on d.pizza_id = p.pizza_id  
join pizza_types t  
on p.pizza_type_id = t.pizza_type_id  
group by t.category  
order by revenue desc;
```

Result Grid			Fit
	category	revenue	
▶	Classic	26.91	
	Supreme	25.46	
	Chicken	23.96	
	Veggie	23.68	

12. ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME.

```
select order_date, round(sum(revenue) over (order by order_date ), 2) Revenue
from
(select o.order_date, sum( d.quantity * p.price) as revenue
from order_details d
join orders o
on d.order_id = o.order_id
join pizzas p
on d.pizza_id = p.pizza_id
group by o.order_date) sales ;
```

Result Grid   Filter R		
	order_date	Revenue
▶	2015-01-01	2713.85
	2015-01-02	5445.75
	2015-01-03	8108.15
	2015-01-04	9863.6
	2015-01-05	11929.55
	2015-01-06	14358.5
	2015-01-07	16560.7
	2015-01-08	19399.05
	2015-01-09	21526.4
	2015-01-10	23990.35



13. DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

- ```
select category,name,amount
from
(select category ,name,amount,
 rank() over (partition by category order by amount desc) rank1
from
(select t.category ,t.name, sum(d.quantity * p.price) amount
from pizza_types t
join pizzas p
on t.pizza_type_id = p.pizza_type_id
join order_details d
on d.pizza_id = p.pizza_id
group by t.category ,t.name
order by category asc) x) y
where rank1 <=3;
```

| Result Grid  |          |                              |            |
|--------------|----------|------------------------------|------------|
| Filter Rows: |          |                              |            |
|              | category | name                         | amount     |
| ▶            | Chicken  | The Thai Chicken Pizza       | 43434.25   |
|              | Chicken  | The Barbecue Chicken Pizza   | 42768      |
|              | Chicken  | The California Chicken Pizza | 41409.5    |
|              | Classic  | The Classic Deluxe Pizza     | 38180.5    |
|              | Classic  | The Hawaiian Pizza           | 32273.25   |
|              | Classic  | The Pepperoni Pizza          | 30161.75   |
|              | Supreme  | The Spicy Italian Pizza      | 34831.25   |
|              | Supreme  | The Italian Supreme Pizza    | 33476.75   |
|              | Supreme  | The Sicilian Pizza           | 30940.5    |
|              | Veggie   | The Four Cheese Pizza        | 32265.7001 |
|              | Veggie   | The Mexicana Pizza           | 26780.75   |
|              | Veggie   | The Five Cheese Pizza        | 26066.5    |





# THANK YOU!