

W203 Lab01 Broadband Exploration

Chandra Sekar, Bhuvnesh Sharma, Eugene Tang

Introduction

Research Question

With the recent rise of the Internet and its increasing importance in our lives, the availability of access to the Internet has also become an increasingly large question and necessity in some societies. In this analysis, we look at broadband markets and in particular, three aspects of these markets and their relationships with each other:

- Price: how much does it cost to access the Internet
- Penetration: what fraction of customers have access to network service
- Speed: what rate can customers upload or download bits of data

We in particular consider this data in the context of open access policies. Much of the developed world has developed aggressive regulatory structures to compel network owners to increase penetration while there are some nations that do not. It is still an open debate on whether such policies are beneficial or harmful in price, penetration, and speed.

In this analysis we seek to tackle two main questions:

- Does a trade-off exist between network price, penetration, and speed?
- Is there evidence for beneficial effects of open access policies?

Dataset Setup (code)

Here is the code we used to prepare our dataset. Please see the below sections to see why certain decisions were made in the preparation of the dataset.

```
library(dplyr)
```

```
##
## Attaching package: 'dplyr'

## The following objects are masked from 'package:stats':
##
##   filter, lag

## The following objects are masked from 'package:base':
##
##   intersect, setdiff, setequal, union
```

```
library(car)
```

```
##
## Attaching package: 'car'

## The following object is masked from 'package:dplyr':
##
##   recode
```

```
df_price = read.table("Price.csv", header = TRUE, sep = ",", stringsAsFactors = FALSE)
df_penetration = head(read.table("Penetration.csv", header = TRUE, sep = ",", stringsAsFactors = FALSE))
df_speed = head(read.table("Speed.csv", header = TRUE, sep = ",", stringsAsFactors = FALSE), -2) # last
```

```

# some dataset cleaning (see "Data Processing" for more details on why we did this)
drops_penetration <- c("X") # extra column to remove
df_penetration = df_penetration[ , !(names(df_penetration) %in% drops_penetration)]
colnames(df_speed)[2] <- "Country.Code" # rename country code column

# convert numeric fields to the numeric type
convert_to_numeric = function(col) {
  return(as.numeric(sub("\\$%", "", col)))
}
NON_ID_DATA_START <- 3 # columns 1 and 2 are the country and country code data
df_price[NON_ID_DATA_START:length(df_price)] = lapply(df_price[NON_ID_DATA_START:length(df_price)], convert_to_numeric)
df_penetration[NON_ID_DATA_START:length(df_penetration)] =
  lapply(df_penetration[NON_ID_DATA_START:length(df_penetration)], convert_to_numeric)
df_speed[NON_ID_DATA_START:length(df_speed)] =
  lapply(df_speed[NON_ID_DATA_START:length(df_speed)], convert_to_numeric)

## Warning in FUN(X[[i]], ...): NAs introduced by coercion

# Join the data
df_partial = full_join(df_penetration, df_price, by = c("Country", "Country.Code"))
df_full = full_join(df_partial, df_speed, by = c("Country", "Country.Code"))

```

Dataset Description

Our dataset comes in three csv files. One for price, penetration, and speed respectively. Each dataset contains observations on 30 countries, with one row for each country. Each dataset contains a variety of variables. Below we include tables of each variable, its type, and its description.

Each of the three datasets contains string columns to represent country and country code field. We use the two fields to join the datasets together since they are unique across each row (though either field individually would also have sufficed. For conciseness, we exclude these two columns in the tables below.

```
writeLines(paste(length(df_full$Country), "countries"))
```

```
## 30 countries
```

```
writeLines(paste(df_full$Country, collapse = ", ", sep = ""))
```

```
## Australia, Austria, Belgium, Canada, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Japan, Korea, Luxembourg, Malaysia, Mexico, Netherlands, New Zealand, Norway, Poland, Portugal, Singapore, South Africa, Spain, Sweden, Switzerland, Taiwan, Thailand, United Kingdom, United States, Uruguay, Venezuela
```

Price Dataset

Our price dataset contained information on the cost to access different levels of Internet

Column	Interpretation
Price for low speeds, combined	Price (in USD\$) for low-speed Internet
Price for med speeds, combined	Price (in USD\$) for medium-speed Internet
Price for high speeds, combined	Price (in USD\$) for high-speed Internet
Price for very high speeds, combined	Price (in USD\$) for very high-speed Internet

Penetration Dataset

Our penetration dataset contained information on how widespread network availability is in a country.

Column	Interpretation
Penetration per 100 OECD, 2008	“Penetration” per 100 people in 2008 as measured by the OECD
Penetration per 100 OECD, 2007	“Penetration” per 100 people in 2007 as measured by the OECD
Household penetration, OECD	Household penetration as measured by the OECD
2G and 3G penetration per 100, OECD	2G and 3G network penetration per 100 people for OECD
Penetration per 100 GC	Penetration per 100 people as measured by GC
3G penetration per 100	3G network penetration per 100 people
Growth in 3G penetration	Growth in 3G network penetration
Wi-Fi hotspots, JiWire	Number of Wi-Fi hotspots
Wi-Fi hotspots per 100,000, JiWire	Number of Wi-Fi hotspots per 100,000 people
Percent of population in urban areas	Percent of population in urban areas with access to the Internet

Speed Dataset

The speed dataset has various metrics on the speed of the network available in a country.

Column	Interpretation
Maximum advertised speed OECD (kbps)	(same as column name)
Average advertised speed OECD (kbps)	(same as column name)
Average actual speed, Akamai (kbps)	(same as column name)
Average download speedtest.net (kbps)	(same as column name)
Standard deviation download, speedtest.net	(same as column name)
Average upload speedtest.net (kbps)	(same as column name)
Standard deviation upload, speedtest.net	(same as column name)
Average latency speedtest.net	Average latency in ms (measured by speedtest.net)
Standard deviation latency, speedtest.net	Standard deviation of latency in ms (measured by speedtest.net)
Median download, speedtest.net (kbps)	(same as column name)
Median upload, speedtest.net (kbps)	(same as column name)
Median latency, speedtest.net	Median latency in ms (measured by speedtest.net)
90p. Download, speedtest.net (kbps)	Top 90% of download speed (measured by speedtest.net)
90p. Upload, speedtest.net (kbps)	Top 90% of upload speed (measured by speedtest.net)
10p. Latency, speedtest.net	Lowest 10% of latency in ms (measured by speedtest.net)

Data Processing / Preparation

When first starting with the dataset, we noticed that two of the files (Speed.csv and Penetration.csv) had extra lines at the bottom. To help work with this, we manually removed the two lines and saved the results in Speed_Modified.csv and Penetration_Modified.csv (also attached).

The next thing we noticed was that the penetration dataset had an extra column called X with no values. We chose to removed this column since it has no values. In the speed dataset, we noticed that the country code column was named differently (“Country code”) from that in the penetration and price datasets (“Country.Code”). To adjust for this, we renamed the country code column to “Country.Code” to help

facilitate joins later on.

```
# some dataset cleaning
drops_penetration <- c("X") # extra column
df_penetration = df_penetration[, !(names(df_penetration) %in% drops_penetration)]
colnames(df_speed)[2] <- "Country.Code"
```

After performing these adjustments, we found that a lot of data were read as factors because some columns had percentage signs or commas in the numbers which had the read.tables function interpret the input as Strings instead of numbers. Because we would want to interact with all of the values as numbers (short of the country and country code columns), we next converted all of the columns to numeric type.

```
# convert numeric fields to the numeric type
convert_to_numeric = function(col) {
  return(as.numeric(sub("[\\$%,]", "", col)))
}
NON_ID_DATA_START <- 3 # columns 1 and 2 are the country and country code data
df_price[NON_ID_DATA_START:length(df_price)] =
  lapply(df_price[NON_ID_DATA_START:length(df_price)], convert_to_numeric)
df_penetration[NON_ID_DATA_START:length(df_penetration)] =
  lapply(df_penetration[NON_ID_DATA_START:length(df_penetration)], convert_to_numeric)
df_speed[NON_ID_DATA_START:length(df_speed)] = lapply(df_speed[NON_ID_DATA_START:length(df_speed)], convert_to_numeric)
```

Finally, we joined the three tables to make it easier to work with.

```
# Join the data
df_partial = full_join(df_penetration, df_price, by = c("Country", "Country.Code"))
df_full = full_join(df_partial, df_speed, by = c("Country", "Country.Code"))
```

Data Quality Evaluation

There were a few columns that had fewer than 30 observations.

```
cols_with_nas <- colnames(df_full)[colSums(is.na(df_full)) > 0]
```

Of these columns, the measurement of the price of very high Internet speeds by far was the most incomplete (had the most NAs). One possible explanation for this is that not all countries have very high speed Internet and thus would not have a value for this column. For columns with NAs, we decided to omit the countries with the NAs from our analyses since we do not have a good default to put in.

```
print_nas = function(colname) {
  writeLines(paste("Number of NAs in ", colname, ": ", sum(is.na(df_full[colname])), sep = ""))
}
invisible(lapply(cols_with_nas, print_nas))
```

```
## Number of NAs in Price.for.low.speeds..combined: 1
## Number of NAs in Price.for.high.speeds..combined: 2
## Number of NAs in Price.for.very.high.speeds..combined: 11
## Number of NAs in Maximum.advertised.speed.OECD..kbps.: 1
## Number of NAs in Average.actual.speed..Akamai..kbps.: 4
```

Outside of this, our data was fairly complete. However, looking through our data, we did notice some irregularities. The first we found is that Poland's value for the percent of population in urban areas field is 162%. We do not have a full understanding of what that means, but it seems that this field measures a percentage of the population of people in urban areas, so since 162% > 100%, we are a little dubious of that data point and feel that it could be likely due to reporting error. For this reason, we decided to remove Poland from analyses containing this column.

Another irregularity was that Turkey's 3G penetration per 100 is 0 despite having 20.20% growth in 3G penetration. It is possible that Turkey had a really really low 3G penetration such that a 20.20% growth would still result in an average of 0 per 100. However, given some of the other values in the other fields, (e.g. 2G and 3G penetration per 100, OECD having a value of 84.93), we are a little dubious of this value and decided to remove Turkey from analyses containing this column.

Finally, we noticed that in the measurement of the standard deviation of latency for Iceland, Iceland has an unusually high value of 1,199 (where all the other standard deviations are around 300). Further irregularities in the data we found and how we handle them can be found in the following sections.

Univariate Analysis of Key Variables

Now we have the combined data in the data frame (df_full), we can use the individual dataframe to perform the univariate analysis of key variables. We renamed the column names for clarity while displaying summary and the plots.

Price Dataset


```
colnames(df_price)[NON_ID_DATA_START:length(df_price)] <- c("Low_Speed", "Medium_Speed", "High_Speed", "VeryHigh_Speed")
summary(df_price)
```

```
##      Country      Country.Code      Low_Speed      Medium_Speed
## Length:30      Length:30      Min.       :13.10      Min.       :23.32
## Class :character Class :character 1st Qu.:24.01      1st Qu.:31.62
## Mode  :character Mode  :character Median :27.28      Median :37.32
##                                     Mean  :29.11      Mean   :41.45
##                                     3rd Qu.:31.96      3rd Qu.:45.71
##                                     Max.   :60.23      Max.   :82.76
##                                     NA's    :1
##
##      High_Speed      VeryHigh_Speed
## Min.       : 0.6931      Min.       : 32.61
## 1st Qu.: 38.1225      1st Qu.: 48.04
## Median : 53.1600      Median : 76.22
## Mean   : 55.6437      Mean   : 77.07
## 3rd Qu.: 64.2075      3rd Qu.:102.92
## Max.   :210.3600      Max.   :130.21
## NA's    :2           NA's    :11
```

By looking at the min, max and the different quartiles we can see there are some outliers. Using a boxplot we can clearly see which variable has outliers and a sense for how much deviation there is.

```
boxplot(df_price[NON_ID_DATA_START:length(df_price)],ylab = "Price in USD" , col = c("palevioletred", "palegreen", "paleyellow", "paleblue"))
```

Boxplots of prices for different levels of Internet

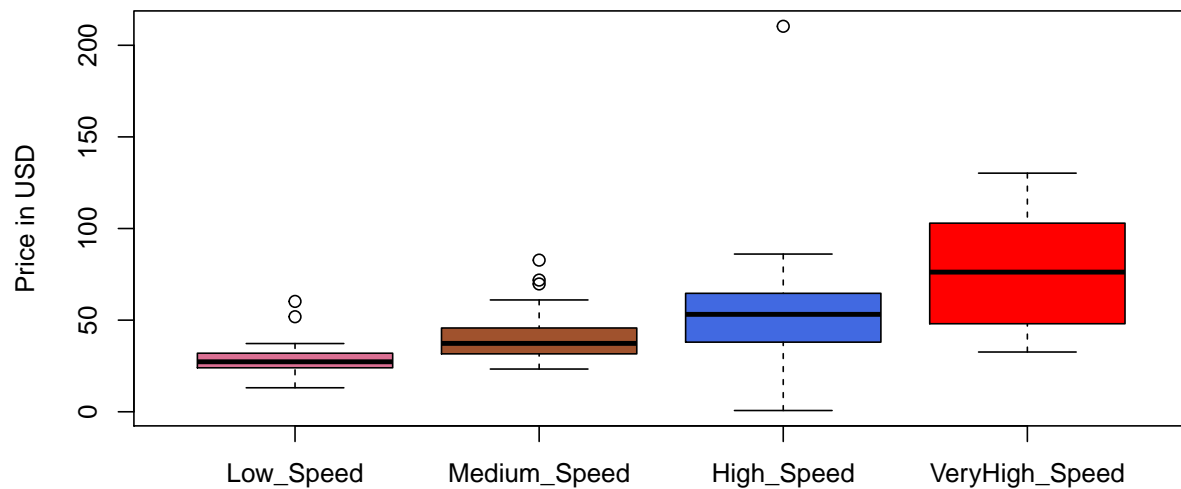

The max value in the “High Speed” variable is \$210.36 for the country Poland, whereas the mean for the “High Speed” variable is \$55 and the 3rd Quartile is \$64. This seems a bit irregular, though it could be possible. The min value for the “High speed” variable is \$0.69 for the country Luxembourg which could be wrong since that country’s Low speed and Medium speed prices are 26 and 36 dollars respectively.

Looking at the NAs, there are 11 NAs for the “VeryHigh Speed” which could mean that those 11 countries do not have veryhigh speed broadband services. But the NA in “Low Speed” variable for the country Belgium is something we need to be aware of when doing further analysis. Similarly, Mexico and Turkey have NAs in the “High Speed” variable.

Since the “Low Speed” and “VeryHigh Speed” variables are incomplete, and given the likely chance that the “High Speed” variable has bad data, we decided to use the price of the “Medium Speed” Internet as a proxy for price in further analysis. In addition, we note that the “Medium Speed” variable is fairly highly correlated with the other three variables:

```
cor(df_price$Low_Speed, df_price$Medium_Speed, use="pairwise.complete.obs")
```

```
## [1] 0.6908609
```

```
cor(df_price$High_Speed, df_price$Medium_Speed, use="pairwise.complete.obs")
```

```
## [1] 0.8320395
```

```
cor(df_price$VeryHigh_Speed, df_price$Medium_Speed, use="pairwise.complete.obs")
```

```
## [1] 0.7168199
```

Speed Dataset

```
colnames(df_speed)[NON_ID_DATA_START:length(df_speed)] <- c("Max Advertised", "Average Advertised", "Average Speed")
summary(df_speed)
```


```
## Country Country.Code Max Advertised Average Advertised
```

```
## Length:30          Length:30          Min.   : 4000   Min.   : 1514
## Class :character    Class :character    1st Qu.: 20480   1st Qu.: 7514
## Mode  :character    Mode  :character    Median : 25600   Median :10570
##                                     Mean  : 43762   Mean  :16765
##                                     3rd Qu.: 50000   3rd Qu.:14500
##                                     Max.   :110000   Max.   :92846
##                                     NA's   :1
## Average Actual      Average Download  SD download      Average upload
## Min.   : 948        Min.   : 1377      Min.   : 2473     Min.   : 380.0
## 1st Qu.: 3032       1st Qu.: 4135      1st Qu.: 6469     1st Qu.: 712.5
## Median : 3780       Median : 5730      Median : 8698     Median : 972.0
## Mean   : 4205       Mean   : 6729      Mean   :10416     Mean   :1486.8
## 3rd Qu.: 4474       3rd Qu.: 8415      3rd Qu.:13547     3rd Qu.:1601.5
## Max.   :15239       Max.   :20493      Max.   :26235     Max.   :5784.0
## NA's    :4
## SD upload          Average Latency    SD Latency        Median Download
## Min.   : 677        Min.   : 69.0      Min.   : 191.0     Min.   : 876
## 1st Qu.: 2664       1st Qu.:107.5     1st Qu.: 254.5     1st Qu.:2521
## Median : 3140       Median :128.5     Median : 288.0     Median :3330
## Mean   : 4093       Mean   :145.4     Mean   : 329.2     Mean   :3766
## 3rd Qu.: 4839       3rd Qu.:156.2     3rd Qu.: 324.8     3rd Qu.:4856
## Max.   :12098       Max.   :464.0     Max.   :1199.0     Max.   :9362
##
## Median upload      Median Latency    Top 90% Download  Top 90% Upload
## Min.   : 211.0      Min.   : 28.00     Min.   : 2591      Min.   : 521.0
## 1st Qu.: 350.8      1st Qu.: 43.50     1st Qu.: 9218      1st Qu.: 884.5
## Median : 477.0      Median : 63.00     Median :11916      Median : 1461.0
## Mean   : 510.2      Mean   : 68.40     Mean   :15221      Mean   : 3048.1
## 3rd Qu.: 631.0      3rd Qu.: 74.75     3rd Qu.:17912      3rd Qu.: 3125.2
## Max.   :1123.0      Max.   :182.00     Max.   :62301      Max.   :20174.0
##
## Bottom 10% Latency
## Min.   : 9.00
## 1st Qu.:12.25
## Median :19.00
## Mean   :24.17
## 3rd Qu.:30.50
## Max.   :79.00
##
```

One of the key variable in this dataset is the “Average Actual speed”. This has NAs for the countries Hungary, Poland, Slovak and Turkey. This is interesting because these countries do have values in the average download speed, upload speed and other variables. Also to note are the Max value of this variable, 15,239Kbps for Korea and the min value 948Kbps for Mexico.

```
hist(df_speed$`Average Actual`, breaks=20, col="red", main = 'Histogram of Average Actual Speed, Akamai
```


Histogram of Average Actual Speed, Akamai

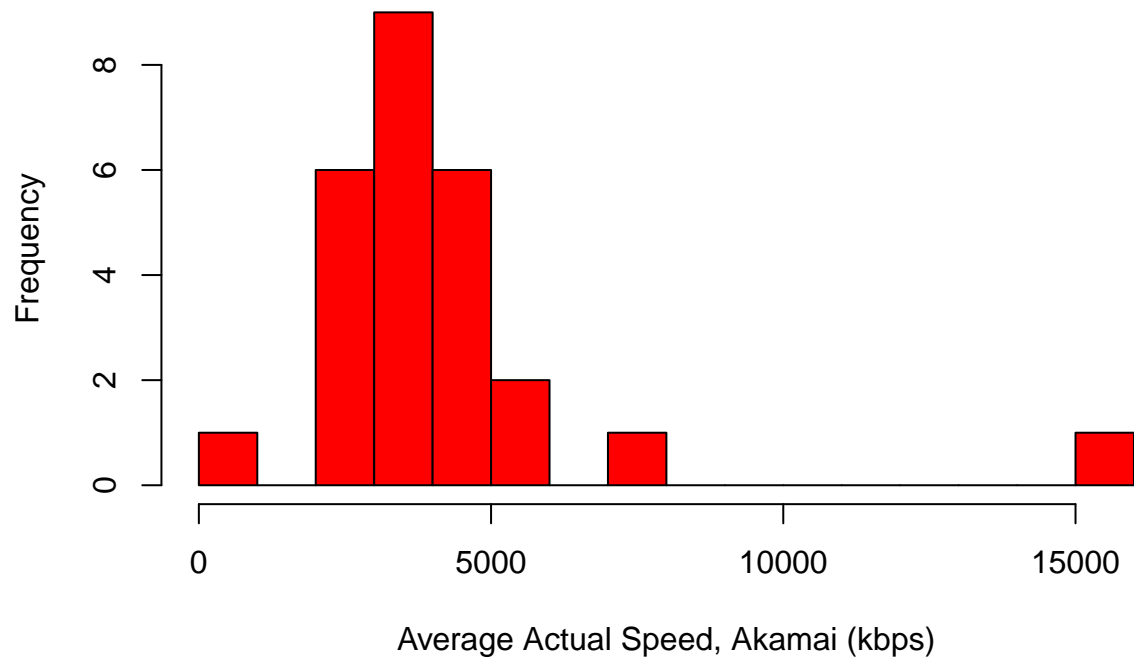

The other Key variable in this dataset is “Average Download speed”

```
hist(df_speed$`Average Actual`, breaks=20, col="royalblue1", main = 'Histogram of Average Download Speed')
```


Histogram of Average Download Speed, Akamai

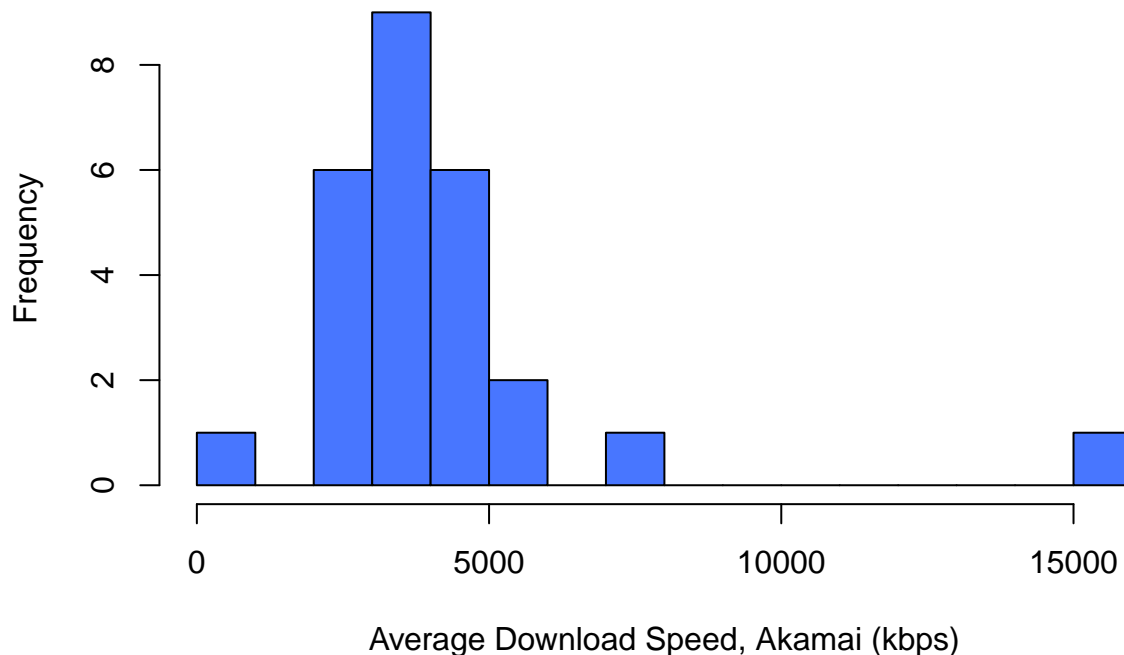

While realizing that the Actual speed has some missing values and looking at the above histogram and it's similarity to the histogram of the "Average Actual speed", we have decided to use "Average Download speed" as the proxy speed variable for further analysis.

While briefly looking at the other key variables we noticed that in the measurement of the standard deviation of latency for Iceland, Iceland has an unusually high value of 1,199 (where all the other standard deviations are around 300). The standard deviation for upload speed is 12,098 for Sweden. Again unusually high while the others have SD in the range of 4,000. Given these potential outliers, we need to keep them in mind when analyzing the rest of the data and how they can affect our analysis or skew our results (e.g. heavily influence the mean or line of best fit).

Below we also show the countries with the maximum median download and upload speeds, and minimum latency. We chose to use the median to avoid having outliers influence the results

```
df_speed$Country[which.max(df_speed$`Median Download`)]
```

```
## [1] "Korea"
```

```
df_speed$Country[which.max(df_speed$`Median upload`)]
```

```
## [1] "Japan"
```

```
df_speed$Country[which.min(df_speed$`Median Latency`)]
```

```
## [1] "Iceland"
```

Penetration dataset

```
colnames(df_penetration)[3:12] <- c("Penetration 2008", "Penetration 2007", "Household Penetration", "2G Penetration", "3G Penetration", "Growth in 3G", "WiFi hotspots", "WiFi per 100000", "Percent Urban", "GDP per 100000")
summary(df_penetration)
```


```
##      Country      Country.Code      Penetration 2008 Penetration 2007
## Length:30      Length:30      Min.   : 7.20      Min.   : 4.30
## Class :character Class :character 1st Qu.:17.68      1st Qu.:15.24
## Mode  :character Mode  :character Median :25.60      Median :23.14
##                                     Mean  :23.96      Mean   :21.66
##                                     3rd Qu.:30.51      3rd Qu.:29.68
##                                     Max.   :37.18      Max.   :35.79
## Household Penetration 2G and 3G Penetration Penetration GC
## Min.   : 1.73      Min.   : 62.11      Min.   : 6.30
## 1st Qu.:30.50      1st Qu.: 97.77      1st Qu.:16.35
## Median :50.19      Median :110.00      Median :25.80
## Mean   :46.41      Mean   :108.26      Mean   :23.19
## 3rd Qu.:62.97      3rd Qu.:117.79      3rd Qu.:30.38
## Max.   :94.13      Max.   :151.39      Max.   :36.90
## 3G Penetration  Growth in 3G  WiFi hotspots  WiFi per 100000
## Min.   : 0.00      Min.   : 0.00      Min.   : 6      Min.   : 0.600
## 1st Qu.:12.42      1st Qu.: 43.98      1st Qu.: 525      1st Qu.: 4.397
## Median :26.28      Median : 58.20      Median : 2336      Median :13.255
## Mean   :27.18      Mean   : 97.70      Mean   : 6899      Mean   :18.984
## 3rd Qu.:37.74      3rd Qu.:113.75      3rd Qu.: 5286      3rd Qu.:22.227
## Max.   :71.80      Max.   :510.90      Max.   :67718      Max.   :74.270
## Percent Urban
## Min.   : 56.00
## 1st Qu.: 66.25
## Median : 77.00
## Mean   : 78.33
## 3rd Qu.: 83.75
## Max.   :162.00
```

Poland's value for the percent of population in urban areas field is 162%. We do not have a full understanding of what that means, but it seems that this field measures a percentage of the population of people in urban areas, so since $162\% > 100\%$, we are a little dubious of that data point and feel that it could be likely due to reporting error. For this reason, we decided to remove Poland from analyses containing this column.

Another irregularity was that Turkey's 3G penetration per 100 is 0 despite having 20.20% growth in 3G penetration. Let's look at the boxplot to understand more abnormal values:

```
boxplot(df_penetration[NON_ID_DATA_START:8], las=2, names=c("2008", "2007", "Household", "2G & 3G", "GDP per 100000"))
```

Boxplots of key penetration variables

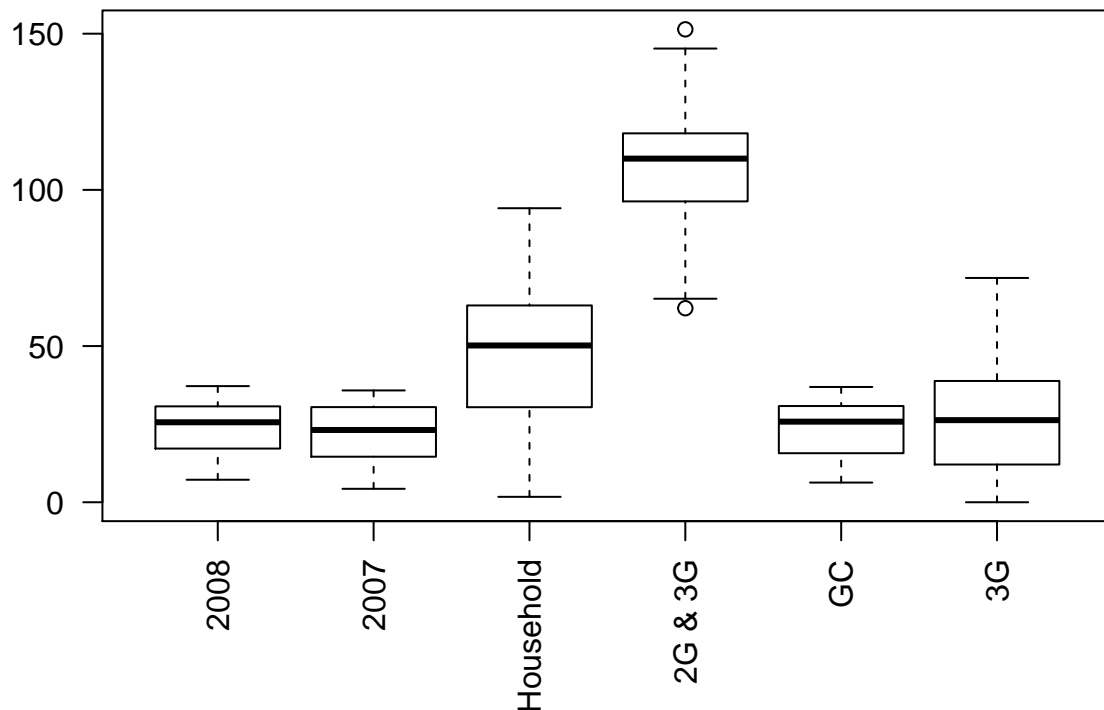


The above boxplot shows that the penetration data for 2008, 2007 and GC are highly correlated and can be used as is for further analysis. We chose the 2008 OECD penetration data as the proxy for the penetration in the Key relationship analysis.

Let's look at the boxplot of the remaining variables.

```
boxplot(df_penetration[9], ylab = "Percentage" , xlab = "Growth in 3G", main="Boxplot of Growth in 3G by")
```


Boxplot of Growth in 3G by percentage

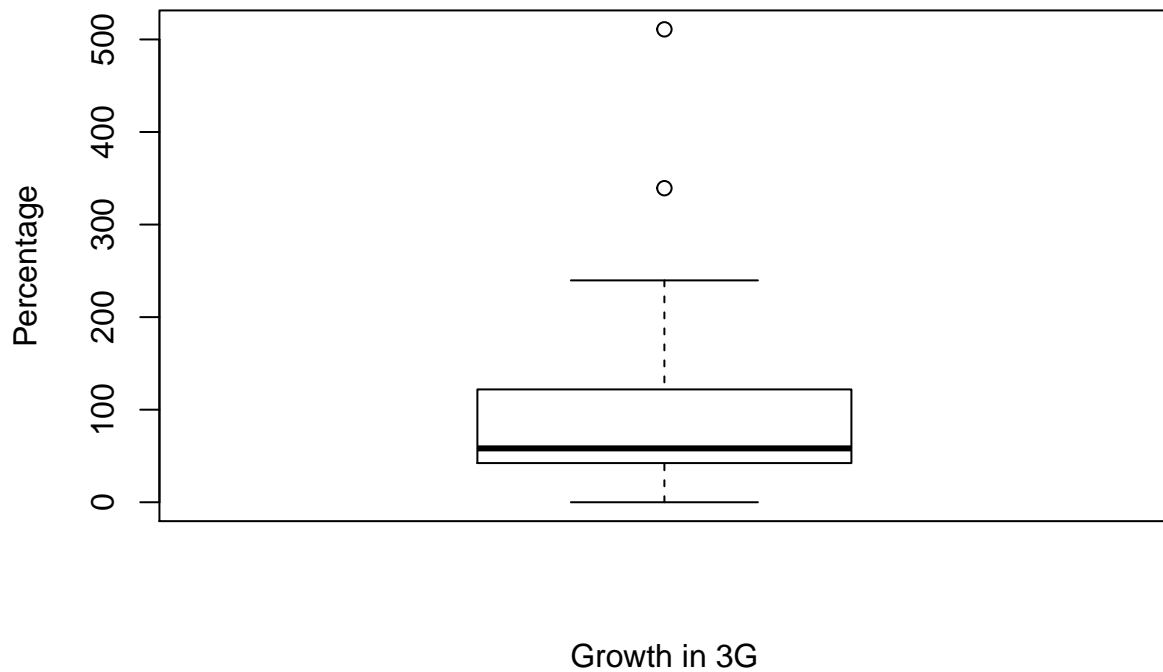

The above plot of Growth in 3G has 2 values outside of the range. Australia and Austria have 510% and 339% of growth respectively.

```
boxplot(df_penetration[10], ylab = "Total number" , xlab = "WiFi Hotspots", main="Boxplot of Total number of WiFi Hotspots")
```


Boxplot of Total number of WiFi Hotspots

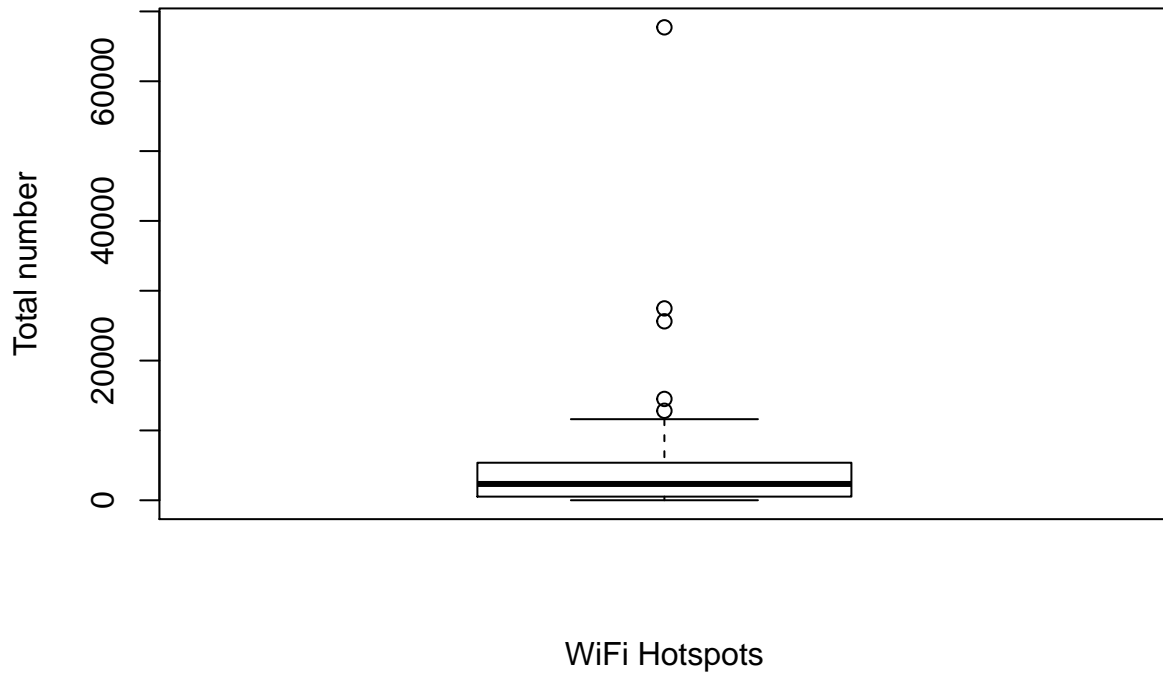

Most of the countries have WiFi hotspots in the range of few hundreds to 5000, whereas Unitedstates has 67718 hotspots followed by France and UK in the 25 thousand range. Another interesting observation is Iceland has only 6.

```
boxplot(df_penetration[11], ylab = "Number per 100000 people" , xlab = "WiFi Hotspots", main="Boxplot of WiFi Hotspots")
```


Boxplot of WiFi Hotspots per 100000 people

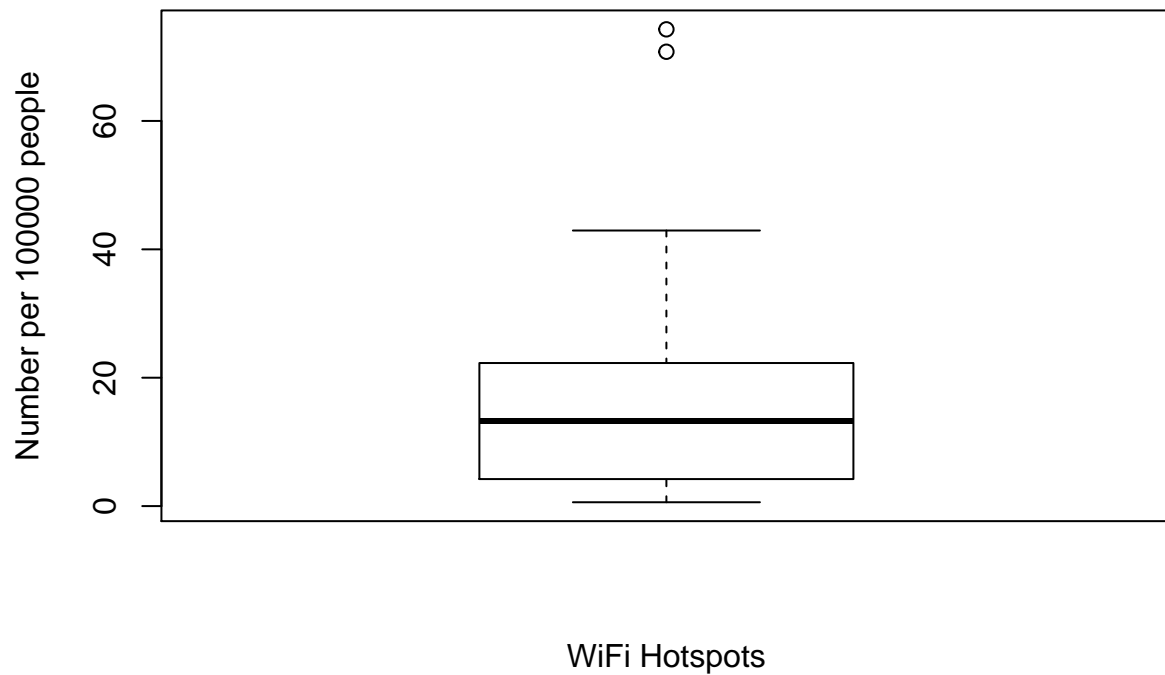

In the above plot Sweden and Switzerland have the most hotspots for it's population, 74 and 70 respectively. Again on the low and possibly on the erroneous side is Iceland with 2 and Turkey with 0.6.

```
boxplot(df_penetration[12], ylab = "Percentage" , xlab = "Urban Population", main="Boxplot of Urban pop
```

Boxplot of Urban population in percentage

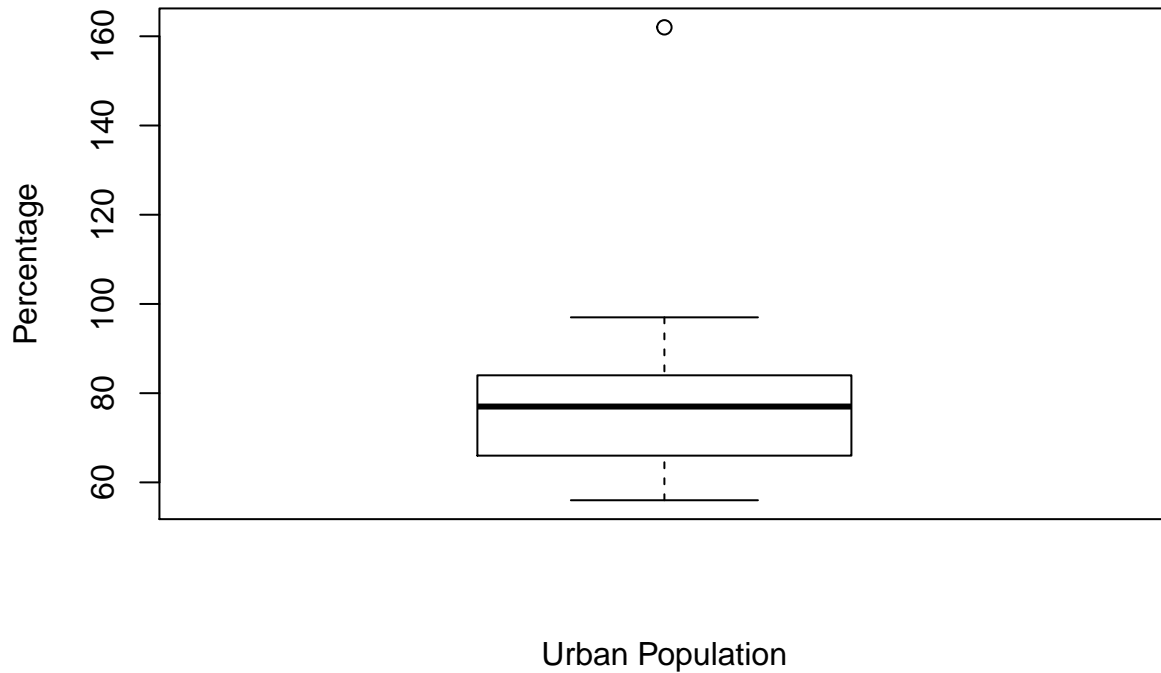


In the above plot the outlier or the questionable entry is for Poland with 162%. The rest of data is within the range of a typical urban population percentage with a median of 77%

Analysis of Key Relationships


In order to perform the Key relationship analysis, we chose the “price for med speeds” from the Price dataset, “2008 Penetration OECD” from the Penetration dataset and “Average Download Speed” from the speed dataset.

```
scatterplotMatrix(~df_full$Price.for.med.speeds..combined + df_full$Penetration.per.100.OECD..2008 + df
```

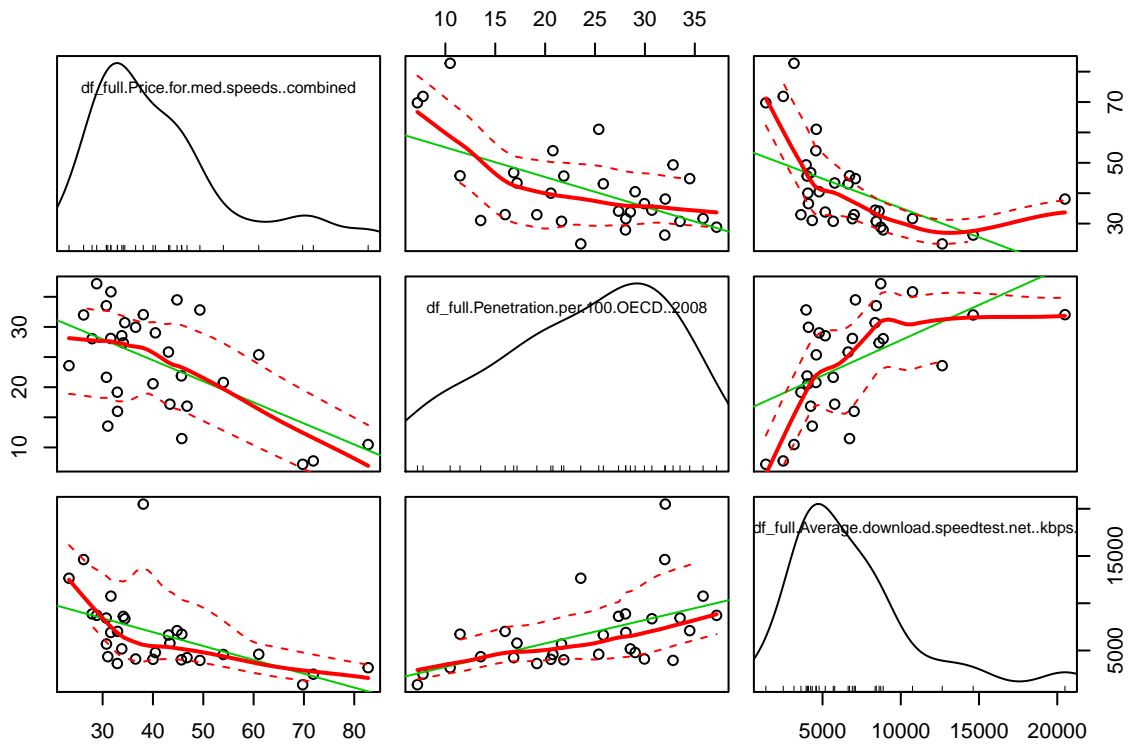

First Observation: When penetration increases the price comes down


```
pairs(~df_full$Price.for.med.speeds..combined+df_full$Average.download.speedtest.net..kbps.+df_full$Penetration.per.100.OECD..2008)
```

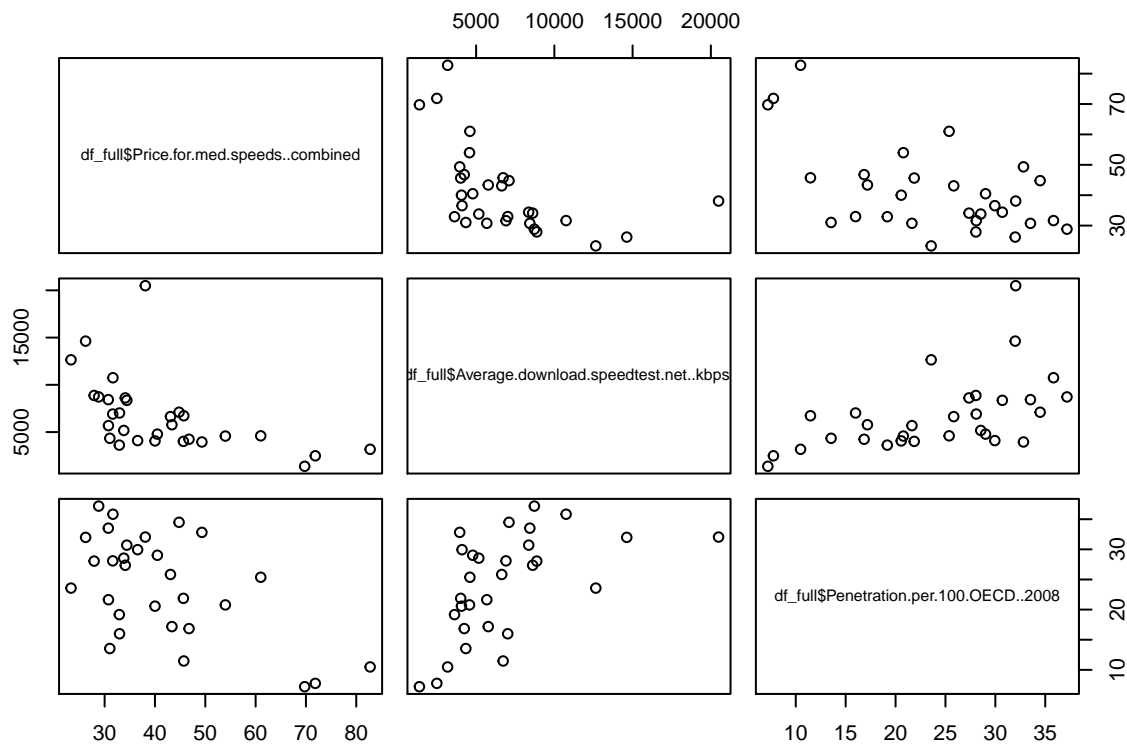Second Observation: Interesting observation is that download speed is higher at a lower price point, whereas the download speed doesn't increase when the price is higher. Third Observation: As the penetration increases the download speed increases.

In order to analyze the key relationship between all 3 datasets, we used a 3dscatterplot.

```
library(scatterplot3d)
attach(df_full)
scatterplot3d(df_full$Penetration.per.100.OECD..2008,df_full$Price.for.med.speeds..combined,log10(df_full$Average.download.speedtest.net..kbps),
  type="h", main="3D Scatterplot of Price Vs Speed Vs Penetration")
```

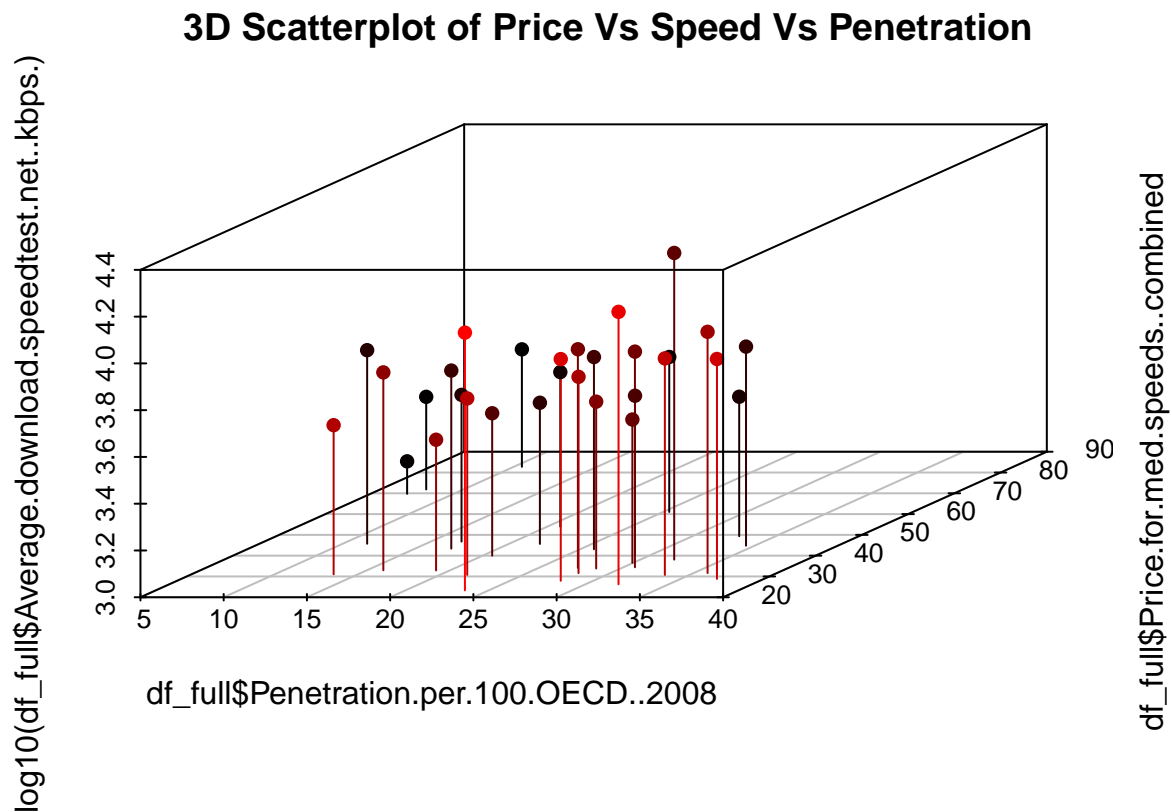

Threeway Relation: when the Penetration increases, it brings down the price and also increases the download speed.

Analysis of Secondary Effects

Secondary variables Culture: South Korea - high speed, gaming / Internet is big Wealth of country - can afford more infrastructure Result: need more data, take with a grain of salt.

Whether a country has open access laws can also influence the appearance of penetration, price, speed, and their relationship. Assuming that we will be using the price to access Medium Speed Internet as a proxy for price, the median download speed as a proxy for speed, and the OECD 2008 penetration metric as a proxy for penetration, we take a quick glance at the difference between countries with and without open access laws.

We take the list of countries without open access laws from the provided assignment document

```
COUNTRIES_NO_OPEN_ACCESS = c("US", "MX", "SK")
df_full_wo_open_access = df_full[df_full$Country.Code %in% COUNTRIES_NO_OPEN_ACCESS, ]
df_full_with_open_access = df_full[!(df_full$Country.Code %in% COUNTRIES_NO_OPEN_ACCESS), ]

summary(df_full_with_open_access[c("Price.for.med.speeds..combined", "Penetration.per.100.OECD..2008",
## Price.for.med.speeds..combined Penetration.per.100.OECD..2008
## Min. :23.32 Min. : 7.76
## 1st Qu.:31.32 1st Qu.:19.87
## Median :34.41 Median :27.36
## Mean :40.18 Mean :24.98
## 3rd Qu.:45.22 3rd Qu.:31.34
```

```
## Max.      :82.76                      Max.      :37.18
## Median.download..speedtest.net..kbps.
## Min.      : 900
## 1st Qu.:2550
## Median :3399
## Mean      :3908
## 3rd Qu.:5030
## Max.      :9362
```

```
summary(df_full_wo_open_access[c("Price.for.med.speeds..combined", "Penetration.per.100.OECD..2008", "M
```

```
## Price.for.med.speeds..combined Penetration.per.100.OECD..2008
## Min.      :43.08                      Min.      : 7.200
## 1st Qu.:44.41                      1st Qu.: 9.335
## Median :45.73                      Median :11.470
## Mean      :52.85                      Mean      :14.833
## 3rd Qu.:57.74                      3rd Qu.:18.650
## Max.      :69.75                      Max.      :25.830
## Median.download..speedtest.net..kbps.
## Min.      : 876
## 1st Qu.:1694
## Median :2511
## Mean      :2497
## 3rd Qu.:3308
## Max.      :4105
```

TODO: some analysis here

Conclusion