-- Retrive the totalnumber of orders placed.

```sql
select count(order_id)  as total_order from orders;
```



Result Grid

	total_order
▶	21350





-- Calculated total revenue generated from pezza sales.alter

```
SELECT
    ROUND(SUM(order_details.quantity * pizzas.price),
            2) AS total_sales
FROM
    order_details
        JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id
```







Result Grid

	total_sales
▶	817860.05



-- indentify the highest- price pizza.

```
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```

OUR SERVICE

Result Grid | Filter Rows:

	name	price
▶	The Greek Pizza	35.95

-- indentify the most common pizza size orderd.

```sql
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    pizzas
        JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Result Grid | Filter Rows:

size	order_count
L	18526
M	15385
S	14137
XL	544
XXL	28



-- list the 5 most orderd pizza types along with their quantities.




```sql
SELECT
    pizza_types.name, SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

Result Grid | Filter Rows:

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

-- join the necessary tables tables to find the
-- total quantity of each pizza category ordered.

```sql
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```

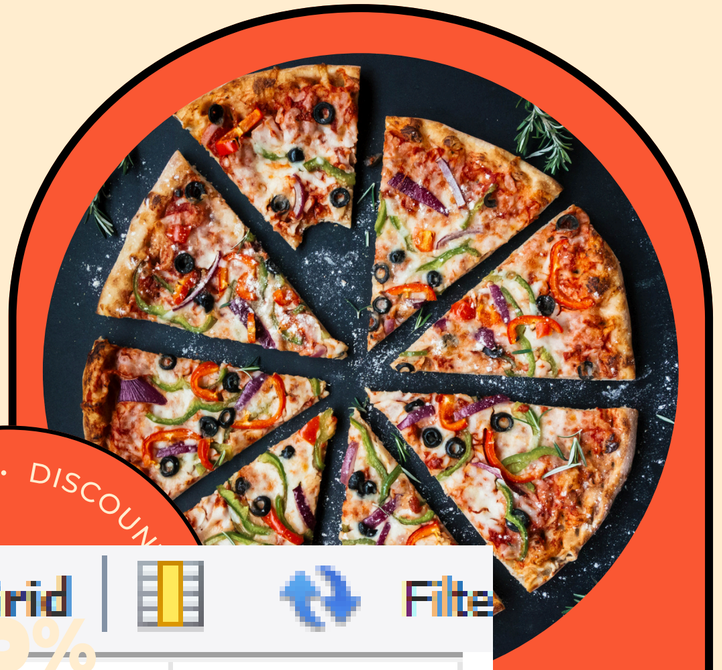

Result Grid | Filte

category	quantity
Classic	14888
Supreme	11987
Veggie	11649
Chicken	11050





-- join the necessary tables tables to find the
-- total quantity of each pizza category ordered.

```sql
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
        JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
        JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```

Result Grid | Fi

category	quantity
Chicken	11050
Classic	14888
Supreme	11987
Veggie	11649



-- Determine the distribution of orders by hour of the day.

```sql
SELECT
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY HOUR(order_time);
```

Result Grid | Filte

hour	order_count
11	1231
12	2520
13	2455
14	1472
15	1468
16	1920
17	2336
18	2399

-- join relevant tables to find the
-- category-wis distribution of pizzas.



```
select category, count(name) from pizza_types
group by category
```

Result Grid | Filter Ro

category	count(name)
Chicken	6
Classic	8
Supreme	9
Veggie	9

-- determine the top 3 most ordered pizza types based on revenue

```sql
select
    pizza_types.name,
    sum(order_details.quantity * pizzas.price) as revenue
from pizza_types
join pizzas
    on pizzas.pizza_type_id = pizza_types.pizza_type_id
join order_details
    on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.name
order by revenue desc
limit 3;
```

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5



-- calculate the percentage contribution of each pizza type to total revenue

```sql
select
    pizza_types.category,
    round(
        sum(order_details.quantity * pizzas.price) /
        (select sum(order_details.quantity * pizzas.price)
         from order_details
         join pizzas
         on pizzas.pizza_id = order_details.pizza_id) * 100,
        2
    ) as revenue_percentage
from pizza_types
join pizzas
    on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
    on order_details.pizza_id = pizzas.pizza_id
group by pizza_types.category
order by revenue_percentage desc;
```

Result Grid | Filter Rows:

category	revenue_percentage
Classic	26.91
Supreme	25.46
Chicken	23.96
Veggie	23.68

-- analyse the cumulative revenue generated over time

```sql
select
    order_date,
    sum(revenue) over (order by order_date) as cum_revenue
from (
    select
        orders.order_date,
        sum(order_details.quantity * pizzas.price) as revenue
    from order_details
    join pizzas
        on order_details.pizza_id = pizzas.pizza_id
    join orders
        on orders.order_id = order_details.order_id
    group by orders.order_date
) as sales;
```

Result Grid | Filter Rows:

order_date	cum_revenue
2015-01-01	2713.850000000000
2015-01-02	5445.75
2015-01-03	8108.15
2015-01-04	9863.6
2015-01-05	11929.55
2015-01-06	14358.5
2015-01-07	16560.7

-- determine the top 3 most ordered pizza types
-- based on revenue for each pizza category

Result Grid | Filter Rows:

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5
The Classic Deluxe Pizza	38180.5
The Hawaiian Pizza	32273.25
The Pepperoni Pizza	
The Spicy Italian Pizza	34831.25
The Italian Supreme Pizza	33476.75
The Sicilian Pizza	30940.5
The Four Cheese Pizza	32265.70000000065
The Mexicana Pizza	26780.75
The Five Cheese Pizza	26066.5

The Hawaiian Pizza

```sql
select name, revenue
from (
    select
        category,
        name,
        revenue,
        rank() over (
            partition by category
            order by revenue desc
        ) as rn
    from (
        select
            pizza_types.category,
            pizza_types.name,
            sum(order_details.quantity * pizzas.price) as revenue
        from pizza_types
        join pizzas
            on pizza_types.pizza_type_id = pizzas.pizza_type_id
        join order_details
            on order_details.pizza_id = pizzas.pizza_id
        join order_details
            on order_details.pizza_id = pizzas.pizza_id
        group by
            pizza_types.category,
            pizza_types.name
    ) as a
) as ranked
where rn <= 3;
```