

Git and Github Tasks

Created Github Account With MFA Security

The screenshot shows the GitHub profile of user 'chandrashekar0532'. The profile includes a circular profile picture of a man, the name 'Chandrashekar Vendrapu', and the handle 'chandrashekar0532 · he/him'. Below the name is the title 'Experienced Graduate Developer' and an 'Edit profile' button. To the left of the main content, there are links to 'noldroi pvt ltd', 'Nizampet', and a LinkedIn profile. The main content area is titled 'Popular repositories' and lists six public repositories: 'epam', 'epa.ms-padawams-java', 'chandu_GRIET_15245A0532', 'smallworld_scripts', 'smallworld_gis_sample_database_difference_tool', and 'Database_difference_tool'. Below the repositories is a '41 contributions in the last year' section with a calendar grid showing contributions from September 2023 to August 2024. The grid shows contributions on various days, with a peak in March 2024. To the right of the calendar is a 'Contribution settings' dropdown menu and a '2026' button.

Executed All command in the video

1. Git init
2. Git status
3. Git config - - list
4. Git config - - global user.name "chandrashekar"
5. Git config - - global user.email psschandrashekar@gmail.com
6. Git add
7. Git commit -m "added my commit message"
8. Git push
9. Added reposit link "git remote add origin
<https://github.com/chandrashekar0532/Git-Practise.git>"
10. Git push -u origin master
11. Git reset
12. Git revert
13. Git log
14. Git remote -v
15. Generated ssh-keygen and added to Github ssh keys

16. Git revert (95af65)

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice
$ git init
Initialized empty Git repository in F:/Git-practice/.git/

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git add a b c d f g h i
fatal: pathspec 'a' did not match any files

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git status
On branch master

No commits yet

nothing to commit (create/copy files and use "git add" to track)

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ touch a b c d f g h i

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git add a b c d f g h i

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
    new file:   a
    new file:   b
    new file:   c
    new file:   d
    new file:   f
    new file:   g
    new file:   h
    new file:   i

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git commit -m "these are added in my local machine"
[master (root-commit) f62523c] these are added in my local machine
 8 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 a
 create mode 100644 b
 create mode 100644 c
 create mode 100644 d
 create mode 100644 f
 create mode 100644 g
 create mode 100644 h
 create mode 100644 i

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ |
```

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git config --global user.name "chandrashekar"

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git config --global user.email "psschandrashekar@gmail.com"

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ |
```

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git remote set-url origin https://github.com/chandrashekar0532/git-practice.git

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git remote -v
origin https://github.com/chandrashekar0532/git-practice.git (fetch)
origin https://github.com/chandrashekar0532/git-practice.git (push)

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git push -u origin master
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 247 bytes | 247.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote: This repository moved. Please use the new location:
remote: https://github.com/chandrashekar0532/Git-practice.git
To https://github.com/chandrashekar0532/git-practice.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ |
```

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ ls
a b c d f g git github h i

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git pull
Already up to date.

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ |
```

Assignment -2

1. Install git.

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git init
Reinitialized existing Git repository in F:/Git-practice/.git/

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$
```

2. Create a repo in github with README.md and .ignore file.

Purpose :To create a central repository on GitHub and initialize it with basic repository files.

Steps:

Open GitHub.

Click New Repository.

Enter the repository name.

Select Add a README file.

Create the repository.

Create .gitignore if it was not created during repository creation.

Files

README.md

.gitignore

Description :README.md provides information about the repository, while .gitignore specifies files that Git should not track.

The screenshot shows a GitHub repository page for 'github-task' by user 'chandrashekar0532'. The repository is public and has 1 branch (main) and 0 tags. The commit history shows two commits: 'Create .gitignore' (1 minute ago) and 'Initial commit' (5 minutes ago). The README file is visible, titled 'github-task', with the content 'task purpose'.

chandrashekar0532 / github-task

<> Code Issues Pull requests Agents Actions Projects Wiki Security and quality Insights Settings

github-task Public Pin Watch

main 1 Branch 0 Tags Go to file Add file <> Code

chandrashekar0532 Create .gitignore 27503be · 1 minute ago 2 Commits

.gitignore	Create .gitignore	1 minute ago
README.md	Initial commit	5 minutes ago

README

github-task

task purpose

3.Clone the created repo to local.

To create a local copy of the GitHub repository for performing Git operations.

Command : git clone <repository-url>

Example: git clone https://github.com/chvkarthik-87/devops-git-assignment.git

Then: cd devops-git-assignment

Description :The git clone command downloads the repository from GitHub to the local system, including its Git history.

```

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ git clone https://github.com/chandrashekar0532/github-task.git
Cloning into 'github-task'...
remote: Enumerating objects: 6, done.
remote: Counting objects: 100% (6/6), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 6 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (6/6), done.

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ ls
a b c d f g git github github-task/ h i

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ cd ..

HP@DESKTOP-1GQ065F MINGW64 /f
$ ls
'$RECYCLE.BIN'/  Git-practice/  'MS Office 2010 Software'/  'System Volume Information'/  repos/  virtual_mchine/

HP@DESKTOP-1GQ065F MINGW64 /f
$ cd Git-practice/

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ ls
a b c d f g git github github-task/ h i

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice (master)
$ cd github-task/

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ ls
README.md

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ |

```

```

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ ls -la
total 10
drwxr-xr-x 1 HP 197121 0 Aug 31 12:14 ./
drwxr-xr-x 1 HP 197121 0 Aug 31 12:14 ../
drwxr-xr-x 1 HP 197121 0 Aug 31 12:14 .git/
-rw-r--r-- 1 HP 197121 2 Aug 31 12:14 .gitignore
-rw-r--r-- 1 HP 197121 29 Aug 31 12:14 README.md

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ |

```

4.Create two files in local repo.

Purpose :To create new files inside the local Git repository.

Commands:

touch file1.txt file2.txt

Check the files:

ls

Description: the touch command creates empty files. These files are initially untracked by Git until they are added to the staging area.

```
HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (main)
$ touch file1.txt file2.txt

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (main)
$ ls
README.md  file1.txt  file2.txt

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (main)
$
```

5.Commit two files and push to central Repository.

Purpose :To save the changes in Git history and upload them to the GitHub repository.

Commands

git add .

git commit -m "Added two files"

git push origin main

Description

git add moves the files to the staging area.

git commit saves the changes in the local Git repository.

git push uploads the committed changes to GitHub

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        file1.txt
        file2.txt

nothing added to commit but untracked files present (use "git add" to track)

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ git add .

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ git commit -m "added two text files"
[main 7a1904c] added two text files
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 file1.txt
 create mode 100644 file2.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ git push origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 322 bytes | 322.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/chandrashekar0532/github-task.git
   27503be..7a1904c  main -> main

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ |
```

main 1 Branch 0 Tags

Go to file

T

Add file

Code

chandrashekar0532 added two text files 7a1904c · 1 minute ago 3 Commits		
.gitignore	Create .gitignore	18 minutes ago
README.md	Initial commit	23 minutes ago
file1.txt	added two text files	1 minute ago
file2.txt	added two text files	1 minute ago

README

github-task

6.Create a branch in local and create a sample file and push to central.

Commands

git branch release

git checkout release

Create a sample file:

touch sample.txt

Add and commit:

git add .

git commit -m "Added sample file"

Push:

git push -u release

Description

A branch allows developers to work on changes independently without directly modifying the main branch

```

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (main)
$ git branch release

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (main)
$ git checkout release
Switched to branch 'release'

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ touch sample.txt

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git commit -m "added sample txt file"
On branch release
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        sample.txt

nothing added to commit but untracked files present (use "git add" to track)

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git add .

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git push -u release
fatal: 'release' does not appear to be a git repository
fatal: Could not read from remote repository.

Please make sure you have the correct access rights
and the repository exists.

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git push origin release
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'release' on GitHub by visiting:
remote:   https://github.com/chandrashekar0532/github-task/pull/new/release
remote:
To https://github.com/chandrashekar0532/github-task.git
 * [new branch]      release -> release

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git branch -a
  main
* release
  remotes/origin/HEAD -> origin/main
  remotes/origin/main
  remotes/origin/release

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ |

```

7.Create a branch in github and clone that to local.

Purpose :To create a branch directly in GitHub and make that branch available in the local repository.

GitHub Steps

Open the GitHub repository.

Select the main branch dropdown.

Create a new branch named:

github-branch

Local Commands

git fetch origin

Create the local branch:

git branch github-branch origin/github-branch

Switch to it:

git checkout github-branch

Check:

git branch

Description

git fetch downloads information about the latest remote branches without modifying the working files.

```

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git fetch origin

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git branch github-branch origin/github-branch
fatal: not a valid object name: 'origin/github-branch'

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git fetch origin

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git branch github-branch origin/github-branch
fatal: not a valid object name: 'origin/github-branch'

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git fetch origin
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 2 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (2/2), 905 bytes | 21.00 KiB/s, done.
From https://github.com/chandrashekar0532/github-task
* [new branch]      github-branch -> origin/github-branch

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git branch github-branch origin/github-branch
branch 'github-branch' set up to track 'origin/github-branch'.

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git checkout github-branch
Switched to branch 'github-branch'
A       sample.txt
Your branch is up to date with 'origin/github-branch'.

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (github-branch)
$ git branch
* github-branch
  main
  release

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (github-branch)
$ |

```

8. Merge the created branch with master in git local.

Purpose : To combine the changes from a feature branch into the main branch.

Commands

Switch to main:

git checkout main

Merge:

git merge release

Push the merged changes:

git push origin main

Description: The git merge command combines the history and changes of one branch into the currently checked-out branch.

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git checkout github-branch
Switched to branch 'github-branch'
A   sample.txt
Your branch is up to date with 'origin/github-branch'.

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (github-branch)
$ git branch
* github-branch
  main
  release

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (github-branch)
$ git checkout main
Switched to branch 'main'
A   sample.txt
Your branch is up to date with 'origin/main'.

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ git merge release
Already up to date.

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ git push origin main
Total 0 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'main' on GitHub by visiting:
remote:   https://github.com/chandrashekar0532/github-task/pull/new/main
remote:
remote: Heads up! The branch 'main' that you pushed to was renamed to 'github-branch'.
remote:
To https://github.com/chandrashekar0532/github-task.git
 * [new branch]    main -> main

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ git log
commit 7a1904ca5d9e2e07202cebabf1eea2c522b4f224 (HEAD -> main, origin/release, origin/main, origin/HEAD, release)
Author: chandrashekar <psschandrashekar@gmail.com>
Date:   Mon Aug 31 12:23:02 2026 +0530

    added two text files

commit 27503be363f98b885ad2ebe407d699a0a83867c4
Author: Chandrashekar Vendrapu <31846520+chandrashekar0532@users.noreply.github.com>
Date:   Mon Aug 31 12:06:21 2026 +0530

    Create .gitignore

commit e4815ddc95192763bfe6a8b66353447fa0e7d6d2
Author: Chandrashekar Vendrapu <31846520+chandrashekar0532@users.noreply.github.com>
Date:   Mon Aug 31 12:01:40 2026 +0530

    Initial commit

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ |
```

9. Merge the created branch with master in github by sending a pull request.

Purpose :To understand how changes are reviewed and merged into the main branch using a GitHub Pull Request.

Steps

Push a new change to feature-branch.

Open the GitHub repository.

Click Compare & pull request.

Select:

Base: main

Compare: feature-branch

Click Create pull request.

Click Merge pull request.

Click Confirm merge.

Description

A Pull Request allows changes from one branch to be reviewed before they are merged into the main branch.

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (main)
$ git checkout release
Switched to branch 'release'
A       sample.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ touch pr-file.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ ls
README.md  file1.txt  file2.txt  pr-file.txt  sample.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git add .

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git commit -m "added file pr-file new to the release"
[release 6459932] added file pr-file new to the release
 2 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 pr-file.txt
 create mode 100644 sample.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git push origin release
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 261 bytes | 261.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/chandrashekar0532/github-task.git
   7a1904c..6459932  release -> release

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ |
```

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across forks](#). [Learn more about diff comparisons here](#).



Re



Merged chandrashekar0532 merged 1 commit into `github-branch` from `release` now

Conversation 0 Commits 1 Checks 0 Files changed 2

chandrashekar0532 commented 2 minutes ago Owner ...

No description provided.

added file `pr-file new` to the release 645993;

chandrashekar0532 merged commit `6ecc61e` into `github-branch` `now` Revert

Pull request successfully merged and closed Delete branch

You're all set — the `release` branch can be safely deleted.

Add a comment

Write Preview H B I

10. Create a file in local and send that to branch in github.

Purpose : To create a new file locally and upload it to a specific remote branch.

Commands

Switch to the branch:

```
git checkout release
```

Create a file:

```
touch newfile.txt
```

Add:

```
git add .
```

Commit:

```
git commit -m "Added new file"
```

Push:

```
git push origin release
```

Description : The file is created locally, committed to the local Git repository, and then pushed to the specified GitHub branch

```

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ touch newfile.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git add .

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git commit -m "added new file"
[release 097d004] added new file
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 newfile.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git push origin release
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 234 bytes | 234.00 KiB/s, done.
Total 2 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/chandrashekar0532/github-task.git
6459932..097d004 release -> release

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$

```


github-task
Public
Pin
Watch

release
3 Branches
0 Tags

Add file
Code

This branch is 1 commit ahead of and 2 commits behind `github-branch`.
Contribute

 chandrashekar0532 added new file 097d004 · 53 minutes ago 5 Commits		
	<code>.gitignore</code>	Create .gitignore 2 hours ago
	<code>README.md</code>	Initial commit 2 hours ago
	<code>file1.txt</code>	added two text files 2 hours ago
	<code>file2.txt</code>	added two text files 2 hours ago
	<code>newfile.txt</code>	added new file 53 minutes ago
	<code>pr-file.txt</code>	added file pr-file new to the release 1 hour ago
	<code>sample.txt</code>	added file pr-file new to the release 1 hour ago


README


11.Clone only a branch from github to local.

Purpose :To work with a specific GitHub branch instead of the default branch.

Command

```
git clone https://github.com/chvkarthik-87/devops-git-assignment.git
```

Then:

```
cd devops-git-assignment
```

Fetch branches:

```
git fetch origin
```

Switch to the required branch:

```
git checkout release
```

Check:

```
git branch
```

Description :The repository is cloned locally and then the required branch is checked out for development

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git fetch origin
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 2 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (2/2), 984 bytes | 44.00 KiB/s, done.
From https://github.com/chandrashekar0532/github-task
   45f8be7..6ecc61e  github-branch -> origin/github-branch

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git branch
  github-branch
  main
* release

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ |
```

```

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git clone https://github.com/chandrashekar0532/github-task.git
Cloning into 'github-task'...
remote: Enumerating objects: 17, done.
remote: Counting objects: 100% (17/17), done.
remote: Compressing objects: 100% (12/12), done.
remote: Total 17 (delta 5), reused 5 (delta 1), pack-reused 0 (from 0)
Receiving objects: 100% (17/17), 4.14 KiB | 4.14 MiB/s, done.
Resolving deltas: 100% (5/5), done.

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ |

```

12. Create a file with all passwords and make that untrackable with git.

Purpose : To create a password file and configure Git to ignore it using .gitignore, preventing the file from being tracked and pushed to GitHub.

Steps

1. Create the password file : touch passwords.txt

2. Open the .gitignore file : nano .gitignore

Add: passwords.txt

Save and exit:

Ctrl + O

Enter

Ctrl + X

3. Verify the .gitignore file : cat .gitignore

Expected output: passwords.txt

4. Check Git status : git status

The passwords.txt file should not appear as an untracked file.

5. Commit the .gitignore file

git add .gitignore

git commit -m "Added password file to gitignore"

6. Verify the repository status:

git status

```

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ touch password.txt

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ ls
github-task/ password.txt

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ nano .gitignore

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ cat .gitignore
passwords.txt

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git status
On branch release
Untracked files:
  (use "git add <file>..." to include in what will be committed)
  ./

nothing added to commit but untracked files present (use "git add" to track)

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git add .
warning: in the working copy of 'git-assignment/.gitignore', LF will be replaced by CRLF
warning: adding embedded git repository: git-assignment/github-task
hint: You've added another git repository inside your current repository.
hint: Clones of the outer repository will not contain the contents of
hint: the embedded repository and will not know how to obtain it.
hint: If you meant to add a submodule, use:
hint:
hint:   git submodule add <url> git-assignment/github-task
hint:
hint: If you added this path by mistake, you can remove it from the
hint: index with:
hint:
hint:   git rm --cached git-assignment/github-task
hint:
hint: See "git help submodule" for more information.

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git commit -m "added password to gitignore file"
[release 8e4903f] added password to gitignore file
3 files changed, 2 insertions(+)
create mode 100644 git-assignment/.gitignore
create mode 160000 git-assignment/github-task
create mode 100644 git-assignment/password.txt

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git status
On branch release
nothing to commit, working tree clean

```

13. Make a commit and make that commit reset without saving changes.

Purpose : To understand how to remove the latest commit and permanently discard its changes using `git reset --hard`.

Step 1 – Create a test file

`touch resetfile.txt`

Step 2 – Add the file

```
git add resetfile.txt
```

Step 3 – Commit the file

```
git commit -m "Added reset file"
```

Step 4 – Check the commit

```
git log --oneline
```

You should see your latest commit at the top.

Step 5 – Reset the commit and discard changes

```
git reset --hard HEAD~1
```

Then:

```
git status
```

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ touch resetfile.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git add .

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git commit -m "added reset file to release"
[release d85a820] added reset file to release
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 git-assignment/resetfile.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git log
commit d85a820c0091690af9257ca4d3b06bcc1315ce59 (HEAD -> release)
Author: chandrashekar <psschandrashekar@gmail.com>
Date: Mon Aug 31 15:43:39 2026 +0530

    added reset file to release

commit 8e4903fcd2299c39b36d70b1fb57fc4ddeaff236
Author: chandrashekar <psschandrashekar@gmail.com>
Date: Mon Aug 31 15:44:45 2026 +0530
```

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git reset --hard HEAD~1
HEAD is now at 8e4903f added password to gitignore file

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git status
On branch release
nothing to commit, working tree clean

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$
```

14.Revert a committed commit to the older version.

Purpose :To undo the changes introduced by a previous commit while keeping the Git

history intact.

Step 1 – Check the commit history

```
git log --oneline
```

You will see commit IDs like:

```
abc1234 Updated file
```

```
def5678 Added file
```

Copy the commit ID of the commit you want to undo.

Step 2 – Revert the commit

```
git revert abc1234
```

Replace abc1234 with your actual commit ID.

If an editor opens, save and exit:

```
Ctrl + O
```

```
Enter
```

```
Ctrl + X
```

Step 3 – Check the log

```
git log --oneline
```

You will see a new commit similar to:

```
Revert "Updated file"
```

Step 4 – Check the status

```
git status
```

Step 5 – Push the revert to GitHub

If the original commit was already pushed to GitHub:

```
git push origin main
```

Result :The selected commit's changes were successfully undone by creating a new revert commit. The original commit remains in the Git history

```

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git log --oneline
8e4903f (HEAD -> release) added password to gitignore file
097d004 (origin/release) added new file
6459932 added file pr-file new to the release
fa1904c (origin/main, origin/HEAD, main) added two text files
27503be Create .gitignore
e4815dd Initial commit

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git revert 097d004
[release cbf57a2] Revert "added new file"
1 file changed, 0 insertions(+), 0 deletions(-)
delete mode 100644 newfile.txt

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git status
On branch release
nothing to commit, working tree clean

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ touch example.txt

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git add .

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git status
On branch release
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   example.txt

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git commit -m "example file"
[release 0ed919f] example file
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 git-assignment/example.txt

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git status
On branch release
nothing to commit, working tree clean

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git log
commit 0ed919f5a2ca531182f1f19dd28858dc23c85f69 (HEAD -> release)
Author: chandrashekar <psschandrashekar@gmail.com>
Date:   Mon Aug 31 16:10:15 2026 +0530

    example file

commit cbf57a236d8515b4e889c2b1c9485b3a912b1946
Author: chandrashekar <psschandrashekar@gmail.com>
Date:   Mon Aug 31 16:03:49 2026 +0530

```

```

P@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git revert 422ac4a
release 2ab7c51] Revert " remove how are you"
1 file changed, 2 deletions(-)

P@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git log --oneline -4
ab7c51 (HEAD -> release) Revert " remove how are you"
22ac4a added how are you
56767c added hello
592afc Revert " new revert added file pr-file new to the release"

P@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ cat password.txt
ello

P@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)

```

```

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ git push origin release
Enumerating objects: 22, done.
Counting objects: 100% (22/22), done.
Delta compression using up to 8 threads
Compressing objects: 100% (18/18), done.
Writing objects: 100% (21/21), 1.83 KiB | 936.00 KiB/s, done.
Total 21 (delta 11), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (11/11), completed with 1 local object.
To https://github.com/chandrashekar0532/github-task.git
   097d004..2ab7c51  release -> release

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ |

```

15. Push a file to stash without saving the changes and work on another file.

Purpose : To temporarily save unfinished changes using Git Stash, work on another file, and continue the previous work later.

Step 1 — Modify a file

Use an existing file:

nano file1.txt

Add any simple text, for example:

Stash practice

Save and exit:

Ctrl + O → Enter → Ctrl + X

Step 2 — Check the changes

git status

file1.txt should show as modified.

Step 3 — Stash the changes

`git stash`

Now the changes in file1.txt are temporarily stored and removed from the working directory.

Check:

`git status`

Step 5 — Check the stash

`git stash list`

You should see something like:

stash@{0}: WIP on release: ...

Result :The changes made to file1.txt were temporarily stored using git stash, allowing work to continue on file2.txt without losing the unfinished changes

```

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task/git-assignment (release)
$ cd ..

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ nano file2.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ cat file2.txt
stash testing
hello world

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git status
On branch release
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file2.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        git-assignment/file1.txt

no changes added to commit (use "git add" and/or "git commit -a")

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git stash
warning: in the working copy of 'file2.txt', LF will be replaced by CRLF the next time Git touches it
Saved working directory and index state WIP on release: 2ab7c51 Revert "remove how are you"

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git status
On branch release
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        git-assignment/file1.txt

nothing added to commit but untracked files present (use "git add" to track)

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git stash list
stash@{0}: WIP on release: 2ab7c51 Revert "remove how are you"

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ |

```

16.Undo the stash file and start working on that again.

Purpose :To restore the previously stashed changes and continue working on the file.

Step 1 — Check the stash

git stash list

You should see:

stash@{0}.....

Step 2 — Restore the stashed changes

`git stash pop`

This brings back the changes that you made to file1.txt.

Step 3 — Check the status

`git status`

You should see:

modified: file1.txt

Step 4 — Continue working on the file

`nano file1.txt`

Add another line, for example:

Continuing stash practice

Save and exit:

Ctrl + O → Enter → Ctrl + X

Step 5 — Check the changes

`git diff`

Result :The previously stashed changes were successfully restored using git stash pop, and the work on file1.txt was continue

```

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git stash pop
On branch release
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file2.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        git-assignment/file1.txt

no changes added to commit (use "git add" and/or "git commit -a")
Dropped refs/stash@{0} (3eaffb8e5684209c8604df94ff949854877f8b6f)

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git status
On branch release
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file2.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        git-assignment/file1.txt

no changes added to commit (use "git add" and/or "git commit -a")

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ nano file2.txt

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ cat file2.txt
stash testing
hello world
statsh practice

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git diff
diff --git a/file2.txt b/file2.txt
index e69de29..48a4779 100644
--- a/file2.txt
+++ b/file2.txt
@@ -0,0 +1,3 @@
+stash testing
+hello world
+statsh practice

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ |

```

17. Generate a ssh-keygen and configure into github.

Purpose :To generate an SSH key and configure it with GitHub for secure authentication.

Steps

1. Generate the SSH key

Run:

```
ssh-keygen
```

When the following prompts appear, press Enter for each:

Enter file in which to save the key:

Enter passphrase:

Enter same passphrase again:

2. Check the generated SSH key

```
ls ~/.ssh
```

Expected output:

```
id_rsa
```

```
id_rsa.pub
```

3. Display the public key

```
cat ~/.ssh/id_rsa.pub
```

Copy the complete output.

4. Add the SSH key to GitHub

Go to:

GitHub → Settings → SSH and GPG keys → New SSH key

Enter a title, paste the copied public key, and click Add SSH key.

5. Test the SSH connection

Run:

```
ssh -T git@github.com
```

If GitHub asks:

Are you sure you want to continue connecting?

Type:

```
yes
```

Expected Result

A successful authentication message similar to:

Hi chvkarthik-87! You've successfully authenticated, but GitHub does not provide shell access.

```

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ ssh-keygen
Generating public/private rsa key pair.
Enter file in which to save the key (/c/Users/HP/.ssh/id_rsa):
Enter passphrase (empty for no passphrase):
Enter same passphrase again:
Your identification has been saved in /c/Users/HP/.ssh/id_rsa
Your public key has been saved in /c/Users/HP/.ssh/id_rsa.pub
The key fingerprint is:
SHA256:cjd91ITaCwk/Fvtj2bxvGaFYewcjJf/bSXm/ks/dfQY HP@DESKTOP-1GQO65F
The key's randomart image is:
+----[RSA 3072]-----+
|
| ..+
| . .+.
| o ** .
| .0=.o|
| . S o.++=**|
| o . o oE+=|
| .ooX|
| o.=X|
| o*O|
+----[SHA256]-----+

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ ls ~/.ssh
id_ed25519 id_ed25519.pub id_rsa id_rsa.pub known_hosts known_hosts.old

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ ls ~/.ssh/id_rsa.pub
ls: cannot access '/c/Users/HP/.ssh/id_rsa.pub': No such file or directory

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ cat ~/.ssh/id_rsa.pub
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGC6R++tAmDVY7ODNxIA6nkqh5mKEh+6N1CXZUhtg00vPcKEzzAiiNceYAl
i/20bvPWIDQ2UfHhmys0kzdDSg/Uc5pkymj3T3qUiqSzjyHpn1bbq3h44IkZHN93cxAPZEpVxK6JH0eU66bwSBKfQr83Ax
lR9RJeyxUMw5+uyIEYrFkjackWTwEbDlXck0EgkXlTiKFvPb9NfmX0HIJQEzm5+/2+XPvquFxRWdYInPk8AW/cM9iwmcG2l

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ |

```

Settings

Type **Z** to search

You have successfully added the key 'chandu'.

Chandrashekar Vendrapu (chandrashekar0532)

Your personal account

Switch settings context

Public profile

Account

Appearance

Accessibility

Notifications

Access

Billing and licensing

Emails

Password and authentication

Sessions

SSH and GPG keys

Credentials

SSH keys

New SSH key

This is a list of SSH keys associated with your account. Remove any keys that you do not recognize.

Authentication keys

Hp Laptop

SHA256:kjKqLEUJobmneUw1+aAQ9a2BUTc0y+dGmnhWt4HTK6w

Added on Aug 28, 2026

Last used within the last week — Read/write

Delete

chandu

SHA256:cjd91ITaCwk/Fvtj2bxvGaFYewcjJf/bSXm/ks/dfQY

Added on Aug 31, 2026

Never used — Read/write

Delete

Check out our guide to [connecting to GitHub using SSH keys](#) or troubleshoot [common SSH problems](#).

```

HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ cat ~/.ssh/id_rsa.pub
ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQgQC6R++tAmDVY70DNxiA6nkqh5mKEh+6N1CXZUhtg00vPcKEzzAiinCeYAB2Vqjt+HQi
i/20bvPWIDQ2UfHhmys0kzdDSg/Uc5pkymj3T3qUiqSzjyHpn1bbq3h44IkZHN93cxAPZEpVxK6JH0eU66bwSBKfQr83AxSDPwOFQB0j
lR9RJeYxUMw5+uyIEYrFkjackWTwEbDlXck0EgkXlTiKFvPb9NfmX0HIJQEzm5+/2+XPvquFxRwdYInPk8AW/cM9iwmCG2KJW+lsL9gk
HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ ssh -T git@github.com
Hi chandrashekar0532! You've successfully authenticated, but GitHub does not provide shell access.
HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ |

```

18. Configure webhooks to github.

Purpose :To configure a webhook in the GitHub repository and send repository events to an external webhook URL.

Steps

1. Open the GitHub repository

Open the devops-git-assignment repository.

2. Open Webhooks

Go to:

Settings → Webhooks → Add webhook

3. Enter the Payload URL

A webhook URL was generated using Webhook.site.

Example:

<https://webhook.site/xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxxxxx>

Enter the generated URL in the Payload URL field.

4. Select Content Type

Select:

application/json

5. Secret

Leave the Secret field blank.

6. Select the Event

Select:

Just the push event

7. SSL Verification

Keep:

Enable SSL verification

enabled.

8. Activate the Webhook

Keep the Active option enabled.

9. Add the Webhook

Click:

Add webhook


Verification

After adding the webhook, make a small push to the GitHub repository.

The webhook testing page should receive a request from GitHub.

Result

The GitHub webhook was successfully configured to send push event notifications to the specified webhook URL.

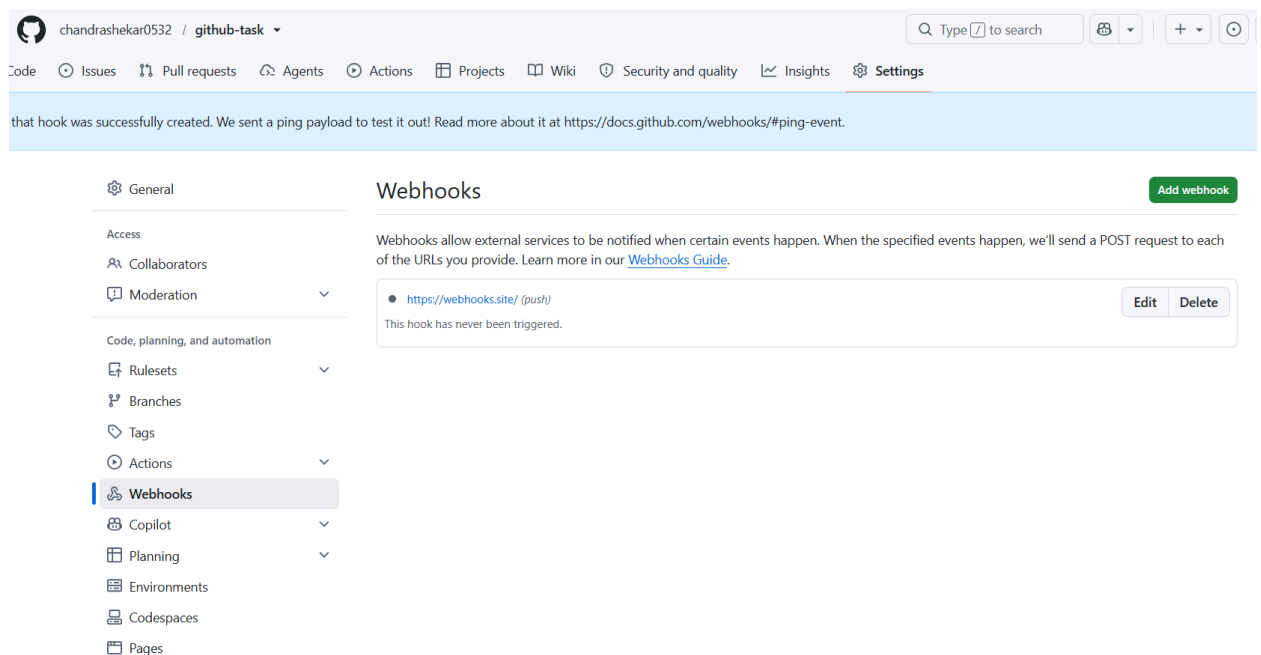

19. Basic understanding of .git file.

Purpose : To understand the .git directory and its role in a Git repository.

Step 1 – Check the .git directory

Inside your repository, run:

```
ls -la
```

You should see:

```
.git
```

Step 2 – View the .git directory

```
ls -la .git
```

You will see files and folders such as:

HEAD

config

objects

refs

index

logs

Description

The .git directory contains the internal information required by Git to manage the repository.

HEAD → Points to the current branch.

config → Contains repository-specific Git configuration.

objects → Stores Git objects such as commits and file data.

refs → Stores references to branches and tags.

index → Stores staging area information.

logs → Contains information about changes to references.

⚠ Do not delete or manually modify the .git directory, because it can damage the Git repository.

Result :The .git directory and its basic structure were successfully examined and understood.

```

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ ls -la
total 15
drwxr-xr-x 1 HP 197121 0 Aug 31 18:33 ./
drwxr-xr-x 1 HP 197121 0 Aug 31 12:14 ../
drwxr-xr-x 1 HP 197121 0 Aug 31 18:33 .git/
-rw-r--r-- 1 HP 197121 2 Aug 31 12:14 .gitignore
-rw-r--r-- 1 HP 197121 29 Aug 31 12:14 README.md
-rw-r--r-- 1 HP 197121 0 Aug 31 12:19 file1.txt
-rw-r--r-- 1 HP 197121 45 Aug 31 18:36 file2.txt
drwxr-xr-x 1 HP 197121 0 Aug 31 16:51 git-assignment/

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ ls -la .git
total 25
drwxr-xr-x 1 HP 197121 0 Aug 31 18:33 ./
drwxr-xr-x 1 HP 197121 0 Aug 31 18:33 ../
-rw-r--r-- 1 HP 197121 41 Aug 31 18:33 AUTO_MERGE
-rw-r--r-- 1 HP 197121 321 Aug 31 16:28 COMMIT_EDITMSG
-rw-r--r-- 1 HP 197121 375 Aug 31 14:33 FETCH_HEAD
-rw-r--r-- 1 HP 197121 24 Aug 31 13:11 HEAD
-rw-r--r-- 1 HP 197121 41 Aug 31 18:26 ORIG_HEAD
-rw-r--r-- 1 HP 197121 387 Aug 31 12:57 config
-rw-r--r-- 1 HP 197121 73 Aug 31 12:14 description
drwxr-xr-x 1 HP 197121 0 Aug 31 12:14 hooks/
-rw-r--r-- 1 HP 197121 661 Aug 31 18:33 index
drwxr-xr-x 1 HP 197121 0 Aug 31 12:14 info/
drwxr-xr-x 1 HP 197121 0 Aug 31 12:14 logs/
drwxr-xr-x 1 HP 197121 0 Aug 31 18:26 objects/
-rw-r--r-- 1 HP 197121 112 Aug 31 12:14 packed-refs
drwxr-xr-x 1 HP 197121 0 Aug 31 18:33 refs/

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$

```

20. Check all the logs of git.

Purpose : To view the complete commit history of the Git repository.

Step 1 – Check Git logs

Run:

git log

This displays details such as:

Commit ID

Author

Date

Commit message

Result :The Git commit history was successfully viewed, including commits from different branches.

```
HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git log
commit 2ab7c5179f5b9990b94c54d6afcba34e5ecd5f38 (HEAD -> release, origin/release)
Author: chandrashekar <psschandrashekar@gmail.com>
Date: Mon Aug 31 16:28:36 2026 +0530

    Revert " remove how are you"

    This reverts commit 422ac4acba3d1ea6febc0edd870272c8634c5111.

commit 422ac4acba3d1ea6febc0edd870272c8634c5111
Author: chandrashekar <psschandrashekar@gmail.com>
Date: Mon Aug 31 16:27:49 2026 +0530

    added how are you

commit 256767c1309ac6378c4c0add0d57e436869ccfd8
Author: chandrashekar <psschandrashekar@gmail.com>
Date: Mon Aug 31 16:26:49 2026 +0530

    added hello

commit a592afcb84b57375ceac3d544e900173bd826cc7
Author: chandrashekar <psschandrashekar@gmail.com>
Date: Mon Aug 31 16:23:12 2026 +0530

    Revert " new revert added file pr-file new to the release"

    This reverts commit 6459932c7b1ee12523fcbf8e0137f8ad94122362.

commit d52b5335d9e81298d779de56683a75d037d9d609
Author: chandrashekar <psschandrashekar@gmail.com>
Date: Mon Aug 31 16:11:16 2026 +0530

    Revert "revert example file"

    This reverts commit 0ed919f5a2ca531182f1f19dd28858dc23c85f69.

commit 0ed919f5a2ca531182f1f19dd28858dc23c85f69
Author: chandrashekar <psschandrashekar@gmail.com>
Date: Mon Aug 31 16:10:15 2026 +0530

    example file
```

21.Rename the commit message.

Purpose :To change the message of the most recent Git commit.

Step 1 – Check the latest commit

```
git log --oneline
```

Example:

```
abc1234 Added new file
```

Step 2 – Rename the commit message

```
git commit --amend -m "Updated commit message"
```

Step 3 – Verify

```
git log --oneline
```

Now the latest commit message should be:

```
abc1234 Updated commit message
```

Result :The latest Git commit message was successfully renamed using git commit --amend.

```

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git log --oneline
2ab7c51 (HEAD -> release, origin/release) Revert " remove how are you"
422ac4a added how are you
256767c added hello
a592afc Revert " new revert added file pr-file new to the release"
d52b533 Revert "revert example file"
0ed919f example file
cbf57a2 Revert "added new file"
8e4903f added password to gitignore file
097d004 added new file
6459932 added file pr-file new to the release
7a1904c (origin/main, origin/HEAD, main) added two text files
27503be Create .gitignore
e4815dd Initial commit

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git commit --amend -m "updtaed the commit msg"
[release 5595a73] updtaed the commit msg
Date: Mon Aug 31 16:28:36 2026 +0530
1 file changed, 2 deletions(-)

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git log --oneline
5595a73 (HEAD -> release) updtaed the commit msg
422ac4a added how are you
256767c added hello
a592afc Revert " new revert added file pr-file new to the release"
d52b533 Revert "revert example file"
0ed919f example file
cbf57a2 Revert "added new file"
8e4903f added password to gitignore file
097d004 added new file
6459932 added file pr-file new to the release
7a1904c (origin/main, origin/HEAD, main) added two text files
27503be Create .gitignore
e4815dd Initial commit

HP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ |

```

22.Merge multiple commits into single commit.

Purpose :To combine multiple Git commits into a single commit using interactive rebase.

Steps

1. Check the Git status

git status

If there are uncommitted changes, temporarily save them using:

git stash

2. Start the interactive rebase

```
git rebase -i HEAD~3
```

The interactive rebase editor opens with the recent commits.

Keep the first commit as:

```
pick
```

Change the other commits to:

```
squash
```

Example:

```
pick commit1
```

```
squash commit2
```

```
squash commit3
```

Save and exit:

```
Ctrl + O → Enter → Ctrl + X
```

3. Enter the final commit message

When Git asks for the final commit message, enter:

```
Combined multiple commits
```

Save and exit:

```
Ctrl + O → Enter → Ctrl + X
```

4. Verify the rebase

```
git log --oneline -5
```

The selected commits should now be combined into a single commit.

5. Restore the previously stashed changes

If git stash was used:

```
git stash pop
```

Then check:

```
git status
```

Result :Multiple commits were successfully combined into a single commit using Git interactive rebase.

```

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git status
On branch release
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file2.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        git-assignment/file1.txt

no changes added to commit (use "git add" and/or "git commit -a")

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git stash
Saved working directory and index state WIP on release: 5595a73 updaed the commit msg

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git rebase -i HEAD~3
[detached HEAD 461079b] added hello
Date: Mon Aug 31 16:26:49 2026 +0530
1 file changed, 1 insertion(+)
Successfully rebased and updated refs/heads/release.

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git log --oneline-5
fatal: unrecognized argument: --oneline-5

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git log --oneline -5
461079b (HEAD -> release) added hello
a592afc Revert "new revert added file pr-file new to the release"
452b533 Revert "revert example file"
0ed919f example file
bfb57a2 Revert "added new file"

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)
$ git stash pop
On branch release
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file2.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        git-assignment/file1.txt

no changes added to commit (use "git add" and/or "git commit -a")
Dropped refs/stash@{0} (a40eb9eb60c005adb0260553e98e08a3a7c44214)

IP@DESKTOP-1GQ065F MINGW64 /f/Git-practice/github-task (release)

```

```
HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
$ git status
On branch release
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   file2.txt

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        git-assignment/file1.txt

no changes added to commit (use "git add" and/or "git commit -a")
HP@DESKTOP-1GQO65F MINGW64 /f/Git-practice/github-task (release)
```