

b-secure Admin Panel

Purpose


The b-secure Admin Panel is an **internal operations dashboard** used exclusively by platform administrators. It provides full visibility and control over the platform’s core entities — guards, users, bookings, payments, SOS events, and analytics — through a unified, real-time web interface.

This is not a customer-facing product. Access is restricted via next-auth credentials-based authentication backed by the Django admin login API. All routes under `/(dashboard)/*` are protected by middleware.

Tech Stack

Layer	Technology
Framework	Next.js 14 (App Router)
Language	TypeScript
Styling	Tailwind CSS + shadcn/ui
Server State	TanStack Query v5 (React Query)
Client State	Zustand
Tables	TanStack Table v8
Charts	Recharts
Forms	React Hook Form + Zod
HTTP Client	Axios
Authentication	next-auth (JWT strategy, Credentials Provider)
Real-time	WebSocket (native browser API)
Icons	lucide-react

Folder Structure

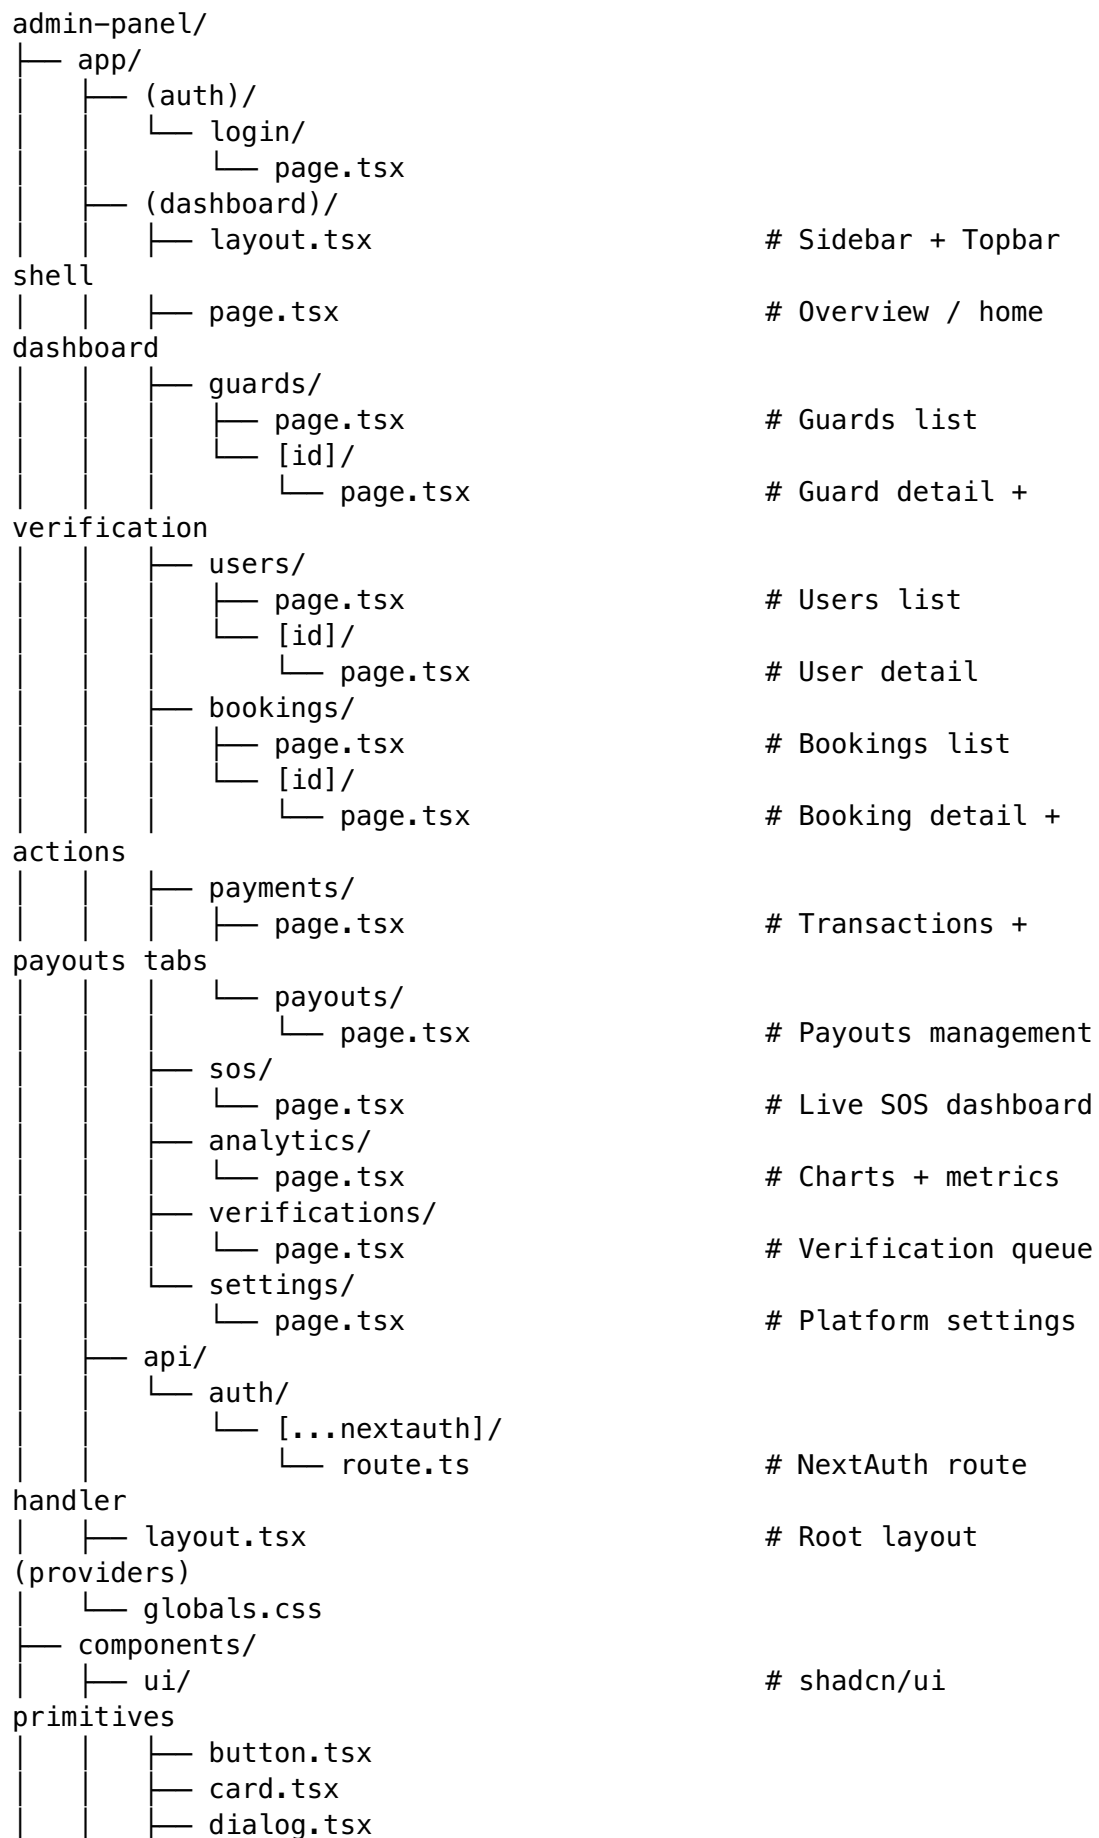

```

|   |   |   | input.tsx
|   |   |   | select.tsx
|   |   |   | badge.tsx
|   |   |   | tabs.tsx
|   |   |   | table.tsx
|   |   |   | dropdown-menu.tsx
|   |   |   | avatar.tsx
|   |   |   | skeleton.tsx
|   |   |   | alert-dialog.tsx
|   |   |   | popover.tsx
|   |   |   | calendar.tsx
|   |   |   |
|   |   |   | layout/
|   |   |   | | Sidebar.tsx          # Nav sidebar
|   |   |   | | Topbar.tsx        # Breadcrumb +
|   |   |   |
|   |   |   | avatar dropdown
|   |   |   | | tables/
|   |   |   | | | DataTable.tsx    # TanStack Table
|   |   |   |
|   |   |   | generic wrapper
|   |   |   | | charts/
|   |   |   | | | BookingsLineChart.tsx
|   |   |   | | | RevenueBarChart.tsx
|   |   |   | | | TierPieChart.tsx
|   |   |   | | | PeakHoursHeatmap.tsx
|   |   |   | | shared/
|   |   |   | | | KPICard.tsx
|   |   |   | | | StatusBadge.tsx
|   |   |   | | | GuardVerificationCard.tsx
|   |   |   | | | SOSEventCard.tsx
|   |   |   | | | BookingTimeline.tsx
|   |   |   | | | PageHeader.tsx
|   |   |   | | | DateRangePicker.tsx
|   |   |   | | | ConfirmDialog.tsx
|   |   |   | | | ExportButton.tsx
|   |   |   |
|   |   |   | hooks/
|   |   |   | | useAdminWebSocket.ts
|   |   |   | | useDashboardMetrics.ts
|   |   |   | | useGuards.ts
|   |   |   | | useUsers.ts
|   |   |   | | useBookings.ts
|   |   |   | | usePayments.ts
|   |   |   | | useSOS.ts
|   |   |   | | useAnalytics.ts
|   |   |   |
|   |   |   | services/
|   |   |   | | axios.ts          # Axios instance +
|   |   |   |
|   |   |   | interceptors
|   |   |   | | dashboardService.ts
|   |   |   | | guardService.ts
|   |   |   | | userService.ts
|   |   |   | | bookingService.ts
|   |   |   | | paymentService.ts
|   |   |   | | sosService.ts
|   |   |   | | analyticsService.ts
|   |   |   | | settingsService.ts
|   |   |   |
|   |   |   | stores/

```

— sosStore.ts	# Live SOS events
(Zustand)	
— wsStore.ts	# WebSocket
connection state	
— dashboardStore.ts	# Live KPI counters
— lib/	
— auth.ts	# NextAuth config
— queryClient.ts	# TanStack Query
client	
— utils.ts	# cn(), formatters
— validators/	
— settingsSchema.ts	
— types/	
— admin.ts	# All TypeScript
interfaces	
— middleware.ts	# Route protection
— next.config.js	
— tailwind.config.ts	
— tsconfig.json	
— .env.local	

Documentation Index

File	Description
overview.md	Setup, environment variables, NextAuth, middleware, layout, Axios, React Query
pages.md	Full TSX code for every page component
components.md	Reusable component implementations
realtime.md	WebSocket hook, SOS alarms, browser notifications
api_integration.md	Axios instance, all service functions, TypeScript types

Quick Start

```

cd admin-panel
npm install
cp .env.example .env.local # fill in values
npm run dev                # http://localhost:3000

```

Login with admin credentials. All dashboard routes auto-redirect to /login if unauthenticated.