



≡

Book

▼

Search this book

Cisco Security for Chromebook Client > Deploy the Chromebook Client > Deploy Cisco Security for Chromebook Client > Google Admin Console > Configure Default Template

Last updated: Feb 13, 2026


Configure Default Template

Procedure


- 1 Log into the [Google Admin console](#).
- 2 Navigate to **Devices > Chrome > Settings > Users & browser settings**.
- 3 Cisco Security for Chromebook is in the process of transitioning from Manifest V2 to Manifest V3 for Chrome Extensions. In the meantime, Google recommends that you use the Manifest V2 Extensions Availability policy to ensure continued functioning of Manifest V2 extensions.

To enable availability of Manifest V2 extensions:

Filter settings for **Manifest**. The **Manifest V2 Extension Availability** setting is displayed.

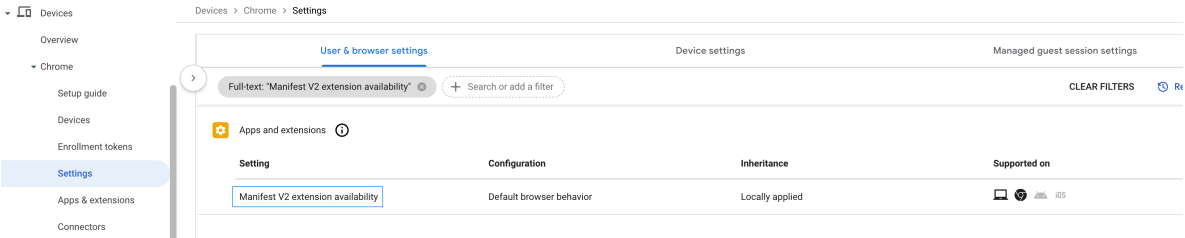

- 4 Select the parent organizational unit on which you want to enable the **Manifest V2 extension availability** policy. Click **Manifest V2 extension availability**.
- 5 In the **Configuration** drop-down list, choose **Enable manifest V2 extensions**.

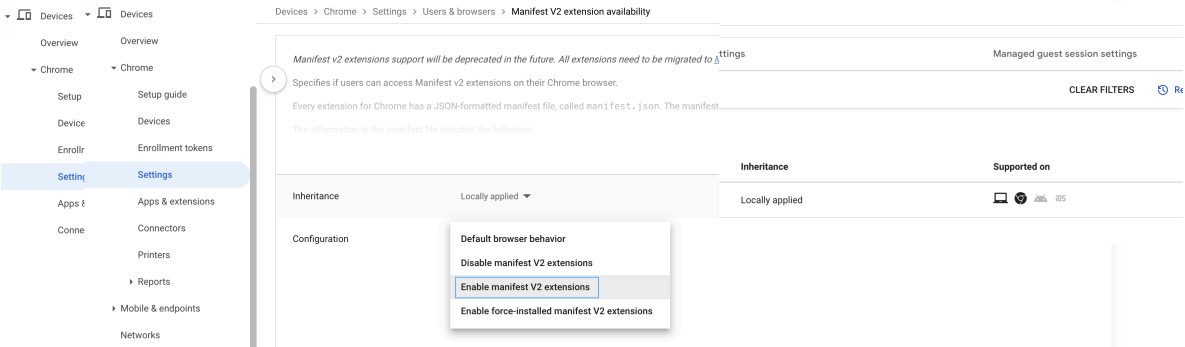

- 6 Filter settings for DNS. The DNS settings are displayed.

Source: https://securitydocs.cisco.com/docs/umbrella-dns/r/h/144399 dita

Search for users, groups or settings

Devices > Chrome > Settings

aravalli.co.in > DevTesting

Settings

User & browser settings Device settings Managed guest session settings

Full-text: "dns" + Search or add a filter CLEAR FILTERS Recent changes

Organizational Units

Search for organizational units

DEIA

Network

Setting	Configuration	Inheritance	Supported on
WebRTC ICE candidate URLs for local IPs		Google default	iOS
DNS-over-HTTPS	2 sub settings	Locally applied	iOS
DNS-over-HTTPS with identifiers	2 sub settings	Locally applied	iOS

- 7 Select **DNS-over-HTTPS** and configure it to **Enable DNS-over-HTTPS with insecure fallback**.

Controls the default mode of the remote Domain Name System (DNS) resolution via the HTTPS protocol for each query. DNS-over-HTTPS (DoH) helps to improve safety and privacy while users are browsing the web. For example, attackers are prevented from observing what sites you visit or sending you to phishing websites.

Choose an option:

Block DNS-over-HTTPS—Chrome never sends DNS requests to DNS servers

More ▾

Inheritance: Locally applied ▾

Configuration

DNS-over-HTTPS mode

Enable DNS-over-HTTPS with insecure fallback ▾

Save Cancel

- 8 Return to the **Users & Browser Settings** page. Select **DNS-over-HTTPS with Identifiers**.

The screenshot shows the 'Settings' page in the Cisco Umbrella interface. The breadcrumb trail is 'Devices > Chrome > Settings'. The 'User & browser settings' tab is selected. A search bar at the top contains 'Full-text: "dns"'. The 'Network' section is expanded, and the 'DNS-over-HTTPS with identifiers' setting is highlighted with a blue box. The table below shows the configuration for this setting:

Setting	Configuration	Inheritance	Supported on
WebRTC ICE candidate URLs for local IPs		Google default	Windows, macOS, Linux, iOS
DNS-over-HTTPS	2 sub settings	Locally applied	Windows, macOS, Linux, iOS
DNS-over-HTTPS with identifiers	2 sub settings	Locally applied	Windows, macOS, Linux, iOS

At the bottom, a message states: 'You are viewing the updated version of Settings. [Switch to legacy version](#)'.

- 9 Enter the URL of the **Default** DoH template and the **Salt** value copied from the Umbrella Dashboard in the earlier steps. Click **Save**.

The screenshot shows the 'DNS-over-HTTPS with identifiers' configuration page. The breadcrumb trail is 'Devices > Chrome > Settings > Users & browsers > DNS-over-HTTPS with identifiers'. The page is for the user 'aravalli.co.in' in the 'DevTesting' environment. The 'Configuration' section shows the following:

DNS-over-HTTPS templates with identifiers
 https://doh.umbrella.com/identity/v1
 {\${USER_EMAIL}}/dns-query{?dns}

URI templates of desired DNS-over-HTTPS resolvers which contain user or device identifiers. One per line. If the URI template contains a (?dns) variable, requests to the resolver will use GET; otherwise requests will use POST. If both DNS-over-HTTPS templates and DNS-over-HTTPS templates with identifiers are set, ChromeOS will default to DNS-over-HTTPS templates with identifiers.


Salt for hashing identifiers in the URI templates
 Salt12345

Salt used for hashing user and device identifiers in the template URIs. Optional starting Chrome version 114.

At the bottom, there are 'Save' and 'Cancel' buttons.


The Salt value entered here should be the same as the Salt value entered in the Umbrella dashboard.

- 10 From **Apps & Extensions**, navigate to **Users & browsers > Organizational Units**.
- 11 Expand **Organizational Units** and choose the organization into which you want to deploy the Cisco Umbrella Unified Chromebook client.
- 12 Click the + (Expand) icon and choose **Add from Chrome Web Store**.

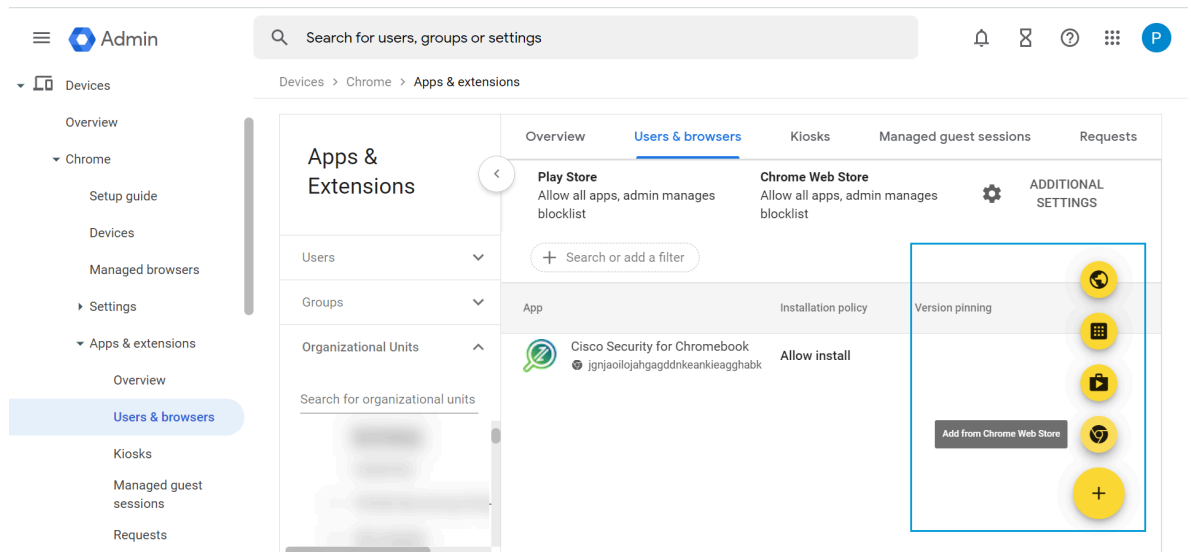

- 13 In the Chrome Web Store, navigate to **Extensions** and search for the Cisco Security Chromebook client extension using the ID **jgnjaiojahgagddnkeankieagghabk**.

 When copying and pasting the extension ID into the search field, ensure there are no spaces before or after it. This will help you locate the Cisco Security for Chromebook client extension.

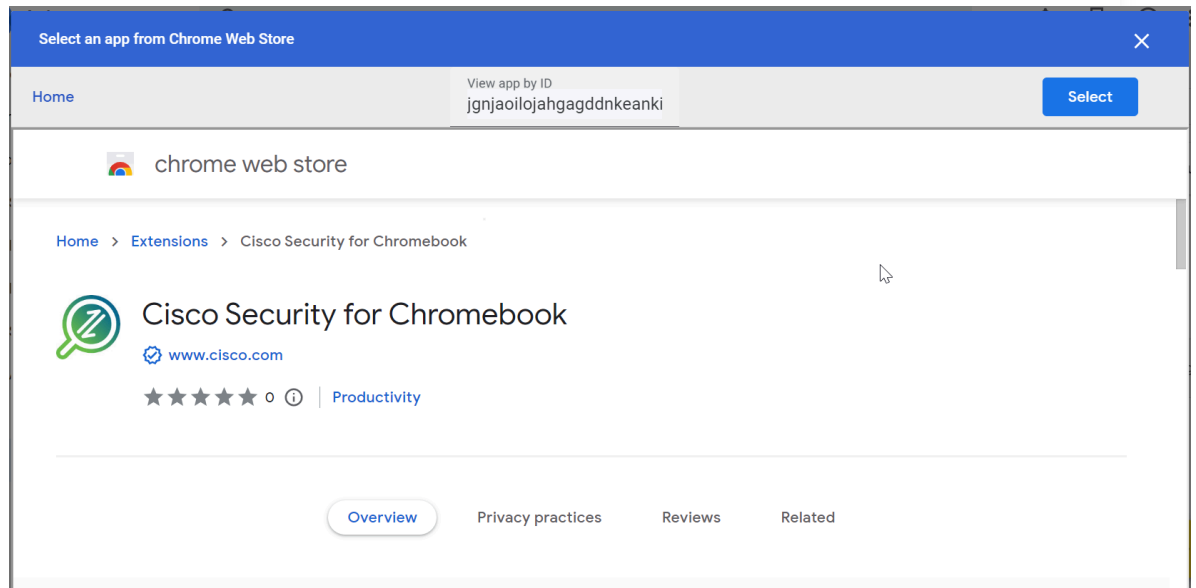


- 14 Click **Select**. The extension is added to the selected organization unit.
- 15 Copy the JSON file that you downloaded and paste it into the **Policy for Extensions** section.




-  The JSON configuration parameters, **googleDirectoryService** and **valPs** apply only to the Cisco Umbrella Chromebook client and not to the Cisco Security for Chromebook client.
-  If you have deployed the Cisco Umbrella Chromebook client, Block or Uninstall the Umbrella Chromebook App and Extension before you deploy the Cisco Security for Chromebook client.

16 Choose **Force Install** and then click **Save**.


The Cisco Security for Chromebook client extension is installed. Force Install ensures that Chromebook users in the selected Organization Unit cannot remove or disable the extension.

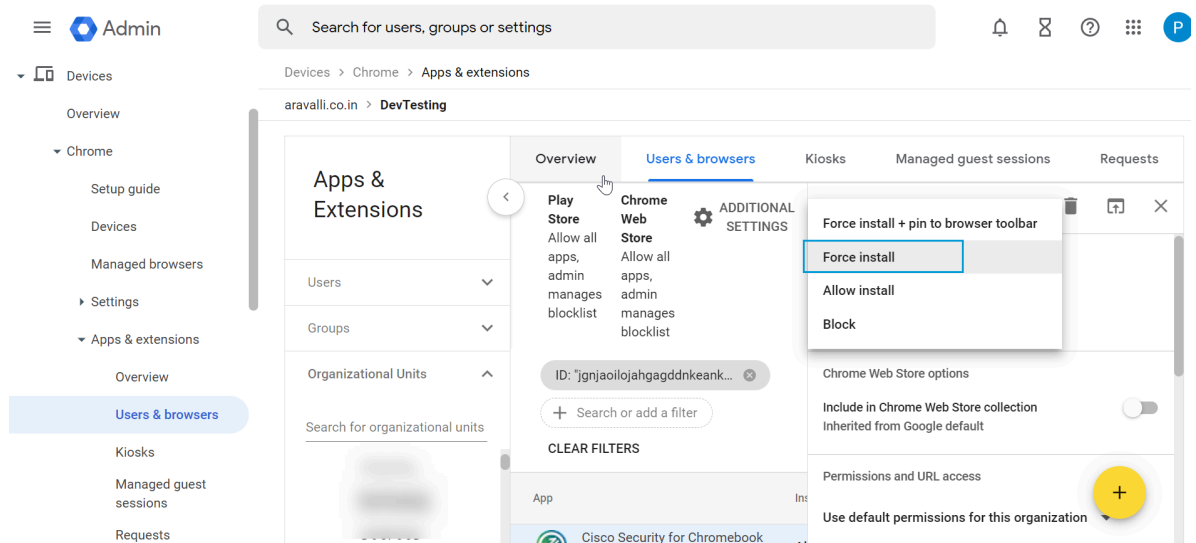

17 Check if the Cisco Security for Chromebook Client is installed on the Chromebooks and if the old Umbrella Chromebook Client (App and Extension) is blocked.

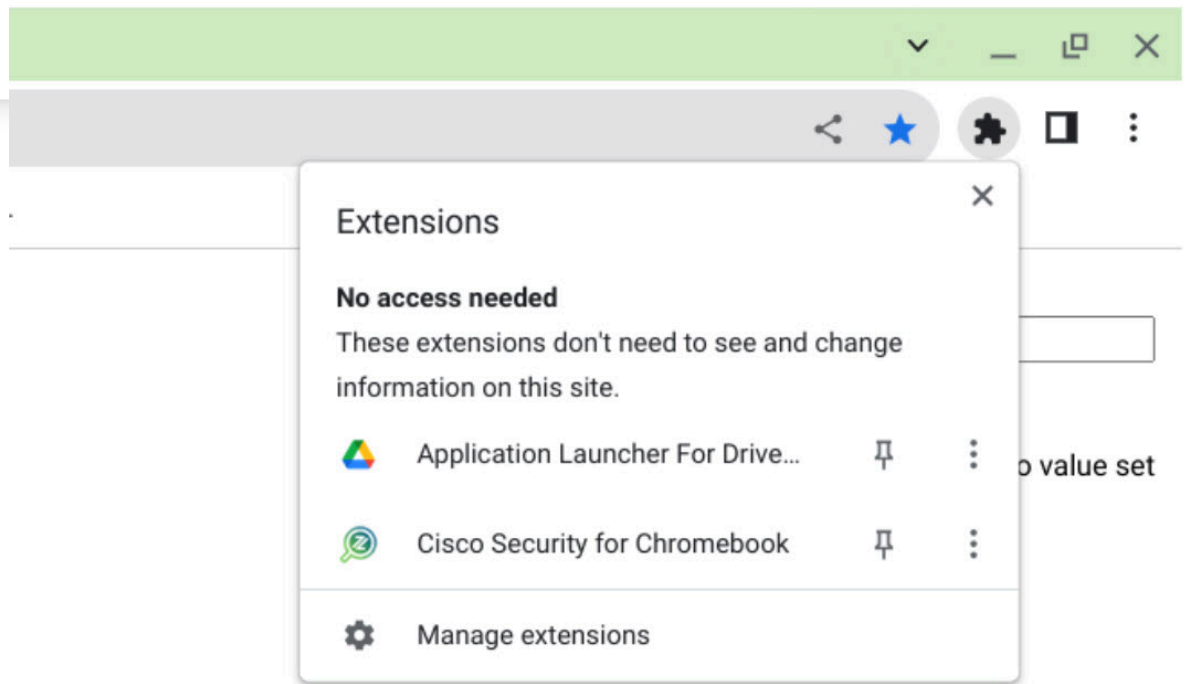

- 18 Open the URL <https://policy-debug.checkumbrella.com> and verify if the device is being protected by Umbrella. For DNS customers, the message displayed is "You are protected by Cisco Umbrella DNS!"

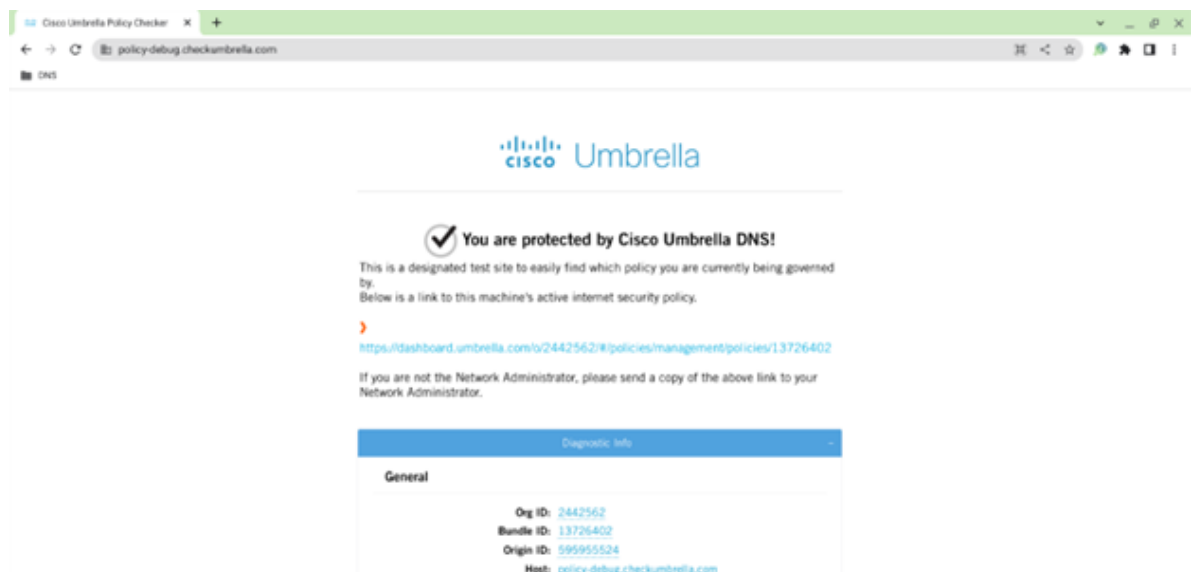

It may take Google up to eight hours to push the Chrome extension to all your Chromebooks. After the client is installed in a Chromebook, allow a few hours for Chromebook traffic to begin appearing in your Umbrella dashboard.

 Chromebooks must be connected and logged in.

[← Previous topic](#)

Google Admin Console

[Next topic →](#)

Configure Managed Guest Session Template