

Add Interactivity: User Input and Callbacks



Objectives

After completing the lab, you will be able to:

- Work with Dash Callbacks

Estimated time needed: 45 minutes

Dataset Used

[Airline Reporting Carrier On-Time Performance](#)

About Skills Network Cloud IDE

This Skills Network Labs Cloud IDE (Integrated Development Environment) provides a hands-on environment in your web browser for completing the course and project-related labs. It utilizes Theia, an open-source IDE platform that can be run on a desktop or on the cloud. So far in the course, you have been using Jupyter Notebooks to run your Python code. This IDE provides an alternative for editing and running your Python code. In this lab, you will be using this alternative Python runtime to create and launch your Dash applications.

Important Notice about this lab environment

Please be aware that sessions for this lab environment are not persisted. When you launch the Cloud IDE, you are presented with a ‘dedicated computer on the cloud’ exclusively for you. This is available to you as long as you are actively working on the labs.

Once you close your session or it is timed out due to inactivity, you are logged off, and this ‘dedicated computer on the cloud’ is deleted along with any files you may have created, downloaded or installed. The next time you launch this lab, a new environment will be created for you.

If you finish only part of the lab and return later, you may have to start from the beginning. So, it is a good idea to plan your time accordingly and finish your labs in a single session.

Let's start creating dash application


Theme

Extract the average monthly arrival delay time and see how it changes over the year. The year range is from 2010 to 2020.

Expected Output

Below is the expected result from the lab. Our dashboard application consists of three components:

- Title of the application
- Component to enter input year
- Chart conveying the average monthly arrival delay

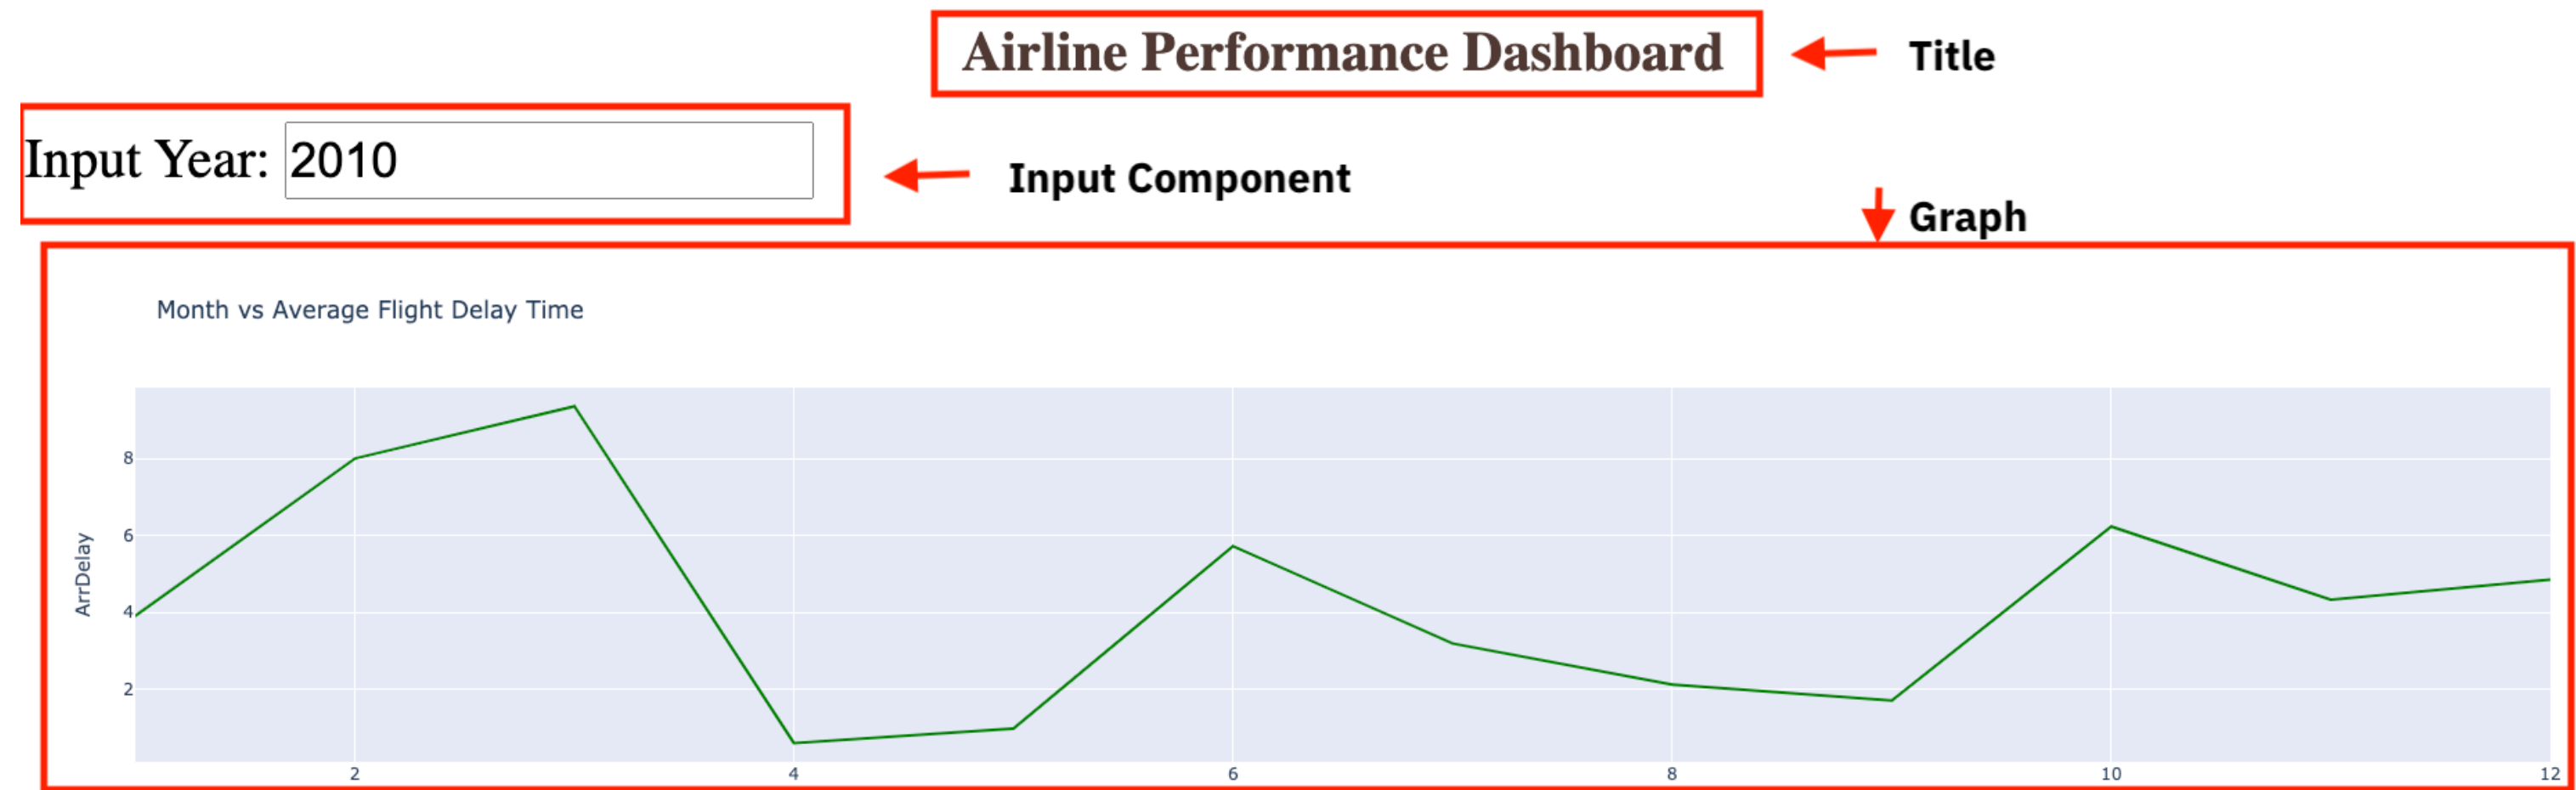

Tasks To do:

1. Task 1
 - Import required libraries
 - Read the dataset
2. Task 2
 - Create an application layout
 - Add title to the dashboard application using HTML H1 component
3. Task 3
 - Add input text box using core input and output components
 - Add the callback decorator and generate the line chart within the callback function.
4. Task 4
 - Practice Exercise

Get the tool ready


- Install python packages required to run the application. Copy and paste the below command to the terminal.

```
python3.11 -m pip install packaging
```


```
python3.11 -m pip install pandas dash
```

```
pip3 install httpx==0.20 dash plotly
```


- Create a new python script, by clicking on the side tool bar **explorer** icon and selecting **new file** icon, as shown in the image below.

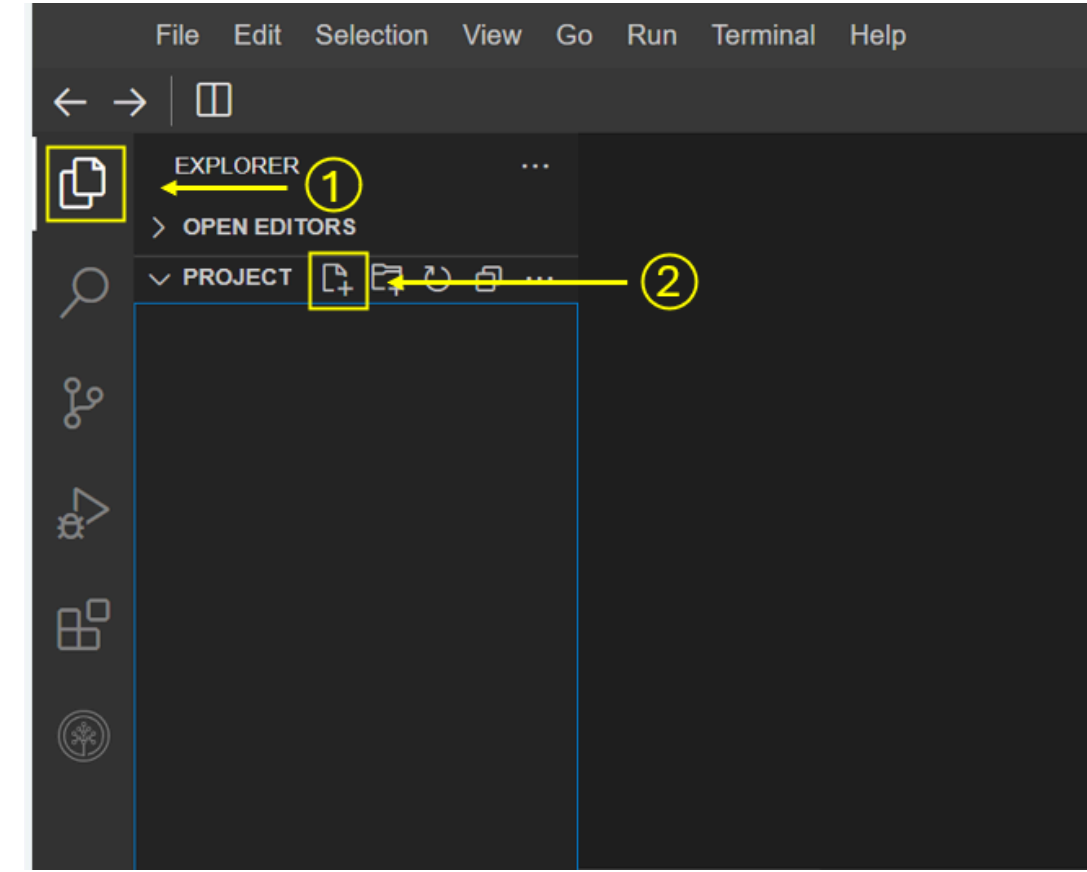


- Provide the file name as dash_interactivity.py

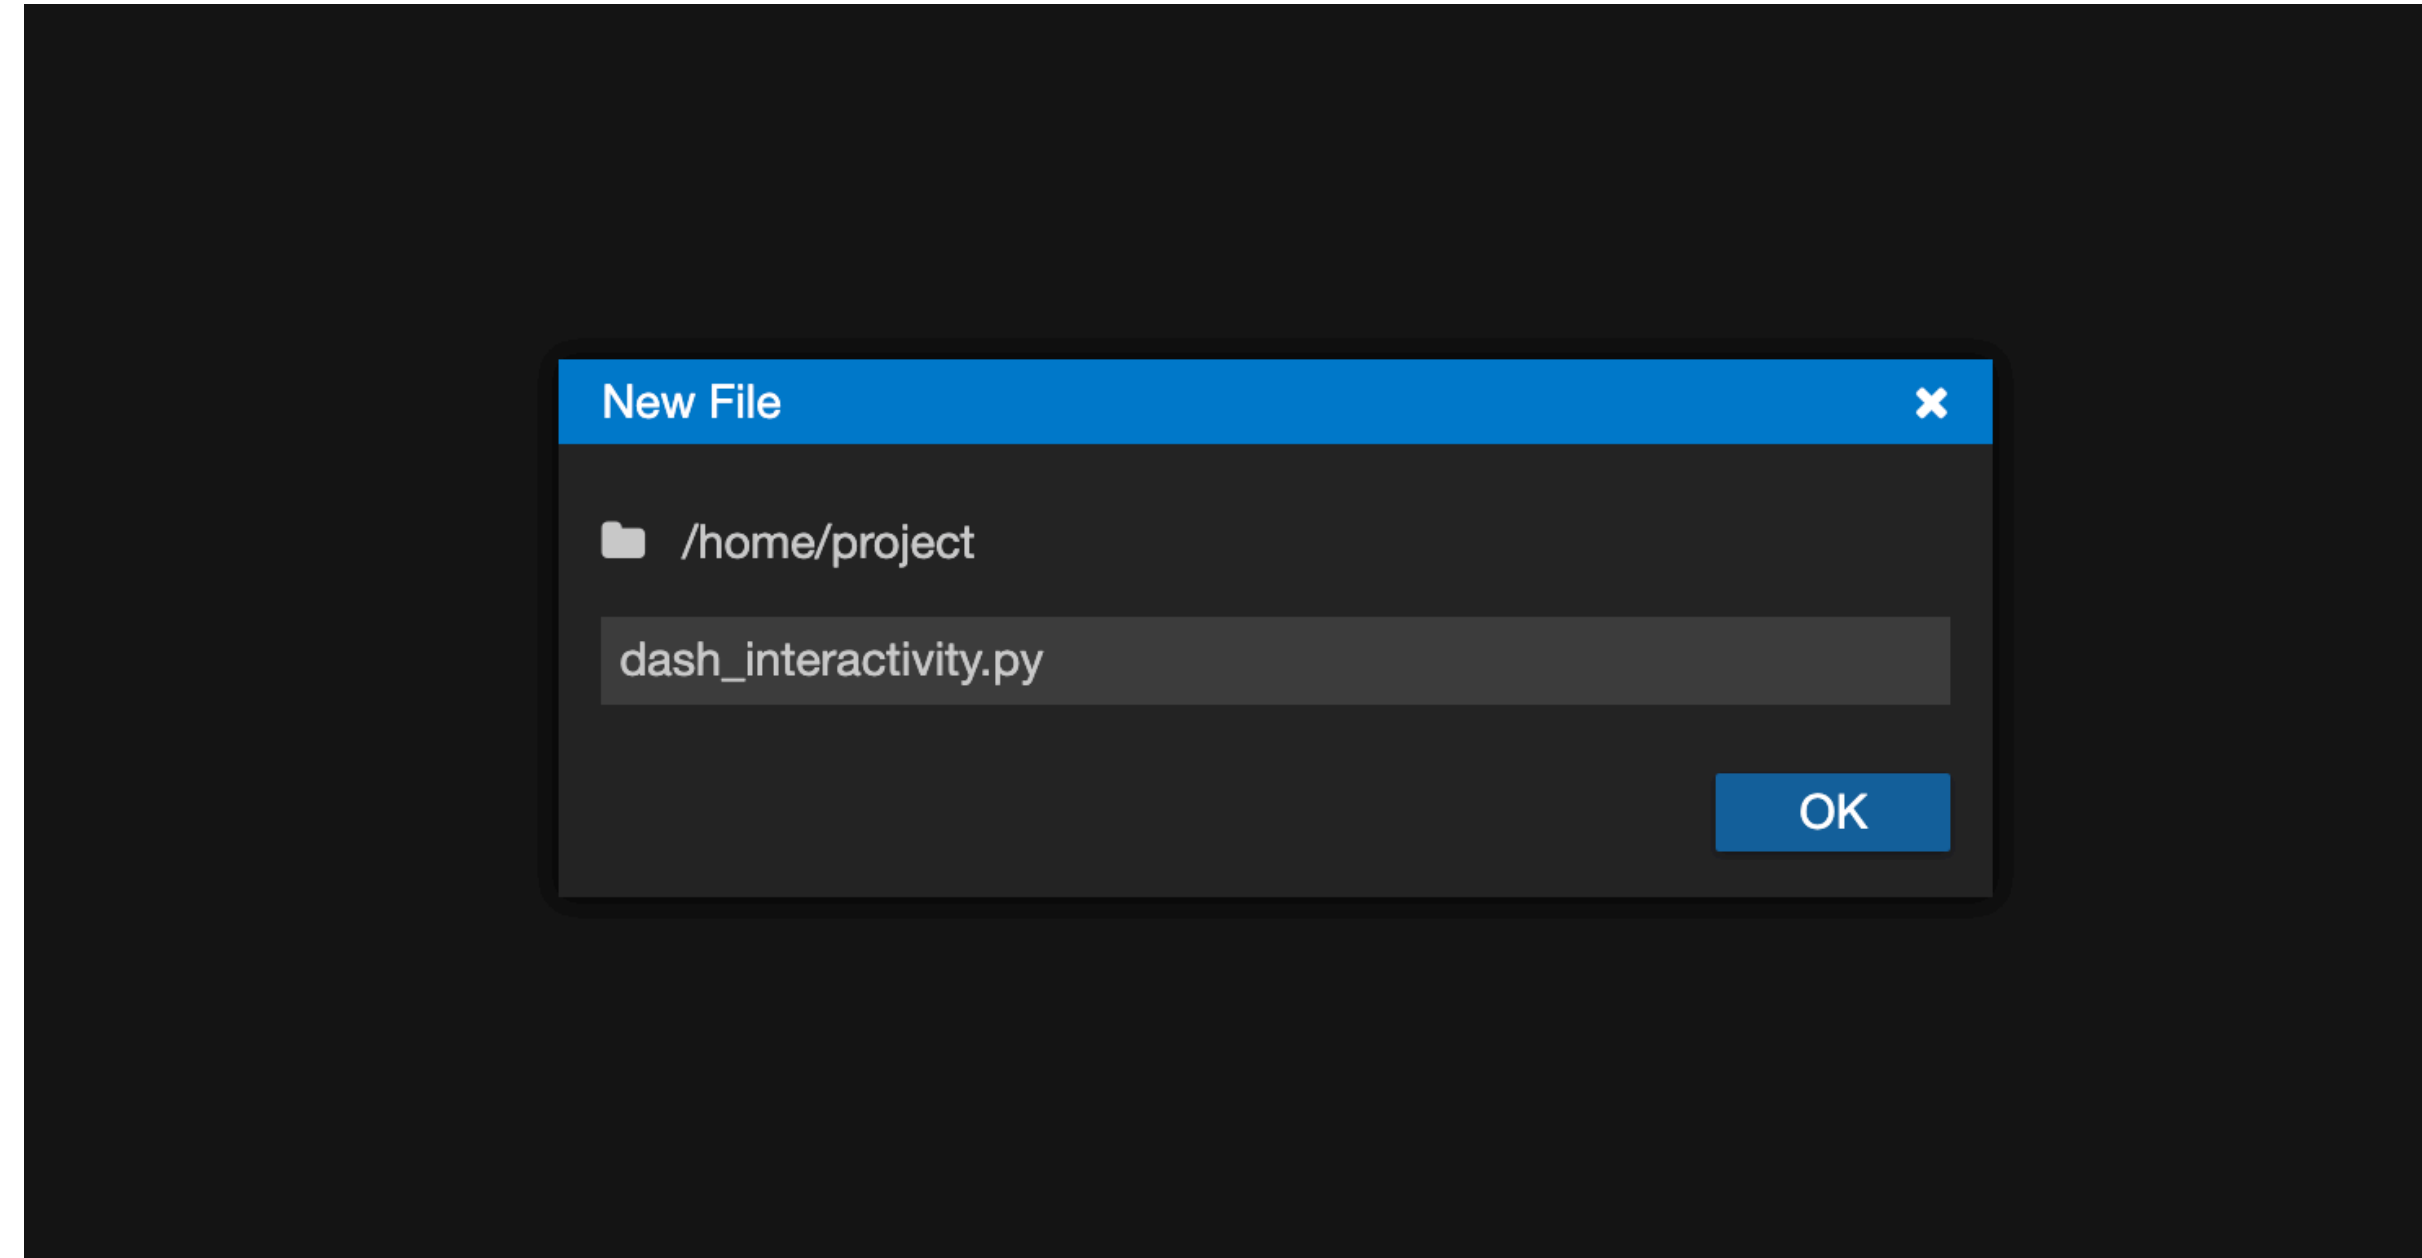

- Open a new terminal by clicking on the menu bar and selecting **Terminal->New Terminal**, as in the image below.

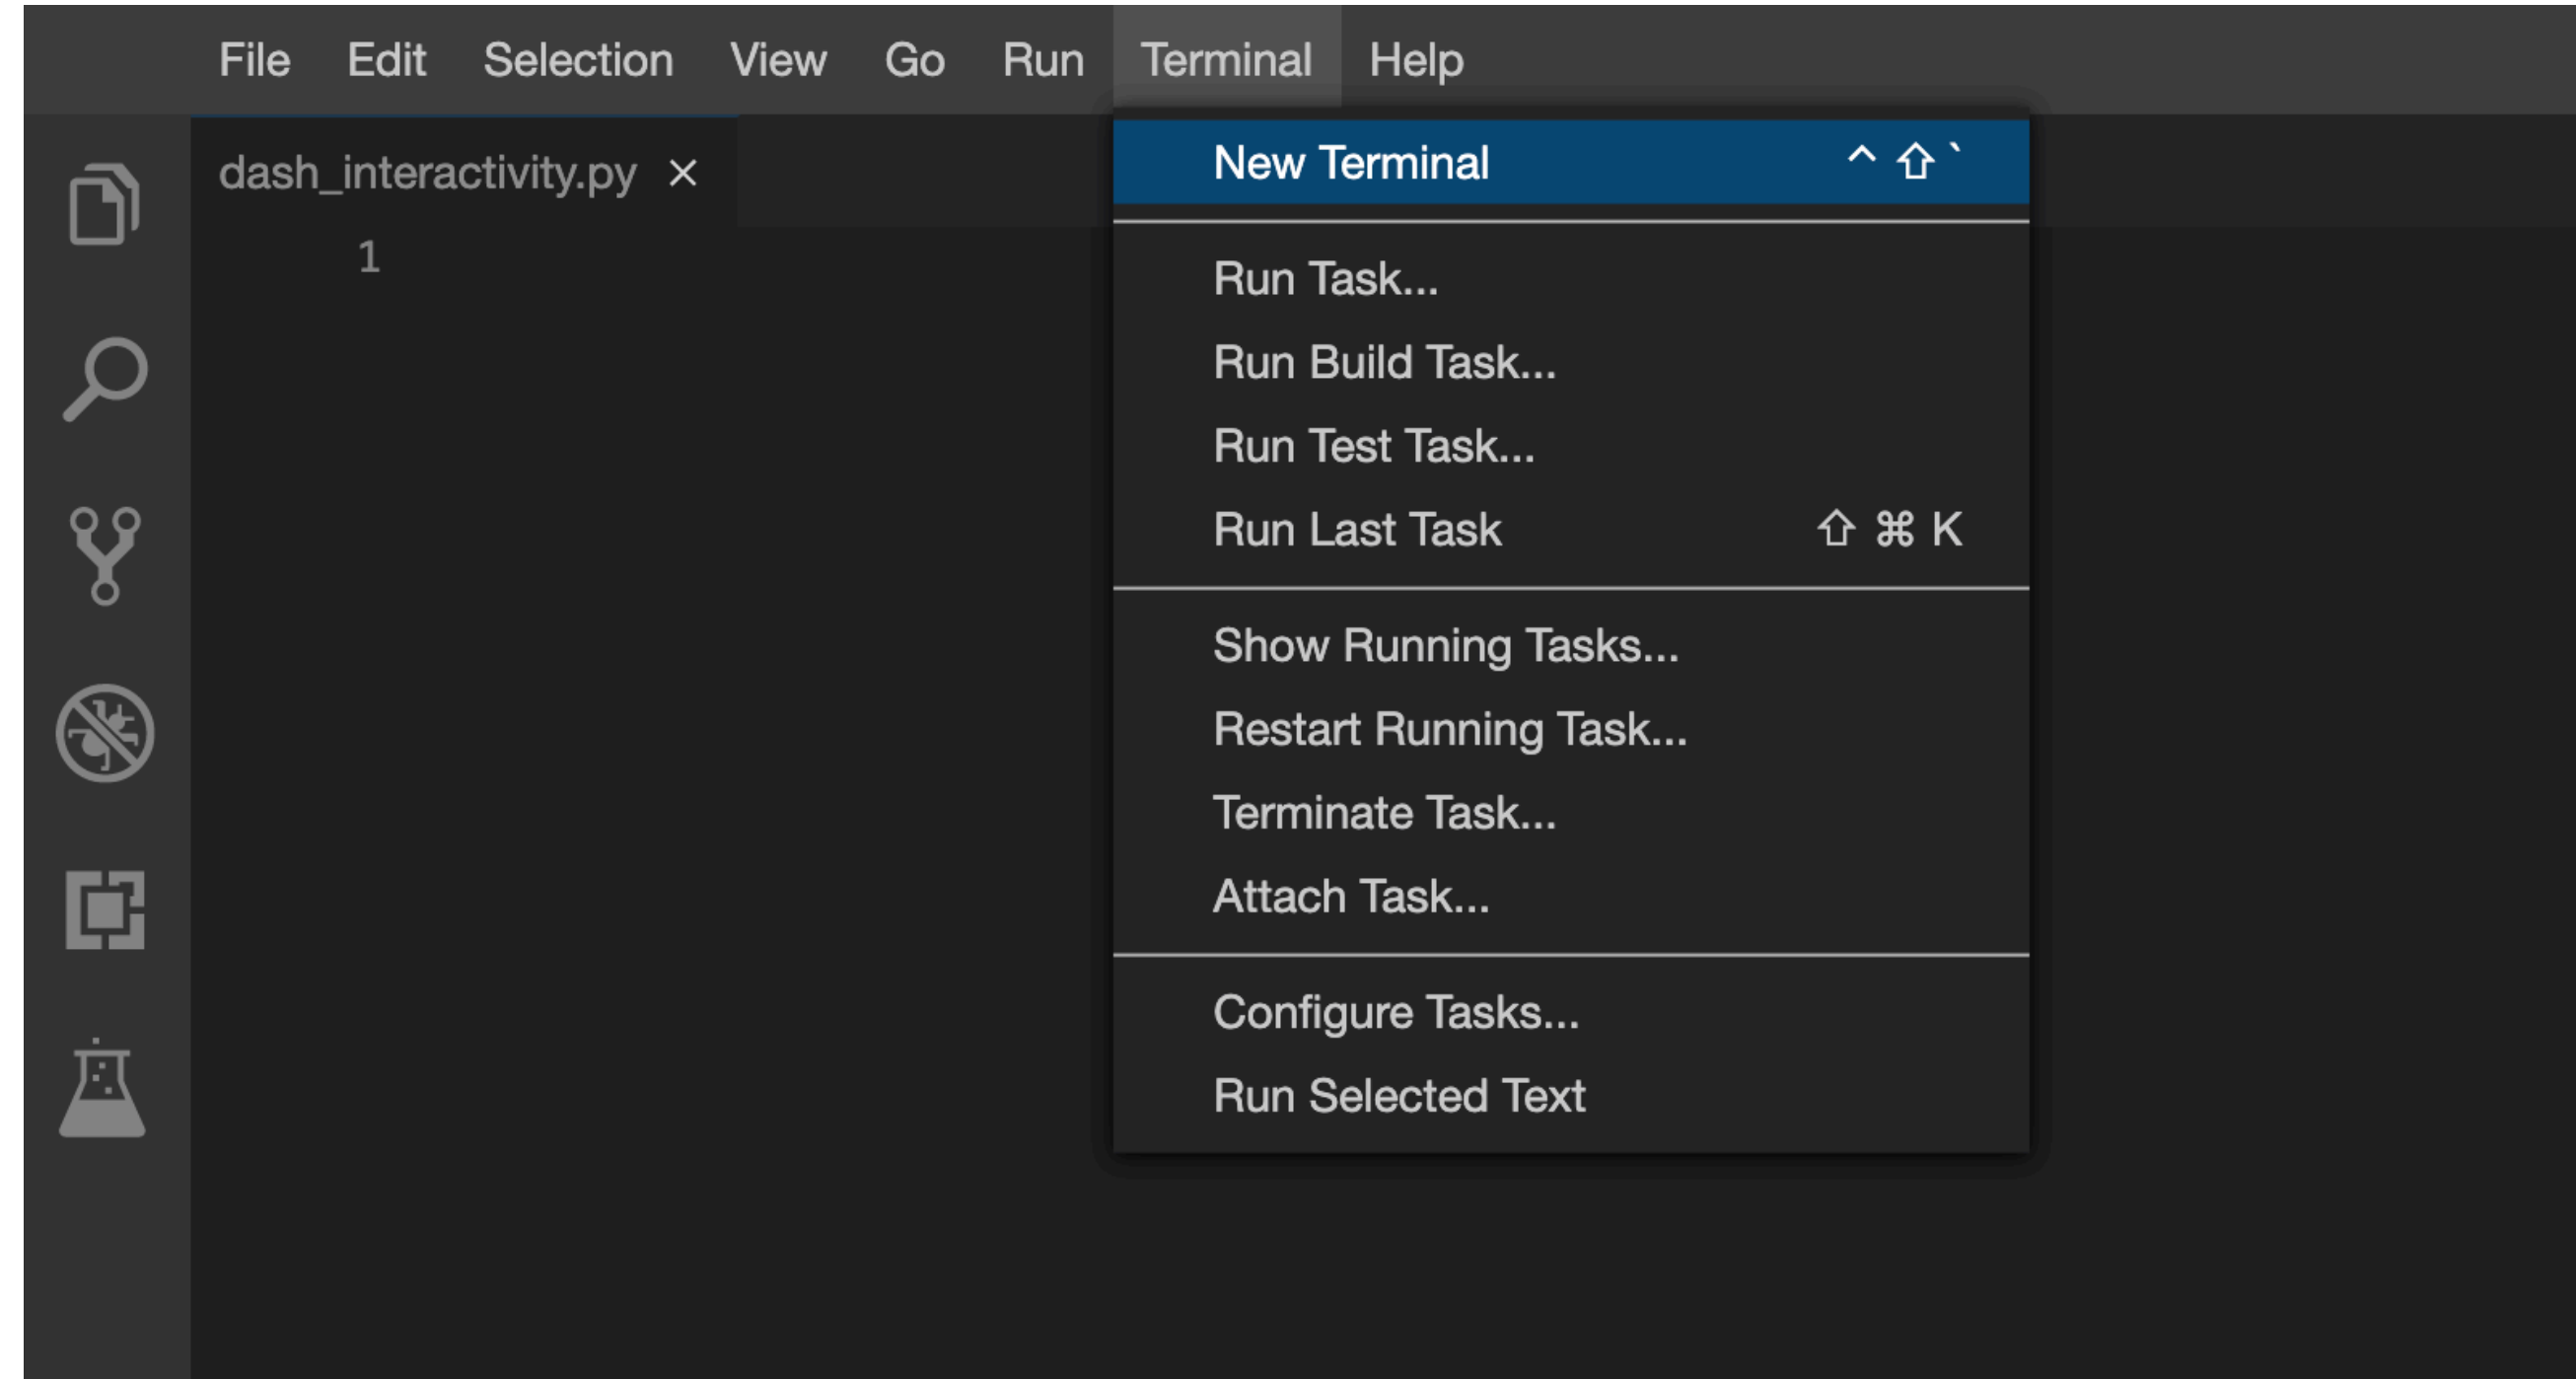

- Now, you have script and terminal ready to start the lab.

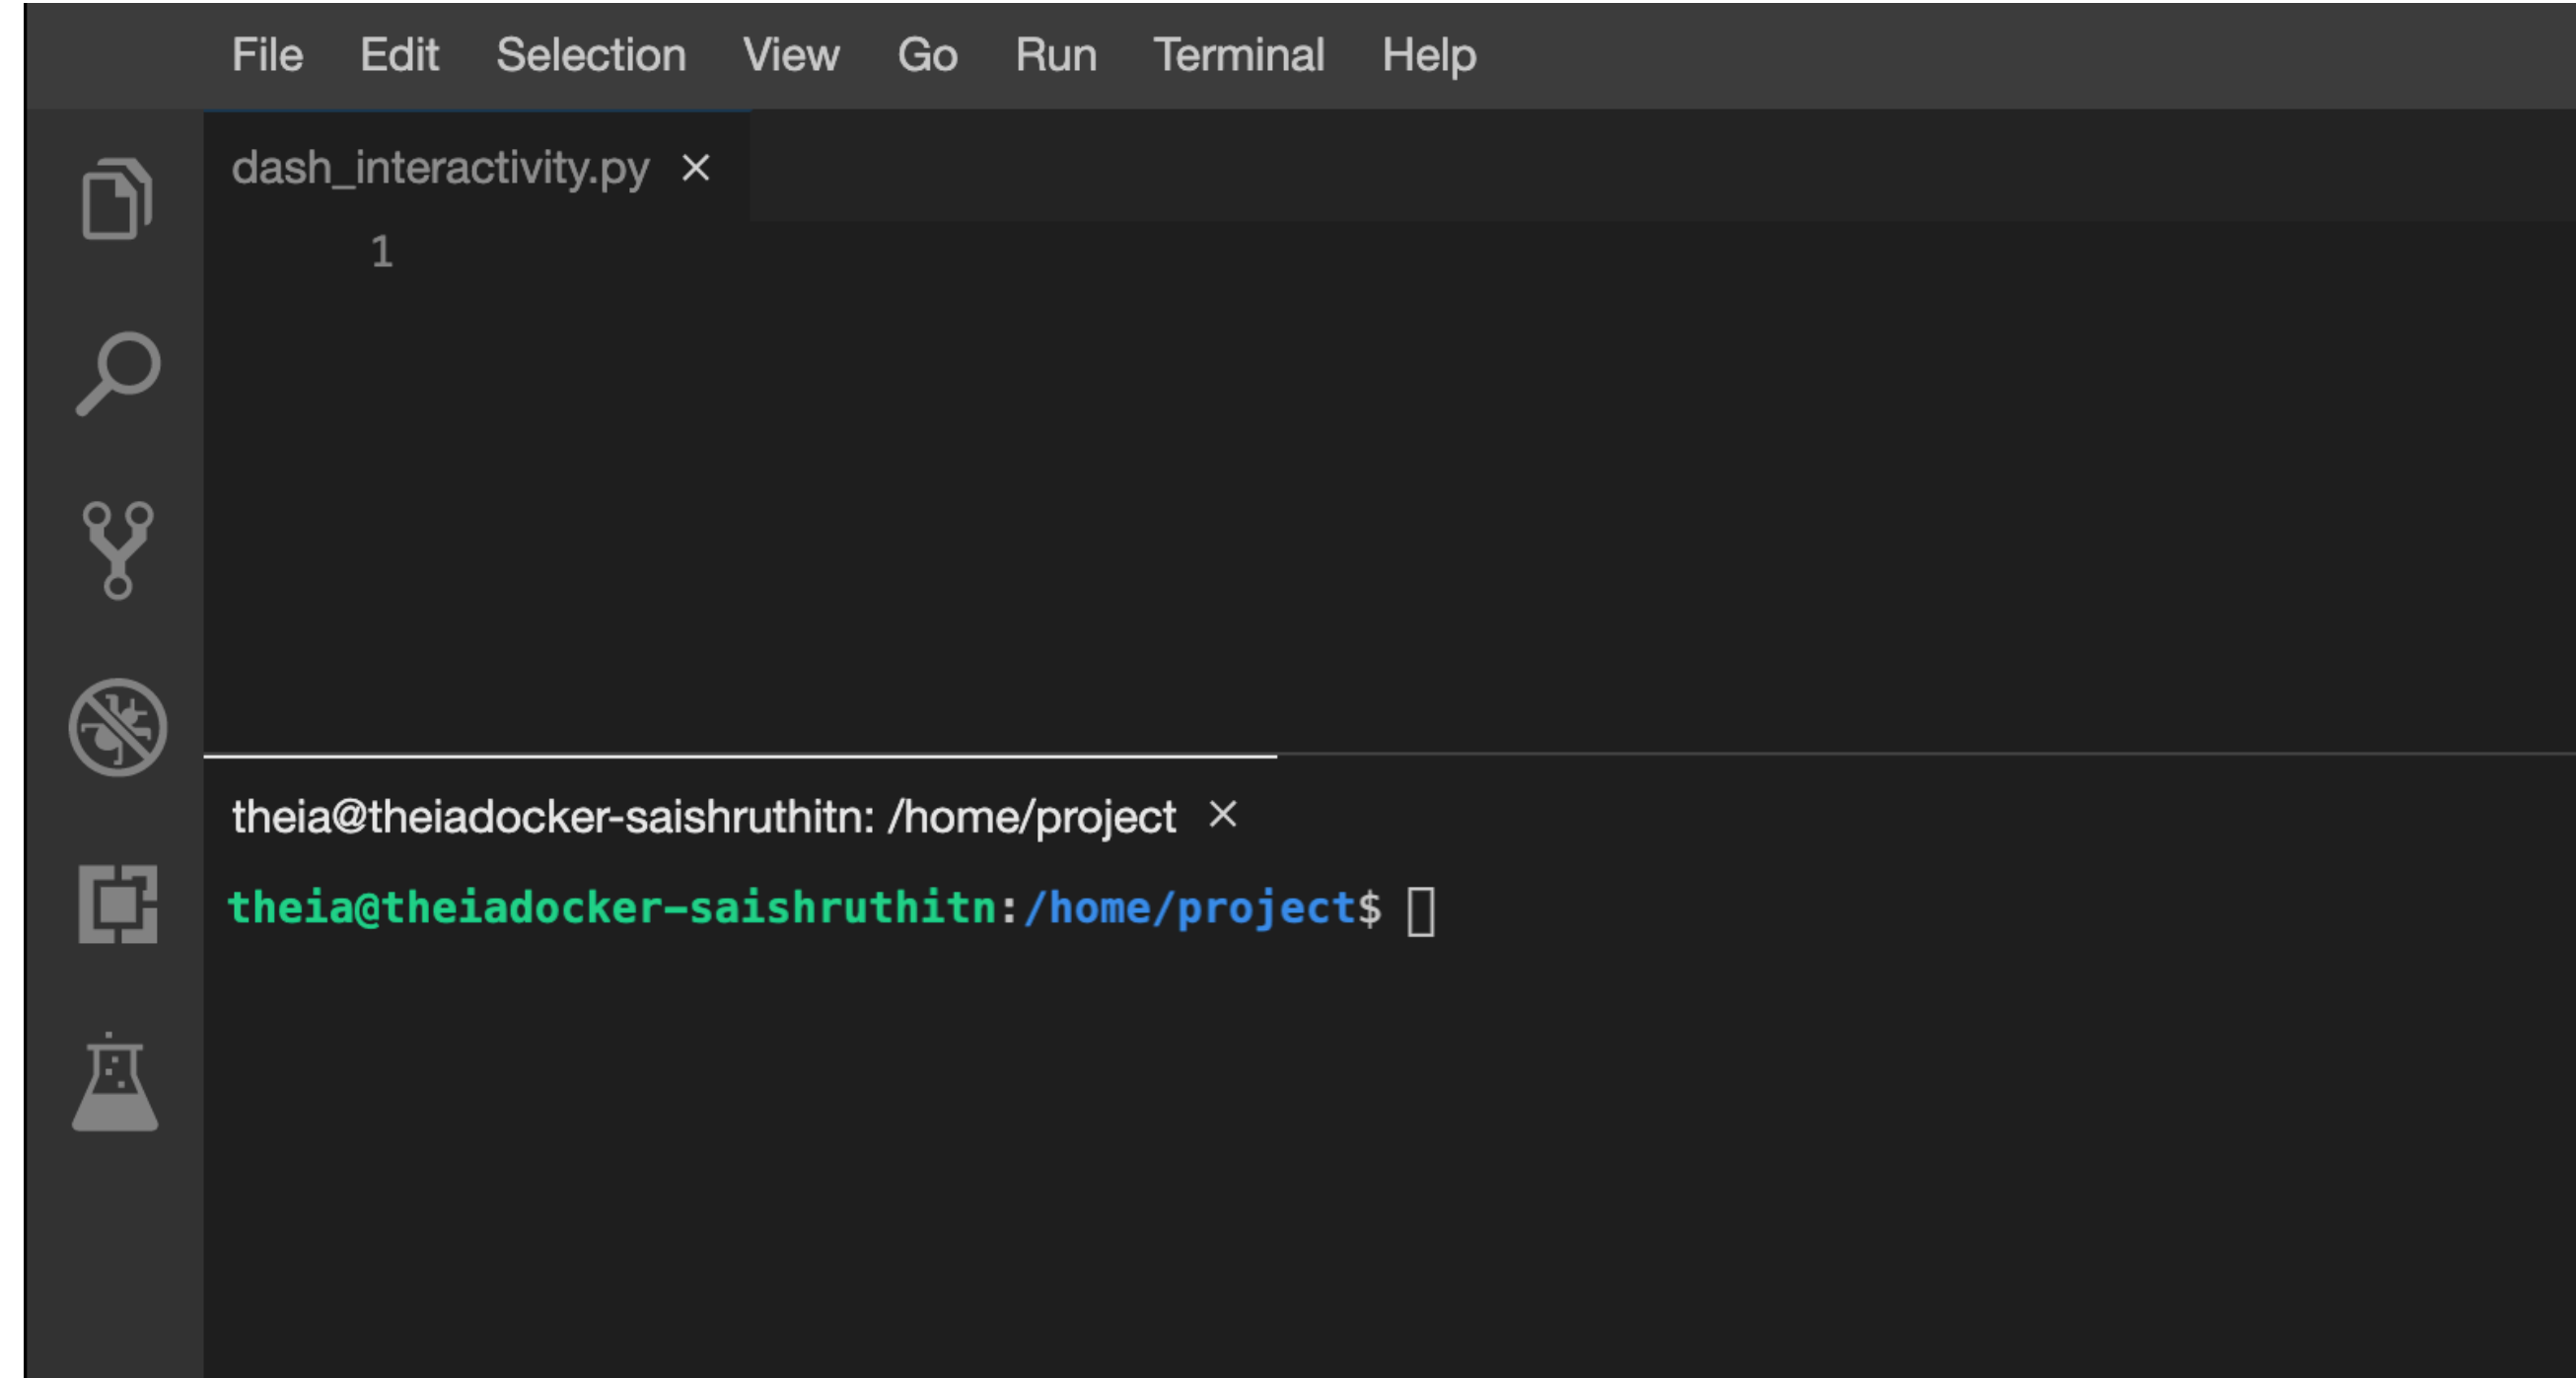

TASK 1 - Read the data

Here you will be:

- Importing necessary libraries
- Reading the data from a CSV file

In this exercise we require the following libraries :

- pandas
- plotly
- dash
- dash_html_components
- dash_core_components
- dash.dependencies

We will first import these libraries

```
import pandas as pd
import plotly.graph_objects as go
import dash
from dash import dcc
from dash import html
from dash.dependencies import Input, Output
```

Now we will read the dataset using the pd.read_csv() function.

```
airline_data = pd.read_csv('https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDeveloperSkillsNetwork-DV0101EN-SkillsNetwork/Data%20Files/airline_data.csv',
                           encoding = "ISO-8859-1",
                           dtype={'Div1Airport': str, 'Div1TailNum': str,
                                   'Div2Airport': str, 'Div2TailNum': str})
```

- The above code reads a CSV file called **airline_data.csv** from a URL using pandas, a popular data analysis library in Python.
- The file is encoded using ISO-8859-1 character encoding, which is a standard way of representing characters in the file.
- We defined data type of specific columns such as (Div1Airport, Div1TailNum, Div2Airport, and Div2TailNum) to be strings, which ensures that these columns are read as text instead of numbers.
- The resulting data is stored in a pandas dataframe object called airline_data, which can be used for further analysis.

Copy the below code to the dash_interactivity.py script and review the code.


```
# Import required libraries
import pandas as pd
import plotly.graph_objects as go
import dash
from dash import dcc
from dash import html
from dash.dependencies import Input, Output
# Read the airline data into the pandas dataframe
airline_data = pd.read_csv('https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDeveloperSkillsNetwork-DV0101EN-SkillsNetwork/Data%20Files/airline_data.csv',
                           encoding = "ISO-8859-1",
                           dtype={'Div1Airport': str, 'Div1TailNum': str,
                                   'Div2Airport': str, 'Div2TailNum': str})
```

Now save and run this code.

Copy and paste the below command in the terminal to run the code.

```
python3.11 dash_interactivity.py
```

After running the above code you can see the below-expected output:

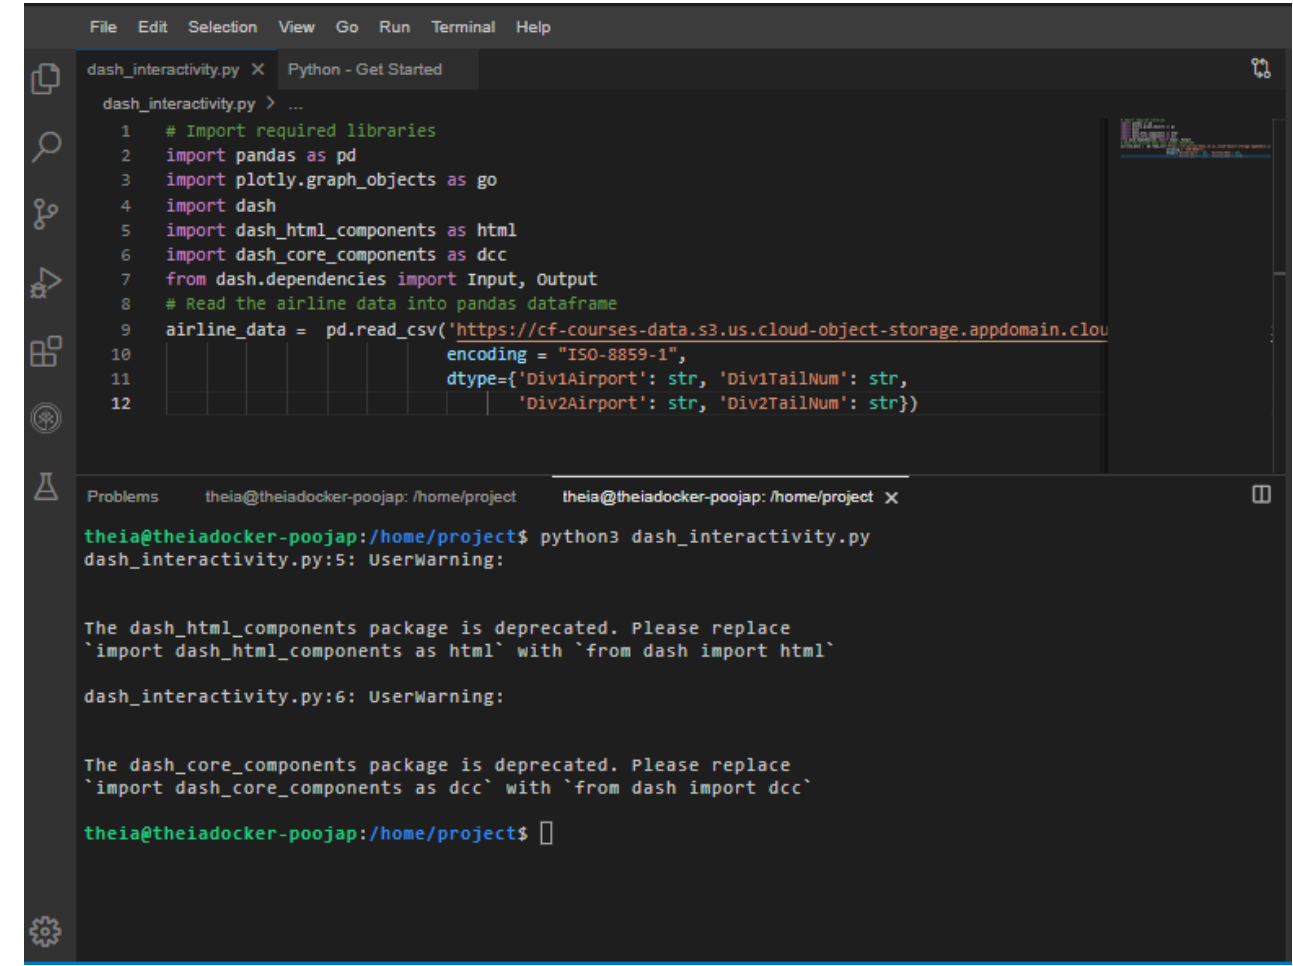

TASK 2 - Create dash application and get the layout

Note: Throughout this lab, you will see placeholder text like `'.....'` or `groupby(.....)`. These dots should be replaced with appropriate values such as column names ('Year', 'Vehicle_Type', etc.), grouping keys, or chart titles. Refer to the comments and hints above each task to determine what needs to be filled in.

Next, we create a skeleton for our dash application. Overall this layout creates a simple container with a heading, an input field, and some empty space.

In the upcoming tasks, you can modify and add new components and styles to the basic layout provided. This will allow you to customize and enhance the user interface of your Dash app to meet your specific needs and requirements as follows:

- First we will define an application `app`. layout.
 - Create a heading using `html.H1()` and add style information within the divison `html.Div()`.
 - create a inner division using `html.Div()` function for adding input and output components such as:
 - Input: label, dropdown input-year and style parameters
 - Output: type of Graph line-plot
- ```
Create a dash application layout
app = dash.Dash(__name__)
Get the layout of the application and adjust it.
Create an outer division using html.Div and add title to the dashboard using html.H1 component
Add a html.Div and core input text component
Finally, add graph component.
app.layout = html.Div(children=[html.H1(.....),
 html.Div(["Input Year", dcc.Input()],
 style={....}),
 html.Br(....),
 html.Br(.....),
 html.Div(.....),
])

```

### Mapping to the respective Dash HTML tags:

#### Application title add using html.H1() tag

- Heading reference: [Plotly H1 HTML Component](#)
- Title as Airline Performance Dashboard
- Use style parameter for the title and make it center aligned, with color code #503D36, and font-size as 40. Check More about HTML section [here](#).

*NOTE:* After adding the components, you code will look like the below code.(You can copy dash application code to dash\_interactivity.py script and run)

```
Import required libraries
import pandas as pd
import plotly.graph_objects as go
import dash
from dash import dcc
from dash import html
from dash.dependencies import Input, Output
Read the airline data into pandas dataframe
airline_data = pd.read_csv('https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDeveloperSkillsNetwork-DV0101EN-SkillsNetwork/Data%20Files/airline_data.csv',
 encoding = "ISO-8859-1",
 dtype={'Div1Airport': str, 'Div1TailNum': str,
 'Div2Airport': str, 'Div2TailNum': str})

Create a dash application
app = dash.Dash(__name__)
app.layout = html.Div(children=[html.H1('Airline Performance Dashboard',style={'textAlign': 'center', 'color': '#503D36', 'font-size': 40}),
 html.Div(["Input Year", dcc.Input()],
 style={...}),
 html.Br(...),
 html.Br(...),
 html.Div(...),
])


Run the app
if __name__ == '__main__':
 app.run()
```

### To run the Dash app follow the below steps

- First, install pandas and dash using the following command in the terminal

```
pip3.11 install pandas dash
```
- Copy and paste the below command in the terminal to run the application.


```
python3.11 dash_interactivity.py
```
- Observe the port number shown in the terminal.

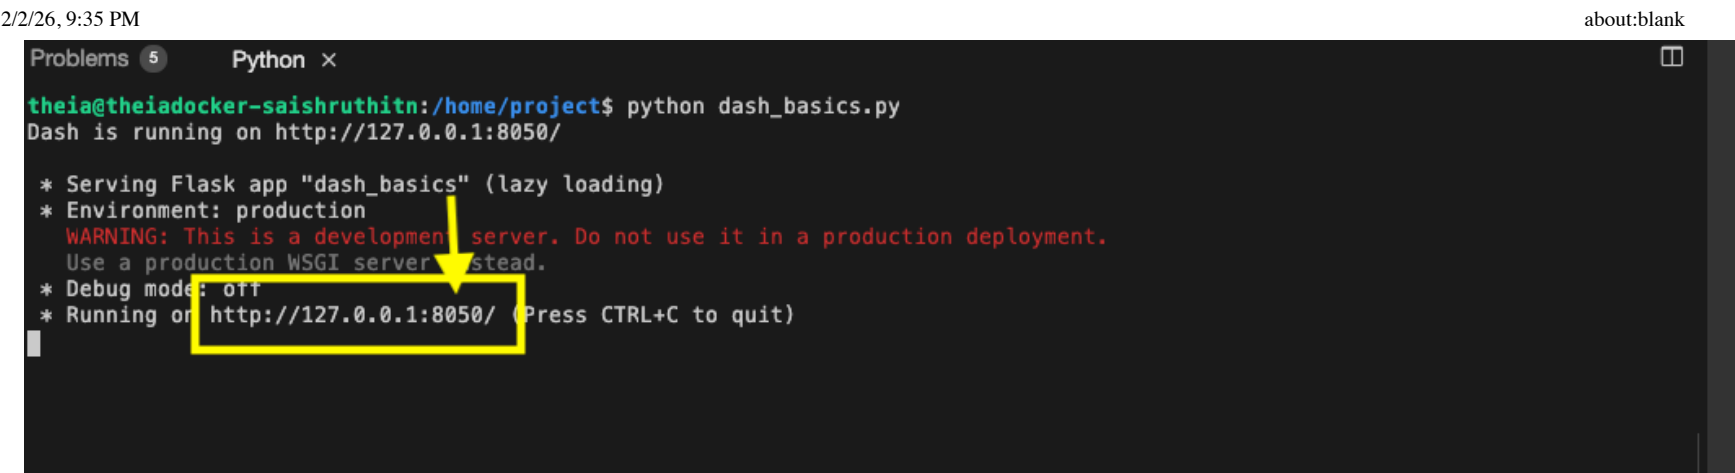

- Click on the Launch Application option from the side menu bar.Provide the port number and click OK

The app will open in a new browser tab like below:

After running the above code, launch the app in a new tab and below is the expected result from the code:

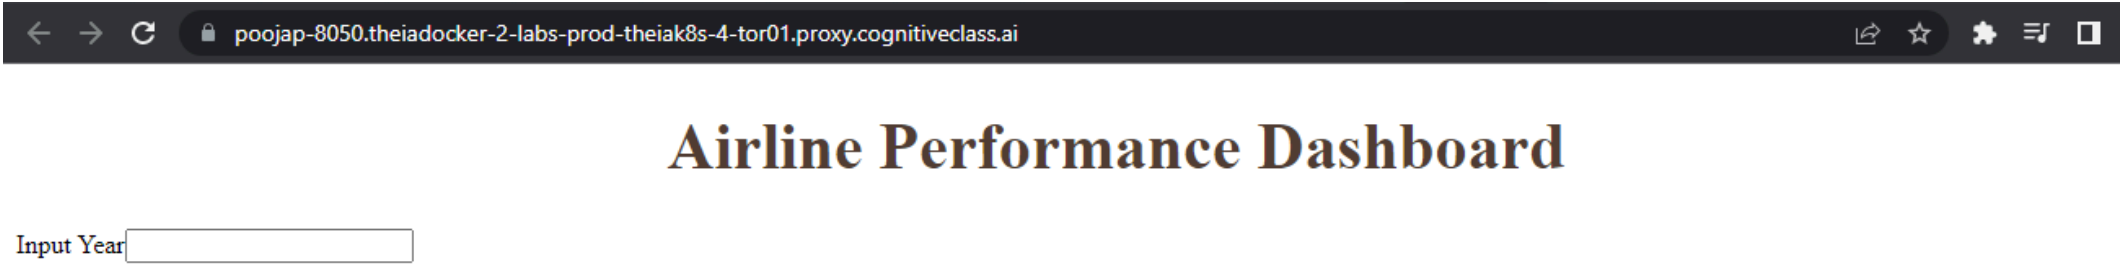

## Input and Output components of layout

### Input component

- As our input is a dropdown showing a list of years we will use the [dcc.Input\(\)](#) function. We define the following parameters
  - id: input-year, which is a unique identifier for this specific input field. The default value for this input field will be set to 2010, and the type of input will be a number.
- style parameter for the dropdown: Here within it we define height of the input box to be50pxandfont-size to be35` to make the text larger and more readable.
- style parameter for the whole division: Now assign font-size as 40 .

### Output component

- Add dcc.Graph() component to the second division.
- Update [dcc.Graph](#) component id as line-plot.

*NOTE:* After adding the componenets you code will look like below code.(You can copy dash application code to dash\_interactivity.py script and run).

To terminate a currently running program in the Python terminal (also known as the Python REPL), you can use the KeyboardInterrupt shortcut. This can be done by pressing the CTRL and C keys simultaneously.

```
Import required libraries
import pandas as pd
import plotly.graph_objects as go
import dash
from dash import dcc
from dash import html
from dash.dependencies import Input, Output
Read the airline data into pandas dataframe
airline_data = pd.read_csv('https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDeveloperSkillsNetwork-DV0101EN-SkillsNetwork/Data%20Files/airline_data.csv',
 encoding = "ISO-8859-1",
 dtype={'Div1Airport': str, 'Div1TailNum': str,
 'Div2Airport': str, 'Div2TailNum': str})

Create a dash application
app = dash.Dash(__name__)

app.layout = html.Div(children=[html.H1('Airline Performance Dashboard',style={'textAlign': 'center', 'color': '#503D36', 'font-size': 40}),
 html.Div(["Input Year: ", dcc.Input(id='input-year', value='2010',
 type='number', style={'height':'50px', 'font-size': 35}),],
 style={'font-size': 40}),
 html.Br(),
 html.Br(),
 html.Div(dcc.Graph(id='line-plot')),
])

Run the app
if __name__ == '__main__':
 app.run()
```

After running the above code, launch the app in a new tab and below is the expected result from the code:





2/2/26, 9:35 PM


about:blank

```
html.Div(dcc.Graph(id='line-plot')),
])

add callback decorator
@app.callback(Output(component_id='line-plot', component_property='figure'),
 Input(component_id='input-year', component_property='value'))
Add computation to callback function and return graph
def get_graph(entered_year):
 # Select 2019 data
 df = airline_data[airline_data['Year']==int(entered_year)]

 # Group the data by Month and compute average over arrival delay time.
 line_data = df.groupby('Month')['ArrDelay'].mean().reset_index()
 fig = go.Figure(data=go.Scatter(x=line_data['Month'], y=line_data['ArrDelay'], mode='lines', marker=dict(color='green')))
 fig.update_layout(title='Month vs Average Flight Delay Time', xaxis_title='Month', yaxis_title='ArrDelay')
 return fig
Run the app
if __name__ == '__main__':
 app.run()
```

After running the above code, launch the app in a new tab and below is the expected final result from the code:

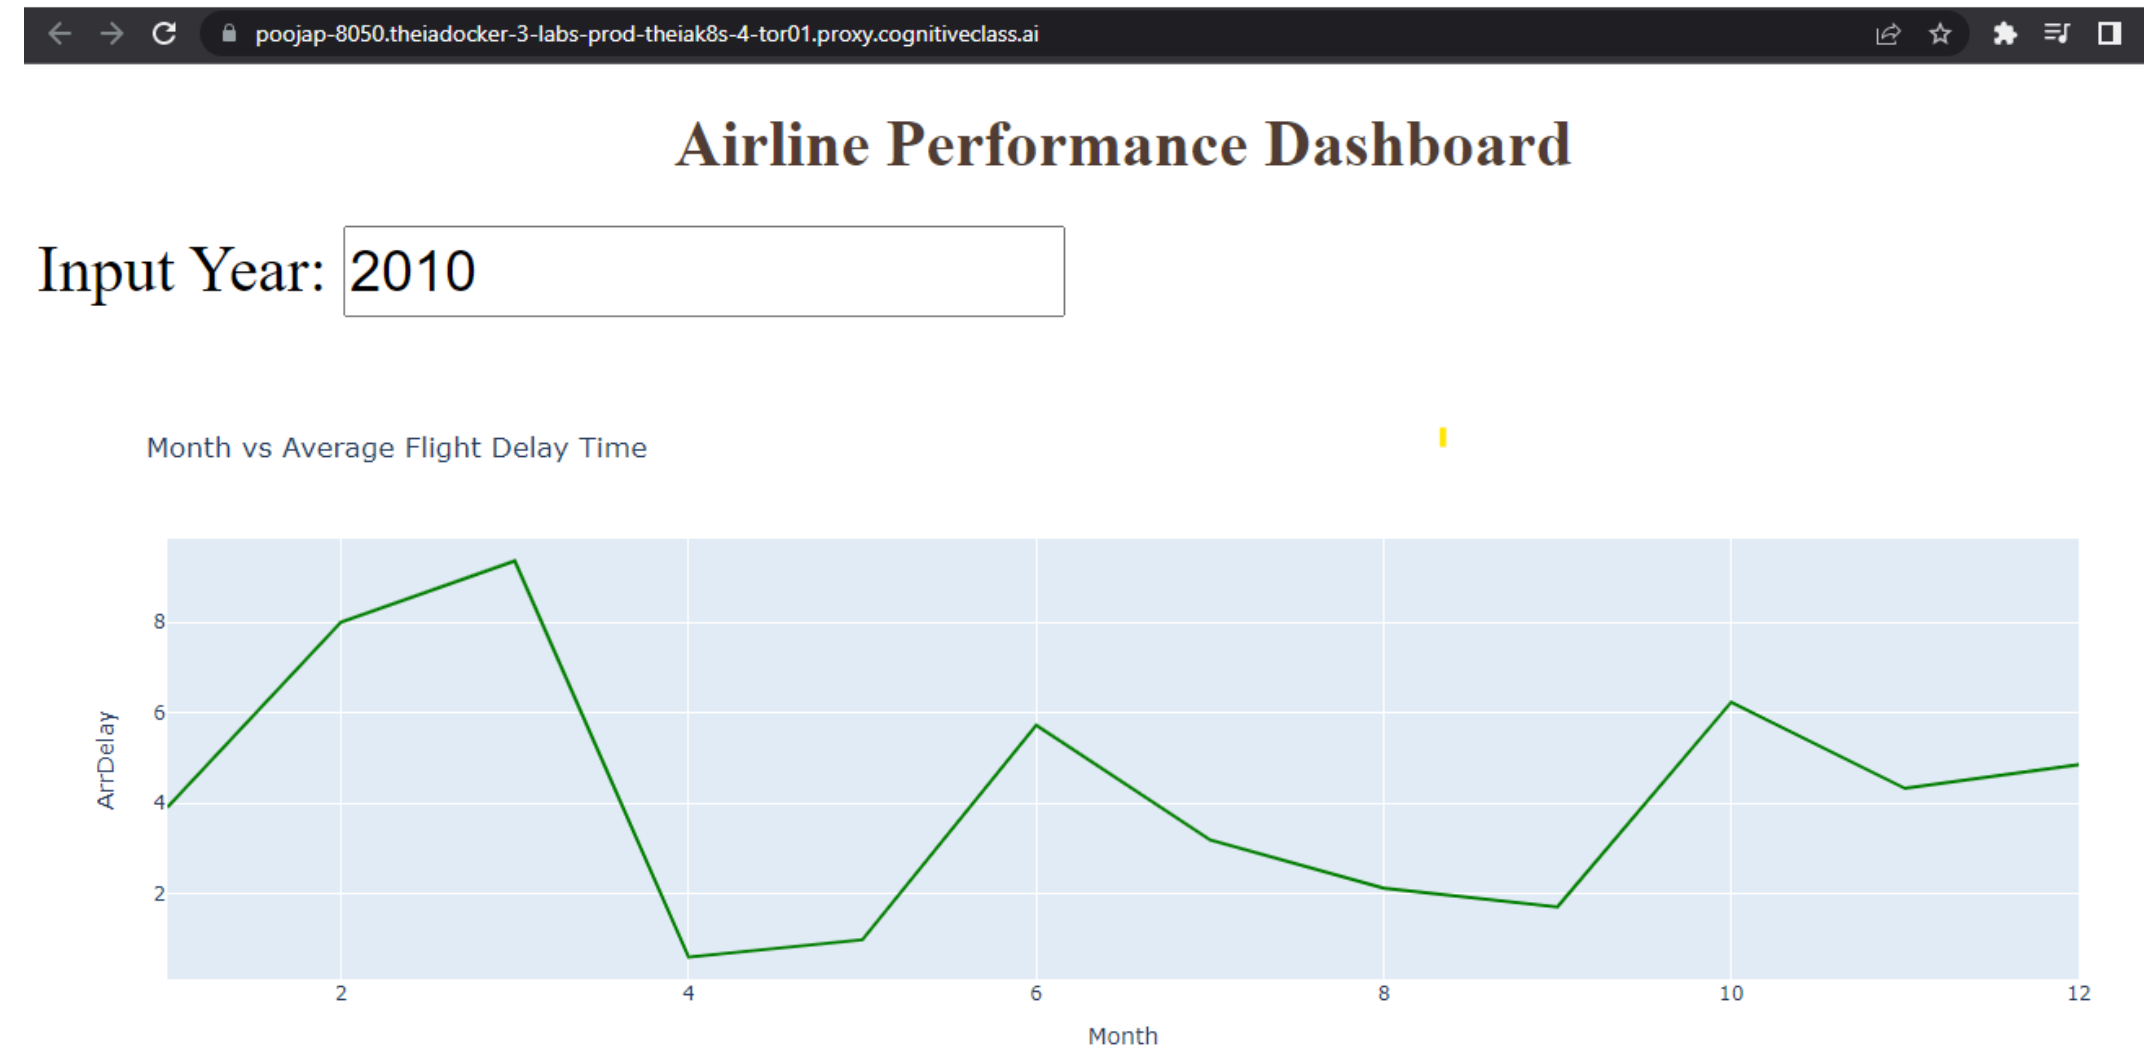

## TASK 4 : Practice Exercise

You will practice some tasks to create the new dashboard.

*Note:* Please refer the Bar chart exercise of [Plotly basics: scatter, line, bar, bubble, histogram, pie, sunburst](#) lab for this exercise.


### Theme

Let us use a bar chart to extract the number of flights from a specific airline that goes to a destination.

### Expected Output

Below is the expected result from the lab. Our dashboard application consists of three components:

- Title of the application
- Component to enter input year
- A chart conveying Total number of flights to the destination state.

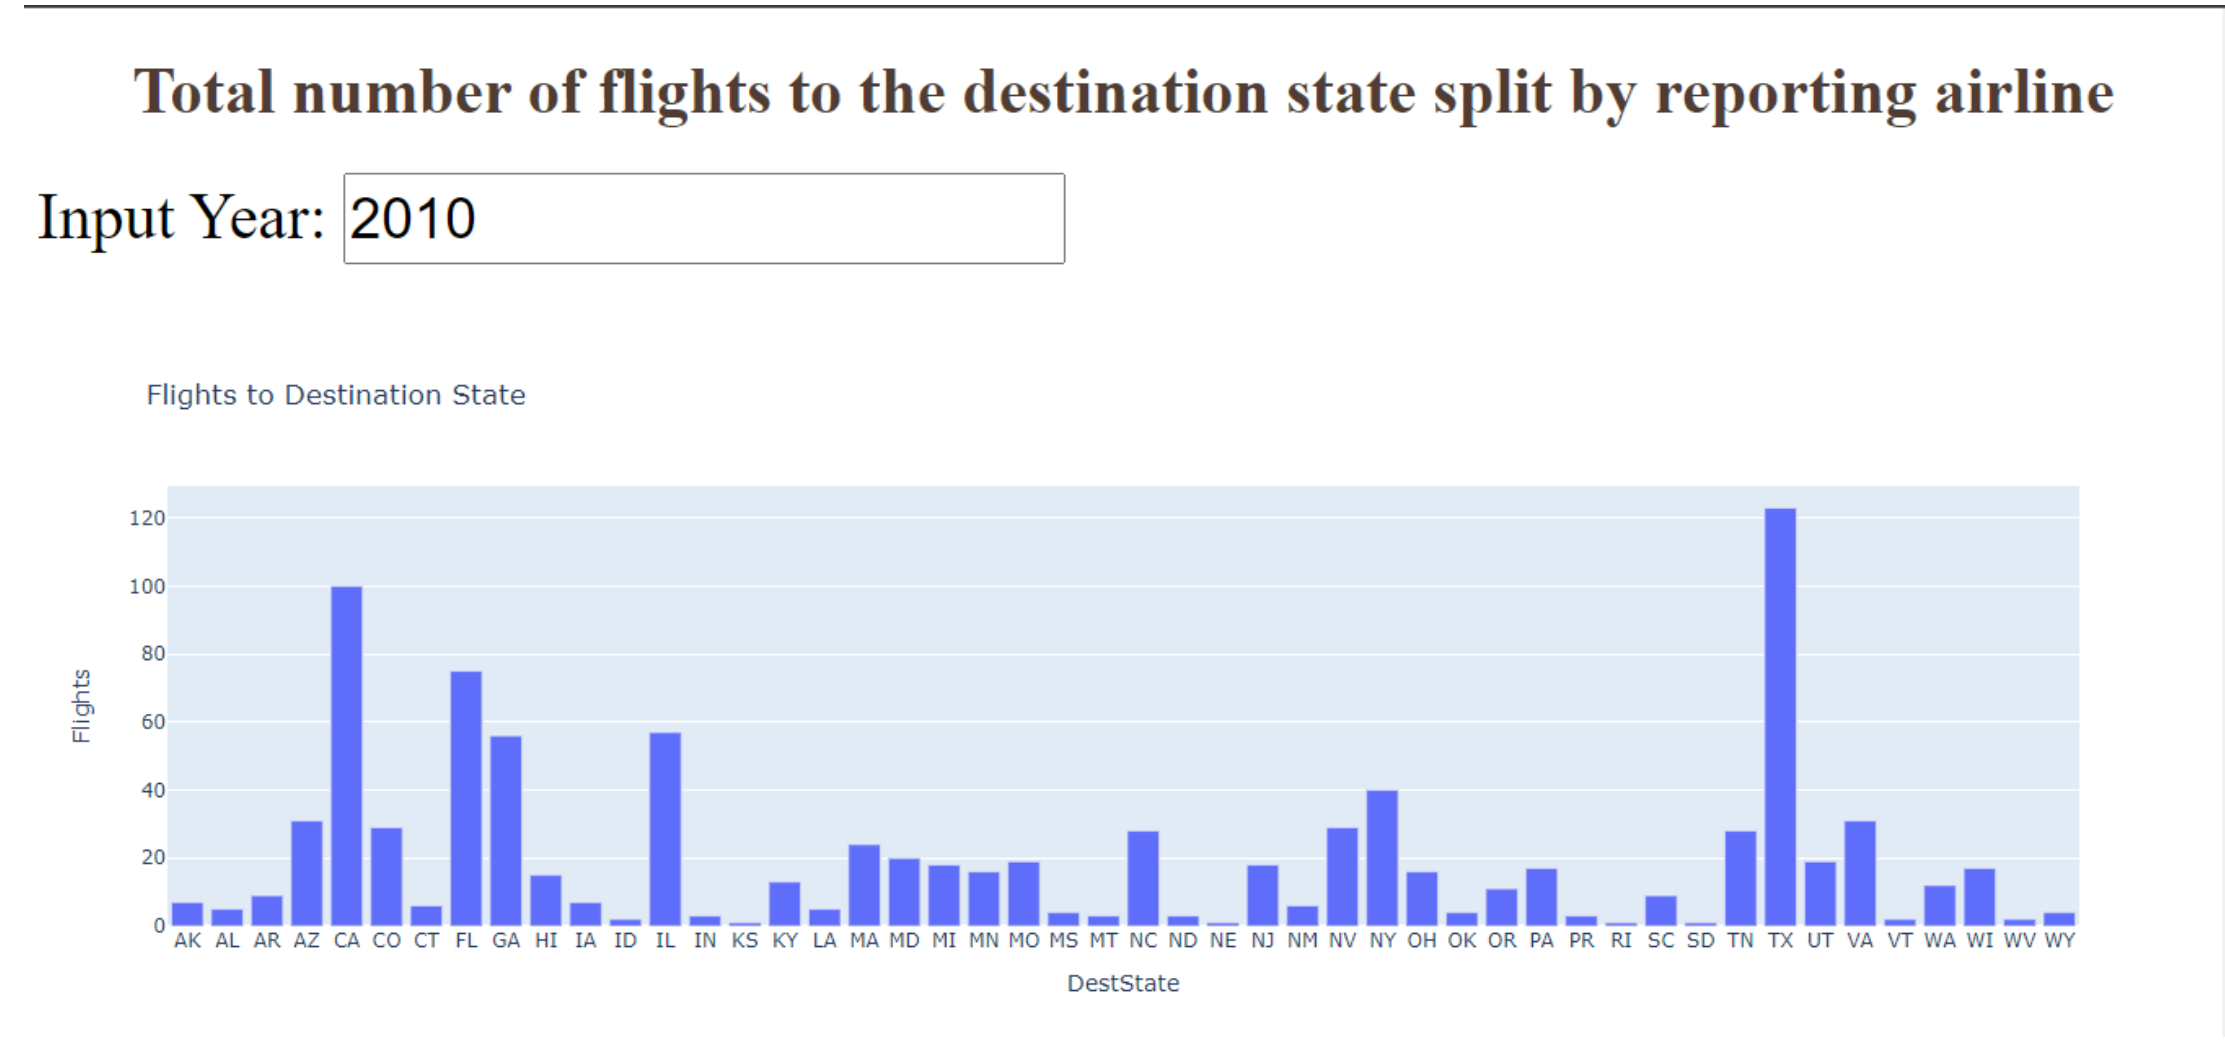

Create a new python script and provide the file name as dash\_interactivity\_barplot.py.

1. Import all the required libraries and read the [Airline Reporting Carrier On-Time Performance](#) dataset.

▼ Answer

```
Import required libraries
import pandas as pd
import plotly.graph_objects as go
import plotly.express as px
import dash
from dash import dcc
from dash import html
from dash.dependencies import Input, Output
Read the airline data into pandas dataframe
airline_data = pd.read_csv('https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDDeveloperSkillsNetwork-DV0101EN-SkillsNetwork/Data%20Files/airline_data.csv',
 encoding = "ISO-8859-1",
 dtype={'Div1Airport': str, 'Div1TailNum': str,
```

2.        Give the title to the dashboard to “Total number of flights to the destination state split by reporting air” using HTML H1 component and font-size as 50.
- **Input component** Make changes to a component called dcc.Input in a tool called Dash. We are updating its id to be input-year, which is a unique identifier for this specific input field. The default value for this input field will be set to 2010, and the type of input will be a number.
- To make the text larger and more readable, use the style parameter and assign the height of the input box to 50px and font-size to be 35. Use style parameter again and assign font-size of 40 for the whole division
- **Output component**Add dcc.Graph() component to the second division. Update dcc.Graph component id as bar-plot.

▼ Answer

```
app = dash.Dash(__name__)
app.layout = html.Div(children=[html.H1('Total number of flights to the destination state split by reporting airline',
 style={'textAlign': 'center', 'color': '#503D36', 'font-size': 40}),
 html.Div(["Input Year: ", dcc.Input(id='input-year',value='2010',
 type='number', style={'height': '50px', 'font-size': 35}),],
 style={'font-size': 40}),html.Br(), html.Br(),
 html.Div(dcc.Graph(id='bar-plot')),])
```

3.        **Add Callback decorator**
- Update **output** component id parameter with bar-plot same as the id provided in the dcc.Graph() component and component property as figure.
- Update **input** component id parameter with input-year same as the id provided in the dcc.Input() component and component property as value.
- Use style parameter and assign font-size as 35 for the whole division.

▼ Answer

```
@app.callback(Output(component_id='bar-plot',component_property='figure'),
 Input(component_id='input-year', component_property='value'))
```

4.        **Define Callback graph function**
- Group the data by destination state and reporting airline. Compute the total number of flights in each combination
- Use plotly express bar chart function px.bar. Provide input data, x and y axis variables, and a chart title. This will give the total number of flights to the destination state

▼ Answer

```
def get_graph(entered_year):
 df = airline_data[airline_data['Year']==int(entered_year)]
 bar_data = df.groupby('DestState')['Flights'].sum().reset_index()
 fig = px.bar(bar_data, x= "DestState", y= "Flights", title='Total number of flights to the destination state split by reporting airline')
 fig.update_layout(title='Flights to Destination State', xaxis_title='DestState', yaxis_title='Flights')
 return fig
```

5.        Add the code for running the app, save the above changes, and relaunch the dashboard application to see the new dashboard.
- ▼ Answer

```
if __name__ == '__main__':
 app.run()
```

Congratulations, you have successfully created your dash application!

Author

[Saishruthi Swaminathan](#)

© IBM Corporation. All rights reserved.