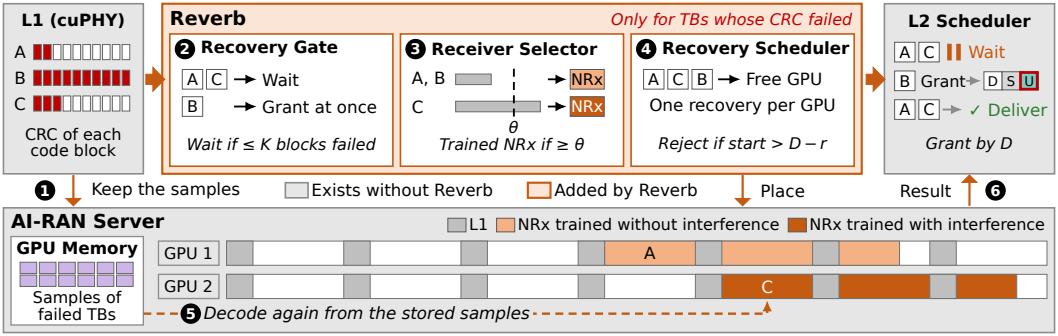

L1 (cuPHY)
A
B
C
CRC of each code block
Reverb
Only for TBs whose CRC failed
❷ Recovery Gate
A C → Wait
B → Grant at once
Wait if ≤ K blocks failed
❸ Receiver Selector
A, B → NRx
C → NRx
θ
Trained NRx if ≥ θ
❹ Recovery Scheduler
A C B → Free GPU
One recovery per GPU
Reject if start > D − r
L2 Scheduler
A C Wait
B Grant D S U
A C ✓ Deliver
Grant by D
❶ Keep the samples
Exists without Reverb
Added by Reverb
Place
Result ❻
AI-RAN Server
L1
NRx trained without interference
NRx trained with interference
GPU Memory
Samples of failed TBs
GPU 1
GPU 2
A
C
❺ Decode again from the stored samples