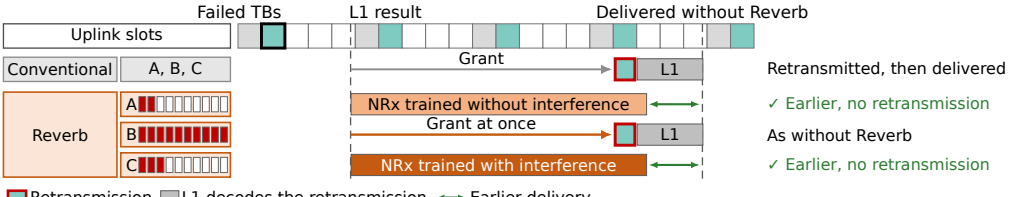
Failed TBs
L1 result
Delivered without Reverb
Uplink slots
Conventional
A, B, C
Reverb
A
B
C
Grant
L1
Retransmitted, then delivered
NRx trained without interference
✓ Earlier, no retransmission
Grant at once
L1
As without Reverb
NRx trained with interference
✓ Earlier, no retransmission
Retransmission
L1 decodes the retransmission
Earlier delivery
Recovery Gate: wait if ≤ K code blocks failed, otherwise grant at once
Receiver Selector: NRx by the interference of the cell