



LAB 08-CONFIGURING CONNECTORS AND TRANSPORT RULES



JUNE 11, 2026

NET46
CHANG LIU

Table of Contents

Exercise 1 – Configuring Send Connectors	1
Exercise 2 – Configuring Receive Connectors	4
Exercise 3 – Configuring Transport rules	6


Exercise 1 – Configuring Send Connectors

Objective:


- Configure **send connectors**

Tasks:

1. Using the Exchange Admin Center
 - a) Create a new **send connector** with the following settings:
 - Name: **ITMT Consultation**
 - Type: **Partner**
 - Network Parameter: **MX Registration**
 - Address Space
 - ✓ Add a new **SMTP** domain
 - ✓ FQDN Name: **itmt.ca**
 - ✓ Cost: **10**
 - Server Source: Select your **Exchange server**.
 - Save the new send connector.

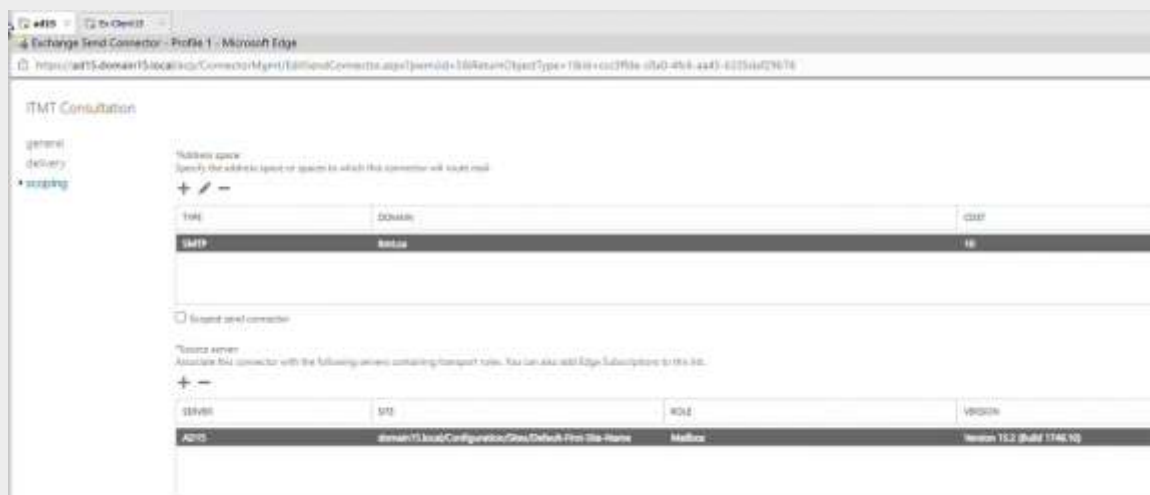

Lab 8 - Configuring connectors and transport rules

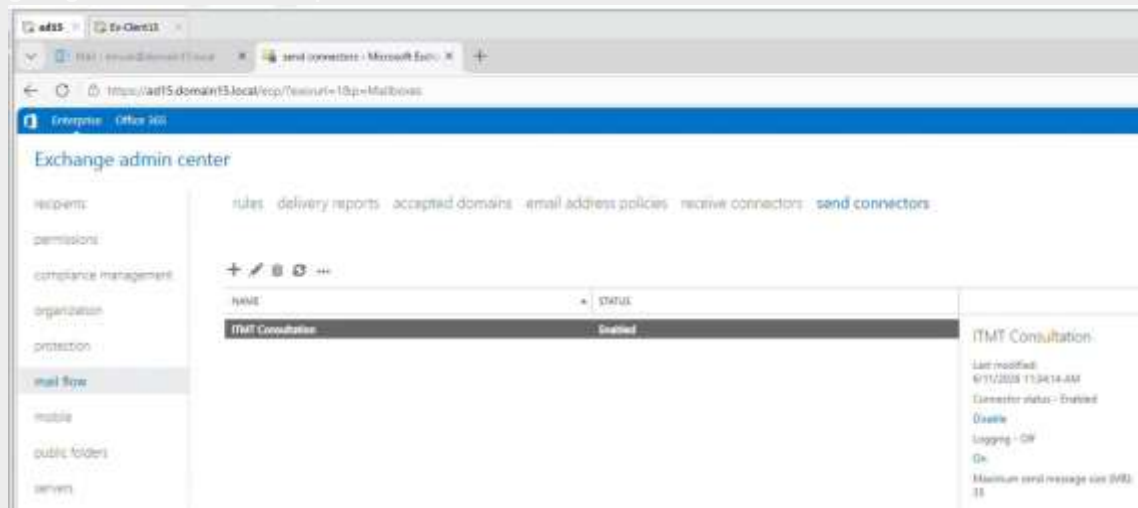

2. Using the PowerShell Exchange Management Shell (EMS)

a) List the existing **send connectors** in your Exchange organization.

```
Machine: ad15.domain15.local
[PS] C:\Windows\system32>Get-SendConnector
Creating a new session for implicit remoting of "Get-SendConnector" command...

Identity      AddressSpaces  Enabled
-----
ITMT Consultation {SMTP:itmt.ca;10} True
```

b) Create a new **Internet** Send Connector for all **Address Spaces ***.

```
Machine: ad15.domain15.local
[PS] C:\Windows\system32>New-SendConnector -Internet -Name Internet -AddressSpaces *

Identity AddressSpaces Enabled
-----
Internet {smtp:*;1} True
```

c) List the send connectors to verify that the **Internet** send connector has been created.

Lab 8 - Configuring connectors and transport rules

```
ad15 x Ex-Client15 x
Machine: ad15.domain15.local
[PS] C:\Windows\system32>Get-SendConnector -Identity Internet | Format-list

AddressSpaces           : {smtp:*;1}
AuthenticationCredential : 
CloudServicesMailEnabled : False
Comment                 : 
ConnectedDomains         : {}
ConnectionInactivityTimeout : 00:10:00
ConnectorType            : Default
DNSRoutingEnabled        : True
DomainSecureEnabled       : False
Enabled                  : True
ErrorPolicies             : Default
ForceHELO                 : False
Fqdn                     : 
FrontendProxyEnabled      : False
HomeMTA                   : Microsoft MTA
HomeMtaServerId           : AD15
Identity                 : Internet
IgnoreSTARTTLS            : False
IsScopedConnector         : False
IsSmtplibConnector        : True
MaxMessageSize            : 35 MB (36,700,160 bytes)
Name                     : Internet
Port                      : 25
ProtocolLoggingLevel       : None
Region                   : NotSpecified
RequireOorg               : False
RequireTLS                : False
SmartHostAuthMechanism     : None
SmartHosts                : {}
SmartHostsString          : 
SmtplibMaxMessagesPerConnection : 20
SourceIPAddress           : 0.0.0.0
SourceRoutingGroup        : Exchange Routing Group (DWBGZMFD01QNBJR)
SourceTransportServers     : {AD15}
TlsAuthLevel              : 
TlsCertificateName        : 
TlsDomain                 : 
UseExternalDNSServersEnabled : False
```

- d) Disable the **ITMT Consultation send connector**.
- e) Check that the **ITMT Consultation send** connector has been disabled.

```
ad15 x Ex-Client15 x
Machine: ad15.domain15.local
[PS] C:\Windows\system32>Set-SendConnector -Identity "ITMT Consultation" -Enabled $false
[PS] C:\Windows\system32>(Get-SendConnector -Identity "ITMT Consultation").Enabled
False
```

- f) Delete the **ITMT Consultation send connector**.

```
ad15 x Ex-Client15 x
Machine: ad15.domain15.local
[PS] C:\Windows\system32>Remove-SendConnector -Identity "ITMT Consultation"

Confirm
Are you sure you want to perform this action?
Removing Send connector "ITMT Consultation".
[Y] Yes [A] Yes to All [N] No [L] No to All [?] Help (default is "Y"): A
[PS] C:\Windows\system32>
```

- g) Verify that the **ITMT Consultation send connector** has been removed.

```
ad15 x Ex-Client15 x
Machine: ad15.domain15.local
[PS] C:\Windows\system32>Get-SendConnector

Identity AddressSpaces Enabled
-----
Internet {smtp:*;1}      True
```

Exercise 2 – Configuring Receive Connectors


Objective:

- Configure the **receive connectors**.

Tasks:

1. Using the Exchange Admin Center

- a) Check the existing **receive connectors**.

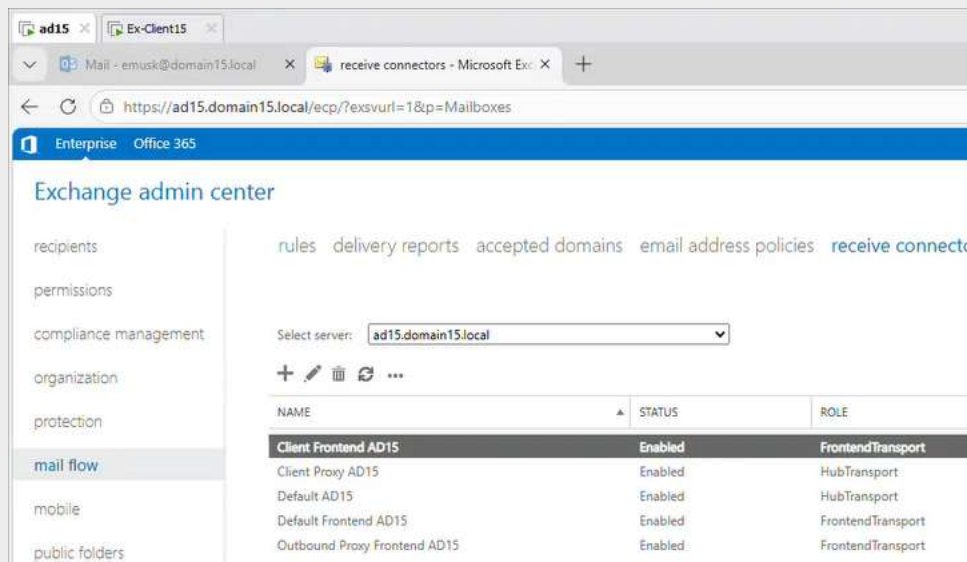


- b) Create a new **receive connector** with the following settings:

- Name: **SharePoint**
- Role: **Hub Transport**
- Type: **Custom**.
- Network Adaptor Binding:
 - ✓ Remove: **All IP Addresses**
 - ✓ Add: The IP address of your server's NIC: **192.168.X.1** port **2525**
- Remote network Settings
 - ✓ All IP Addresses


- c) Save the new receive connector.

Lab 8 - Configuring connectors and transport rules

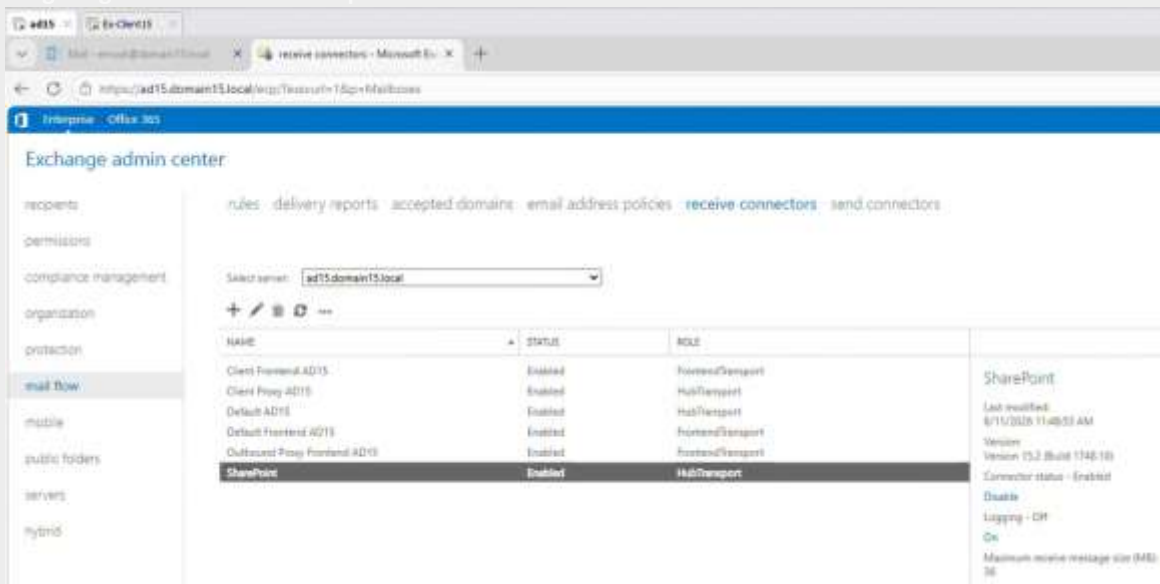

d) Open the new **SharePoint** receive connector and select:

- Basic authentication.
- Permission Groups: **Exchange users**.

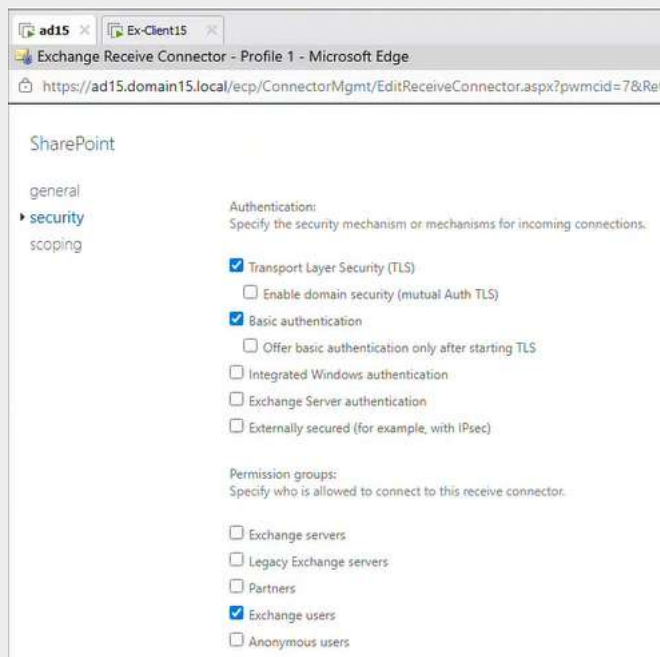

2. Using the PowerShell Exchange Management Shell (EMS)

a) List the existing **receiving connectors** in your Exchange organization.

```

ad15 x Ex-Client15 x
Machine: ad15.domain15.local
[PS] C:\Windows\system32>Get-ReceiveConnector

Identity Bindings Enabled
-----
AD15\Default AD15 {0.0.0.0:2525, [::]:2525} True
AD15\Client Proxy AD15 {[::]:465, 0.0.0.0:465} True
AD15\Default Frontend AD15 {[::]:25, 0.0.0.0:25} True
AD15\Outbound Proxy Frontend AD15 {[::]:717, 0.0.0.0:717} True
AD15\Client Frontend AD15 {[::]:587, 0.0.0.0:587} True
AD15\SharePoint {192.168.15.1:2525} True

```

b) Create a new **receive connector** with the following settings:

- Name: **Internet**
- Usage: **Internet**
- Binding: **192.168.X.0** port **2525**
- Remote network settings: **0.0.0.0-255.255.255.255**

```

ad15 x Ex-Client15 x
Machine: ad15.domain15.local
[PS] C:\Windows\system32>New-ReceiveConnector -Name Internet -Usage Internet -Bindings 192.168.15.0:2525 -RemoteIPRanges 0.0.0.0-255.255.255.255

Identity Bindings Enabled
-----
AD15\Internet {192.168.15.0:2525} True

```

c) Change the setting of the new **Internet** connector to allow use of the connector by **anonymous users**.

d) Verify that the new setting has been changed.

```

ad15 x Ex-Client15 x
Machine: ad15.domain15.local
[PS] C:\Windows\system32>Set-ReceiveConnector -Identity Internet -PermissionGroups AnonymousUsers
[PS] C:\Windows\system32>(Get-ReceiveConnector -Identity Internet).PermissionGroups
AnonymousUsers

```

e) Delete the **SharePoint** receive connector.

f) Verify that the **SharePoint** receive connector has been successfully deleted.

```

ad15 x Ex-Client15 x
Machine: ad15.domain15.local
[PS] C:\Windows\system32>Remove-ReceiveConnector -Identity SharePoint

Confirm
Are you sure you want to perform this action?
Removing Receive connector "ad15.domain15.local\SharePoint".
[Y] Yes [A] Yes to All [N] No [L] No to All [?] Help (default is "Y"): A
[PS] C:\Windows\system32>
[PS] C:\Windows\system32>Get-ReceiveConnector

Identity Bindings Enabled
-----
AD15\Default AD15 {0.0.0.0:2525, [::]:2525} True
AD15\Client Proxy AD15 {[::]:465, 0.0.0.0:465} True
AD15\Default Frontend AD15 {[::]:25, 0.0.0.0:25} True
AD15\Outbound Proxy Frontend AD15 {[::]:717, 0.0.0.0:717} True
AD15\Client Frontend AD15 {[::]:587, 0.0.0.0:587} True
AD15\Internet {192.168.15.0:2525} True

```

Exercise 3 – Configuring Transport rules


Objective:

- Configure **Transport rules**.

Tasks:


1. Using the **Exchange Admin Center**

- a) Create a new rule → **Filter messages by size**.
- b) Use the following settings:
 - Name: **Block Large Messgaes**
 - Apply this rule if → The message size is greater than or equal **20000 KB**
 - → Block messages → Reject messages and include an explanation → specifies rejection reason: **Size greater than 20MB**
 - Save.

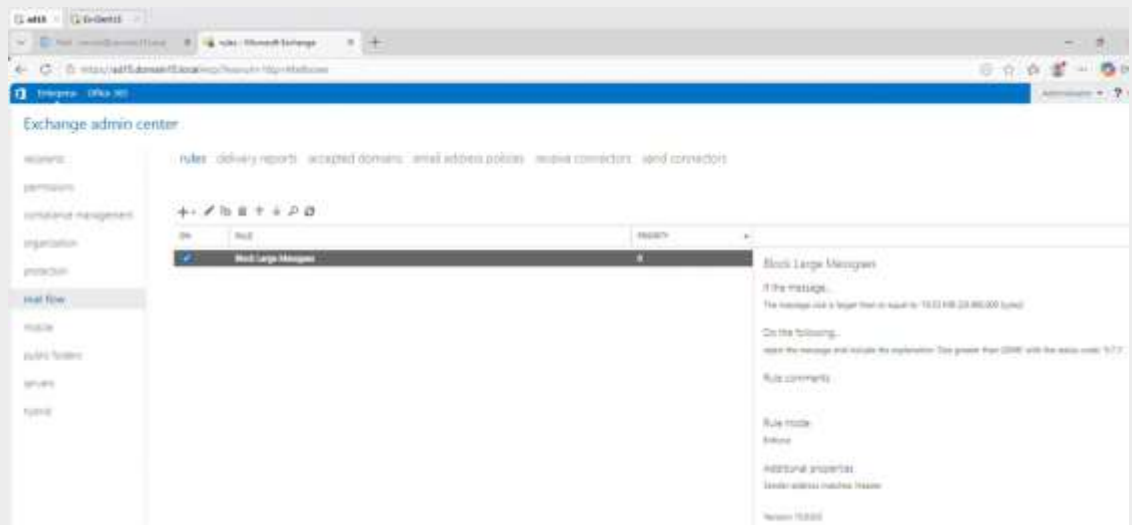


2. Using the PowerShell Exchange Management Shell (EMS)


- a) List the existing **Transport rules** for your Exchange organization.

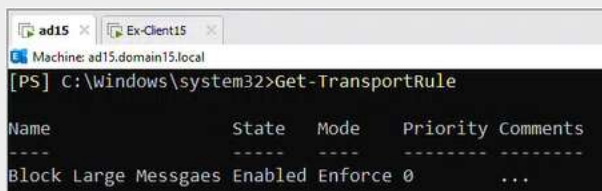

- b) Create a transport rule for the deployment of a **Disclaimer** like the one created in the presentation.

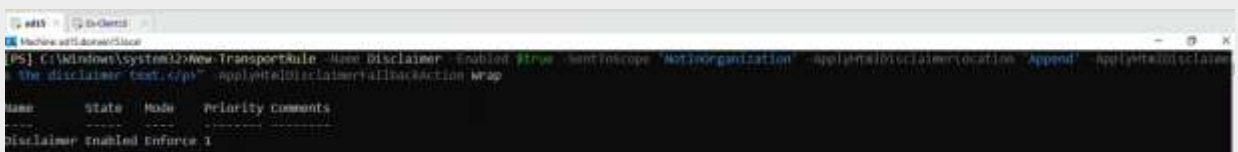


- c) List **transport rules** to verify that the **Disclaimer** transport rule has been created.

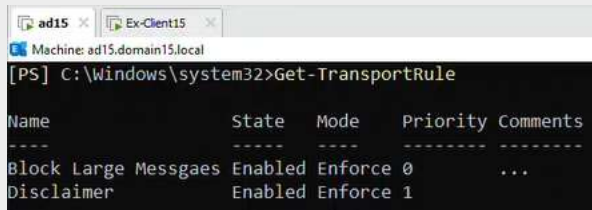

```
[PS] C:\Windows\system32>Get-TransportRule
```

Name	State	Mode	Priority	Comments
Block Large Messgaes	Enabled	Enforce	0	...
Disclaimer	Enabled	Enforce	1	...


- d) Remove the **Block Large Messages** rule.

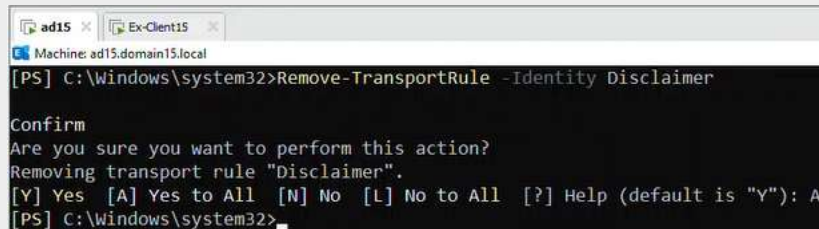

```
[PS] C:\Windows\system32>Remove-TransportRule -Identity Disclaimer
```

Confirm
Are you sure you want to perform this action?
Removing transport rule "Disclaimer".
[Y] Yes [A] Yes to All [N] No [L] No to All [?] Help (default is "Y"): A
[PS] C:\Windows\system32>

- e) List the transport rules to verify that the **Block Large Messages** rule has been removed.

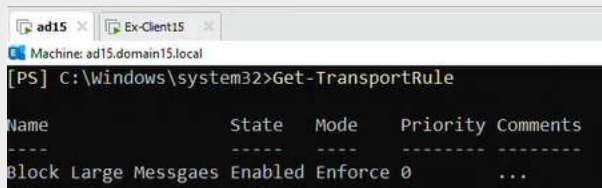

```
[PS] C:\Windows\system32>Get-TransportRule
```

Name	State	Mode	Priority	Comments
Block Large Messgaes	Enabled	Enforce	0	...