

Vietunion Gateway

Integration Specification

History

Ngày	Phiên bản	Người thực hiện	Mô tả
30/05/2022	1.0	Chu Pham	Overview of the integration specification Vietunion gateway.

Mục lục

Overview.....	1
2. API/Vietunion function.	2
2.1. API general structure.	2
2.2. Function details.....	5
2.2.1. Inquiry bill.	5
2.2.2. Bill payment.	20
2.2.3. Check transaction status.	28
3. Workflow.	32
3.1. Bill payment.	32
3.2. Check transaction status.	34
.....	34
4. Contact.	34

Overview.

The document describes an overview of the VietUnion Backend Gateway. Include the information: connection requirement, security, and details of APIs.

1. Connection Requirement.

To ensure connectivity Partner gateway – VietUnion Gateway to be safe and stable, VietUnion applies the following criteria:

1.1. Using SSL/HTTPS protocol.

The purpose of using SSL/HTTPS is for data exchange between Partner gateway and VietUnion gateway to be encoded. It's difficult for theft and forgery. Therefore, SSL/HTTPS is applied on connectivity between VietUnion gateway and Partner gateway. As deployed, VietUnion gateway web service is set up SSL with a pair of private keys/certificates of VietUnion.

1.2. Verify Partner through Credentials.

VietUnion will provide AgentId identification information to the Partner. Therefore, orders sent from the Partner to VietUnion must include this information.

Vietunion will provide the partner identification code. Therefore, the requests from the Partner to Vietunion need to include this information. Depending on the system will have a value corresponding.

1.3. Verify static IP address.

VietUnion Backend Gateway needs to verify the static IP of Partner gateway, one or more IPs depending on Partner requirements/ agreement between two parties.

When receiving the requests, the API of VietUnion gateway will verify the IP by checking the static IP's list of Partner. If not belong to an authorized Partner, VietUnion gateway will refuse to execute queries.

1.4. Verify the execute time (RequestTime) from the Partner gateway.

T = NowTime – RequestTime

If **T > 5 minutes**, Vietunion gateway will returns error.

The time-zone of RequestTime is **GMT+7**

1.5. Verify the digital signature.

To ensure the data transfer between the Partner – Vietunion will be safe, Vietunion uses the digital signature. When the Partner calls API of Vietunion gateway or Vietunion returns the result to the Partner needs to include the signature.

2. API/Vietunion function.

2.1. API general structure.

Vietunion gateway is a restful web service (method post–content application/JSON) that provides a unique API. This API will apply all services: bill payment, scratch card, mobile topup, etc...

Webservice test: <https://vusandbox.payoo.com.vn/VURestPaymentAPI.svc/execute>

The structure:

Header

Tham số	Mô tả
PartnerCode	This is the Partner identity code. It is provided by Vietunion. Example: FINX123. Depending on the system will have a value corresponding.
Operation	This is command code. Included values: - QueryBillBE: Inquiry bill. - PayBillBE: Payment bill. - GetTransactionStatusBE: Checking the transaction status. Note: The Operation is case-sensitive.
RequestTime	The execute time at the Partner gateway. The formatting is yyyyMMddHHmmss The time-zone is GMT+7.
Signature	Digital signature. This value uses the RSA-SHA256 algorithm to generate. The Partner calls to Vietunion. Signature = SHA256WithRSA(content of Data parameter in the Body, the private key of the Partner) VietUnion returns the result to the Partner. Signature = SHA256WithRSA(content of Data parameter in the Body, the private key of VietUnion)
<u>Example:</u> <pre> header: { "PartnerCode": "FINX123", "Operation": "QueryBillBE", "RequestTime": "20220525144200", "Signature": " mweV7G1vhFwyypbdLN7oHRNFxa59xqCHG+KYFCrD3g2NxsznVohzfNeSDY </pre>	

```
TOBrTjMqVBAh/1OJ2ugzT0iCzJ/V62mHtfQ0AWCevgWPGnKie7XweR0DFdo
6a9Dk9ZRvHfVZI7TfzjTaC7Oqacml3jN5mA45ixt8GBANp2bhwnbkBKOKlvulH0ydXwd
DSaXevHq+61KzMy6rdN+UFx4WG8XM7qlZcJRHrg25DiLarMokZNZ4M63y
86tiBkGdljqE0wLKtfj9CYJjqZsaD/Z0oxYq0PLjmbog
TcKKNepMmmLqzTwlz7muNtlofls4wcNC8bDhGBn6
TUZfHRZobHVD0O8w=="
}
```

Body.

○ Request

Tham số	Mô tả
Data	This is the request data (JSON format) that contains the parameters of the corresponding command.
"Data": "json serialize(Request Data)" <u>Example</u>: For the inquiry bill. <pre>{ "Data": "{ \"UserId\": \"0972465503\", \"ProviderId\": \"EVNSG\", \"SearchValue\": \"PE1911202101\", \"ServiceId\": \"DIEN\", \"ChannelPerform\": \"MOBI\" }" }</pre>	

○ Response

Tham số	Mô tả
Data	This is the reponse data (JSON format) that contains the parameters of the corresponding command.
<pre>{ "Data": "json serialize(Response Data)" }</pre>	

Example: For the response of inquiry bill.

```
{
  "Data": "{ \"Bills\": [{ \"BillId\": \"124029\", \"ServiceId\": \"DIEN\",
    \"ProviderId\": \"EVNSG\", \"ServiceName\": \"Dien\",
    \"ProviderName\": \"EVN HCMC\", \"CustomerId\": \"PE1911202101\",
    \"CustomerName\": \"Customer A\", \"Month\": \"09/2021\",
    \"MoneyAmount\": 2500.0, \"PaymentFee\": 0.0, \"Address\": \"Address AAA...\",
    \"MinRange\": 1, \"MaxRange\": 10000000, \"PaymentRule\": 2,
    \"IsPrepaid\": false, \"ShippingDateNum\": 0.0 }], \"IsShowMoney\": false,
    \"PaymentFeeType\": 0, \"PercentFee\": 0.0, \"ConstantFee\": 0.0,
    \"MinFee\": 0.0, \"MaxFee\": 0.0, \"ReturnCode\": 0
  }"
}
```

2.2. Function details.

2.2.1. Inquiry bill.

- **Purpose:** This function uses to query bill.

- **Command code**

Operation: **QueryBillBE**

- **Request Data**

Json Data.

```
{
  "UserId":string,
  "SearchValue":string,
  "ProviderId":string,
  "ServiceId":string,
  "AddingInput":string,
  "ChannelPerform":string
}
```

Parameter	Type	Max Length	Allowance NULL	Description
UserId	String	64	N	User account in the Partner system. This value can: userId, user name, phone number, etc... the Partner can hash this value before sending it to

				Vietunion. Vietunion will use this value to control the number of bill queries in a period of time.
SearchValue	String	30	N	This is value for the searching bill. Including: - CustomerId - Tel - ID - ... Depending on the provider-service will have a value corresponding.
ServiceId	String	30	N	The service code (Example: DIEN, NUOC, etc). This value will be provided by Vietuion.
ProviderId	String	30	N	The provider code (example: CNNB, CL, etc). This value will be provided by Vietuion.
AddingInput	String	60	Y	The additional information requested. In case of query bill results, Vietunion returns the error code -25 (ReturnCode = -25) and includes the additional information of customer (refer to CustomerInfo class). AddingInput is IdentityCode property in class CustomerInfo. Example: Query bill of AIA provider with insurance service: Step 01: User selects insurance service and AIA provider. Step 02: User input the number of

				contract. <u>Step 03:</u> the partner call to Vietunion to query -> Vietuion will forward this request to provider (AIA) system. AIA returns the list of fee registered by that customer -> Vietunion forward this result to partner. <u>Step04:</u> the partner will show this list on the screen -> User will select one in the list. <u>Step05:</u> the partner call to Vietunion to query. In this step, the partner needs to send AddingInput.
ChannelPerform	String	7	N	The channel action. Including 04 values: - COUNTER => action at counter. - WEB => action on web site. - MOBI => action on mobi app. - AUTO => auto payment/remind.

○ **Response Data.**

Json Data
<pre>{ "ReturnCode":int, "SubReturnCode":int, "DescriptionCode":string, "PaymentFeeType": int, "PercentFee":Decimal, "ConstantFee":Decimal, "MinFee":Decimal,</pre>

```

    "MaxFee":Decimal,

    "IsShowMoney":Boolean,

    "ExtraInfo":string,

    "Bills":array BillInfoBE,

    "Customers":array CustomerInfo

}

```

Parameter	Type	Max Length	Allowance NULL	Description
ReturnCode	Int	4	N	0: Query bill has done. <i>In this case, VietUnion will return the outstanding bill. The bill information reference class BillInfoBE below.</i> 3: Currently, customers do not arise bills in the provider system yet 4: The system is not able to find out customer information follow query: SearchValue, ServiceId and ProviderId -1: Query bill is failure because query information is invalid. -3: Time out. <i>In this case, the Partner needs to re-try.</i> -9: The query bill is failed in the following cases: <i>Service/Provider unavailable, supporting area has been suspended, area has not yet</i>

				supported payment by Vietunion, etc... Depending on the case that Vietunion will enclose the description message and SubReturnCode corresponding. Reference the DescriptionCode param below. -10: ServiceId – ProviderId are limited by Vietunion. -25: The partner needs to send additional Information. In this case, Vietunion will enclose the list of fee-type. User needs to select one of them to query bill. Reference to class CustomerInfo for the list of fee-type. -26: ServiceId – ProviderId do not exist in the Vietunion system. -28: Bill of customer is blocked in the provider system. -84: Customer Information (SearchValue) in the area that do not support for payment via VietUnion. -85: Provider is off in the Vietunion system. -86: The Partner/User of Partner exceeded the number of query bill that allowed by Vietunion. 2001: Invalid time between Partner
--	--	--	--	---

				– VietUnion. <i>In this case, the Partner needs to check the server time. This error code means that the server time between the Partner - Vietunion is different (> 5 minutes).</i> 2005: Invalid IP. <i>This error means that the IP executing the command is not in the IP list of the Partner who provided VietUnion.</i> 2004: Invalid digital signature. In this case, the Partner needs to check the Signature.
Bills	BillInfoBE []		Y	The list of outstanding bill. Reference class BillInfoBE below.
Customers	CustomerInfo []		Y	List of the fee type. Note: This case is just applied for the insurance service. The fee type is categories that the customer registered with the provider.
DescriptionCode	String	300	Y	Description for error-code. This value just apply for ReturnCode = -9 <i>Here is the content that the Partner used for display a message to users..</i>
PaymentFeeType	Int	1	Y	The type of payment fee. Depending on the provider will have value corresponding.

				The Partner will depend on this value to compute the PaymentFee Include values: 0: Not charge fee (fee = 0). 1: Charge fee by period debt. PaymentFee = Sum of the fee of the bill that the customer wants to pay. Example: The result of queries bill, Vietunion returns the list of bills. Details: Bill 01: - Month: 01/2020 - MoneyAmount: 100k - PaymentFee: 2k - Bill 02: - Month: 02/2020 - MoneyAmount: 200k - PaymentFee: 2k - If User select payment: - Only Bill 01. PaymentFee = PaymentFee of Bill 01. - Or - Only Bill 02. PaymentFee = PaymentFee
--	--	--	--	--

				of Bill 02. Or - Both of them. $\text{PaymentFee} = \text{PaymentFee of Bill 01} + \text{PaymentFee of Bill 02.}$ 2: Charge fee by the amount to pay. $\text{PaymentFee} = \text{Payment amount} * \text{PercentFee} + \text{ConstantFee.}$ Note: - The <u>PaymentFee</u> must be roundup (ceiling roundup). - The <u>PaymentFee</u> must be compare with <u>MinFee</u> – <u>MaxFee</u> below. Follow up: If $\text{PaymentFee} < \text{MinFee}$, $\text{PaymentFee} = \text{MinFee}$ If $\text{PaymentFee} > \text{MaxFee}$, $\text{PaymentFee} = \text{MaxFee.}$
PercentFee	Decimal	6	Y	Percent of fee. Example: 0.0030, 0.04 etc...
ConstantFee	Decimal	6	Y	Constant of fee. Example: 1000,11000 etc...
MinFee	Decimal	6	Y	Min of fee.
MaxFee	Decimal	6	Y	Max of fee.
IsShowMoney	Boolean		N	Option display the amount of debt on the screen or not. True: allow display.

				False: not display. Currently, there has some providers who do not want to show the amount of debt on the screen.
SubReturnCode	Int	4	Y	This is the sub-error code and enclosed with the ReturnCode = -9. Included values: -101: The service/provider is unavailable. -102: The supporting area has been suspended. -103: The area has not yet supported payment by Vietunion. -104: E-commerce payment code is not existed. This error code is just applied for the e-com service (ServiceId TMDT). -105: The school has not been supported to pay by Vietunion. This error code is just applied for the Tuition service (ServiceId TTHP). -106: The order code [X] has already been paid. <i>This error code is just applied for the e-com service (ServiceId TMDT).</i> <i>[X] is order code.</i> -107: The reservation code [X] has expired or paid.

				<i>This error code is just applied for the Train/Passenger/Flight ticket (ServiceId VEXE).</i> <i>[X] is reservation code.</i> -109: CustomerId does not exist or does not issued invoice. -110: The order code [X] is expired. <i>This error code is just applied for the e-com service (ServiceId TMĐT).</i> <i>[X] is order code.</i> ----- <i>Note: The value of [X] is dynamic. Depending on the case, Vietunion will return the value corresponding.</i> <u>ExtraInfo</u> below.
ExtraInfo	String	100	Y	This is the dynamic value ([X]) that is enclosed with the SubReturncode. Depending on SubReturnCode will have the corresponding value. Included values: - If SubReturnCode is -106, ExtraInfo is "ORDER_CODE:[X]". In this case, [X] is order code. <u>Example:</u> ORDER_CODE: 1234566 - If SubReturnCode is -107, ExtraInfo is "BOOKING_CODE:[X]". In this case, [X] is reservation code.

				<u>Example:</u> BOOKING_CODE: 1234566 - If SubReturnCode is -110, ExtraInfo is “ORDER_CODE:[X]”. In this case, [X] is order code. <u>Example:</u> ORDER_CODE: 1234566 - If SubReturnCode is -120, ExtraInfo is “MAX_AMOUNT:[X]”. In this case, [X] is max amount.
--	--	--	--	---

class BillInfoBE

Parameter	Type	Max Length	Allowance NULL	Description
BillId	String	30	N	Identifier code of bill. Example: 1234
ServiceId	String	30	N	Service code. For example: NET, CAP....
ServiceName	String	70	N	Service Name. For example: Internet, TV, v.v..
ProviderId	String	30	N	Provider code. For example: VIETTEL, VINASG
ProviderName	String	70	N	Provider Name. For example: VIETTEL, VINASG
Month	String	100	N	Debt Period. Depending on the bill type (IsPrepaid : Pre-paid/Post-paid), Vietunion will return the value with the formatted corresponding.

				Example: - <u>Pre-paid bill</u>: The value is the title of usage packages. Such as: 03 months package, 06 months package, etc. - <u>Post-paid bill</u>: The value is period debt with the format MM/yyyy. Such as: 03/2022, 04/2022... Note: There are some Providers want to confidential information. So, they have not returned the value.
MoneyAmount	Decimal	9	N	Bill amount. Example: 100000, 900000000 etc... <i>Note: There are some financial providers that will not return the amount of bill. But they allow customers to input any amount to pay. In this case, the value of MoneyAmount is 0</i>
PaymentFee	Decimal	6	N	Payment fee. This is the fee collect customer when payment. Note: refer to PaymentFeeType property
CustomerId	String	30	N	This is client code.
CustomerName	String	50	Y	Full name of the customer. Note: There are some Providers want to confidential information. So, they have not returned the name of the customer.
Address	String	50	Y	Address of the customer. Note: There are some Providers want to confidential information. So, they have not returned the address of the customer.

ExpiredDate	String	15	Y	This is the expiration date of the bill. The format is yyyyMMdd Note: With Pre-paid bill (IsPrepaid = true) and e-com bills (ServiceId = TMĐT) have Expired Date, this value is returned by the provider. The partner needs to display on the screen.
MinRange	Decimal	6	N	This is the minimum amount that customers need to pay. There are some providers in Financial services that allow customers to input flexible amounts of pay. Just need this amount to be in the min-max range. Note: If the PaymentRule param is 5 (input amount to pay), the Partner needs to validate the amount in the min-max range. Other rules, no need to validate min-max range.
MaxRange	Decimal	6	N	This is the maximum amount that customer need to pay. There are some providers in Financial services that allow customers to input flexible amounts of pay. Just need this amount to be in the min-max range. Note: If the PaymentRule param is 5 (input amount to pay), the Partner needs to validate the amount in the min-max range. Other rules, no need to validate min-max range.
IsPrepaid	Boolean		N	Bill type. Include values: True: Pre-paid bill False: Post-paid bill.

InfoEx	string	200	Y	This is additional information included by the provider to help customers know more about their bills. This value will have the format TITLE:VALUE TITLE:VALUE, etc Example: CMND:1234567 The Partner needs to display this value on the screen.
PaymentRule	Int		N	This is the payment rule of the provider. Each provider has a different value. It includes the following values: 1. Payment for all bills Customers have many outstanding bills, which require they must pay all bills. If not, payment will fail. 2. Payment for the oldest bill Customers have many outstanding bills, which require they must pay the oldest bill or pay all bills. Example: Customer has 03 bills. Details: Bill 01: - Month: 01/2022 - MoneyAmount: 100k - Bill 02: - Month: 02/2022 - MoneyAmount: 200k

				- Bill 03: - Month: 03/2022 - MoneyAmount: 200k - In this case, the customer must pay to follow these situations: - Option 1: Paying for Bill 01. - Option 2: Paying for Bill 01 and Bill 02 - Option 3: Paying for Bill 01, to Bill 02, and Bill 03. Note: The list of bills has been sorted from oldest to newest by Vietunion 3. Payment for any one bill. If customers have many outstanding bills, they will choose any 1 bill to pay. Note: This rule is just applied to the pre-paid bill (IsPrepaid = true). 5. Input a flexible amount to pay. Customers can input any amount that wants to pay. Note: In this case, the partner must validate the amount inputted. It must be in the Min-Max range allowed by the provider
--	--	--	--	---

				7: Choose any multiple bills to pay. If customers have many outstanding bills, they can choose multiple bills to pay. <u>Note:</u> - Other payment methods will be updated later if they happen. - In case Vietunion returns multi-bills, the PaymentRule is the same.
--	--	--	--	---

class CustomerInfo

Parameter	Type	Max Length	Allowance NULL	Description
CustomerId	String	30	N	Client code/Fee type/Contract type. Depending on provider will have value corresponding.
IdentityCode	String	30	N	The identity code of the kinds of payment.
Title	String	120	N	The title of the kinds of payment.

2.2.2. Bill payment.

- **Purpose:** This function used for making payment bill.

- **Command code**

Operation: PayBillBE

- **Request Data**

Json Data
<pre>{ "UserId":string, "BillIds":string, "ContactPhone":string, "SystemTrace":string,</pre>

```

"MoneyTotal":Decimal,

"TransactionTime":string,

"ChannelPerform": string,

"PaymentFee": Decimal

}

```

Parameter	Type	Max Length	Allowance NULL	Description
UserId	String	64	N	User account in the Partner system. This value can: userId, user name, phone number, etc... the Partner can hash this value before sending it to Vietunion.
BillIds	String	200	N	This is the list of BillIds that need to make payment. Each BillId will be separated by a comma (,). (Refer to BillId in class BillInfoBE)
ContactPhone	String	11	N	This is the contact phone of user. <i>Purpose of wanting to resolve complaints and supporting customers with issues related to payment.</i>
SystemTrace	String	64	N	This is the transaction ID of the Partner and must be unique for each transaction. This value will use for: - Checking information related to the transaction. - Reconciliation between Partner – Vietunion. Note: VietUnion will check the duplicates of Systemtrace for 45 days.

MoneyTotal	Decimal	9	N	Total amount of bills customers want to pay. It is not included PaymentFee below.
TransactionTime	String	14	N	Time for executing the transaction. The format yyyyMMddHHmmss Timezone: GMT+7
ChannelPerform	String	7	N	The channel action. Including 04 values: - COUNTER => action at counter. - WEB => action on web site. - MOBI => action on mobi app. - AUTO => auto payment/remind.
PaymentFee	Decimal	6	N	The fee of payment.

○ **Response Data**

Json Data
<pre>{ "ReturnCode":int, "OrderNo":string, "DescriptionCode":string, "SubReturnCode":int, "ExtraInfo":string, "AddInfo":string }</pre>

Parameter	Type	Max Length	Allowance NULL	Description
ReturnCode	Int	4	N	0: Making payment successfully.

				<i>In this case, the partner:</i> - Collect money from customers. - Update transaction status to Success. 1 : The transaction is in progress. <i>In this case, the Partner:</i> - Still hold on customer's money. - Update transaction status to in progress. - Call Vietunion by API to check the transaction status or settlement later. -1: The transaction is failure because the request is invalid or another internal error in Vietunion. <i>In this case, the Partner will:</i> - Refund to customer. - Update transaction status to failed. 3: Transaction is timeout. <i>In this case, the Partner:</i> - Still hold on customer's money. - Update transaction status to in progress. - Call Vietunion by API to check the transaction status or settlement later. -4: The transaction is failure because the payment amount is not in the range Min-Max. <i>In this case, the Partner will:</i> - Refund to customer.
--	--	--	--	---

				- Update transaction status to failed. -7: The transaction is failure because the balance of the Partner account at Vietunion does not enough to pay. <i>In this case, the Partner will:</i> - Refund to customer. - Update transaction status to failed. -9: The transaction is failure in the following cases: bill is expired, payment amount is invalid, exceeded a regulatory limit on the number of payments for CustomerID, etc... Depending on the case that Vietunion will enclose the description message and SubReturnCode corresponding. <i>In this case, the Partner will:</i> - Refund to customer. - Update transaction status to failed. 2001: The transaction is failure because the RequestTime is invalid. <i>In this case, the Partner needs:</i> - To check the server time. This error code means that the server time between the Partner - Vietunion is different (> 5 minutes). - Refund to customer. - Update transaction status to failed. 2005: The transaction is failure because the IP is invalid.
--	--	--	--	---

				<i>In this case, the Partner will:</i> - Refund to customer. - Update transaction status to failed. 2004: The transaction is failure because the digital signature is invalid. <i>In this case, the Partner will:</i> - Refund to customer. - Update transaction status to failed. Note: With case, the Partner does not receive the reponse from Vietunion (time-out case), the Partner will: - Still hold on customer's money. - Update transaction status to in progress. - Call Vietunion by API to check the transaction status or settlement later.
OrderNo	String	100	Y	The transaction ID of Vietunion.
AddInfo	String	300	N Y	The additional information related to the payment and returned by the provider. The formatting: TITLE1:VALUE1#TITLE2:VALUE2#... Note: If the Partner system support printing the payment receipt or viewing detail of the payment history, the Partner needs to record this information.
DescriptionCode	String	300	N Y	Description code for error-code. This just applies for the Returncode = -9.
SubReturnCode	Int	4	Y	This is the sub-error code and enclosed with the ReturnCode = -9.

				Included values: -111: The bill has already been paid. -118: The payment amount is invalid because it is not in range Min-Max of the provider rule. -119: The bill code [X] has expired. <i>This error code is just applied for the e-com service (ServiceId TMĐT).</i> -112: The payment amount of the client code [X] has exceeded the rule of the provider ([Y] VND / month) -113: The payment amount of the client code [X] has exceeded the rule of the provider ([Y] VND/ day). -114: Times payment of the client code [X] has exceeded the rule of the provider([Y] time/month). -115: The payment amount is invalid. It should be less or equal to [Y] VND. -116: The payment amount is invalid. It should be greater or equal to [Y]. -117: The system does not support the payment of this bill. <i>Note: The value of [X] and [Y] are dynamic. Depending on the case, Vietunion will return the value corresponding. Reference to the ExtraInfo param below.</i>
ExtraInfo	String	100	Y	This is the dynamic value ([X],[Y]) that is enclosed with the SubReturncode. Depending on SubReturnCode will have the

				corresponding value. Included values: - If the SubReturnCode is -119, ExtraInfo is "ORDER_CODE:[X]". In this case, [X] is bill code. <u>Example:</u> ORDER_CODE: 1234566 - If the SubReturnCode is -112, ExtraInfo is "CUSTOMER_ID:[X] MAX_AMOUNT:[Y]". In this case, [X] is the client code and [Y] is max amount per month. <u>Example:</u> CUSTOMER_ID: 1234566 MAX_AMOUNT:2000000 - If the SubReturnCode is -113, ExtraInfo is "CUSTOMER_ID:[X] MAX_AMOUNT:[Y]". In this case, [X] is the client code and [Y] is max amount per day. <u>Example:</u> CUSTOMER_ID: 1234566 MAX_AMOUNT:2000000 - If SubReturnCode is -114, ExtraInfo is "CUSTOMER_ID:[X] MAX_TIMES:[Z]". In this case, [X] is the client code and [Y] is max times per month. <u>Example:</u> CUSTOMER_ID: 1234566 MAX_TIMES:4 - If SubReturnCode is -115, ExtraInfo is "AMOUNT:[Y]". In this case, [Y] is min amount. <u>Example:</u> AMOUNT: 10000000 - If SubReturnCode is -116, ExtraInfo is
--	--	--	--	---

				"AMOUNT:[Y]". In this case, [Y] is max amount. <u>Example</u>: AMOUNT: 20000
--	--	--	--	--

2.2.3. Check transaction status.

- **Purpose:** This function used for checking the transaction status.

- **Command code**

Operation: GetTransactionStatusBE

- **Request Data.**

Json Data
<pre>{ "SystemTrace":string, "RequestTime":string, "TransactionTime":string }</pre>

Parameter	Type	Max Length	Allowance NULL	Description
SystemTrace	String	64	N	This is the transaction ID of the Partner that wanted to check the status. Note: This is the SystemTace param in the payment request.
RequestTime	String	14	N	This is executing time at the Partner system. The formatting is yyyyMMddHHmmss Timezone: GMT+7
TransactionTime	String	14	N	This is the transaction time of transaction that wanted to check the status. The formatting is

				yyyyMMddHHmmss. Note: This is the value of TransactionTime param in the payment request.
--	--	--	--	--

○ **Response Data.**

Json Data
<pre>{ "ReturnCode":int, "Status":string, "OrderNo":string }</pre>

Parameter	Type	Max Length	Allowance NULL	Description
ReturnCode	Int	4	N	0: Checking status of transaction successful. <i>In this case, vietunion will enclose the current status of this transaction.</i> <i>(Reference to the Status param below.)</i> -1: The checking process gets the error. <i>This is an internal error in Vietunion system. In this case, the Partner needs to re-try again.</i> -2: With the SystemTrace input, Vietunion does not find transactions in the system. <i>In this case, the Partner will:</i> - Refund to customer. - Update transaction status to be


				failed. -3: Timeout. <i>In this case, the Partner needs to re-try again.</i> 2001: The RequestTime is invalid. <i>In this cae, the Partner needs to:</i> - Check the server time. This error code means that the server time between the Partner - Vietunion is different (> 5 minutes). - Re-try again. 2005: IP is invalid. <i>In this cae, the Partner needs to:</i> - Check the IP of server. - Re-try again. 2004: The digital signature is invalid. <i>In this cae, the Partner needs to:</i> - Check the digital signature. - Re-try again. Note: With case, the Partner does not receive the reponse from Vietunion (time-out case), the Partner needs to re-try again.
Status	Int		N	This is the current status of transaction. 1: Successful. <i>This is the final status. In this case, the Partner needs to update the transaction status to success.</i>

				2: Cancel <i>This is the final status. In this case, the Partner needs to:</i> - Refund to customer. - Update transaction status to be failed. 5: Failed payment. <i>This is the final status. In this case, the Partner needs to:</i> - Refund to customer. - Update transaction status to be failed. Note: For other values, the transaction status is not final. Therefore the Partner needs to re-try again.
OrderNo	String	100	Y	Transaction ID of Vietunion.


3. Workflow.

3.1. Bill payment.

Bill payment

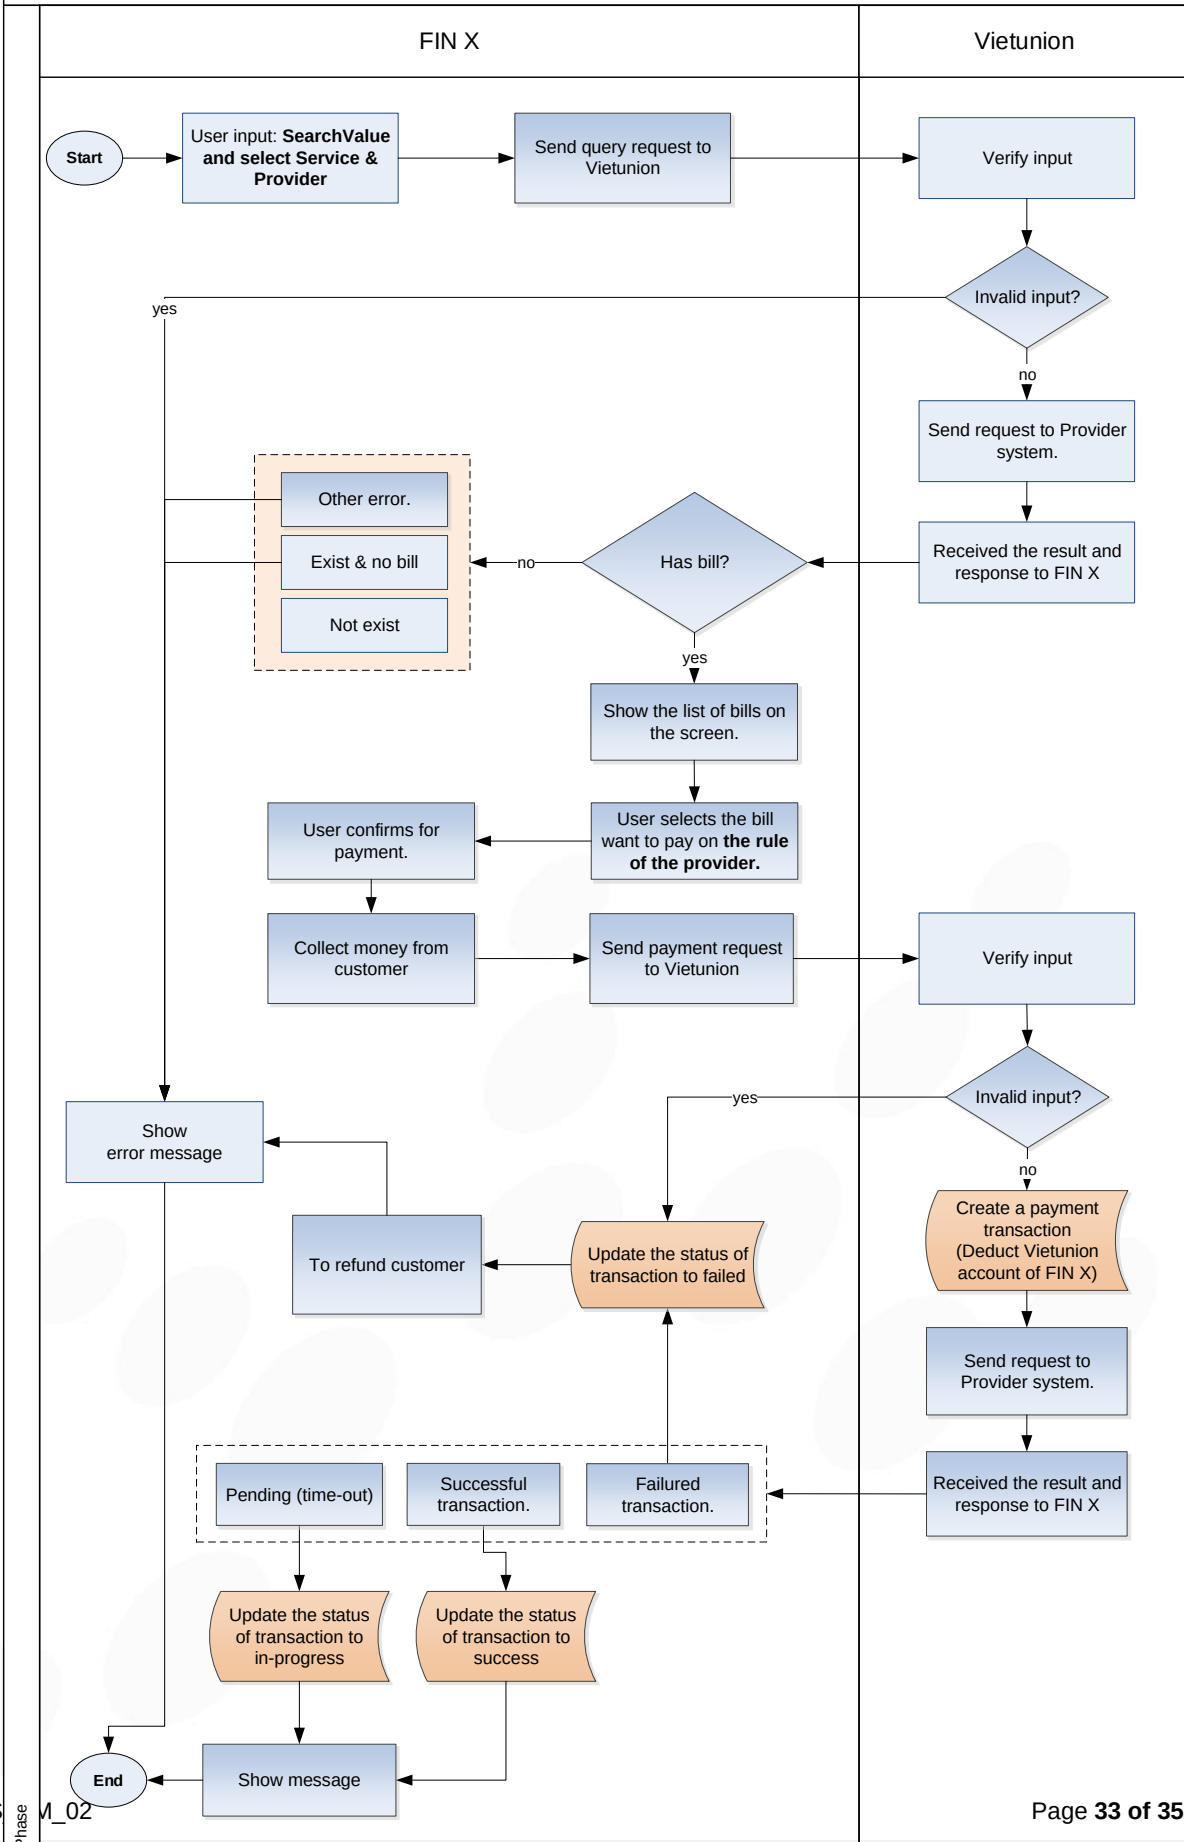

3.2. Check transaction status.

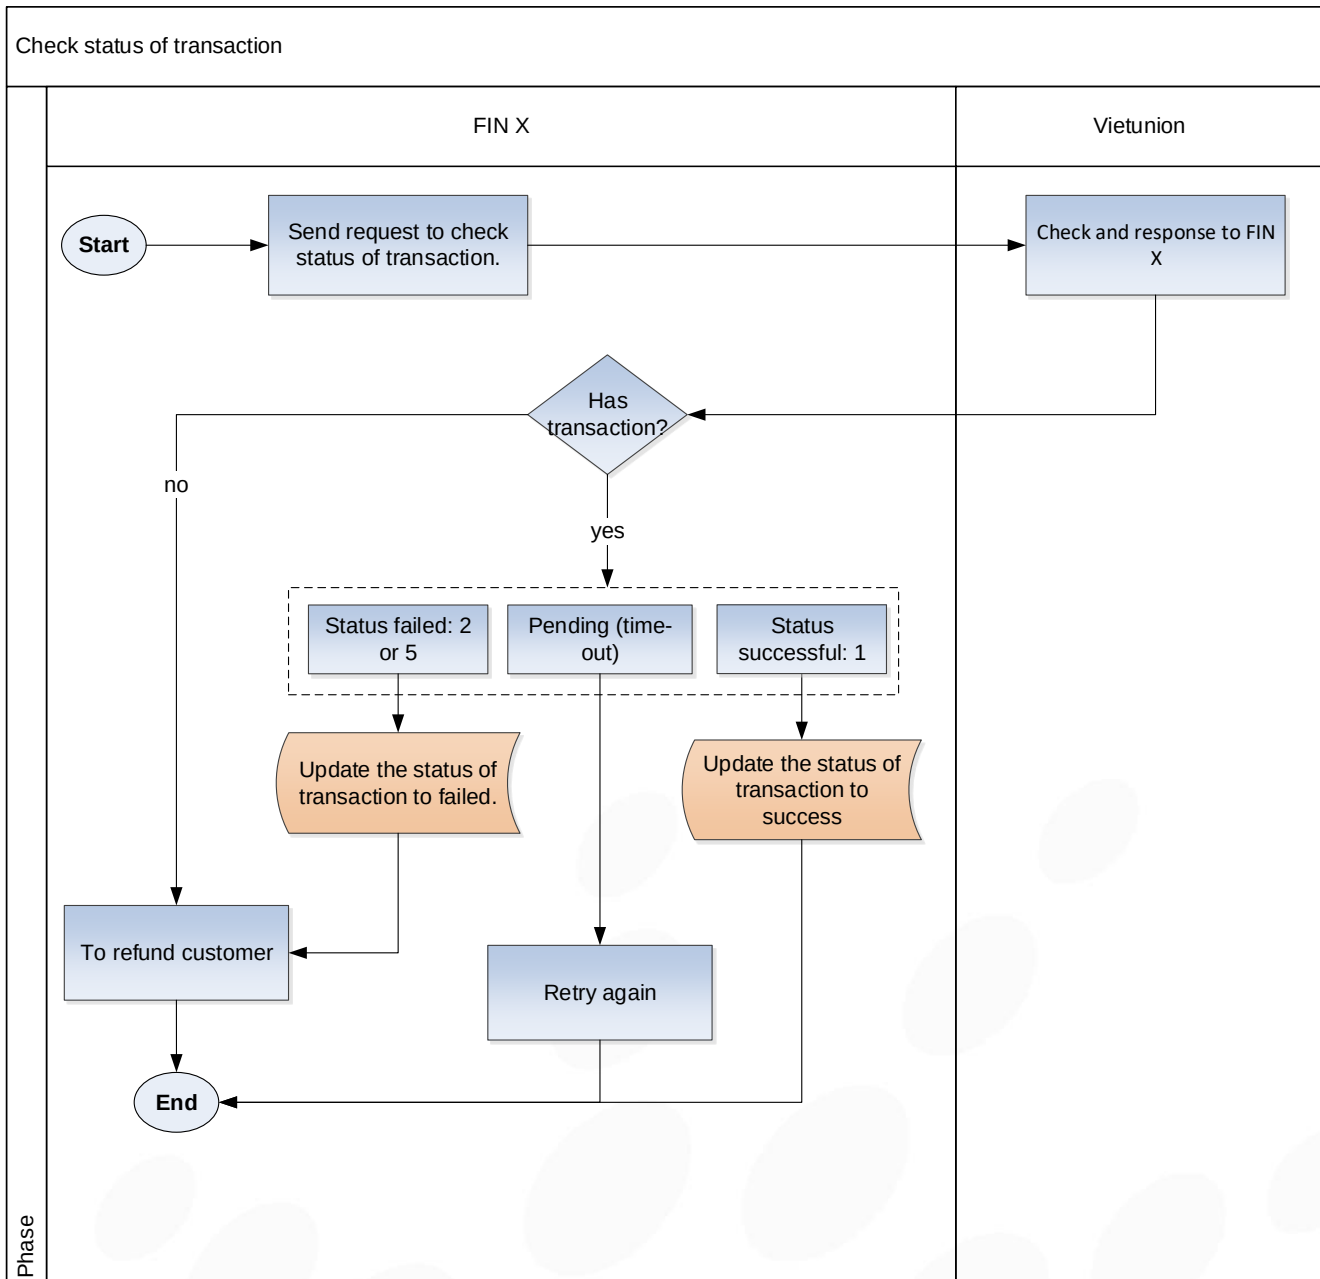

4. Contact.

Phạm công Chứ

Email: chu.pham@vietunion.com.vn

Phone: 0972465503

Skype: smallbank1987