


AlertDialog 用法

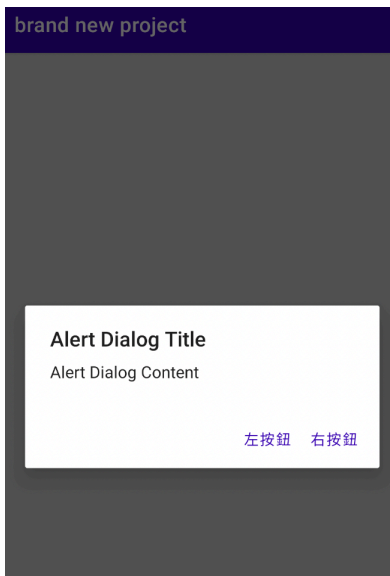


使用 `AlertDialog.Builder` 建立 `AlertDialog` 對象

```
AlertDialog.Builder(this)
    .setTitle("Alert Dialog Title")
    .setMessage("Alert Dialog Content")
    .setCancelable(false)
    .setPositiveButton("左按鈕") { _, _ ->
        Toast.makeText(this, "左按鈕 Clicked",
Toast.LENGTH_SHORT).show()
    }
    .setNegativeButton("右按鈕") { _, _ ->
        Toast.makeText(this, "右按鈕 Clicked",
Toast.LENGTH_SHORT).show()
    }.show()
```

```
// _ 表示占位符，表示不使用這個參數
// show() 最後加上才能彈出 AlertDialog
```

建立單選式 AlertDialog

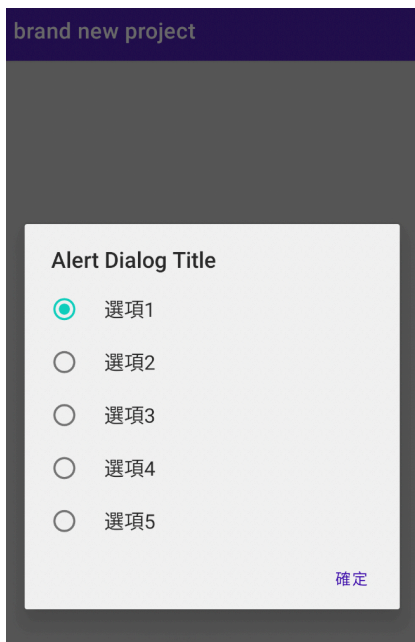

```
val item = arrayOf("選項1", "選項2", "選項3", "選項4", "選項5")
var index = 0
```

```
dialogButton.setOnClickListener {
    AlertDialog.Builder(this)
        .setTitle("Alert Dialog Title")
        .setSingleChoiceItems(item, 0) { _, i, ->
            index = i
        }
        .setPositiveButton("確定") { _, _ ->
            Toast.makeText(this, "你的選項是:${item[index]}",
                Toast.LENGTH_SHORT).show()
        }.show()
}
```

```
// setSingleChoiceItems 用來設置選項列表和獲取所選項目 index 值
```