


打開新Activity，並由新打開 Activity 處理完成後返回數據到原 Activity

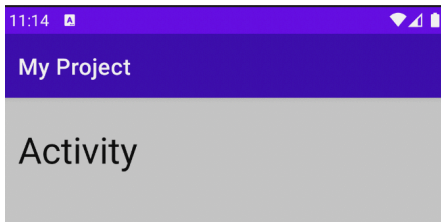

1. 在 Activity 中宣告 ActivityResultLauncher 作為 Activity 啟動器

```
private val startForResult =
    registerForActivityResult(ActivityResultContracts.StartActivityForResult()) {
        result: ActivityResult ->
        if(result.resultCode == Activity.RESULT_OK) {
            val intent = result.data
            val value = intent?.getStringExtra("result")
        }
    }
```

// result: ActivityResult 回到這個 Activity 時執行的代碼

2. 使用 ActivityResultLauncher 前往另一個 Activity

```
val intent = Intent(this, MainActivity2::class.java)
startForResult.launch(intent)
```

3. 在新打開 Activity 中用 setResult() 回傳資料

```
val bundle = Bundle()
bundle.putString("result", "result here")
val intent = Intent().putExtras(bundle)

setResult(RESULT_OK, intent)
finish()
```

// finished() 關閉目前 Activity