


自定義 Spinner

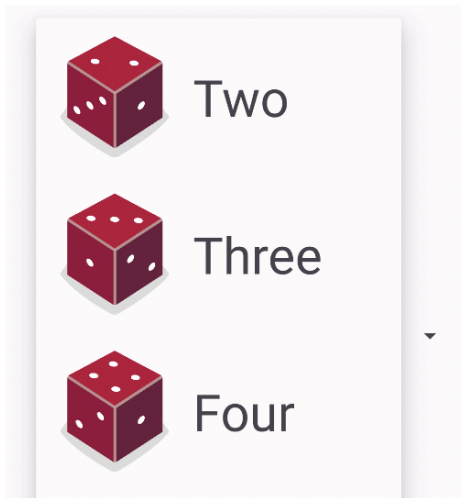

1. 根據內容建立 class

```
class Dice(var name: String, var image: Int)
```

2. 建立 Spinner 中項目模版

R.layout.dice_layout.xml

```
<LinearLayout
xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:gravity="center_vertical"
    android:layout_width="match_parent"
    android:layout_height="wrap_content">

    <ImageView
        android:id="@+id/diceImageView"
        android:layout_width="100dp"
        android:layout_height="100dp"
        android:layout_margin="15dp"
        app:srcCompat="@drawable/dice_1" />

    <TextView
        android:id="@+id/diceNameTextView"
        android:text="One"
        android:textSize="42sp" />

</LinearLayout>
```

3. 建立 Adapter

重寫 getView 和 initView 方法

```
class DiceAdapter(context: Context, list: List<Dice>) :
    ArrayAdapter<Dice>(context, 0, list) {

    override fun getView(position: Int, convertView: View?, parent: ViewGroup):
View {
        return initView(position, convertView, parent)
    }

    override fun getDropDownView(position: Int, convertView: View?, parent:
ViewGroup): View {
        return initView(position, convertView, parent)
    }

    private fun initView(position: Int, convertView: View?, parent: ViewGroup):
View {
        val view = LayoutInflater.from(context).inflate(R.layout.dice_layout, null)

        val item = getItem(position)
        val diceImageView: ImageView = view.findViewById(R.id.diceImageView)
        val diceNameTextView: TextView = view.findViewById(R.id.diceNameTextView)

        diceImageView.setImageResource(item!!.image)
        diceNameTextView.text = item!!.name

        return view
    }
}
```

4. 使用 Adapter

```
val diceList: List<Dice> = listOf(
    Dice("One", R.drawable.dice_1),
    Dice("Two", R.drawable.dice_2),
    Dice("Three", R.drawable.dice_3),
    Dice("Four", R.drawable.dice_4),
    Dice("Five", R.drawable.dice_5),
    Dice("Six", R.drawable.dice_6),
)

diceSpinner.adapter = DiceAdapter(this, diceList)
```

5. 得到自定義 Spinner 所選內容

```
spinner.onItemSelectedListener = object :
    AdapterView.OnItemSelectedListener {
        override fun onItemSelected(
            p0: AdapterView<*>?,
            p1: View?,
            p2: Int,
            p3: Long
        ) {
            val textView = p0?.findViewById<TextView>(R.id.textView)
            Toast.makeText(this@MainActivity, textView!!.text.toString(),
                Toast.LENGTH_SHORT).show()
        }

        override fun onNothingSelected(p0: AdapterView<*>?) {
        }
    }
}
```