


Apache 域名绑定 (wampserver 环境)

- 【1】 打开文件路径：C:\Windows\System32\drivers\etc，修改 hosts 文件如下：

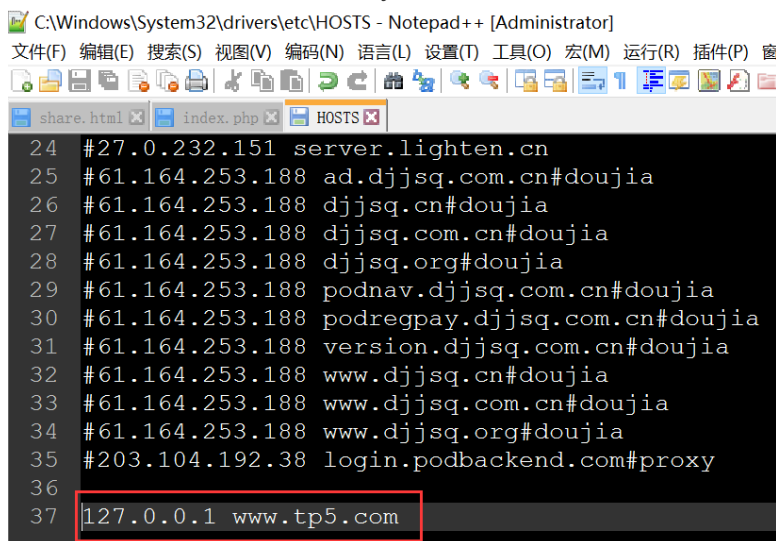

```
C:\Windows\System32\drivers\etc\HOSTS - Notepad++ [Administrator]
文件(F) 编辑(E) 搜索(S) 视图(V) 编码(N) 语言(L) 设置(T) 工具(O) 宏(M) 运行(R) 插件(P) 窗
24 #27.0.232.151 server.lighten.cn
25 #61.164.253.188 ad.djjsq.com.cn#doujia
26 #61.164.253.188 djjsq.cn#doujia
27 #61.164.253.188 djjsq.com.cn#doujia
28 #61.164.253.188 djjsq.org#doujia
29 #61.164.253.188 podnav.djjsq.com.cn#doujia
30 #61.164.253.188 podregpay.djjsq.com.cn#doujia
31 #61.164.253.188 version.djjsq.com.cn#doujia
32 #61.164.253.188 www.djjsq.cn#doujia
33 #61.164.253.188 www.djjsq.com.cn#doujia
34 #61.164.253.188 www.djjsq.org#doujia
35 #203.104.192.38 login.podbackend.com#proxy
36
37 127.0.0.1 www.tp5.com
```

- 【2】 打开路径：C:\wamp64\bin\apache\apache2.4.23\conf\，打开 httpd.conf 文件，搜索 “Include conf/extra/httpd-vhosts.conf”，去掉前面的 # 号，这是为了引入了 httpd-vhosts.conf 虚拟主机配置文件。



```
554 # User home directories
555 #Include conf/extra/httpd-userdir.conf
556
557 # Real-time info on requests and configuration
558 #Include conf/extra/httpd-info.conf
559
60 # Virtual hosts启动虚拟主机的配置
61 Include conf/extra/httpd-vhosts.conf
62
563 # Local access to the Apache HTTP Server Manual
564 #Include conf/extra/httpd-manual.conf
```


- 【3】 打开虚拟主机配置文件 C:\wamp64\bin\apache\apache2.4.23\conf\extra\httpd-vhosts.conf：去掉 NameVirtualHost *:80 前面的 # 号，这是为了启用 httpd-vhosts.conf 文件，使原来 httpd.conf 中默认的配置失效。修改后的代码如下：

```
<Directory />
    Options FollowSymLinks
    AllowOverride None
    Order deny,allow
    allow from all    #设置无条件允许访问
    Satisfy all
</Directory>
```

```

# Virtual Hosts
#
<VirtualHost *:80>
    ServerName localhost
    DocumentRoot c:/wamp64/www
    <Directory "c:/wamp64/www/">
        Options +Indexes +Includes +FollowSymLinks +MultiViews
        AllowOverride All
        Require local
    </Directory>
</VirtualHost>
<VirtualHost *:80>
    ServerName www.tp5.com
    DocumentRoot "C:/wamp64/www/tp5/public"
    <Directory "C:/wamp64/www/tp5/public">
        Options +Indexes +Includes +FollowSymLinks +MultiViews
        AllowOverride All
        Require local
    </Directory>
</VirtualHost>
<Directory />
    Options FollowSymLinks
    AllowOverride None
    Order deny,allow
    allow from all    # 设置无条件允许访问
    Satisfy all
</Directory>
#
```

【4】 重启 Apache，在网页输入：www.tp5.com,显示如下：



:)

ThinkPHP V5

十年磨一剑 - 为API开发设计的高性能框架

[V5.0 版本由 [七牛云](#) 独家赞助发布]

【5】 成功了。