


HH scan: three parameter slices

H200 NVL | B=16, S=16 | T=1600, dt=0.025 ms | float64 | completed coarse scan

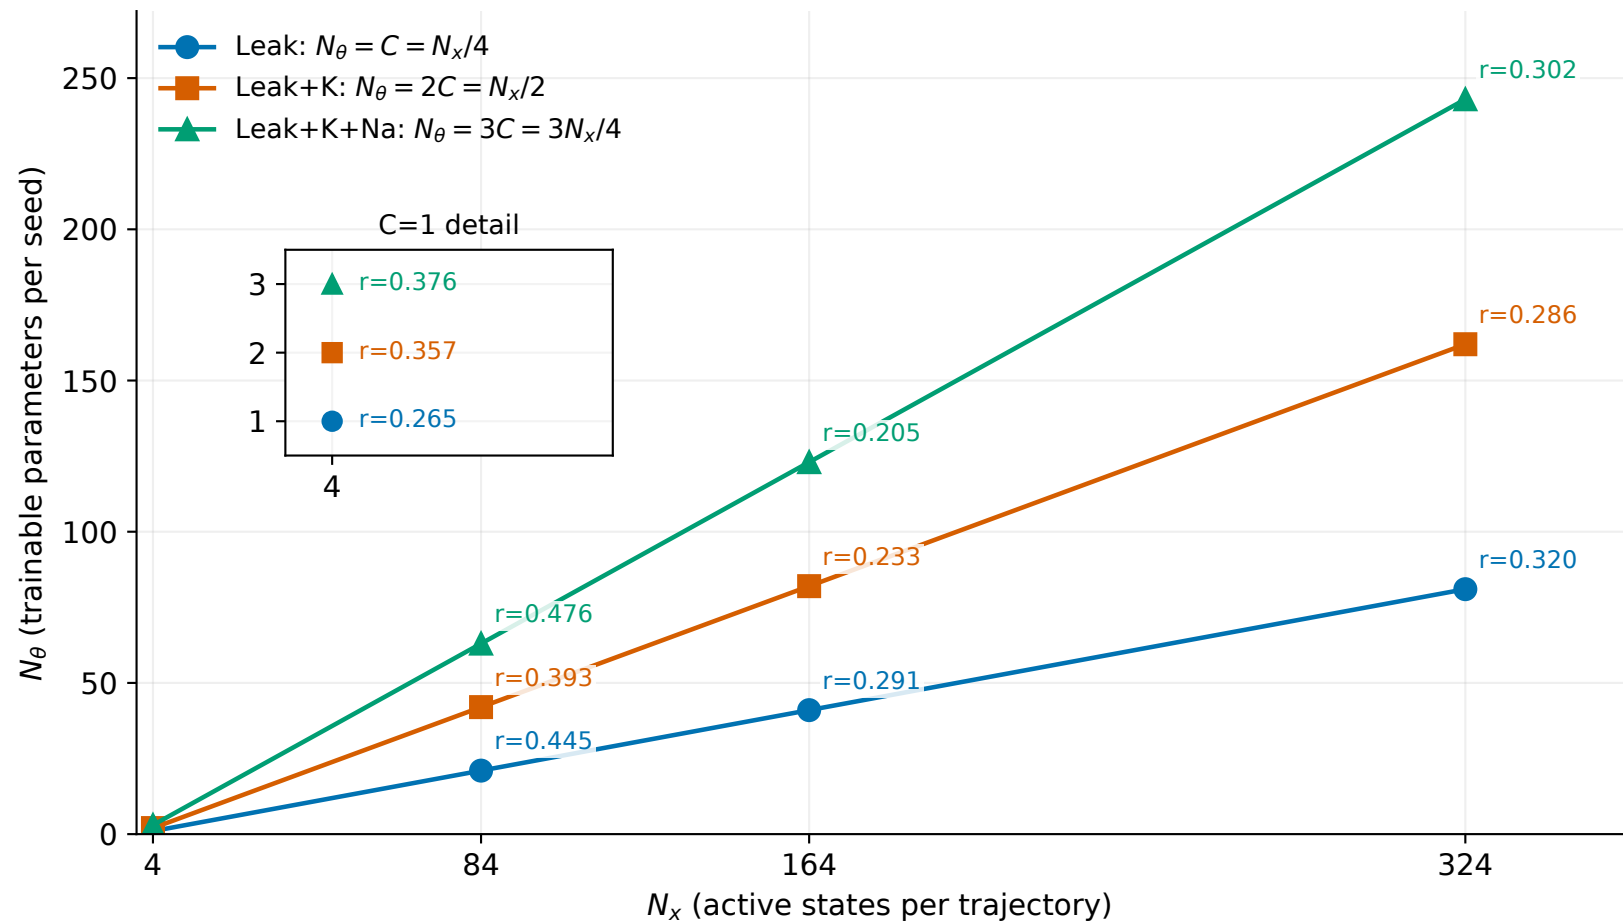

Labels: $r = t_{RTRL}/t_{BPTT}$; $r < 1$ favors RTRL. Lines connect sampled slice locations only. Only markers are measured; no crossover boundary has been inferred.