




non/blocking Read BB

- Processes ~~wait~~ waiting packets from the network. Applications discretion whether blocking or not

~~See report.~~
See report.txt for further details.

Incoming-thread

- declare packet descriptor
- non-blocking get pd
- flush packet descriptor
- await incoming packet (network)

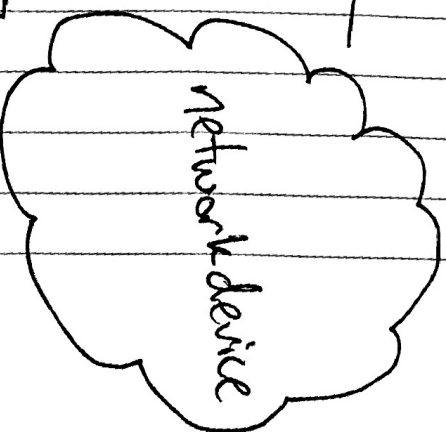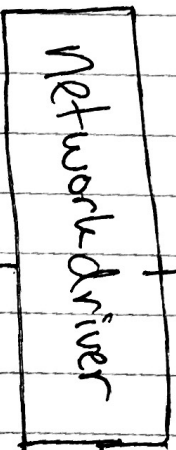

non/blocking write BB

- writes a packet descriptor to BBin either blocking or non blocking. Apps. discretion.

Outgoing-thread

- declare packet descriptor
- read from BBin
- Try to send packet 5 times
- Return pd to fpds