

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/322265991>

# Nerve Segmentation in Ultrasound Images

Conference Paper · January 2018

DOI: 10.1109/IPACT.2017.8244914

---

CITATIONS

0

---

READS

202

2 authors, including:



Aju D

VIT University

28 PUBLICATIONS 28 CITATIONS

SEE PROFILE

Some of the authors of this publication are also working on these related projects:



Medical Image Fusion [View project](#)

# Nerve Segmentation in Ultrasound Images

Vidushi Vashishtha  
SCOPE

Vellore Institute of Technology  
Vellore, India

vidushi.vashishtha2015@vit.ac.in

Dr. Aju D  
SCOPE

Vellore Institute of Technology  
Vellore, India

daju@vit.ac.in

**Abstract**—Today medical field has provided us enormous facilities that has been never thought before. There has been done many improvements in the field of surgery, medicine, X-Rays and many more. But some areas still want some improvements so that patients don't need to face any type of difficulty or pain. This paper is trying to highlight the difficulties and in the treatments that are based on the ultrasound images. So in paper this our main focus is to improve the treatments based on ultrasound scans which is used widely in medical field due to vast area of application and cost effectiveness. These ultrasound scans are very important to detect any kind of injury of disease in human body because it used to scan the internal tissues of the body. One major disadvantage of these images is that they include huge amount of noise so doctors face difficulty in finding the exact location of the nerve where they have to inject the medicine to operate. These pictures are not clear enough to find the nerve at once so they have to inject needle very times. With this application they can find the nerve very easily because it includes the segmentation of these nerves in ultrasound images. This application is further extended to train the system with this data so that it can be used worldwide.

**Keywords**—Machine learning; Python; Ultrasound images; Nerve Segmentation.

## I. INTRODUCTION

Ultrasound scans have very wide range of application area in the medical Field because they are cheap and easy to produce and we have many instruments available to take these scans. Ultrasound scans are mainly used to diagnose and analyze the internal body structures like muscles, nerves etc. So to accurately operate the internal body structure based on ultrasound scans is very important.

To operate these body structures doctors have to use narcotics to reduce the pain for the patient but these narcotics have many side effects on our body. So it is very important to use the right quantity of these narcotics and on the right part of the body. This paper introduces the method for nerve segmentation in the ultrasound images and scans so that we can reduce the side effects of narcotics on our body by correctly finding the nerve to be operated.

Digital image processing has become an important part of the medical imaging. With the help of image segmentation we can highlight the important part in any medical image that is useful for the doctors to study. So it is very important to accurately segment the image and provide the useful information that can be used by the doctors without any difficulty for the different medical purposes. Ultrasound scans are very useful and widely used because of their less cost, portability and safety but due to the poor image quality of the ultrasound scans we need some processing that can provide us more information to operate based on the ultrasound scans. So it is very important to provide the good segmentation scheme for these ultrasound scans that can be used in medical field world-wide and can benefit people.

## II. LITERATURE SURVEY

The paper[1] proposed by Qinghua Huang, Xiao Bai and Yingguang Li in the year 2014, for segmentation of ultrasound images, they have used a graph based approach in their paper. This paper concentrates on the segmentation of breast lesions in ultrasound scans. This paper focuses on the robust graph based algorithm for segmentation in ultrasound images. In their method they have first converted these images into a graph, then this robust graph method merges the spatially aligned pixels that are neighbors to each other. So they have build a minimal spanning tree with the help of these pixels and these pixels have the same intensities in this minimal spanning tree which corresponds to the subgraph. So like this images can be grouped into several subgraphs or sub regions. The final segmentation can be achieved by merging these forests of the minimal spanning trees.

The algorithm includes the following steps:

Step 1: First construct a graph  $G=(V, E)$ , in which pixels corresponds to vertex and an edge connects two vertices which are spatially neighbor vertices.

Step 2: Sort these edges into ascending order of the edge weights and set  $q = 1$ .

Step 3: Pick an edge within the sorted edges which connects the two subgraphs.

Step 4: Update  $q = q+1$  and repeat step 3 until all the edges have been traversed. After all the edges have been traversed, a forest of minimal spanning tree has been generated. Each one of this MST corresponds to one of the sub region in the ultrasound image.

In the paper[2] which is proposed by Hui Wang, Ting-Zhu Huang and Yugang Wang in year 2016. In this paper they have used active contours method. This method includes two stages of image segmentation in ultrasound images. In the first stage they have applied the global segmentation and in the second stage they have applied a local segmentation in an ultrasound image. According to them they have applied Gaussian Distribution for global segmentation and by applying a window function they have achieved local segmentation. The details that we get in the first stage for local segmentation is further used in the second stage. So second stage results depends on the accurate results of the first stage. If the results of the first stage are accurate then we will get more accurate results of the second stage.

In the paper[3] proposed by Deep Gupta and R.S. Anand in year 2016-17, they have used a hybrid approach for ultrasound image segmentation. In this hybrid approach they have used kernel fuzzy clustering with spatial constraints and edge based active contour method with the use of distance regularized level set function. The results that are obtained from the kernel fuzzy clustering helps in identifying object boundaries. The processing speed of this distance regularized level set function is also very high because in this you don't have to reinitialize anything in the level set function.

Techniques used are as follows:

Kernel fuzzy C-means clustering: It works on the principle of grouping the similar data into one cluster. With this the similar pixels or data points are grouped by minimizing the cost function. This cost function is based on the Euclidian distance of the pixels from the centroids of the other clusters.

Distance regularized level set segmentation model: This is used for solving dynamic variation boundaries problem in the ultrasound scans. In this potential function has been used for distance regularization. This techniques is applied on the contour forms of the ultrasound images.

Hybrid Technique: In this they have merged Fuzzy C means and edge based active contour method to segment the edges in the ultrasound images.

In the paper[4] proposed by Jung-Ha An, Paul Bigeleisen, and Steven Damelin in year 2011, they have used modified mumford-shah functional algorithm and some prior information. In this they have extracted some region of interest with the help of some approximation. This algorithm is not able to identify all the required information like noise etc so for this problem this needs some information that is known already. This will result as efficient segmentation. The information that we have acquired previously is given to the distance function. So with the help of this prior information and mumford shah functional effective results for the ultrasound images can be acquired.

In paper[5] author discusses about a beam steering method by using which the nerve segmentation of image is done. So, as to easily identify the nerve present in any part of vessel, organs or tissues. A machine-learning method is used for needle segmentation. Training of system is done using a statistical approach.

Paper[6] shows how a review is conducted between different methods for extracting features in given ultrasound image. And after comparison of different methods Hough transform is used for developing the model. In paper[7] author describes about a method by using which anesthesia can be easily be given to the blocked region so that in ultrasound image finding of blocked area or region of interest can be found. Paper[8] tells about Modified Mumford-Shah Functional and Prior Information for finding nerves in the given ultrasound image this method also used for recognizing vessel, nerve, tissue.

Paper[9], [10] and [11] discusses about segmentation methods, for finding vessel, organ tissue in the given ultrasound image. Using edge based segmentation, global and local region active contours a two stage segmentation approach for finding the part which to be medicated or to inject some medicine. And an graph based segmentation approach is also discussed for finding nerve respectively in papers.

In paper[12] semi supervised method is used for predicting the nerve area. A semi-supervised method is developed by seeing the failures of supervised method. Pearson distance is used for calculating distance between given patch images. Phantom and clinical data is used for this work.

Paper[13] OCT images are segmented and then from segmented image noise is removed. For proper visualizing of prostate gland edge detection of image is done. Combining all these steps improves the quality of obtained image. And hence resulting in a clear diagnosis process by doctor.

In paper[14] a B-mode image analysis technique is introduced for segmenting curved needles in biological tissue. Several points are made on the Doppler image which can help doctors predict the right region of interest. In paper[15] measurement of optic nerve is done. For the study purpose 33 different normal eyes were considered for the examination purpose and a method C-scan is introduced for measuring the optic nerve diameter of an eye.

### III. PROPOSED METHODOLOGY

In this proposed method we have divided this image processing into three different parts. The architecture for the same has shown below:

1. Image preprocessing.
2. Nerve Segmentation.
3. Machine learning.

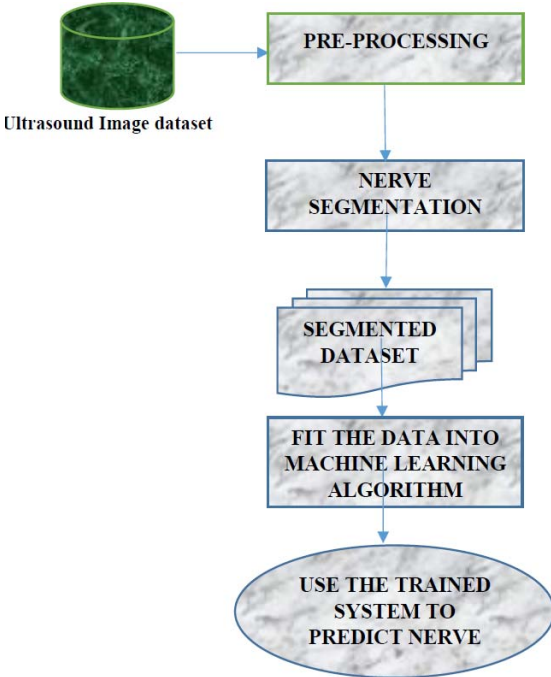


Figure 1: Workflow diagram of proposed system

In the above diagram first we will filter the image data set that we have got from any source like database etc. then we will apply the segmentation algorithm for edge detection in the images. After that we will fit this segmented data into a machine learning algorithm to train the system.

The detailed description for each step is as follows:

**Image preprocessing:** In this module we have applied some preprocessing techniques to the ultrasound images. Ultrasound images contains some speckle noise into them due to that it is hard to extract information out of them. So for this purpose we have used some filters for the images so that we can reduce this speckle noise form ultrasound images.

**Nerve Segmentation:** After applying the image preprocessing we get the preprocessed images which do not contain any type of noise. These image can be further used for image segmentation. For image segmentation or to segment the nerve area from the ultrasound images we have used edge detection algorithm or canny operator algorithm in python that can detect the edges very efficiently with the help of the sobel operator. The input images are being converted into 2D arrays. In this we have given input for train and test images and these images are converted into arrays and then saved in the form of arrays. This we have achieved with the help of python numpy array. Now we will give this data as an input to the machine learning algorithm to train the system. For training the system the array of train images will be given to the fit model of machine learning algorithm and the predict model will predict out of learning on the test images.

**Canny Algorithm:** Firstly it will apply the Gaussian filter to remove the noise from the image then it will find the intensity gradient in the image. This gradient is divided into two factors for vertical and horizontal then these factors are merged and final edge gradient with direction will be calculated. Then it will apply an edge thinning technique so that the edges will not get blurred. Finally it will apply the double threshold to keep the less gradient edges secure with the high gradient edges.

**Machine learning:** In this module we will train the system with the help of the results that we get from the nerve segmentation. All the data that we get as the result of the nerve segmentation will be loaded into the machine learning algorithm. We will use support vector machine learning algorithm to train the system for nerve segmentation in ultrasound images. After this learning the system will be trained and it will be able to predict the nerve area in the new set of ultrasound images.

### IV. RESULTS

Below is the image data set that has been used in this project for segmentation and machine learning:

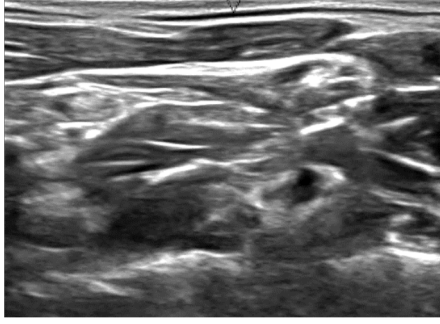


Figure 2



Figure 3

For the above image dataset the results for the two modules that is for images filtering and nerve segmentation are as follows:

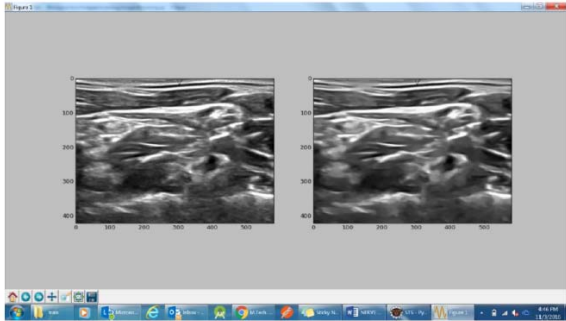


Figure 4: Image after applying filters

Above figure illustrates the result of filtering. This filtering will remove noise from the ultrasound images.



Figure 5: Edge detection using canny operator



Figure 6: Edge detection using canny operator

These figures illustrates the results of detecting the edges of the nerve area in the ultrasound images by using the canny operator.

## V. CONCLUSION

In the proposed paper the nerve area in the ultrasound image has done with the help of different modules. So that it can help doctors to detect easily the nerve area where they have to inject any medicine. This application can help a lot of people to protect themselves from the side effects of anesthesia that has been injected in their body at the time of operating their body parts. Ultrasound scans are used worldwide due to their availability and cost effectiveness that's why this application will contribute a lot in the medical field. Also the machine learning will make the human intervention very less and doctors don't have to worry about the procedure because system will train itself by learning and will provide better results than any human can provide. This will make any surgery very easy as doctors don't have to put efforts in finding any nerves in ultrasound images.

REFERENCES

- [1] Hafiane, Adel, Pierre Vieyres, and Alain Delbos. "Phase-based probabilistic active contour for nerve detection in ultrasound images for regional anesthesia." *Computers in biology and medicine* 52 (2014): 88-95.
- [2] Mayer, M. A., et al. "Automatic nerve fiber layer segmentation and geometry correction on spectral domain OCT images using fuzzy C-means clustering." *Investigative Ophthalmology & Visual Science* 49.13 (2008): 1880-1880.
- [3] Potočnik, Božidar, and Damjan Zazula. "Automated analysis of a sequence of ovarian ultrasound images. Part I: segmentation of single 2D images." *Image and Vision Computing* 20.3 (2002): 217-225.
- [4] Hetz, Walter, and Peter Weber. "Manually operated ultrasound application." U.S. Patent No. 4,545,386. 8 Oct. 1985.
- [5] Hatt, Charles R., Gary Ng, and Vijay Parthasarathy. "Enhanced needle localization in ultrasound using beam steering and learning-based segmentation." *Computerized Medical Imaging and Graphics* 41 (2015): 46-54.
- [6] Revell, J., M. Mirmehdi, and D. McNally. "Applied review of ultrasound image feature extraction methods." *The 6th Medical Image Understanding and Analysis Conference*. 2002.
- [7] Thouin, Emmanuelle, et al. "Nerve region segmentation for ultrasound guided local regional anaesthesia (Ira)." *Mediterranean Conference on Information Systems*. 2011.
- [8] An, Jung-Ha, Paul Bigeleisen, and Steven Damelin. "Identification of Nerves in Ultrasound Scans Using a Modified Mumford-Shah Functional and Prior Information." *Proceedings of the World Congress on Engineering and Computer Science*. Vol. 1. 2011.
- [9] Gupta, Deep, and R. S. Anand. "A hybrid edge-based segmentation approach for ultrasound medical images." *Biomedical Signal Processing and Control* 31 (2017): 116-126.
- [10] Wang, Hui, et al. "A two-stage image segmentation via global and local region active contours." *Neurocomputing* 205 (2016): 130-140.
- [11] Huang, Qinghua, et al. "Optimized graph-based segmentation for ultrasound images." *Neurocomputing* 129 (2014): 216-224.
- [12] Ciurte, Anca, et al. "An efficient segmentation method for ultrasound images based on a semi-supervised approach and patch-based features." *2011 IEEE International Symposium on Biomedical Imaging: From Nano to Macro*. IEEE, 2011.
- [13] Chitchian, Shahab, et al. "Combined image-processing algorithms for improved optical coherence tomography of prostate nerves." *Journal of biomedical optics* 15.4 (2010): 046014-046014.
- [14] Greer, Joseph D., et al. "Real-time 3D curved needle segmentation using combined Bmode and power doppler ultrasound." *International Conference on Medical Image Computing and Computer-Assisted Intervention*. Springer International Publishing, 2014.
- [15] Garcia, Julian PS, et al. "Optic nerve measurements by 3D ultrasound-based coronal" C-scan" imaging." *Ophthalmic Surgery, Lasers and Imaging Retina* 36.2 (2005): 142-146.