## 本程序使用说明

1、程序数据库配置图解 database.php

```
资源管理器
                              🙌 web.php
                                                  UserController.php

    ≡ adminuser.blade.php

                                                                                                                   💏 database.php 🗶
▲ 打开的编辑器
                                               'connections' => [
     m web.php php/cours..
     UserController.php...
                                                    'sqlite' ⇒ [
                                                         'driver' ⇒ 'sqlite',
'database' ⇒ env('DB_DATABASE', database_path('database.sqlite')),
'prefix' ⇒ '',

≡ adminuser.blade.p...

≡
     database.php php/...
▲ MY (工作区)
        ▶ bootstrap
        'mysql' => [
                                                         'driver' => 'mysql',
'host' => env('DB_HOST', '127.0.0.1'),
'port' => env('DB_PORT', '3306')
         💏 app.php
         e auth.php
         m broadcasting.p..
                                                         'database'
                                                                        => env(<mark>'DB_DATABASE', 'work'),</mark>
         cache.php
                                                                          env('DB_USERNAME', 'root'),
env('DB_PASSWORD', 'robt'),
=> env('DB_SOCKET', ''),
                                                         'username'
         en database.php
                                                          'password'
         💏 filesystems.php
                                                         'unix_socket'
                                                         'charset' =
         mail.php
                                                         'collation'
                                                                         => 'utf8_unicode_ci',
         e queue.php
                                                          'prefix'
         services.php
```

.env

```
资源管理器
                           UserController.php

    ■ adminuser.blade.php

                                                                                  en database.php
                                                                                                       .env ×
                                 APP NAME=Laravel
打开的编辑器
                                 APP_ENV=local
  m web.php php/cours...
                                 APP_KEY=base64:/zFE0r16+TD4A5uesmqHqvxhpSlSKWeNxtfDIpKM/yE=
  ♥ UserController.php...
                                 APP_DEBUG=true

    adminuser.blade.p...


                                 APP_LOG_LEVEL=debug
  ndatabase.php php/...
                                 APP_URL=<a href="http://localhost">http://localhost</a>
  .env php/coursework
                                 DB_CONNECTION=mysql
MY (工作区)
                                 DB HOST=127.0.0.1
                                 DB_PORT=3306
     ▶ resources
                                 DB DATABASE=work
     ▶ routes
                                 DB_USERNAME=root
     storage
                                 DB_PASSWORD=root
     ▶ tests
    ▶ vendor
                                 BROADCAST_DRIVER=log
                                 CACHE_DRIVER=file
                                 SESSION_DRIVER=file
    QUEUE_DRIVER=sync
    gitattributes
    gitignore
                                 REDIS_HOST=127.0.0.1
```

2、导入数据库文件work.sql

文件路径: coursework/database/work.sql

3、运行程序

http://localhost/index

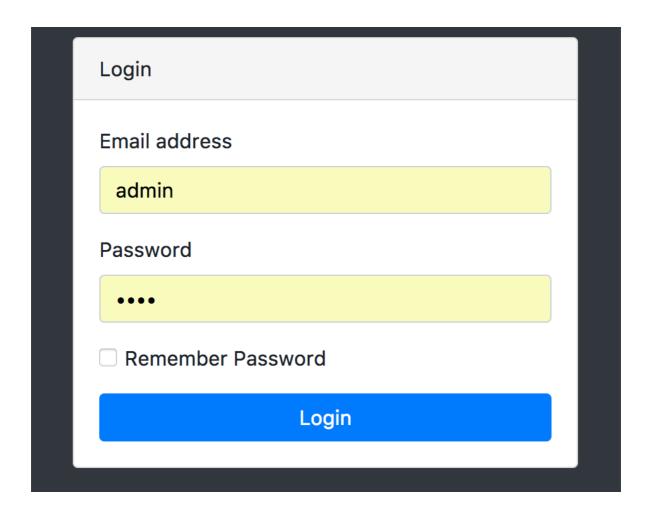

4、 以admin身份登录进入主面板 用户名: admin 密码: admin

