

# An Experiment of Adversarial Exmaples Crafting and Adversarial Training on Various Datasets

Jian Li

Mingyue Yang

David Lie

December 6, 2017

## Abstract

In this paper, we exercised adversarial example crafting and adversarial training on various datasets and evaluated the performances of crafting and adversarial training.

## 1 Introduction

Goodfellow et al. and Papernot et. al. introduced several algorithms of crafting *adversarial examples*. These algorithms include *Fast Gradient Sign Method*[1] and *Saliency Map Method*[2]. We exercised these two adversarial crafting methods on several datasets and trying to find out the relationship between the datasets and the performance of the algorithm.

We constructed several CNNs with TensorFlow[10] to recognize several datasets. Then we modified the CNN model to apply adversarial algorithms (implemented by CleverHans[9]). We generated adversarial examples with both algorithms and evaluated their success rate from both misclassification and targeted attack perspectives. Then we retrained the model with adversarial training, and regenerated adversarial examples to evaluate the performance of the adversarial training.

Due to limited time frame, we were not able to experiment adversarial training with Saliency Map method.

## 2 Datasets

We crafted adversarial examples using different settings on CGTSRB10, CIFAR10, FMNIST, MNISTBG datasets.

CGTSRB10 is a subset of the original GTSRB[5] dataset. GTSRB is an image collection consisting of 43 traffic signs. These images are captured from real-life videos so that every traffic sign has a serial of images with different resolutions. For experiment purpose, we handpicked 10 classes from GTSRB, then cropped the images to the exact frame of the traffic signs using the annotation data given in the dataset, and resized the images to  $32 \times 32$  pixels. This dataset is used in RGB mode (colour images).

CIFAR10[4] is an image collection of objects. It contains 60000  $32 \times 32$  colour images in 10 classes.

FMNIST(Fashion MNIST)[6] is a MNIST-like fashion product dataset. It consists of a training set of 60000 examples and a test set of 10000 examples. Each example is a  $28 \times 28$  grayscale image, associated with a label from 10 classes. This dataset has exact attribute as MNIST dataset[8], with the images are replaced with fashion objects such as shirts, skirts and shoes.

MNISTBG(MNIST with background)[7] is a patched version of MNIST dataset. Each MNIST example is attached with a background image extracted randomly from a set of 20 images downloaded from the Internet.

As a comparasion, we did the same experiment on the original MNIST dataset.

Dataset	Test accuracy
CGTSRB10	97%
CIFAR10	68%
FMNIST	92%
MNISTBG	92%
MNIST	99%

Table 1: CNN test accuracy with legitimate examples

### 3 Adversarial Examples Crafting

We used the implmenetation of fast gradient sign method and saliency map method from the CleverHans[9].

#### 3.1 CNN Models

We trained a convolutional neural network model with TensorFlow[10] for each dataset. The legitimate test accuracy is shown in Table 1.

#### 3.2 Fast Gradient Sign Method

For fast gradient sign method, we used 5000 examples from the test set of each dataset (except for CGTSRB10 which has only 3360 test examples) and generated adversarial examples with  $\epsilon = 0.1 \sim 0.6$ . For each example, first a random label different than the example’s original label is selected as attack target. Then the FGSM algorithm is executed to generate an adversarial example. Finally, the generated adversarial example is fed into the original CNN model to get a prediction, and the prediction is compared with its original label and the attack target. If the prediction is identical with attack target then it is a successful targeted attack, otherwise if the prediction is not the same as the original label, its a successful misclassification.

Figure 1a shows the result of success rate for both misclassification and targeted attacks.

#### 3.3 Saliency Map Method

For saliency map method, we used the same 5000 examples to generate adversarial examples. Our plan was to evaluate the performance of different  $\gamma$  parameters. However, since  $\gamma$  controls the number of iterations, it is not necessary to repeat the execution on every variation of  $\gamma$ . Therefore we crafted the adversarial examples with  $\gamma = 0.15$  while recording the iteration count when misclassification and targeted attack succeed with a slightly modified JSMA algorithm.

After the adversarial examples are generated, we calculated the success rate for each planned  $\gamma$  value with the data recorded during the crafting. Figure 1b shows the result of success rate.

#### 3.4 Observe

FGSM can easily confuse CNN model to misclassify an image by altering all the pixels by  $\epsilon$ . For all the datasets,  $\epsilon = 0.2$  can easily achieve 80% success rate on a naïve CNN model. Practically  $\epsilon = 0.3$  is easily detectable by human eyes.

However the targeted attacks did not show a good success rate. In most case, targeted success rate starts to fall when  $\epsilon \geq 0.3$ . Intuitively when  $\epsilon \geq 0.3$  the perturbation is enough to confuse human to make wrong classification, which results in low success rate for targeted attack. However the reason still requires further investigation.

The CNN model for CIFAR10 dataset is easily attacked (misclassification rate  $\approx 100\%$  when  $\epsilon = 0.1$ ), which is considered the result of its low accuracy (68%) on legitimate examples.

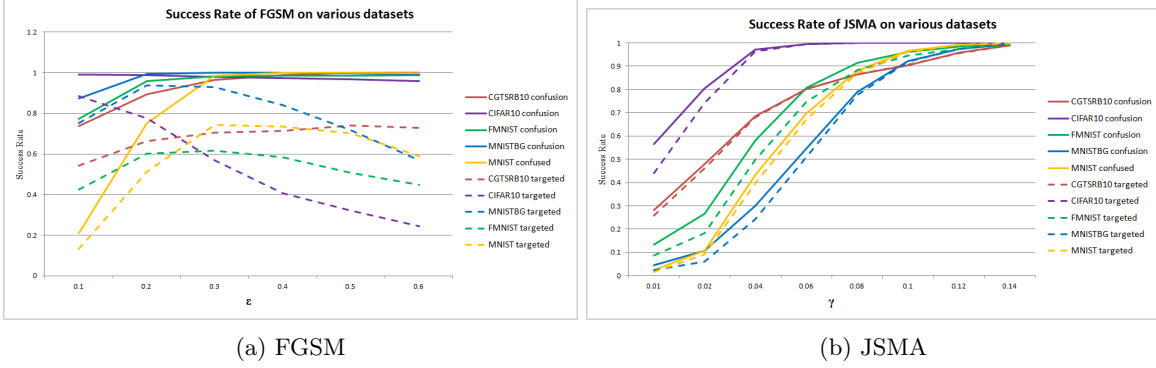


Figure 1: Success rate of JSMA and FGSM on various datasets.

JSMA gave a good success rate on both misclassification and targeted attacks. For most datasets,  $\gamma = 0.14$  is enough to guarantee 95% success rate against a naïve model.

## 4 Adversarial Training with FGSM

Adversarial training is introduced by Goodfellow et al.[1]. The fundamental idea is to use adversarial examples as a regularizer:

$$\tilde{J}(\theta, x, y) = \alpha J(\theta, x, y) + (1 - \alpha) J(\theta, x + \epsilon \text{sign}(\nabla_x J(\theta, x, y)))$$

In all of our experiments we used  $\alpha = 0.5$ . First, we train the CNN model with legitimate training data to get a naïve mode. Then we craft adversarial examples with test data and evaluate the misclassification and targeted success rate. Next, we do adversarial training three times and regenerate adversarial examples and re-evaluate the success rate after each training session. We repeated this process with  $\alpha = 0.1 \sim 0.6$  on all the datasets.

Due to space limit, we only picked some of the results (Figure 2), which however could demonstrate some interesting facts.

### 4.1 Observe

Initially we expected the adversarial training could produce a more robust model that could defense the FGSM attacks. However we found two interesting facts. Denote the parameter used in adversarial training by  $\epsilon$  and the parameter used in following adversarial example crafting by  $\tilde{\epsilon}$ .

First, a lower  $\epsilon$  ( $\epsilon = 0.1$ ) does not provide too much defense against higher  $\tilde{\epsilon}$ . Especially in the FMNIST dataset, even after several adversarial trainings,  $\tilde{\epsilon} = 0.6$  can still achieve approximately 80% misclassification rate.

Second, a higher  $\epsilon$  does not provide any defense on lower  $\tilde{\epsilon}$ . When  $\epsilon = 0.3$ , although adversarial examples crafted with  $\tilde{\epsilon} = 0.3$  can only make less than 10% success rate, adversarial examples crafted with  $\tilde{\epsilon} = 0.1$  has higher success rate than  $\tilde{\epsilon} = 0.3$  and will not decrease significantly. The similar effect can be seen in  $\epsilon = 0.5$ .

This indicates that adversarial training with various  $\tilde{\epsilon}$  may be required in order to train a robust model, however the feasibility is still an open question.

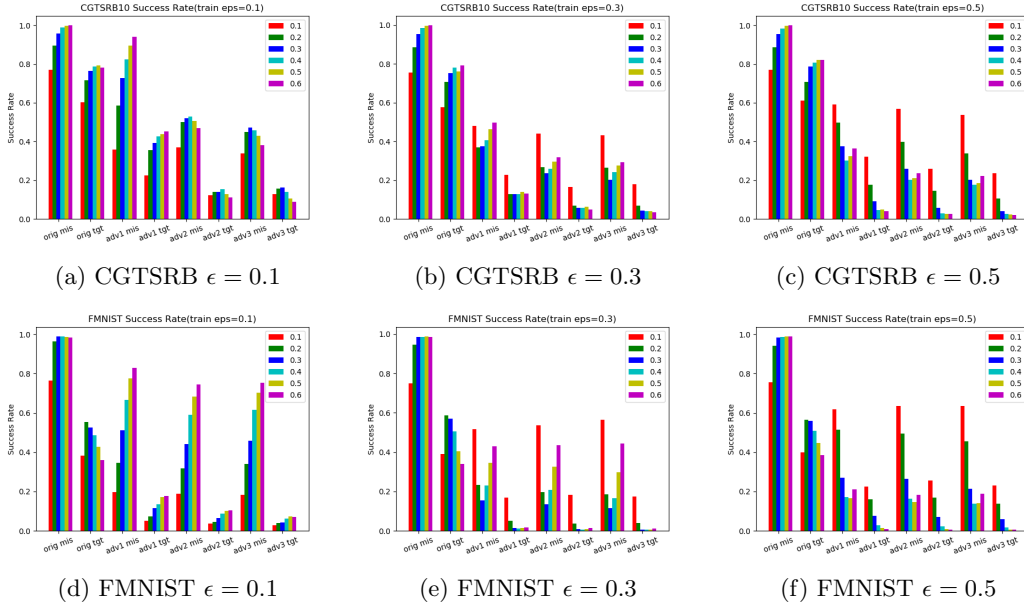


Figure 2: Success Rate of FGMS with adversarial training. Bars 0.1 ~ 0.6 are  $\tilde{\epsilon}$  used in adversarial example crafting.

## 5 Effect of Number of Epochs on FGSM Whitebox Attack

FGSM attacks are first performed on models that are cleanly trained with slightly fewer epochs (slightly underfitting). For comparison, the FGSM attacks are again performed on models that are cleanly trained with slightly more epochs (overfitting). The accuracy of the 4 models start to show a general trend as epsilon increases. When the epsilon becomes large, models for all the 4 datasets show low accuracy for the FGSM adversarial attack. It can be observed that all overfitting models are more resistant to attacks with small epsilon values than their underfitting counterparts. For attacks with large epsilon values, however, overfitting models may or may not perform slightly worse on FGSM adversarial samples.

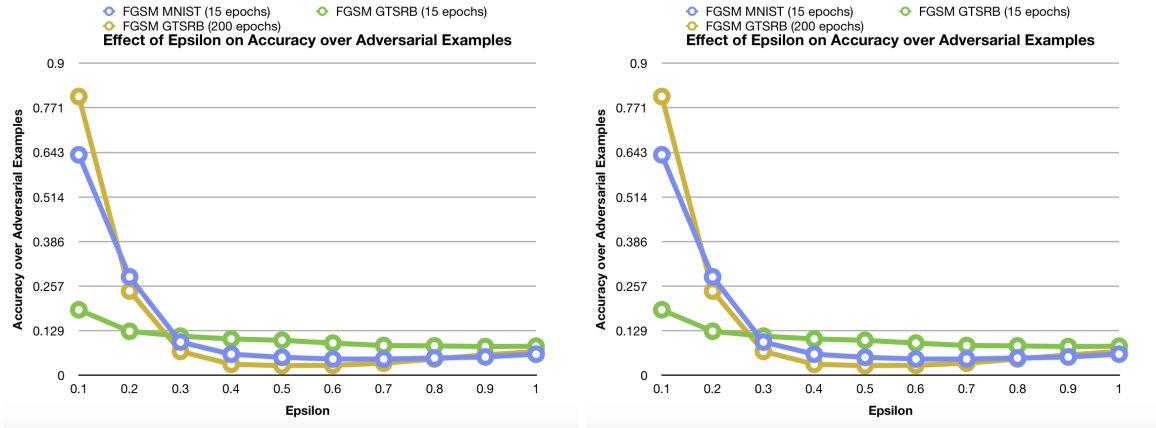


Figure 3: Effect of number of epoches on FGSM whitebox attack

## 6 Effect of Dataset on FGSM Whitebox Attack and Blackbox Attack

Also, comparing to models trained with datasets containing noisy backgrounds (GTSRB10 and SVHN), models cleanly trained on dataset with clear background (MNIST and FMNIST) are sustainable to adversarial attacks with a small epsilon value. For both the overfitting and underfitting models, MNIST and FMNIST datasets have better accuracy over adversarial samples with small epsilon values.

Then, the FGSM black-box attacks are performed on models trained with all the 4 datasets. Although we used substitute models with higher accuracy for the MNIST and FMNIST datasets, their accuracy on the adversarial samples are still generally higher than the SVHN and GTSRB10 model. For MNIST and FMNIST models, the FGSM blackbox attacks are hardly successful with a small epsilon value. As the epsilon value increases, the accuracy of all the 4 models decrease in a smooth curvy trend. The accuracy over adversarial samples converge to around 10% as the epsilon value approaches its maximum. This again demonstrates that models trained with clean-background dataset are more robust under the FGSM attacks with small epsilon values. This may be due to the fact that the datasets with clean backgrounds are easier to train and the FGSM component introduced is seen as anomaly for their clean background.

## 7 Cross-model FGSM Attacks for FGSM Adversarial Training

Cross-model attack is also performed for models with adversarial training. For each dataset, the result of cross-model attack is averaged over 5 separate CNN models with similar structure, trained with same adversarial samples with an epsilon value of 0.5, but different initialization parameters. The details of the 5 models used for each dataset is shown in Table 4. The FGSM attack first use samples constructed from a CNN model with the same architecture as the attacked models but different initialization parameter. Then the adversarial samples are constructed from a DNN model, that has different architecture as the attacked models. The results are shown in Figure 4 and Figure 5.

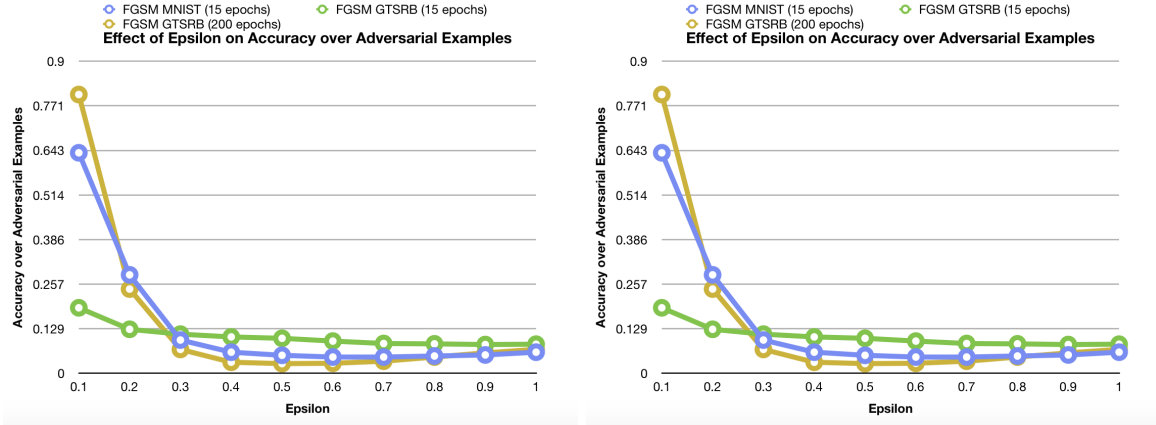


Figure 4: Effect of number of epochs on FGSM whitebox attack

Figure 5 shows how GTSRB with different number of classes perform for cross-model attacks. It can be observe that, the GTSRB10 dataset using only 10 classes from the GTSRB dataset, although obtained a lower adversarial training accuracy, has much higher accuracy than the GTSRB43 dataset

which includes all 43 classes. This result is intuitive: with more classes, it is easier to reach a close class boundary that causes the model to misclassify.

From Figure 4 and Figure 5, it can be seen that the different architecture and the epsilon value used to construct the adversarial samples do not have much effect on models accuracy. Although there are trends for specific dataset types, no general pattern can be observed. Further exploration may be required to figure out the pattern.

## 8 Dataset Distribution

To investigate why dataset type can influence accuracy of model over adversarial attacks, the distribution of all datasets is studied. The T-SNE algorithm is performed on all datasets to obtain a 2D view for the high-dimensional data points. T-SNE graphs for original clean data are obtained for both the MNIST dataset and the GTSRB10 are shown in Figure 6. From the graphs, it can be observed that the MNIST dataset have more easily distinguishable clusters with clear boundaries, while the clusters for the GTSRB10 dataset are more scattered. (We tried tuning the perplexity of the T-SNE algorithm for GTSRB10, but it can never obtain a clearer boundary than MNIST). This is due to the fact that the MNIST dataset have a simple clear background, while the GTSRB10 dataset has a noisy background. This result also holds for other datasets that have clear/noisy background. The complexity and lack of clear boundary may contribute to the fact that of datasets with noisy backgrounds are more susceptible to attacks with small epsilon values.

To show how the adversarial samples and original clean samples are different, the T-SNE algorithm is again performed on both original samples and FGSM adversarial samples of the MNIST dataset. For data labelled by their original class, it can be seen that data points in same original class form easily distinguishable clusters. For data labelled using epsilon values from  $0 \sim 0.9$ , it can be seen that adversarial data points all scatter over the 2D space, while original clean data form many small clusters in the 2D space. The boundary between the adversarial and clean data points is not clear. This shows that although the FGSM adversarial samples are able to fool the attacked models, from the T-SNE perspective, FGSM adversarial samples can still be distinguished by their original class, and the common patterns in adversarial samples are not obvious.

For further investigation, an MNIST class is randomly picked, and T-SNE is performed on both FGSM adversarial samples and original clean samples in this specific class. In this specific class, original clean data form a distinguishable cluster, while the adversarial samples scatter over the space and there is no boundary between samples with different epsilon values. This indicates that it is possible to separate adversarial samples and original clean data given the original class.

## 9 Conclusion

We experimented adversarial example crafting on various datasets and demonstrated the success rate of fast gradient sign method and saliency map method on each dataset. We also experimented FGSM adversarial training and found that various  $\epsilon$  values may be required to obtain a robust model with adversarial training.

TODO

## References

- [1] Goodfellow, Ian J et al., *Explaining and Harnessing Adversarial Examples*, arXiv:1412.6572v3, 3/2015
- [2] Nicolas Papernot et. al., *The Limitations of Deep Learning in Adversarial Settings*, arXiv 1511.07528v1, 11/2015

- [3] Nicolas Papernot et. al., *Practical Black-Box Attacks against Machine Learning*. ASIA CCS '17, 2017.
- [4] *The CIFAR-10 dataset*, <https://www.cs.toronto.edu/~kriz/cifar.html>
- [5] *German Traffic Sign Recognition Benchmark*.  
<http://benchmark.ini.rub.de/?section=gtsrb&subsection=dataset>
- [6] *Fashion MNIST*, <https://github.com/zalandoresearch/fashion-mnist>
- [7] *MNIST with Background*,  
<http://www.iro.umontreal.ca/~lisa/twiki/bin/view.cgi/Public/MnistVariations>
- [8] *MNIST*, <http://yann.lecun.com/exdb/mnist/>
- [9] *CleverHans*, <https://github.com/tensorflow/cleverhans>
- [10] *TensorFlow*, <http://tensorflow.org/>