

signals 2 / processes API

## last time

signals : [hardware] exceptions :: OS : hardware

“forwarding” exceptions as signals

sigaction, registering signal handlers

# signal handler unsafety (0)

```
void foo() {  
    /* SIGINT might happen while foo() is running */  
    char *p = malloc(1024);  
    ...  
}  
  
/* signal handler for SIGINT  
(registered elsewhere with sigaction()) */  
void handle_sigint() {  
    printf("You pressed control-C.\n");  
}
```

# signal handler unsafety (1)

```
void *malloc(size_t size) {  
    ...  
    to_return = next_to_return;  
    /* SIGNAL HAPPENS HERE */  
    next_to_return += size;  
    return to_return;  
}  
  
void foo() {  
    /* This malloc() call interrupted */  
    char *p = malloc(1024);  
    p[0] = 'x';  
}  
  
void handle_sigint() {  
    // printf might use malloc()  
    printf("You pressed control-C.\n");  
}
```


# signal handler unsafety (1)

```
void *malloc(size_t size) {  
    ...  
    to_return = next_to_return;  
    /* SIGNAL HAPPENS HERE */  
    next_to_return += size;  
    return to_return;  
}  
  
void foo() {  
    /* This malloc() call interrupted */  
    char *p = malloc(1024);  
    p[0] = 'x';  
}  
  
void handle_sigint() {  
    // printf might use malloc()  
    printf("You pressed control-C.\n");  
}
```

## signal handler unsafety (2)

```
void handle_sigint() {  
    printf("You pressed control-C.\n");  
}  
  
int printf(...) {  
    static char *buf;  
    ...  
    buf = malloc()  
    ...  
}
```

# signal handler unsafety: timeline

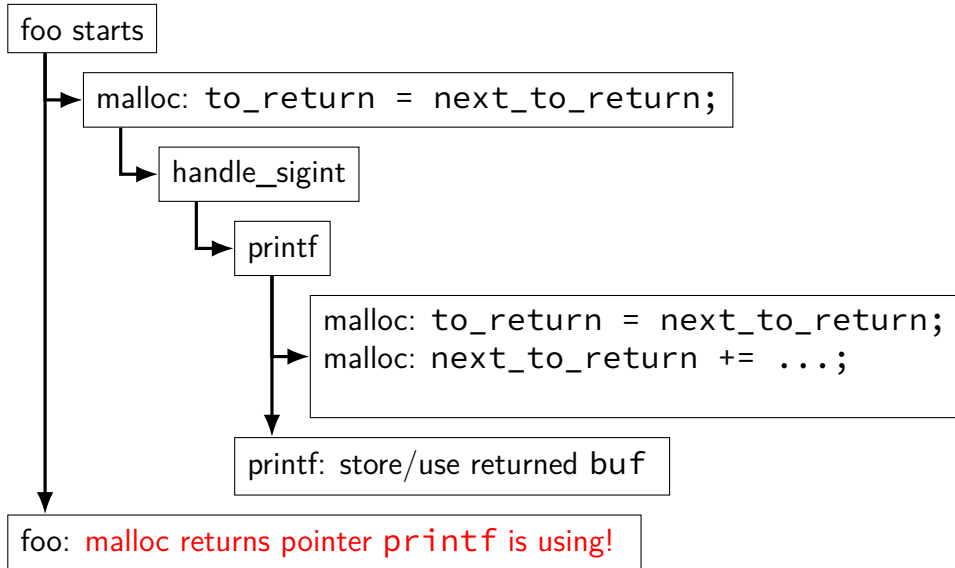

## signal handler unsafety (3)

```
foo() {  
    char *p = malloc(1024)... {  
        to_return = next_to_return;  
        handle_sigint() { /* signal delivered here */  
            printf("You pressed control-C.\n") {  
                buf = malloc(...) {  
                    to_return = next_to_return;  
                    next_to_return += size;  
                    return to_return;  
                }  
                ...  
            }  
        }  
        next_to_return += size;  
        return to_return;  
    }  
    /* now p points to buf used by printf! */  
}
```



# signal handler unsafety (3)

```
foo() {  
    char *p = malloc(1024)... {  
        to_return = next_to_return;  
        handle_sigint() { /* signal delivered here */  
            printf("You pressed control-C.\n") {  
                buf = malloc(...) {  
                    to_return = next_to_return;  
                    next_to_return += size;  
                    return to_return;  
                }  
                ...  
            }  
        }  
        next_to_return += size;  
        return to_return;  
    }  
    /* now p points to buf used by printf! */  
}
```

# signal handler safety

POSIX (standard that Linux follows) defines “async-signal-safe” functions

these must work correctly no matter what they interrupt

...and no matter how they are interrupted

includes: `write`, `_exit`

does not include: `printf`, `malloc`, `exit`

# blocking signals

avoid having signal handlers anywhere:

can instead **block signals**

`sigprocmask()`, `pthread_sigmask()`

blocked = signal handled doesn't run

signal not *delivered*

instead, signal becomes *pending*

# controlling when signals are handled

first, block a signal

then use API for inspecting pending signals

example: `sigwait`

typically **instead of having signal handler**

and/or unblock signals only at certain times

some special functions to help:

`sigsuspend` (unblock until handler runs),

`pselect` (unblock while checking for I/O), ...

# synchronous signal handling

```
int main(void) {  
    sigset_t set;  
    sigemptyset(&set);  
    sigaddset(&set, SIGINT);  
    sigprocmask(SIG_BLOCK, &set, NULL);  
  
    printf("Waiting for SIGINT (control-C)\n");  
    int num;  
    if (sigwait(&set, &num) != 0) {  
        printf("sigwait failed!\n");  
    }  
    if (num == SIGINT);  
        printf("Got SIGINT\n");  
    }  
}
```

# POSIX process management

essential operations

process information: `getpid`

process creation: `fork`

running programs: `exec*`

also `posix_spawn` (not widely supported), ...

waiting for processes to finish: `waitpid` (or `wait`)

process destruction, 'signaling': `exit`, `kill`

# POSIX process management

essential operations

process information: `getpid`

process creation: `fork`

running programs: `exec*`

also `posix_spawn` (not widely supported), ...

waiting for processes to finish: `waitpid` (or `wait`)

process destruction, 'signaling': `exit`, `kill`

# fork

`pid_t fork()` — copy the current process

returns twice:

- in *parent* (original process): pid of new *child* process

- in *child* (new process): 0

everything (but pid) duplicated in parent, child:


- memory

- file descriptors (later)

- registers



# fork and process info (w/o copy-on-write)

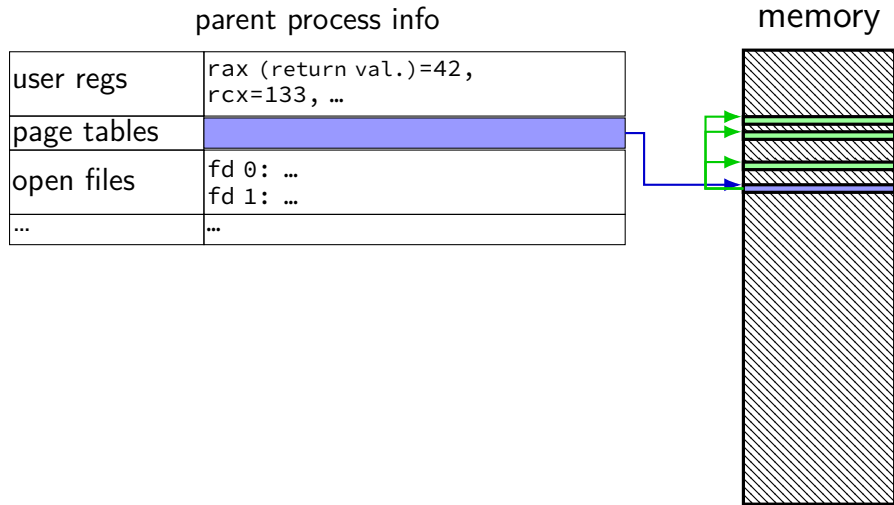


# fork and process info (w/o copy-on-write)

parent process info

user regs	rax (return val.)=42, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

memory

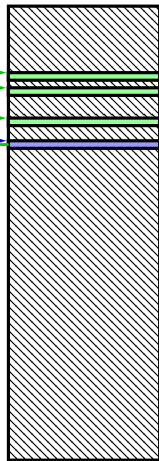

copy

child process info


user regs	rax (return val.)=42, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

# fork and process info (w/o copy-on-write)

parent process info

user regs	rax (return val.)=42, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

memory

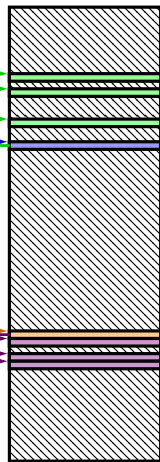

copy

child process info


user regs	rax (return val.)=42, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

# fork and process info (w/o copy-on-write)

parent process info


user regs	rax (return val.)=42, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

memory

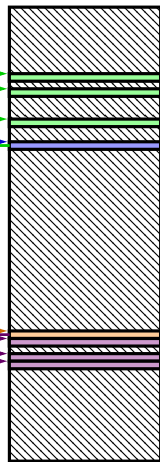

child process info

user regs	rax (return val.)=42, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...




# fork and process info (w/o copy-on-write)

parent process info


user regs	rax (return val.)=42 <del>child pid</del> , rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

memory




child process info

user regs	rax (return val.)=42 <del>0</del> , rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...




# do we really need a complete copy?

bash

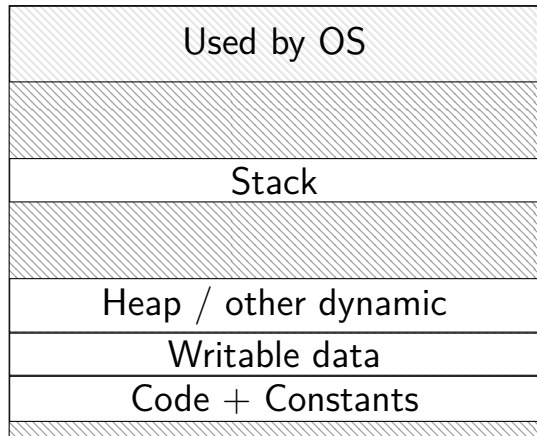


new copy of bash

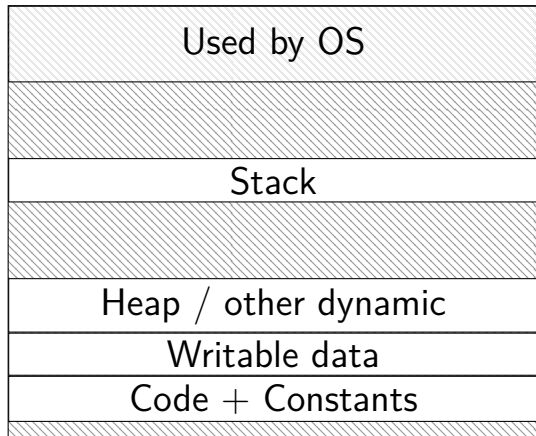


# do we really need a complete copy?

bash

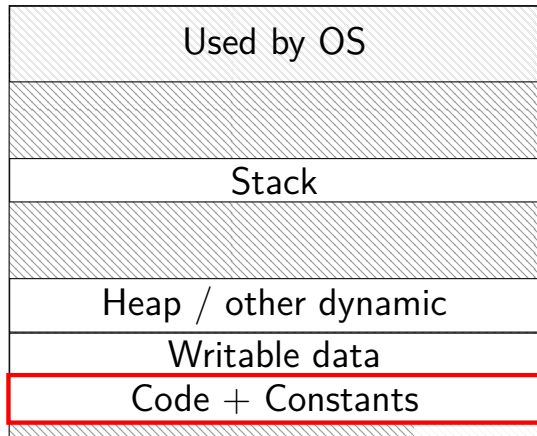


new copy of bash

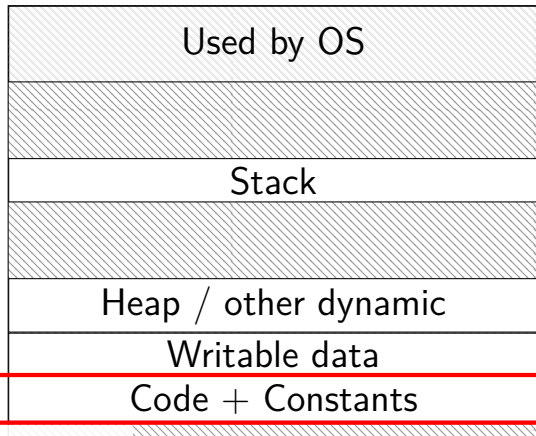


shared as read-only

# do we really need a complete copy?

bash

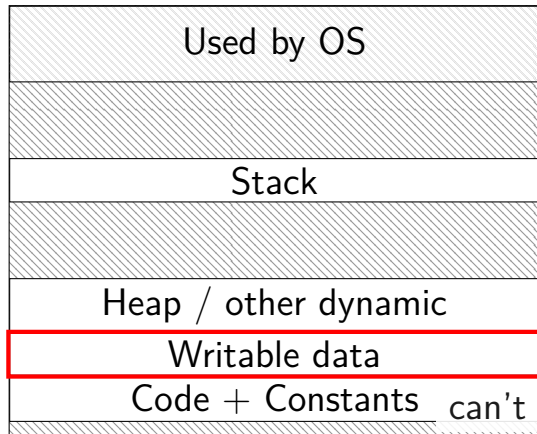

new copy of bash

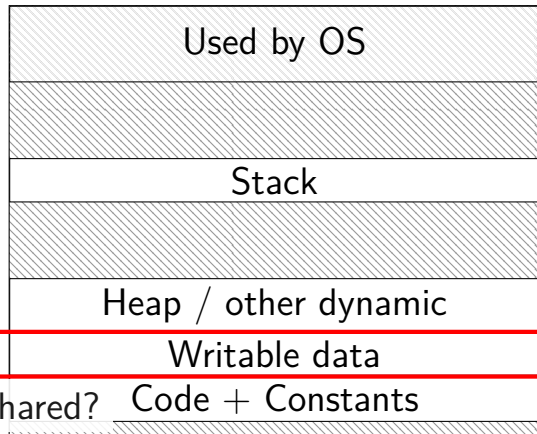

can't be shared?



## trick for extra sharing

sharing writeable data is fine — until either process modifies it

example: default value of global variables

might typically not change

(or OS might have preloaded executable's data anyways)

can we detect modifications?

## trick for extra sharing

sharing writeable data is fine — until either process modifies it

example: default value of global variables

might typically not change

(or OS might have preloaded executable's data anyways)

can we detect modifications?

trick: tell CPU (via page table) shared part is read-only

processor will trigger a fault when it's written

# copy-on-write and page tables

VPN	valid?	write?	physical page
...	...	...	...
0x00601	1	1	0x12345
0x00602	1	1	0x12347
0x00603	1	1	0x12340
0x00604	1	1	0x200DF
0x00605	1	1	0x200AF
...	...	...	...

# copy-on-write and page tables

VPN	valid?	write?	physical page
...	...	...	...
0x00601	1	0	0x12345
0x00602	1	0	0x12347
0x00603	1	0	0x12340
0x00604	1	0	0x200DF
0x00605	1	0	0x200AF
...	...	...	...

VPN	valid?	write?	physical page
...	...	...	...
0x00601	1	0	0x12345
0x00602	1	0	0x12347
0x00603	1	0	0x12340
0x00604	1	0	0x200DF
0x00605	1	0	0x200AF
...	...	...	...

copy operation actually duplicates page table  
both processes **share all physical pages**  
but marks pages in **both copies as read-only**

# copy-on-write and page tables

VPN	valid?	write?	physical page
...	...	...	...
0x00601	1	0	0x12345
0x00602	1	0	0x12347
0x00603	1	0	0x12340
0x00604	1	0	0x200DF
0x00605	1	0	0x200AF
...	...	...	...

VPN	valid?	write?	physical page
...	...	...	...
0x00601	1	0	0x12345
0x00602	1	0	0x12347
0x00603	1	0	0x12340
0x00604	1	0	0x200DF
0x00605	1	0	0x200AF
...	...	...	...

when either process tries to write read-only page  
triggers a fault — OS actually copies the page


# copy-on-write and page tables

VPN	valid?	write?	physical page
...	...	...	...
0x00601	1	0	0x12345
0x00602	1	0	0x12347
0x00603	1	0	0x12340
0x00604	1	0	0x200DF
0x00605	1	0	0x200AF
...	...	...	...

VPN	valid?	write?	physical page
...	...	...	...
0x00601	1	0	0x12345
0x00602	1	0	0x12347
0x00603	1	0	0x12340
0x00604	1	0	0x200DF
0x00605	1	1	0x300FD
...	...	...	...

after allocating a copy, OS reruns the write instruction

# fork (w/ copy-on-write, if parent writes first)

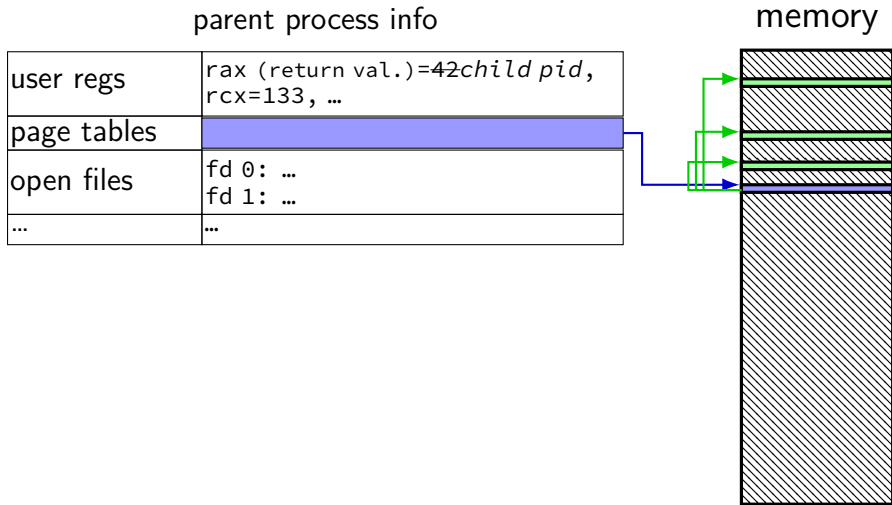


# fork (w/ copy-on-write, if parent writes first)

parent process info

user regs	rax (return val.)=42 child pid, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

memory

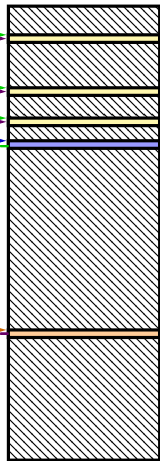

shared  
read-only

copy

child process info

user regs	rax (return val.)=420, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...



# fork (w/ copy-on-write, if parent writes first)


parent process info

user regs	rax (return val.)=42 child pid, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

child process info

user regs	rax (return val.)=420, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

memory

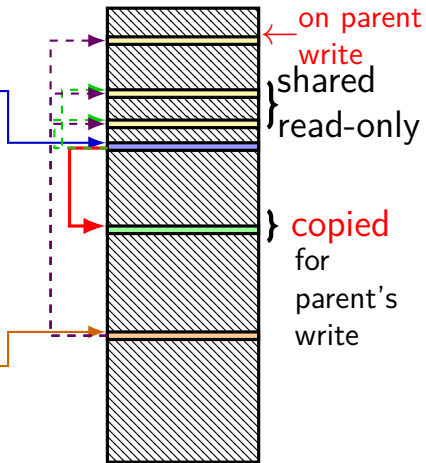

# fork (w/ copy-on-write, if parent writes first)


parent process info

user regs	rax (return val.)=42 child pid, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

child process info

user regs	rax (return val.)=420, rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

memory

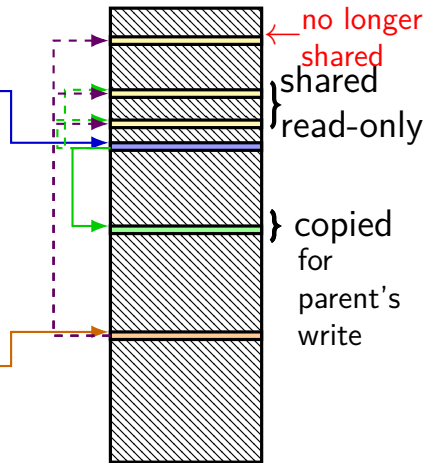


# fork (w/ copy-on-write, if parent writes first)

parent process info

user regs	rax (return val.)=42 <del>child pid</del> , rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

memory

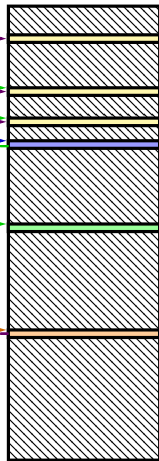

copy

child process info

user regs	rax (return val.)=42 <del>0</del> , rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...


} copied  
for  
parent's  
write

# fork and process info (w/o copy-on-write)

parent process info

user regs	rax (return val.)=42 <del>child pid</del> , rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

memory



copy

child process info

user regs	rax (return val.)=42 <del>0</del> , rcx=133, ...
page tables	
open files	fd 0: ... fd 1: ...
...	...

copy

# fork example

```
// not shown: #include various headers
int main(int argc, char *argv[]) {
    pid_t pid = getpid();
    printf("Parent pid: %d\n", (int) pid);
    pid_t child_pid = fork();
    if (child_pid > 0) {
        /* Parent Process */
        pid_t my_pid = getpid();
        printf("[%d] parent of [%d]\n",
            (int) my_pid,
            (int) child_pid);
    } else if (child_pid == 0) {
        /* Child Process */
        pid_t my_pid = getpid();
        printf("[%d] child\n",
            (int) my_pid);
    } else {
        perror("Fork failed");
    }
    return 0;
}
```

# fork example

*// not shown: #include various headers*

```
int main(int argc, char *argv[]) {
    pid_t pid = getpid();
    printf("Parent pid: %d\n",
        pid_t child_pid = fork());
    if (child_pid > 0) {
        /* Parent Process */
        pid_t my_pid = getpid();
        printf("[%d] parent of [%d]\n",
            (int) my_pid,
            (int) child_pid);
    } else if (child_pid == 0) {
        /* Child Process */
        pid_t my_pid = getpid();
        printf("[%d] child\n",
            (int) my_pid);
    } else {
        perror("Fork failed");
    }
    return 0;
}
```

getpid — returns current process pid

# fork example

*// not shown: #include various headers*

```
int main(int argc, char *argv[]) {
```

```
    pid_t pid;
```

```
    printf("Pa
```

```
    pid_t chil
```

```
    if (child_
```

```
        /* Par
```

```
        pid_t my_pid = getpid();
```

```
        printf("[%d] parent of [%d]\n",
```

```
            (int) my_pid,
```

```
            (int) child_pid);
```

```
    } else if (child_pid == 0) {
```

```
        /* Child Process */
```

```
        pid_t my_pid = getpid();
```

```
        printf("[%d] child\n",
```

```
            (int) my_pid);
```

```
    } else {
```

```
        perror("Fork failed");
```

```
    }
```

```
    return 0;
```

```
}
```

cast in case pid\_t isn't int

POSIX doesn't specify (some systems it is, some not...)

(not necessary if you were using C++'s cout, etc.)

# fork example

*// not shown: #include various headers*

```
int main(int argc, char *argv[]) {
```

```
    pid_t
```

```
    print
```

```
    pid_t
```

```
    if (
```

prints out Fork failed: *error message*

(example *error message*: "Resource temporarily unavailable")

from error number stored in special global variable `errno`

```
        pid_t my_pid = getpid();
```

```
        printf("[%d] parent of [%d]\n",
```

```
               (int) my_pid,
```

```
               (int) child_pid);
```

```
    } else if (child_pid == 0) {
```

```
        /* Child Process */
```

```
        pid_t my_pid = getpid();
```

```
        printf("[%d] child\n",
```

```
               (int) my_pid);
```

```
    } else {
```

```
        perror("Fork failed");
```

```
    }
```


```
    return 0;
```

```
}
```



# fork example

```
// not shown: #include various headers
int main(int argc, char *argv[]) {
    pid_t pid = getpid();
    printf("Parent pid: %d\n", (int) pid);
    pid_t child_pid = fork();
    if (child_pid > 0) {
        /* Parent Process */
        pid_t my_pid = getpid();
        printf("[%d] parent of [%d]\n",
            (int) my_pid,
            (int) child_pid);
    } else if (child_pid == 0) {
        /* Child Process */
        pid_t my_pid = getpid();
        printf("[%d] child\n",
            (int) my_pid);
    } else {
        perror("Fork failed");
    }
    return 0;
}
```

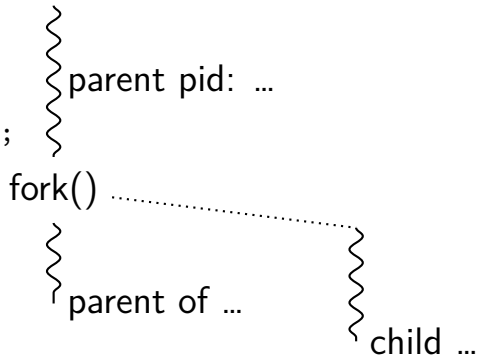

Example output:

```
Parent pid: 100
[100] parent of [432]
[432] child
```

## a fork question

```
int main() {  
    pid_t pid = fork();  
    if (pid == 0) {  
        printf("In child\n");  
    } else {  
        printf("Child %d\n", pid);  
    }  
    printf("Done!\n");  
}
```

Exercise: Suppose the pid of the parent process is 99 and child is 100. Give **two** possible outputs. (Assume no crashes, etc.)

# a fork question

```
int main() {  
    pid_t pid = fork();  
    if (pid == 0) {  
        printf("In child\n");  
    } else {  
        printf("Child %d\n", pid);  
    }  
    printf("Done!\n");  
}
```

Exercise: Suppose the pid of the parent process is 99 and child is 100. Give **two** possible outputs. (Assume no crashes, etc.)



Child 100  
In child  
Done!  
Done!



In child  
Done!  
Child 100  
Done!

# POSIX process management

essential operations

process information: `getpid`

process creation: `fork`

running programs: `exec*`

also `posix_spawn` (not widely supported), ...

waiting for processes to finish: `waitpid` (or `wait`)

process destruction, 'signaling': `exit`, `kill`

## exec\*

exec\* — **replace** current program with new program

\* — multiple variants

same pid, new process image

```
int execv(const char *path, const char  
**argv)
```

path: new program to run

argv: array of arguments, terminated by null pointer

also other variants that take argv in different form and/or  
environment variables\*

\*environment variables = list of key-value pairs

## execv example

```
...
child_pid = fork();
if (child_pid == 0) {
    /* child process */
    char *args[] = {"ls", "-l", NULL};
    execv("/bin/ls", args);
    /* execv doesn't return when it works.
       So, if we got here, it failed. */
    perror("execv");
    exit(1);
} else if (child_pid > 0) {
    /* parent process */
    ...
}
```

## execv example

```
...  
child_pid = fork();  
if (child_pid == 0) {  
    /* child process */  
    char *args[] = {"ls", "-l", NULL};  
    execv("/bin/ls", args);  
    /* execv doesn't return if successful */  
    So, if we got here, it means execv failed  
    perror("execv");  
    exit(1);  
} else if (child_pid > 0) {  
    /* parent process */  
    ...  
}
```

used to compute argv, argc  
when program's main is run

convention: first argument is program name

## execv example

```
...
child_pid = fork();
if (child_pid == 0) {
    /* child process */
    char *args[] = {"ls", "-l", NULL};
    execv("/bin/ls", args)
    /* execv doesn't return here */
    So, if we got here,
    perror("execv");
    exit(1);
} else if (child_pid > 0) {
    /* parent process */
    ...
}
```

path of executable to run  
need not match first argument  
(but probably should match it)

on Unix /bin is a directory  
containing many common programs,  
including ls ('list directory')




# exec in the kernel

the process control block

user regs	eax=42, ecx=133, ...
pagetables	
open files	fd 0: (terminal ...) fd 1: ...
...	...

memory

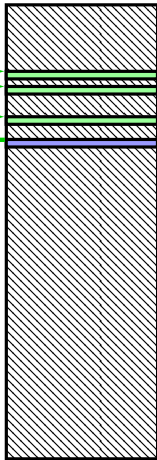


# exec in the kernel

the process control block

user regs	eax=42 <del>init. val.</del> , ecx=133 <del>init. val.</del> , ...
pagetables	
open files	fd 0: (terminal ...) fd 1: ...
...	...

memory

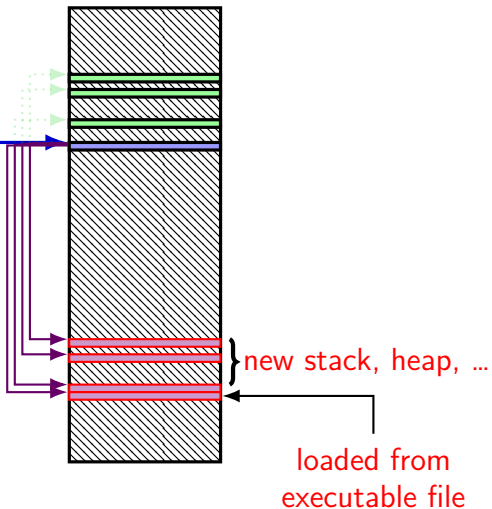


# exec in the kernel

the process control block

user regs	eax=42 <i>init. val.</i> , ecx=133 <i>init. val.</i> , ...
pagetables	
open files	fd 0: (terminal ...) fd 1: ...
...	...

memory

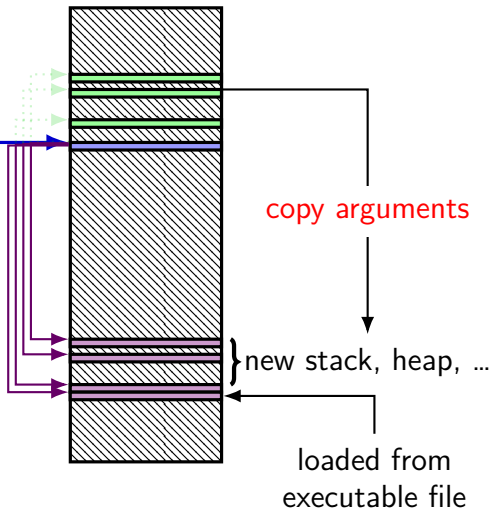


# exec in the kernel

the process control block

user regs	eax=42 <i>init. val.</i> , ecx=133 <i>init. val.</i> , ...
pagetables	
open files	fd 0: (terminal ...) fd 1: ...
...	...

not changed!  
(more on this later)

memory

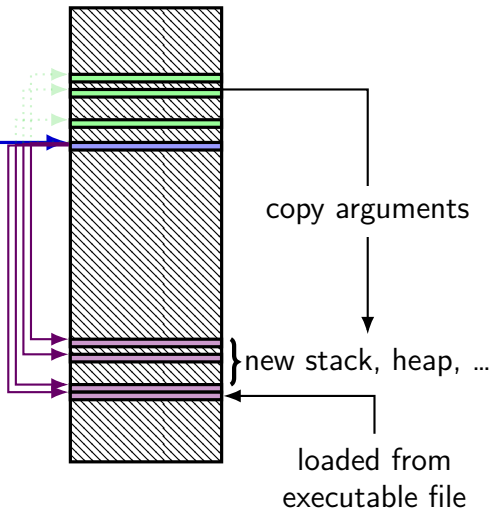

# exec in the kernel

the process control block

user regs	eax=42 <i>init. val.</i> , ecx=133 <i>init. val.</i> , ...
pagetables	
open files	fd 0: (terminal ...) fd 1: ...
...	...

not changed!  
(more on this later)


memory

old memory  
discarded

copy arguments

} new stack, heap, ...

loaded from  
executable file

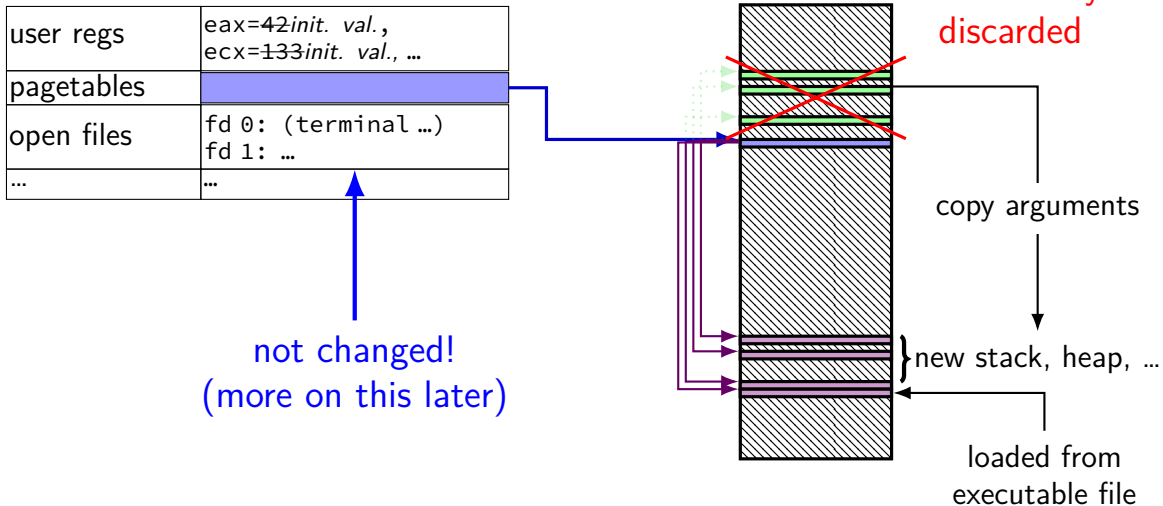

## why fork/exec?

could just have a function to spawn a new program

Windows `CreateProcess()`; POSIX's (rarely used) `posix_spawn`

some other OSs do this (e.g. Windows)

needs to include API to set new program's state

e.g. without fork: either:

need function to set new program's current directory, *or*

need to change your directory, then start program, then change back

e.g. with fork: just change your current directory before exec

but allows OS to avoid 'copy everything' code

probably makes OS implementation easier

# posix\_spawn

```
pid_t new_pid;
const char argv[] = { "ls", "-l", NULL };
int error_code = posix_spawn(
    &new_pid,
    "/bin/ls",
    NULL /* null = copy current process's open files;
              if not null, do something else */,
    NULL /* null = no special settings for new process */,
    argv,
    NULL /* null = copy current "environment variables",
              if not null, do something else */
);
if (error_code == 0) {
    /* handle error */
}
```

# some opinions (via HotOS '19)

## A fork() in the road

Andrew Baumann  
Microsoft Research

Jonathan Appavoo  
Boston University

Orran Krieger  
Boston University

Timothy Roscoe  
ETH Zurich

### **ABSTRACT**

The received wisdom suggests that Unix's unusual combination of `fork()` and `exec()` for process creation was an inspired design. In this paper, we argue that `fork` was a clever hack for machines and programs of the 1970s that has long outlived its usefulness and is now a liability. We catalog the ways in which `fork` is a terrible abstraction for the modern programmer to use, describe how it compromises OS implementations, and propose alternatives.



# POSIX process management

essential operations

process information: `getpid`

process creation: `fork`

running programs: `exec*`

also `posix_spawn` (not widely supported), ...

waiting for processes to finish: `waitpid` (or `wait`)

process destruction, 'signaling': `exit`, `kill`

## wait/waitpid

```
pid_t waitpid(pid_t pid, int *status,  
              int options)
```

wait for a child process (with `pid=pid`) to finish

sets `*status` to its “status information”

`pid=-1` → wait for any child process instead


options? see manual page (command `man waitpid`)

0 — no options


# waitpid example

```
#include <sys/wait.h>
...
child_pid = fork();
if (child_pid > 0) {
    /* Parent process */
    int status;
    waitpid(child_pid, &status, 0);
} else if (child_pid == 0) {
    /* Child process */
    ...
}
```


# typical pattern

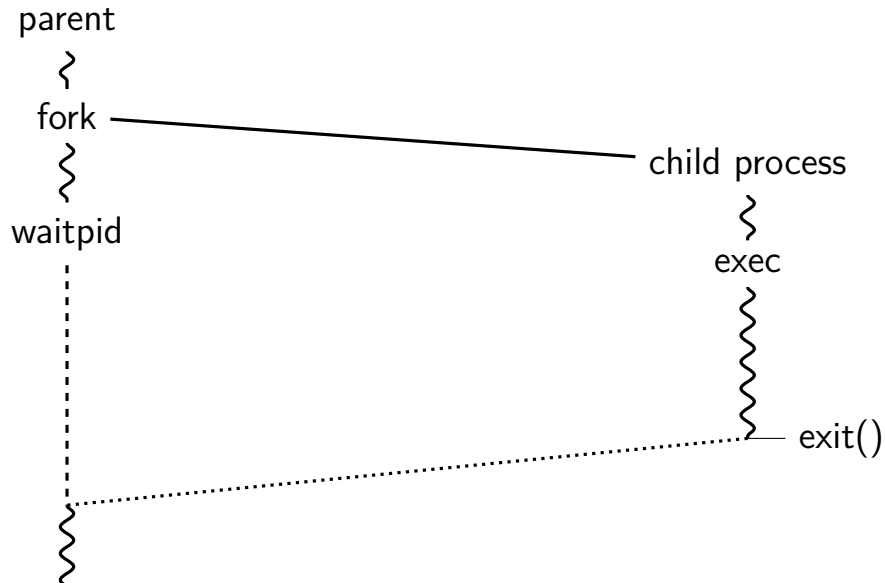

## typical pattern (alt)

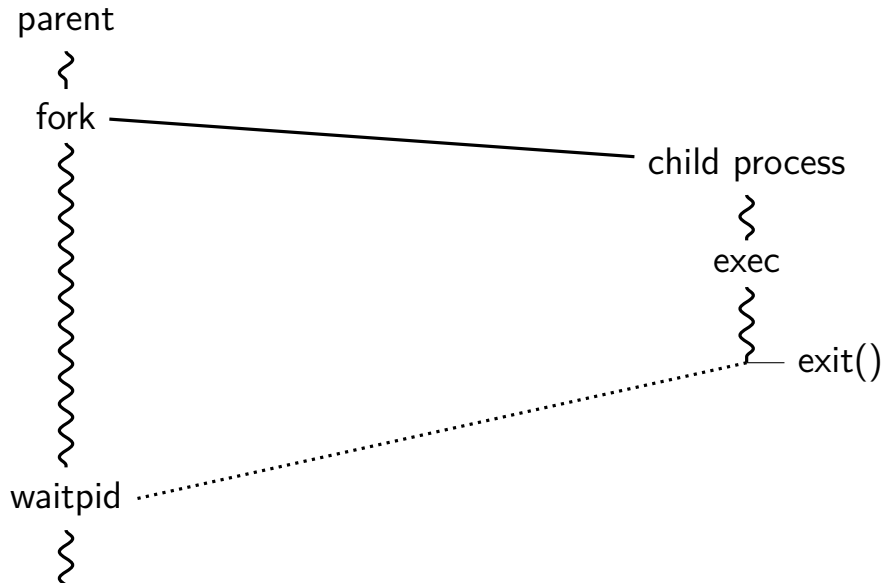

# typical pattern (detail)

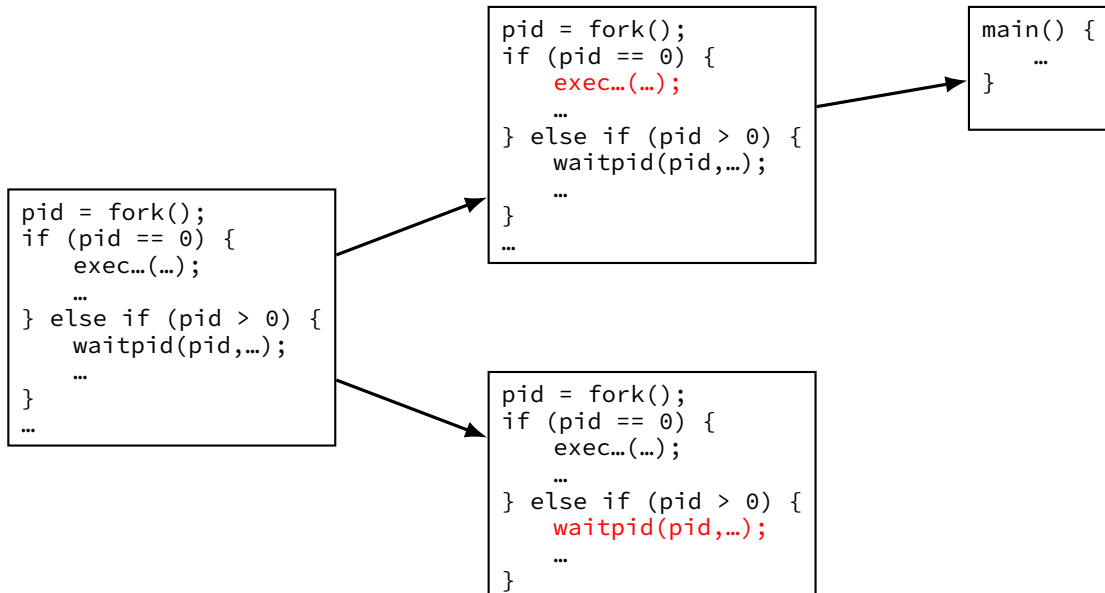

# POSIX process management

essential operations

process information: `getpid`

process creation: `fork`

running programs: `exec*`

also `posix_spawn` (not widely supported), ...

waiting for processes to finish: `waitpid` (or `wait`)

process destruction, 'signaling': `exit`, `kill`

## exercise (1)

```
int main() {
    pid_t pids[2]; const char *args[] = {"echo", "ARG", NULL};
    const char *extra[] = {"L1", "L2"};
    for (int i = 0; i < 2; ++i) {
        pids[i] = fork();
        if (pids[i] == 0) {
            args[1] = extra[i];
            execv("/bin/echo", args);
        }
    }
    for (int i = 0; i < 2; ++i) {
        waitpid(pids[i], NULL, 0);
    }
}
```

Assuming fork and execv do not fail, which are possible outputs?

- |                                        |                            |
|----------------------------------------|----------------------------|
| <b>A.</b> L1 (newline) L2              | <b>D.</b> A and B          |
| <b>B.</b> L1 (newline) L2 (newline) L2 | <b>E.</b> A and C          |
| <b>C.</b> L2 (newline) L1              | <b>F.</b> all of the above |



## exercise (2)

```
int main() {
    pid_t pids[2]; const char *args[] = {"echo", "0", NULL};
    for (int i = 0; i < 2; ++i) {
        pids[i] = fork();
        if (pids[i] == 0) { execv("/bin/echo", args); }
    }
    printf("1\n"); fflush(stdout);
    for (int i = 0; i < 2; ++i) {
        waitpid(pids[i], NULL, 0);
    }
    printf("2\n"); fflush(stdout);
}
```

Assuming fork and execv do not fail, which are possible outputs?

- |           |   |           |   |           |   |           |   |           |                  |
|-----------|---|-----------|---|-----------|---|-----------|---|-----------|------------------|
| <b>A.</b> | 0 | (newline) | 0 | (newline) | 1 | (newline) | 2 | <b>E.</b> | A, B, and C      |
| <b>B.</b> | 0 | (newline) | 1 | (newline) | 0 | (newline) | 2 | <b>F.</b> | C and D          |
| <b>C.</b> | 1 | (newline) | 0 | (newline) | 0 | (newline) | 2 | <b>G.</b> | all of the above |
| <b>D.</b> | 1 | (newline) | 0 | (newline) | 2 | (newline) | 0 | <b>H.</b> | something else   |

## exercise (2)

```
int main() {
    pid_t pids[2]; const char *args[] = {"echo", "0", NULL};
    for (int i = 0; i < 2; ++i) {
        pids[i] = fork();
        if (pids[i] == 0) { execv("/bin/echo", args); }
    }
    printf("1\n"); fflush(stdout);
    for (int i = 0; i < 2; ++i) {
        waitpid(pids[i], NULL, 0);
    }
    printf("2\n"); fflush(stdout);
}
```

Assuming fork and execv do not fail, which are possible outputs?

- |           |   |           |   |           |   |           |   |           |                  |
|-----------|---|-----------|---|-----------|---|-----------|---|-----------|------------------|
| <b>A.</b> | 0 | (newline) | 0 | (newline) | 1 | (newline) | 2 | <b>E.</b> | A, B, and C      |
| <b>B.</b> | 0 | (newline) | 1 | (newline) | 0 | (newline) | 2 | <b>F.</b> | C and D          |
| <b>C.</b> | 1 | (newline) | 0 | (newline) | 0 | (newline) | 2 | <b>G.</b> | all of the above |
| <b>D.</b> | 1 | (newline) | 0 | (newline) | 2 | (newline) | 0 | <b>H.</b> | something else   |

# some POSIX command-line features

searching for programs

```
ls -l ≈ /bin/ls -l  
make ≈ /usr/bin/make
```

running in background

```
./someprogram &
```

redirection:

```
./someprogram >output.txt  
./someprogram <input.txt
```

pipelines:

```
./someprogram | ./somefilter
```

# some POSIX command-line features

searching for programs

```
ls -l ≈ /bin/ls -l  
make ≈ /usr/bin/make
```

running in background

```
./someprogram &
```

redirection:

```
./someprogram >output.txt  
./someprogram <input.txt
```

pipelines:

```
./someprogram | ./somefilter
```

# some POSIX command-line features

searching for programs

```
ls -l ≈ /bin/ls -l  
make ≈ /usr/bin/make
```

running in background

```
./someprogram &
```

redirection:

```
./someprogram >output.txt  
./someprogram <input.txt
```

pipelines:

```
./someprogram | ./somefilter
```

# file descriptors

```
struct process_info {  /* <-- in the kernel somewhere */
    ...
    struct open_file_description *files[SIZE];
    ...
};
...
process->files[file_descriptor]
```

Unix: every process has  
array (or similar) of *open file descriptions*

“open file”: terminal · socket · regular file · pipe

file descriptor = index into array

usually what's used with system calls

stdio.h FILE\*s usually have file descriptor + buffer

# special file descriptors

file descriptor 0 = standard input

file descriptor 1 = standard output

file descriptor 2 = standard error

constants in `unistd.h`

`STDIN_FILENO`, `STDOUT_FILENO`, `STDERR_FILENO`

# special file descriptors

file descriptor 0 = standard input

file descriptor 1 = standard output

file descriptor 2 = standard error

constants in `unistd.h`

`STDIN_FILENO`, `STDOUT_FILENO`, `STDERR_FILENO`

but you can't choose which number `open` assigns...?

more on this later



# getting file descriptors

```
int read_fd = open("dir/file1", O_RDONLY);  
int write_fd = open("/other/file2", O_WRONLY | ...);  
int rdwr_fd = open("file3", O_RDWR);
```

used internally by fopen(), etc.

also for files without normal filenames...:

```
int fd = shm_open("/shared_memory", O_RDWR, 0666); // shared memory  
int socket_fd = socket(AF_INET, SOCK_STREAM, 0); // TCP socket  
int term_fd = posix_openpt(O_RDWR); // pseudo-terminal  
int pipe_fds[2]; pipe(pipefds); // "pipes" (later)  
...
```

# close

```
int close(int fd);
```

close the file descriptor, deallocating that array index  
does not affect other file descriptors  
that refer to same “open file description”  
(e.g. in `fork()`ed child or created via (later) `dup2`)

if last file descriptor for open file description, resources deallocated

returns 0 on success

returns -1 on error

e.g. ran out of disk space while finishing saving file

# shell redirection

`./my_program ... < input.txt:`

run `./my_program ...` but use `input.txt` as input  
like we copied and pasted the file into the terminal

`echo foo > output.txt:`

runs `echo foo`, sends output to `output.txt`  
like we copied and pasted the output into that file  
(as it was written)

# exec preserves open files

the process control block

user regs	eax=42 <i>init. val.</i> , ecx=133 <i>init. val.</i> , ...
pagetable	
open files	fd 0: (terminal ...) fd 1: ...
...	...

not changed!  
redirection/etc.:

setup stdin/stdout before exec

memory

old memory  
discarded

copy arguments

} new stack, heap, ...


loaded from  
executable file

# fork copies open file list

parent process control block

user regs	eax=42 <i>child (new) pid</i> , ecx=133, ...
page table	
open files	fd 0: ... fd 1: ... ...
...	...

memory



copy

child process control block

user regs	eax=420, ecx=133, ...
pagetable	
open files	fd 0: ... fd 1: ... ...
...	...

# fork copies open file list


parent process control block

user regs	eax=42, child (new) pid, ecx=133, ...
page table	
open files	fd 0: ... fd 1: ... ...
...	...

child process control block

user regs	eax=420, ecx=133, ...
pagetable	
open files	fd 0: ... fd 1: ... ...
...	...

memory



copy

open file description (stdin)


open file description (stdout)

# fork copies open file list

parent process control block

user regs	eax=42, child (new) pid, ecx=133, ...
page table	
open files	fd 0: ... fd 1: ... ...
...	...

memory



copy

child process control block


user regs	eax=420, ecx=133, ...
pagetable	
open files	fd 0: ... fd 1: ... ...
...	...

open file description (stdin)

open file description (stdout)

redirected-to stdout?  
(set after fork, before exec)

# typical pattern with redirection

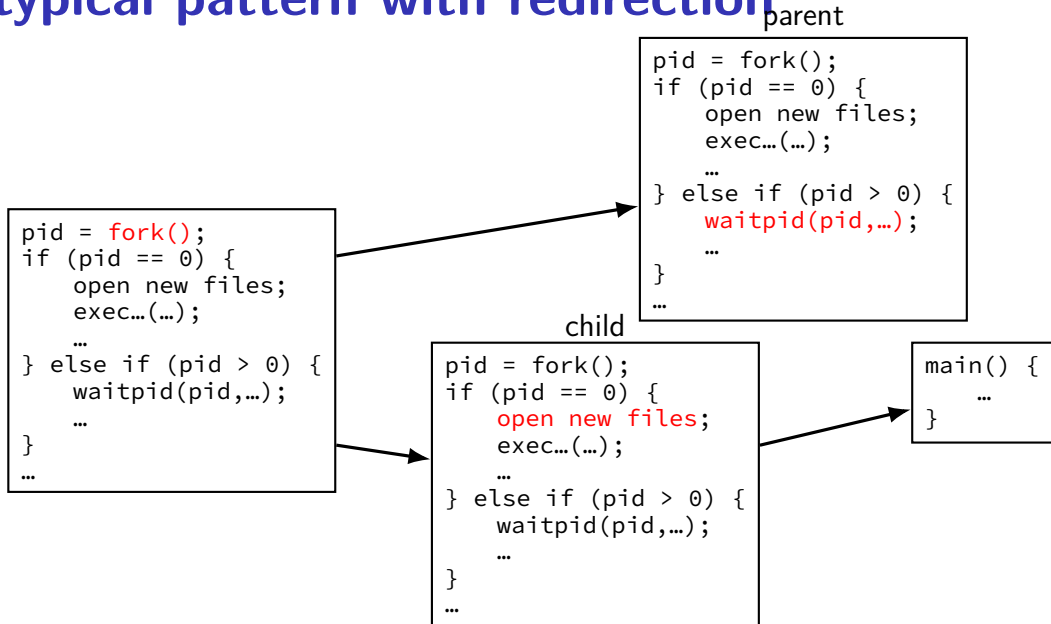



# redirecting with exec

standard output/error/input are files

(C stdout/stderr/stdin; C++ cout/cerr/cin)

(probably after forking) open files to redirect

...and make them be standard output/error/input

using `dup2()` library call

then `exec`, preserving new standard output/etc.

# reassigning file descriptors

redirection: `./program >output.txt`

step 1: open output.txt for writing, get new file descriptor

step 2: make that new file descriptor stdout (number 1)

# reassigning and file table

*// something like this in OS code*

```
struct process_info {  
    ...  
    struct open_file_description *files[SIZE];  
    ....  
};  
...  
process->files[STDOUT_FILENO] = process->files[opened-fd];  
  
syscall: dup2(opened-fd, STDOUT_FILENO);
```

# reassigning file descriptors

redirection: `./program >output.txt`

step 1: open `output.txt` for writing, get new file descriptor

step 2: **make that new file descriptor stdout (number 1)**

tool: `int dup2(int oldfd, int newfd)`

make `newfd` refer to same open file as `oldfd`

*same open file description*

shares the current location in the file

(even after more reads/writes)

what if `newfd` already allocated — closed, then reused

## dup2 example

redirects stdout to output to output.txt:

```
fflush(stdout); /* clear printf's buffer */
int fd = open("output.txt",
              O_WRONLY | O_CREAT | O_TRUNC);
if (fd < 0)
    do_something_about_error();

dup2(fd, STDOUT_FILENO);
/* now both write(fd, ...) and write(STDOUT_FILENO, ...)
   write to output.txt
   */

close(fd); /* only close original, copy still works! */

printf("This will be sent to output.txt.\n");
```

# open/dup/close/etc. and fd array

*// something like this in OS code*

```
struct process_info {
```

```
    ...
```

```
    struct open_file_description *files[NUM];
```

```
};
```

```
open: files[new_fd] = ...;
```

```
dup2(from, to): files[to] = files[from];
```

```
close: files[fd] = NULL;
```

```
fork:
```

```
    for (int i = ...)
```

```
        child->files[i] = parent->files[i];
```

# pipes

special kind of file: pipes

bytes go in one end, come out the other — once

created with `pipe()` library call

intended use: communicate between processes  
like implementing shell pipelines

# pipe()

```
int pipe_fd[2];  
if (pipe(pipe_fd) < 0)  
    handle_error();  
/* normal case: */  
int read_fd = pipe_fd[0];  
int write_fd = pipe_fd[1];
```

then from one process...

```
write(write_fd, ...);
```

and from another

```
read(read_fd, ...);
```



# pipe example (1)

```
int pipe_fd[2];
if (pipe(pipe_fd) < 0)
    handle_error(); /* e.g. out of file descriptors */
int read_fd = pipe_fd[0];
int write_fd = pipe_fd[1];
child_pid = fork();
if (child_pid == 0) {
    /* in child process, write to pipe */
    close(read_fd);
    write_to_pipe(write_fd); /* function not shown */
    exit(EXIT_SUCCESS);
} else if (child_pid > 0) {
    /* in parent process, read from pipe */
    close(write_fd);
    read_from_pipe(read_fd); /* function not shown */
    waitpid(child_pid, NULL, 0);
    close(read_fd);
} else { /* fork error */ }
```

# pipe example (1)

'standard' pattern with fork()

```
int pipe_fd[2];
if (pipe(pipe_fd) < 0)
    handle_error(); /* e.g. out of file descriptors */
int read_fd = pipe_fd[0];
int write_fd = pipe_fd[1];
child_pid = fork();
if (child_pid == 0) {
    /* in child process, write to pipe */
    close(read_fd);
    write_to_pipe(write_fd); /* function not shown */
    exit(EXIT_SUCCESS);
} else if (child_pid > 0) {
    /* in parent process, read from pipe */
    close(write_fd);
    read_from_pipe(read_fd); /* function not shown */
    waitpid(child_pid, NULL, 0);
    close(read_fd);
} else { /* fork error */ }
```

# pipe example (1)

```
int pipe_fd[2];
if (pipe(pipe_fd) < 0)
    handle_error(); /* e.g. out of file */
int read_fd = pipe_fd[0];
int write_fd = pipe_fd[1];
child_pid = fork();
if (child_pid == 0) {
    /* in child process, write to pipe */
    close(read_fd);
    write_to_pipe(write_fd); /* function not shown */
    exit(EXIT_SUCCESS);
} else if (child_pid > 0) {
    /* in parent process, read from pipe */
    close(write_fd);
    read_from_pipe(read_fd); /* function not shown */
    waitpid(child_pid, NULL, 0);
    close(read_fd);
} else { /* fork error */ }
```

read() will not indicate  
end-of-file if write fd is open  
(any copy of it)

# pipe example (1)

```
int pipe_fd[2];
if (pipe(pipe_fd) < 0)
    handle_error(); /* e.g. out of file descriptors */
int read_fd = pipe_fd[0];
int write_fd = pipe_fd[1];
child_pid = fork();
if (child_pid == 0) {
    /* in child process, write to pipe */
    close(read_fd);
    write_to_pipe(write_fd); /* function not shown */
    exit(EXIT_SUCCESS);
} else if (child_pid > 0) {
    /* in parent process, read from pipe */
    close(write_fd);
    read_from_pipe(read_fd); /* function not shown */
    waitpid(child_pid, NULL, 0);
    close(read_fd);
} else { /* fork error */ }
```

have habit of closing  
to avoid 'leaking' file descriptors  
you can run out


# pipe and pipelines

```
ls -l | grep foo
```

```
pipe(pipe_fd);
ls_pid = fork();
if (ls_pid == 0) {
    dup2(pipe_fd[1], STDOUT_FILENO);
    close(pipe_fd[0]); close(pipe_fd[1]);
    char *argv[] = {"ls", "-l", NULL};
    execv("/bin/ls", argv);
}
grep_pid = fork();
if (grep_pid == 0) {
    dup2(pipe_fd[0], STDIN_FILENO);
    close(pipe_fd[0]); close(pipe_fd[1]);
    char *argv[] = {"grep", "foo", NULL};
    execv("/bin/grep", argv);
}
close(pipe_fd[0]); close(pipe_fd[1]);
```

# example execution

parent

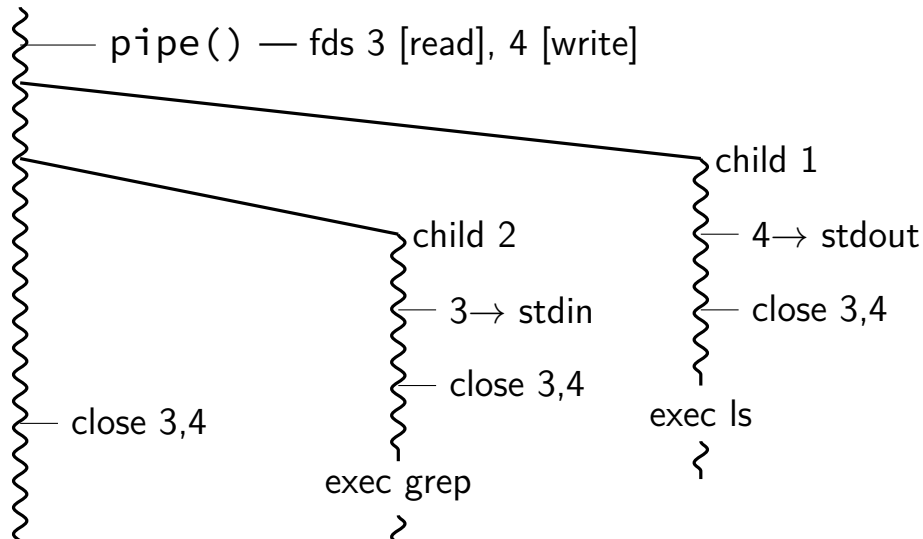

## exercise

```
pid_t p = fork();
int pipe_fds[2];
pipe(pipe_fds);
if (p == 0) { /* child */
    close(pipe_fds[0]);
    char c = 'A';
    write(pipe_fds[1], &c, 1);
    exit(0);
} else { /* parent */
    close(pipe_fds[1]);
    char c;
    int count = read(pipe_fds[0], &c, 1);
    printf("read %d bytes\n", count);
}
```

The child is trying to send the character A to the parent, but the above code outputs read 0 bytes instead of read 1 bytes. What happened?

## exercise solution

`pipe()` is after `fork` — two pipes, one in child, one in parent



# Unix API summary

spawn and wait for program: `fork` (copy), then  
    in child: setup, then `execv`, etc. (replace copy)  
    in parent: `waitpid`

files: open, read and/or write, close  
    one interface for regular files, pipes, network, devices, ...

file descriptors are indices into per-process array  
    index 0, 1, 2 = `stdin`, `stdout`, `stderr`  
    `dup2` — assign one index to another  
    `close` — deallocate index

redirection/pipelines

`open()` or `pipe()` to create new file descriptors  
    `dup2` in child to assign file descriptor to index 0, 1

# backup slides

# output of this?

pid 1000

```
void handle_usr1(int num) {
    write(1, "X", 1);
    kill(2000, SIGUSR1);
    _exit(0);
}

int main() {
    struct sigaction act;
    ...
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    kill(1000, SIGUSR1);
}
```

pid 2000

```
void handle_usr1(int num) {
    write(1, "Y", 1);
    _exit(0);
}

int main() {
    struct sigaction act;
    ...
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
}
```

If these run at same time, expected output?

- A. XY
- B. X
- C. Y
- D. YX
- E. X or XY, depending on timing
- F. crash
- G. (nothing)
- H. something else

# output of this? (v2)

pid 1000

```
void handle_usr1(int num) {
    write(1, "X", 1);
    kill(2000, SIGUSR1);
    _exit(0);
}

int main() {
    struct sigaction act;
    ...
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act);
    kill(1000, SIGUSR1);
    while (1) pause();
}
```

pid 2000

```
void handle_usr1(int num) {
    write(1, "Y", 1);
    _exit(0);
}

int main() {
    struct sigaction act;
    ...
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act);
    while (1) pause();
}
```

If these run at same time, expected output?

A. XY

B. X

C. Y

D. YX

E. X or XY, depending on timing

F. crash

G. (nothing)

H. something else

# sending signals (1)

pid 1000

```
void handle_usr1(int num) {
    write(1, "Y", 1);
    kill(2000, SIGUSR2);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    sleep(60); // wait for pid 2000 to start
    kill(2000, SIGUSR1);
    while (1) pause();
}
```

# sending signals (2)

pid 1000

```
void handle_usr1(int num) {
    write(1, "Y", 1);
    kill(2000, SIGUSR2);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    sleep(60); // wait for pid 2000 to start
    kill(2000, SIGUSR1);
    while (1) pause();
}
```

pid 2000

```
void handle_usr1(int num) {
    write(1, "X", 1);
    kill(1000, SIGUSR1);
}

void handle_usr2(int num) {
    write(1, "Z", 1);
    kill(1000, SIGTERM);
    _exit(0);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    act.sa_handler = &handle_usr2;
    sigaction(SIGUSR2, &act, NULL);
    while (1) pause();
}
```

# sending signals (2)

pid 1000

```
void handle_usr1(int num) {
    write(1, "Y", 1);
    kill(2000, SIGUSR2);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    sleep(60); // wait for pid 2000 to start
    kill(2000, SIGUSR1);
    while (1) pause();
}
```

pid 2000

```
void handle_usr1(int num) {
    write(1, "X", 1);
    kill(1000, SIGUSR1);
}

void handle_usr2(int num) {
    write(1, "Z", 1);
    kill(1000, SIGTERM);
    _exit(0);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    act.sa_handler = &handle_usr2;
    sigaction(SIGUSR2, &act, NULL);
    while (1) pause();
}
```

# sending signals (2)

pid 1000

```
void handle_usr1(int num) {
    write(1, "Y", 1);
    kill(2000, SIGUSR2);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    sleep(60); // wait for pid 2000 to start
    kill(2000, SIGUSR1);
    while (1) pause();
}
```

pid 2000

```
void handle_usr1(int num) {
    write(1, "X", 1);
    kill(1000, SIGUSR1);
}

void handle_usr2(int num) {
    write(1, "Z", 1);
    kill(1000, SIGTERM);
    _exit(0);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    act.sa_handler = &handle_usr2;
    sigaction(SIGUSR2, &act, NULL);
    while (1) pause();
}
```



# sending signals (2)

pid 1000

```
void handle_usr1(int num) {
    write(1, "Y", 1);
    kill(2000, SIGUSR2);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    sleep(60); // wait for pid 2000 to start
    kill(2000, SIGUSR1);
    while (1) pause();
}
```

pid 2000

```
void handle_usr1(int num) {
    write(1, "X", 1);
    kill(1000, SIGUSR1);
}

void handle_usr2(int num) {
    write(1, "Z", 1);
    kill(1000, SIGTERM);
    _exit(0);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    act.sa_handler = &handle_usr2;
    sigaction(SIGUSR2, &act, NULL);
    while (1) pause();
}
```

# sending signals (2)

pid 1000

```
void handle_usr1(int num) {
    write(1, "Y", 1);
    kill(2000, SIGUSR2);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    sleep(60); // wait for pid 2000 to start
    kill(2000, SIGUSR1);
    while (1) pause();
}
```

pid 2000

```
void handle_usr1(int num) {
    write(1, "X", 1);
    kill(1000, SIGUSR1);
}

void handle_usr2(int num) {
    write(1, "Z", 1);
    kill(1000, SIGTERM);
    _exit(0);
}

int main() {
    struct sigaction act;
    ... // initialize act
    act.sa_handler = &handle_usr1;
    sigaction(SIGUSR1, &act, NULL);
    act.sa_handler = &handle_usr2;
    sigaction(SIGUSR2, &act, NULL);
    while (1) pause();
}
```

# sending signals (2)

pid 1000

```
void handle_usr1(int num) {  
    write(1, "Y", 1);  
    kill(2000, SIGUSR2);  
}  
  
int main() {  
    struct sigaction act;  
    ... // initialize act  
    act.sa_handler = &handle_usr1;  
    sigaction(SIGUSR1, &act, NULL);  
    sleep(60); // wait for pid 2000 to start  
    kill(2000, SIGUSR1);  
    while (1) pause();  
}
```

pid 2000

```
void handle_usr1(int num) {  
    write(1, "X", 1);  
    kill(1000, SIGUSR1);  
}  
  
void handle_usr2(int num) {  
    write(1, "Z", 1);  
    kill(1000, SIGTERM);  
    _exit(0);  
}  
  
int main() {  
    struct sigaction act;  
    ... // initialize act  
    act.sa_handler = &handle_usr1;  
    sigaction(SIGUSR1, &act, NULL);  
    act.sa_handler = &handle_usr2;  
    sigaction(SIGUSR2, &act, NULL);  
    while (1) pause();  
}
```

# exit statuses

```
int main() {  
    return 0; /* or exit(0); */  
}
```

# the status

```
#include <sys/wait.h>
...
waitpid(child_pid, &status, 0);
if (WIFEXITED(status)) {
    printf("main returned or exit called with %d\n",
           WEXITSTATUS(status));
} else if (WIFSIGNALED(status)) {
    printf("killed by signal %d\n", WTERMSIG(status));
} else {
    ...
}
```

“status code” encodes both return value and if exit was abnormal  
W\* macros to decode it

# the status

```
#include <sys/wait.h>
...
waitpid(child_pid, &status, 0);
if (WIFEXITED(status)) {
    printf("main returned or exit called with %d\n",
           WEXITSTATUS(status));
} else if (WIFSIGNALED(status)) {
    printf("killed by signal %d\n", WTERMSIG(status));
} else {
    ...
}
```

“status code” encodes both return value and if exit was abnormal  
W\* macros to decode it

# shell

allow user (= person at keyboard) to run applications

user's wrapper around process-management functions

## aside: shell forms

POSIX: command line you have used before

also: graphical shells

e.g. OS X Finder, Windows explorer

other types of command lines?

completely different interfaces?



# searching for programs

POSIX convention: *PATH environment variable*

example: `/home/cr4bd/bin:/usr/bin:/bin`

list of directories to check in order

environment variables = key/value pairs stored with process  
by default, left unchanged on `execve`, `fork`, etc.

one way to implement: [pseudocode]

```
for (directory in path) {  
    execv(directory + "/" + program_name, argv);  
}
```

# kernel buffering (reads)


program

operating system


keyboard

disk


# kernel buffering (reads)

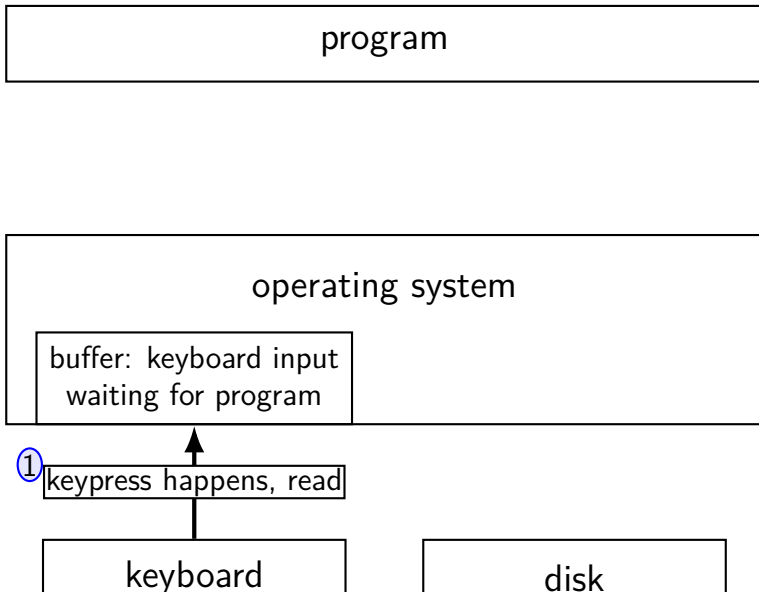


# kernel buffering (reads)

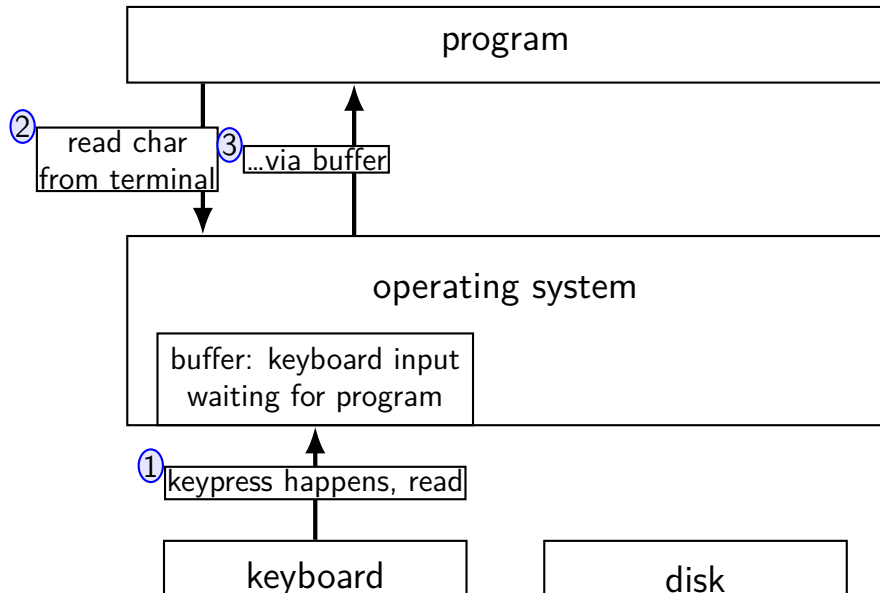


# kernel buffering (reads)

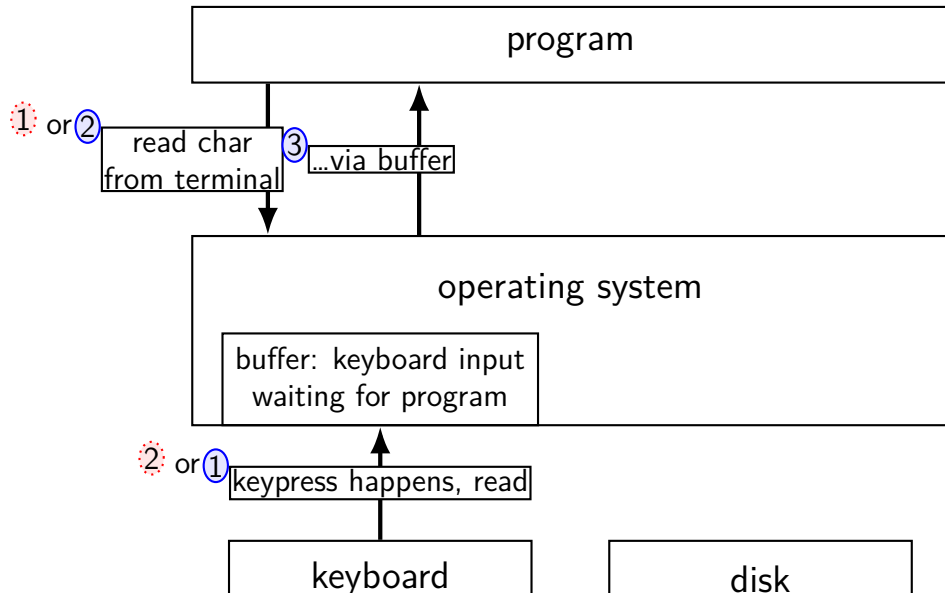

# kernel buffering (reads)

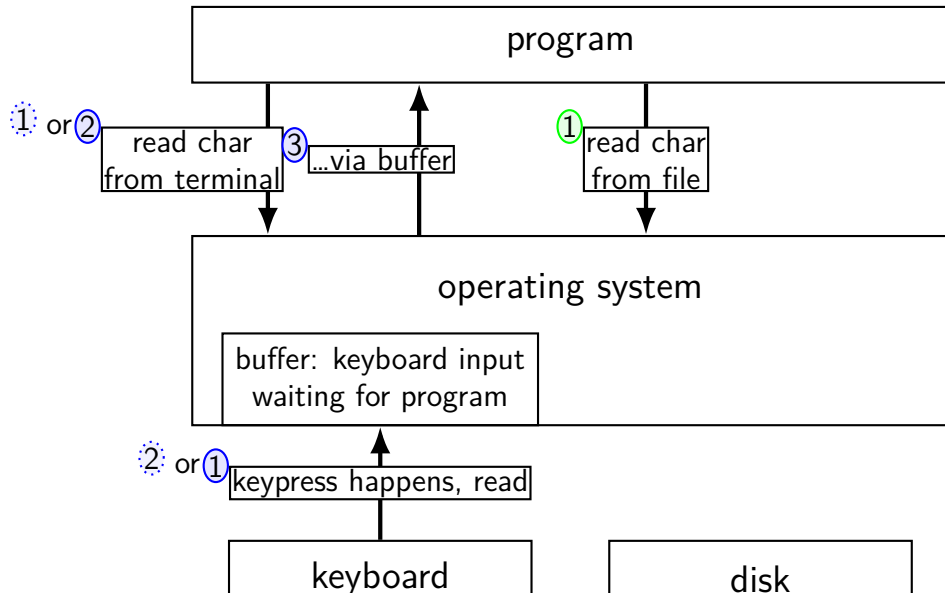

# kernel buffering (reads)

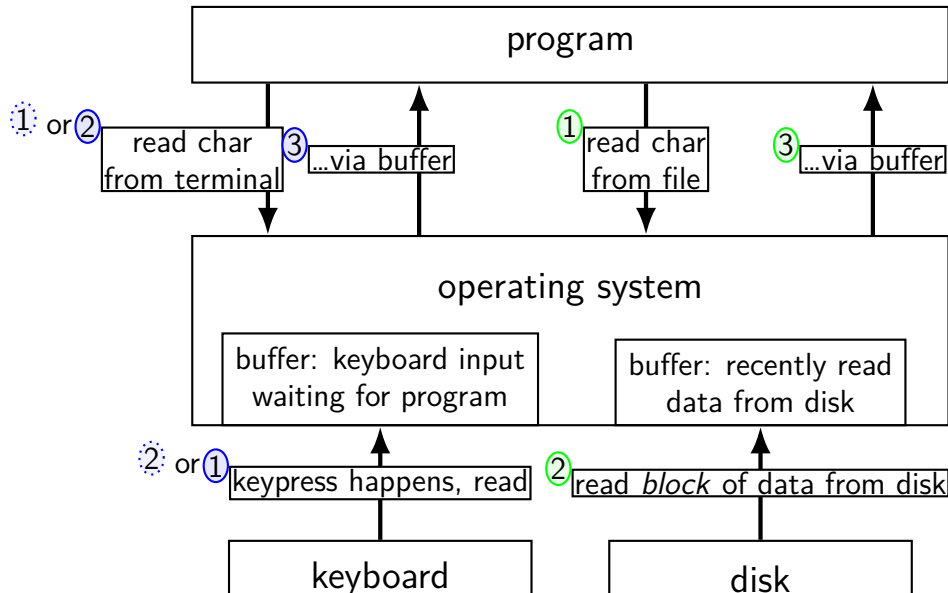

# kernel buffering (writes)

program


operating system

network


disk




# kernel buffering (writes)

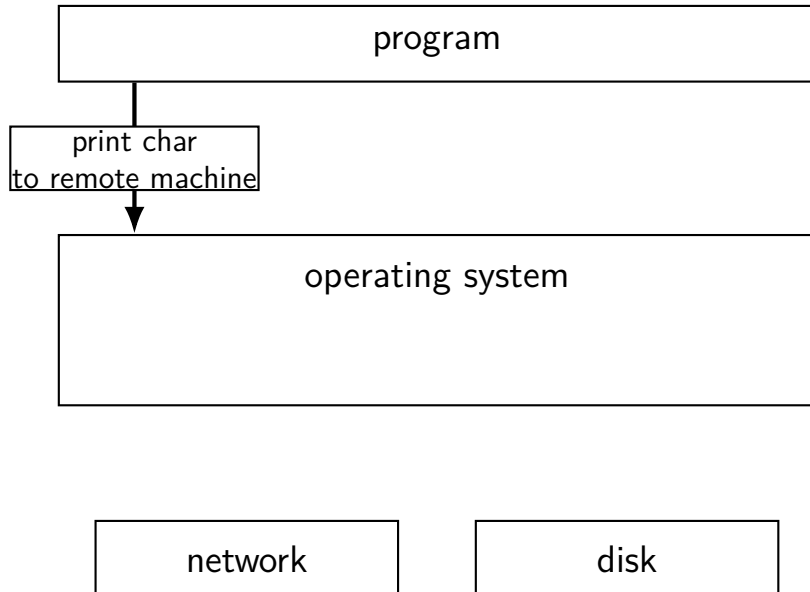


# kernel buffering (writes)

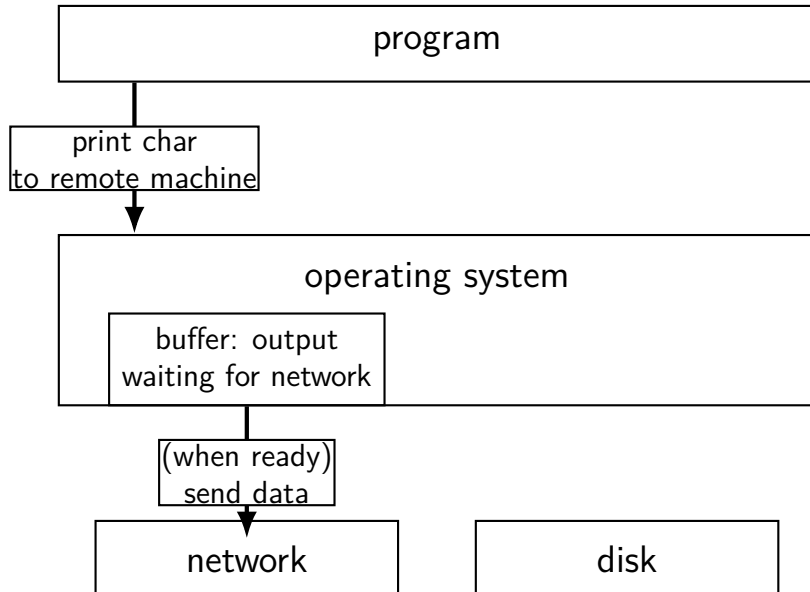

# kernel buffering (writes)

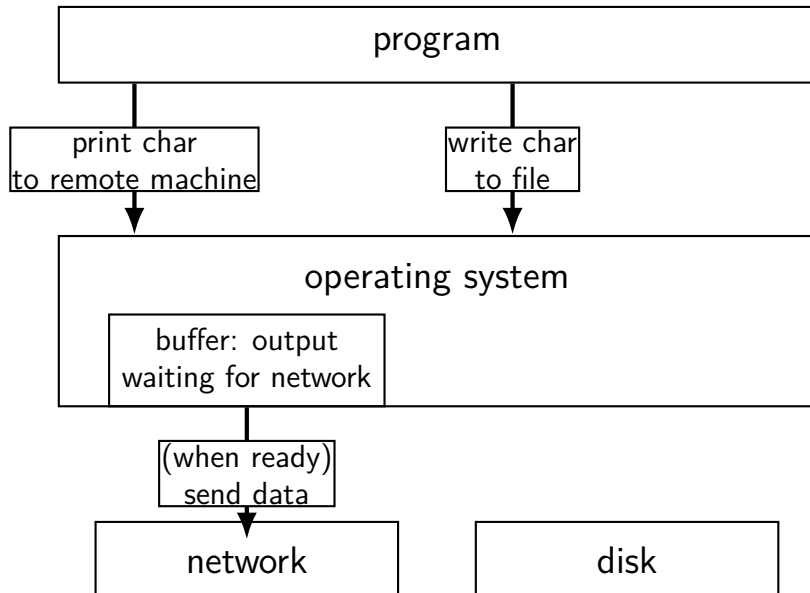

# kernel buffering (writes)

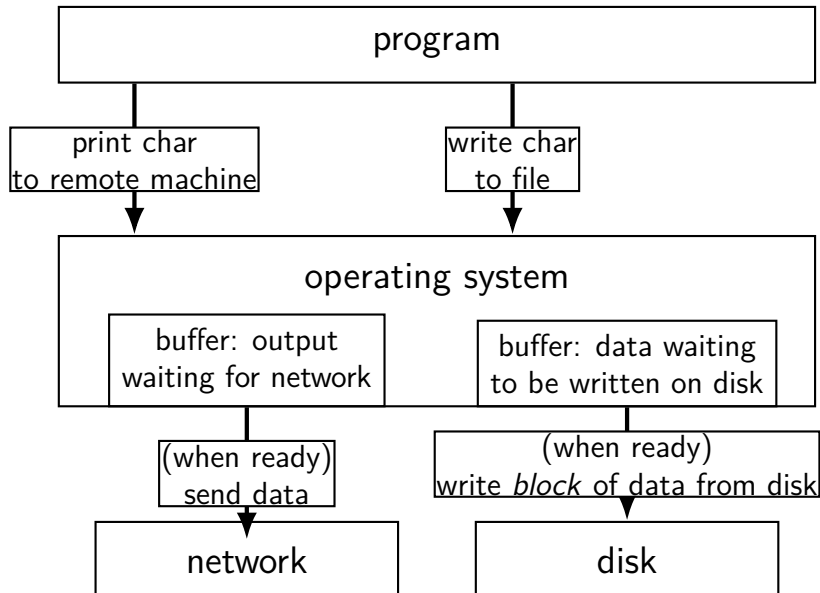


# read/write operations

`read()/write()`: move data into/out of buffer

possibly wait if buffer is empty (read)/full (write)

actual I/O operations — wait for device to be ready  
trigger process to stop waiting if needed

# layering

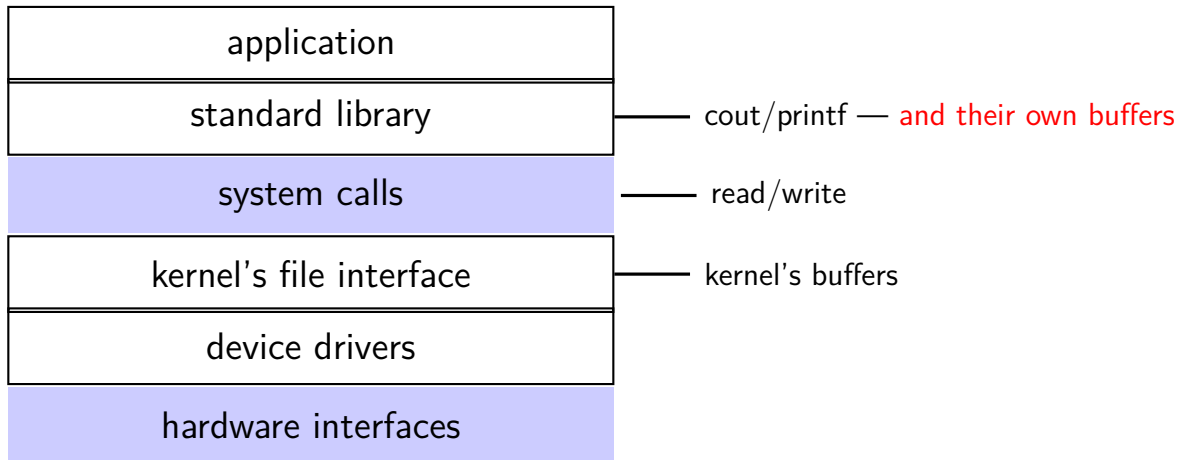

# why the extra layer

better (but more complex to implement) interface:

- read line

- formatted input (scanf, cin into integer, etc.)

- formatted output

less system calls (bigger reads/writes) sometimes faster

- buffering can combine multiple in/out library calls into one system call

more portable interface

- cin, printf, etc. defined by C and C++ standards

# pipe() and blocking


**BROKEN** example:

```
int pipe_fd[2];  
if (pipe(pipe_fd) < 0)  
    handle_error();  
int read_fd = pipe_fd[0];  
int write_fd = pipe_fd[1];  
write(write_fd, some_buffer, some_big_size);  
read(read_fd, some_buffer, some_big_size);
```

This is likely to **not terminate**. What's the problem?



## pattern with multiple?

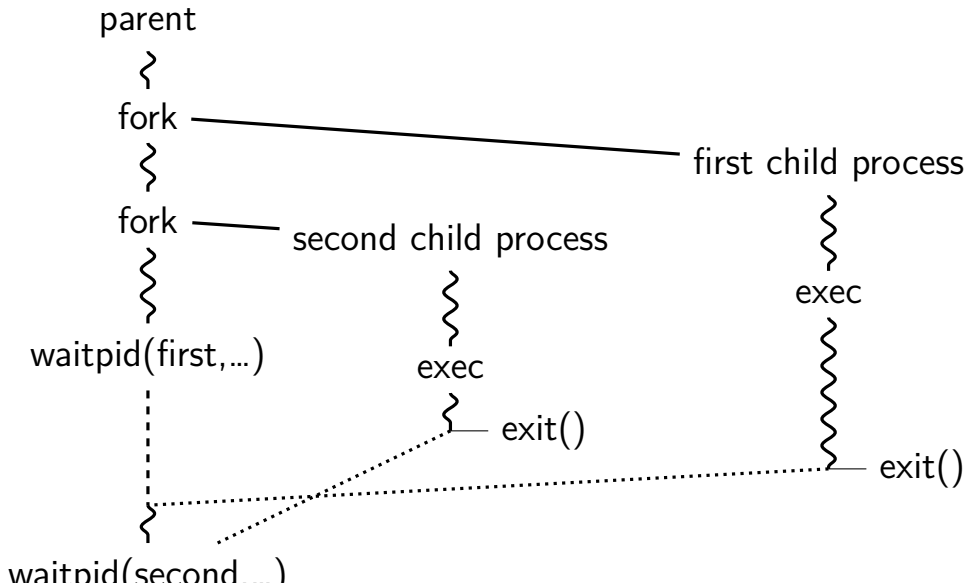

# this class: focus on Unix

Unix-like OSes will be our focus


we have source code

used to from 2150, etc.?

have been around for a while

xv6 imitates Unix

# Unix history

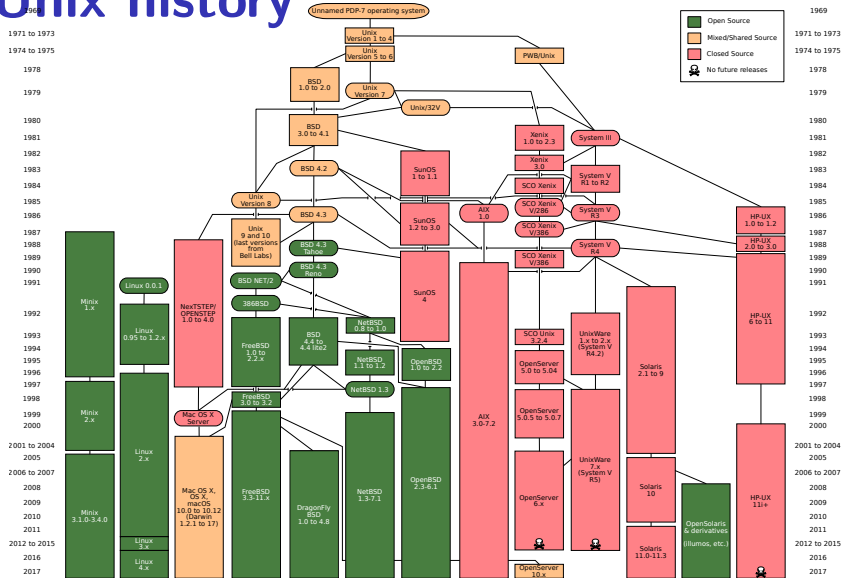

# POSIX: standardized Unix

Portable Operating System Interface (POSIX)

“standard for Unix”

current version online:

<https://pubs.opengroup.org/onlinepubs/9699919799/>

(almost) followed by most current Unix-like OSes

...but OSes add extra features

...and POSIX doesn't specify everything

# what POSIX defines

POSIX specifies the **library and shell interface**  
source code compatibility

doesn't care what is/is not a system call...

doesn't specify binary formats...

idea: write applications for POSIX, recompile and run on all  
implementations

this was a very important goal in the 80s/90s  
at the time, no dominant Unix-like OS (Linux was very immature)

# getpid

```
pid_t my_pid = getpid();  
printf("my pid is %ld\n", (long) my_pid);
```

## process ids in ps

```
cr4bd@machine:~$ ps
```

PID	TTY	TIME	CMD
14777	pts/3	00:00:00	bash
14798	pts/3	00:00:00	ps

## read/write

```
ssize_t read(int fd, void *buffer, size_t count);  
ssize_t write(int fd, void *buffer, size_t count);
```

read/write up to *count* bytes to/from *buffer*

returns number of bytes read/written or -1 on error

*ssize\_t* is a signed integer type

    error code in *errno*

read returning 0 means end-of-file (*not an error*)

    can read/write less than requested (end of file, broken I/O device, ...)



# read'ing one byte at a time

```
string s;  
ssize_t amount_read;  
char c;  
/* cast to void * not needed in C */  
while ((amount_read = read(STDIN_FILENO, (void*) &c, 1)) > 0)  
    /* amount_read must be exactly 1 */  
    s += c;  
}  
if (amount_read == -1) {  
    /* some error happened */  
    perror("read"); /* print out a message about it */  
} else if (amount_read == 0) {  
    /* reached end of file */  
}
```

# write example

```
/* cast to void * optional in C */  
write(STDOUT_FILENO, (void *) "Hello, World!\n", 14);
```

# aside: environment variables (1)

key=value pairs associated with every process:

```
$ printenv
```

```
MODULE_VERSION_STACK=3.2.10
```

```
MANPATH=/opt/puppetlabs/puppet/share/man
```

```
XDG_SESSION_ID=754
```

```
HOSTNAME=labsrv01
```

```
SELINUX_ROLE_REQUESTED=
```

```
TERM=screen
```

```
SHELL=/bin/bash
```

```
HISTSIZE=1000
```

```
SSH_CLIENT=128.143.67.91 58432 22
```

```
SELINUX_USE_CURRENT_RANGE=
```

```
QTDIR=/usr/lib64/qt-3.3
```

```
OLDPWD=/zf14/cr4bd
```

```
QTINC=/usr/lib64/qt-3.3/include
```

```
SSH_TTY=/dev/pts/0
```

```
QT_GRAPHICSSYSTEM_CHECKED=1
```

```
USER=cr4bd
```

```
LS_COLORS=rs=0:di=01;34:ln=01;36:mh=00:pi=40;33:so=01;35:do=01;35:bd=40;33;01:cd=40;33;01:or
```

```
MODULE_VERSION=3.2.10
```

```
MAIL=/var/spool/mail/cr4bd
```

```
PATH=/zf14/cr4bd/.cargo/bin:/zf14/cr4bd/bin:/usr/lib64/qt-3.3/bin:/usr/local/bin:/usr/bin:/u
```

```
PWD=/zf14/cr4bd
```

```
LANG=en_US.UTF-8
```

## aside: environment variables (2)

environment variable library functions:

`getenv("KEY")`  $\rightarrow$  *value*

`putenv("KEY=value")` (sets KEY to *value*)

`setenv("KEY", "value")` (sets KEY to *value*)

```
int execve(char *path, char **argv, char **envp)
```

```
char *envp[] = { "KEY1=value1", "KEY2=value2", NULL };
```

```
char *argv[] = { "somecommand", "some arg", NULL };
```

```
execve("/path/to/somecommand", argv, envp);
```

normal exec versions — keep same environment variables

## aside: environment variables (3)

interpretation up to programs, but common ones...

`PATH=/bin:/usr/bin`

to run a program 'foo', look for an executable in `/bin/foo`, then `/usr/bin/foo`

`HOME=/zf14/cr4bd`

current user's home directory is `'/zf14/cr4bd'`

`TERM=screen-256color`

your output goes to a 'screen-256color'-style terminal

...

# multiple processes?

```
while (...) {  
    pid = fork();  
    if (pid == 0) {  
        exec ...  
    } else if (pid > 0) {  
        pids.push_back(pid);  
    }  
}
```

```
/* retrieve exit statuses in order */  
for (pid_t pid : pids) {  
    waitpid(pid, ...);  
    ...  
}
```

# waiting for all children

```
#include <sys/wait.h>
...
while (true) {
    pid_t child_pid = waitpid(-1, &status, 0);
    if (child_pid == (pid_t) -1) {
        if (errno == ECHILD) {
            /* no child process to wait for */
            break;
        } else {
            /* some other error */
        }
    }
}
/* handle child_pid exiting */
}
```

# multiple processes?

```
while (...) {  
    pid = fork();  
    if (pid == 0) {  
        exec ...  
    } else if (pid > 0) {  
        pids.push_back(pid);  
    }  
}
```

```
/* retrieve exit statuses as processes finish */  
while ((pid = waitpid(-1, ...)) != -1) {  
    handleProcessFinishing(pid);  
}
```



# 'waiting' without waiting

```
#include <sys/wait.h>
```

```
...
```

```
pid_t return_value = waitpid(child_pid, &status, WNOHANG);
```

```
if (return_value == (pid_t) 0) {
```

```
    /* child process not done yet */
```

```
} else if (child_pid == (pid_t) -1) {
```

```
    /* error */
```

```
} else {
```

```
    /* handle child_pid exiting */
```

```
}
```

# parent and child processes

every process (but process id 1) has a *parent process* (getppid())

this is the process that can wait for it

creates tree of processes (Linux pstree command):

```
init(1) -- ModemManager(919) --+ {ModemManager}(972)
    |
    +-- NetworkManager(1160) --+ dhcpcd(1755)
    |   |
    |   +-- dnsmasq(1985)
    |   |
    |   +-- {NetworkManager}(1180)
    |   |
    |   +-- {NetworkManager}(1194)
    |   |
    |   +-- {NetworkManager}(1195)
    |
    +-- accounts-daemon(1649) --+ {accounts-daemon}(1757)
    |   |
    |   +-- {accounts-daemon}(1758)
    |
    +-- acpid(1338)
    +-- apache2(3165) --+ apache2(4125) --+ {apache2}(4126)
    |   |
    |   +-- {apache2}(4127)
    |   |
    |   +-- {apache2}(28920) --+ {apache2}(28926)
    |   |   |
    |   |   +-- {apache2}(28960)
    |   |   |
    |   |   +-- {apache2}(28921) --+ {apache2}(28927)
    |   |   |   |
    |   |   |   +-- {apache2}(28963)
    |   |   |   |
    |   |   |   +-- {apache2}(28922) --+ {apache2}(28928)
    |   |   |   |   |
    |   |   |   |   +-- {apache2}(28961)
    |   |   |   |   |
    |   |   |   |   +-- {apache2}(28923) --+ {apache2}(28930)
    |   |   |   |   |   |
    |   |   |   |   |   +-- {apache2}(28962)
    |   |   |   |   |   |
    |   |   |   |   |   +-- {apache2}(28925) --+ {apache2}(28958)
    |   |   |   |   |   |   |
    |   |   |   |   |   |   +-- {apache2}(28965)
    |   |   |   |   |   |   |
    |   |   |   |   |   |   +-- {apache2}(32165) --+ {apache2}(32166)
    |   |   |   |   |   |   |   |
    |   |   |   |   |   |   |   +-- {apache2}(32167)
    |   |
    |   +-- at-spi-bus-launcher(2252) --+ dbus-daemon(2269)
    |   |   |
    |   |   +-- {at-spi-bus-launcher}(2266)
    |   |   |
    |   |   +-- {at-spi-bus-launcher}(2268)
    |   |   |
    |   |   +-- {at-spi-bus-launcher}(2270)
    |   |
    |   +-- at-spi2-registr(2275) --+ {at-spi2-registr}(2282)
    |
    +-- atd(1633)
    +-- automount(13454) --+ {automount}(13455)
    |   |
    |   +-- {automount}(13456)
    |   |
    |   +-- {automount}(13461)
    |   |
    |   +-- {automount}(13464)
    |   |
    |   +-- {automount}(13465)
    |
    +-- {nmls}(2051)
    +-- {nmls}(2052)
    +-- nosh-server(19090) --+ bash(19091) --+ tmux(5442)
    |   |
    |   +-- nosh-server(21996) --+ bash(21997)
    |   |
    |   +-- nosh-server(22533) --+ bash(22534) --+ tmux(22588)
    |   |
    |   +-- nm-applet(2580) --+ {nm-applet}(2739)
    |   |   |
    |   |   +-- {nm-applet}(2743)
    |
    +-- nmbd(2224)
    +-- ntpd(3091)
    +-- polkitd(1197) --+ {polkitd}(1239)
    |   |
    |   +-- {polkitd}(1240)
    |
    +-- pulseaudio(2563) --+ {pulseaudio}(2617)
    |   |
    |   +-- {pulseaudio}(2623)
    |
    +-- puppet(2373) --+ {puppet}(32455)
    |
    +-- rpc.statd(875)
    +-- rpc.statd(954)
    +-- rpcbind(884)
    +-- {apache2}(32167)
    +-- rserver(1501) --+ {rserver}(1786)
    |   |
    |   +-- {rserver}(1787)
    |
    +-- rsyslogd(1090) --+ {rsyslogd}(1092)
    |   |
    |   +-- {rsyslogd}(1093)
    |   |
    |   +-- {rsyslogd}(1094)
    |
    +-- rtkit-daemon(2565) --+ {rtkit-daemon}(2566)
    |   |
    |   +-- {rtkit-daemon}(2567)
    |
    +-- sd_cicero(2852) --+ sd_cicero(2853)
    |   |
    |   +-- {sd_cicero}(2854)
    |   |
    |   +-- {sd_cicero}(2855)
    |
    +-- sd_dummy(2849) --+ {sd_dummy}(2850)
    |   |
    |   +-- {sd_dummy}(2851)
    |
    +-- sd_espeak(2749) --+ {sd_espeak}(2845)
    |   |
    |   +-- {sd_espeak}(2846)
```

## parent and child questions...

what if parent process exits before child?

child's parent process becomes process id 1 (typically called *init*)

what if parent process never `waitpid()`s (or equivalent) for child?

child process stays around as a “zombie”

can't reuse pid in case parent wants to use `waitpid()`

what if non-parent tries to `waitpid()` for child?

`waitpid` fails

# read'ing a fixed amount

```
ssize_t offset = 0;
const ssize_t amount_to_read = 1024;
char result[amount_to_read];
do {
    /* cast to void * optional in C */
    ssize_t amount_read =
        read(STDIN_FILENO,
            (void *) (result + offset),
            amount_to_read - offset);
    if (amount_read < 0) {
        perror("read"); /* print error message */
        ... /* abort??? */
    } else {
        offset += amount_read;
    }
}
```

## partial reads

on regular file: read reads what you request

but otherwise: usually gives you what's known to be available  
after waiting for something to be available

## partial reads

on regular file: read reads what you request

but otherwise: usually gives you what's known to be available  
after waiting for something to be available

reading from network — what's been received

reading from keyboard — what's been typed

## write example (with error checking)

```
const char *ptr = "Hello, World!\n";
ssize_t remaining = 14;
while (remaining > 0) {
    /* cast to void * optional in C */
    ssize_t amount_written = write(STDOUT_FILENO,
                                   ptr,
                                   remaining);

    if (amount_written < 0) {
        perror("write"); /* print error message */
        ... /* abort??? */
    } else {
        remaining -= amount_written;
        ptr += amount_written;
    }
}
```

# partial writes

usually only happen on error or interruption

but can request “non-blocking”

(interruption: via *signal*)

*usually*: write **waits until it completes**

= until remaining part fits in buffer in kernel

does not mean data was sent on network, shown to user yet, etc.



# kernel buffering (reads)


program

operating system


keyboard

disk


# kernel buffering (reads)

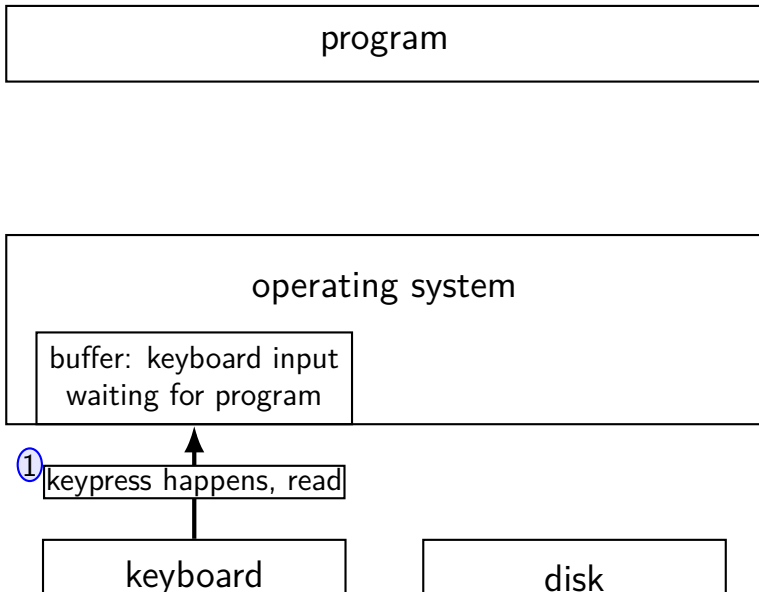


# kernel buffering (reads)

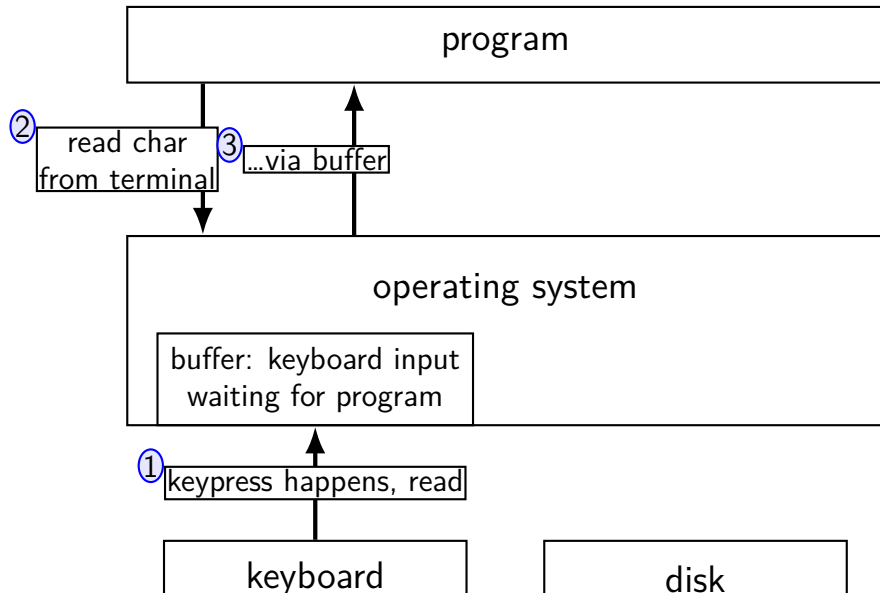


# kernel buffering (reads)

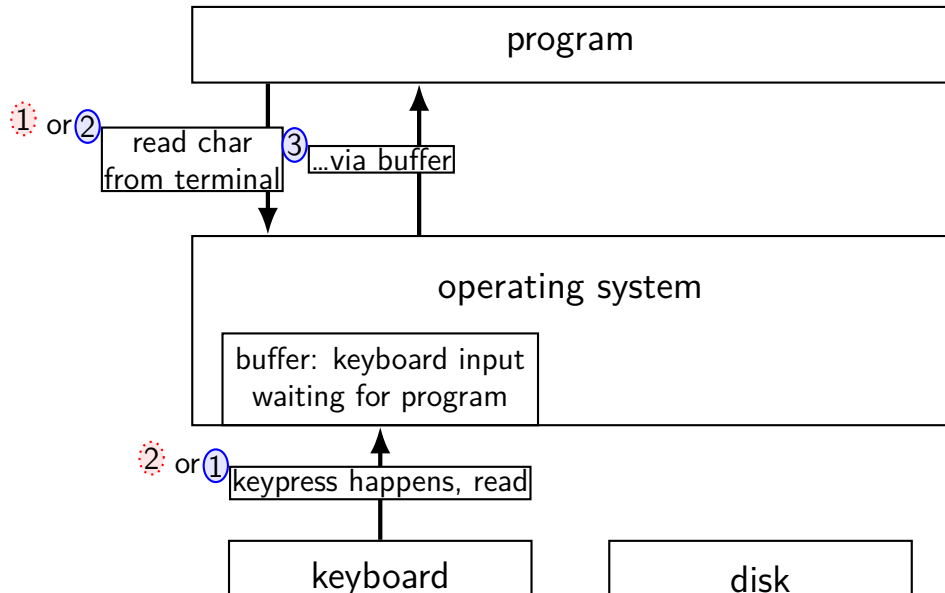

# kernel buffering (reads)

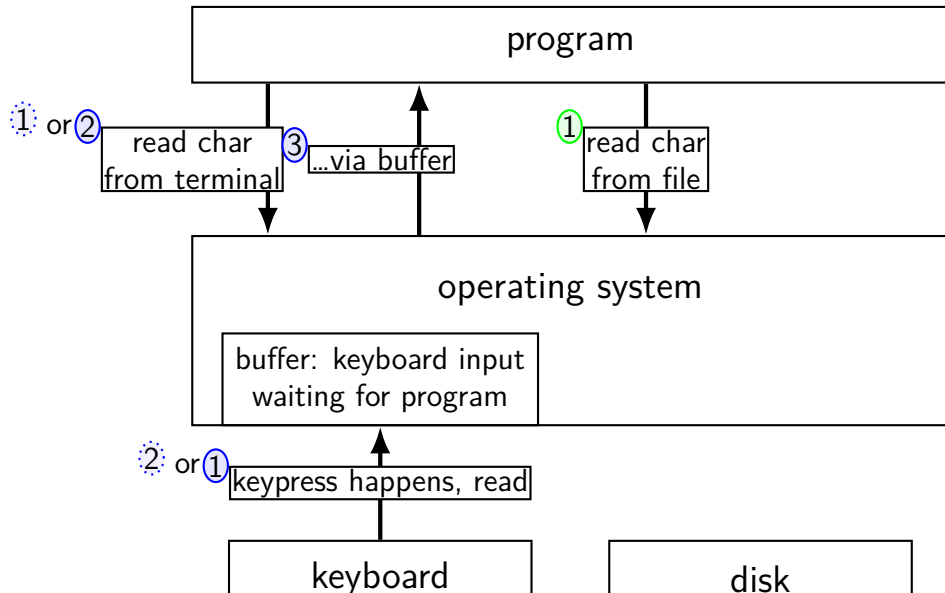

# kernel buffering (reads)

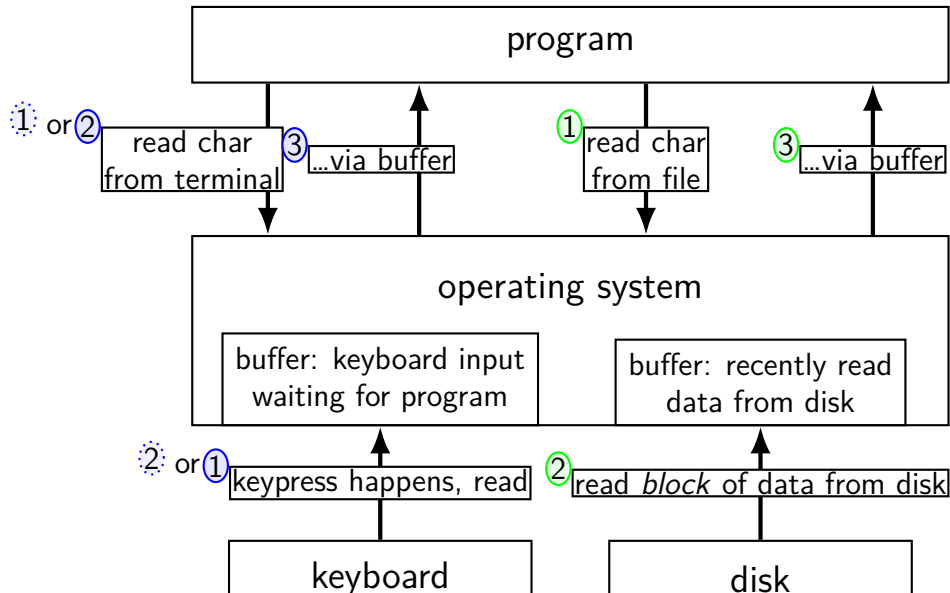

# kernel buffering (writes)


program

operating system

network


disk

# kernel buffering (writes)

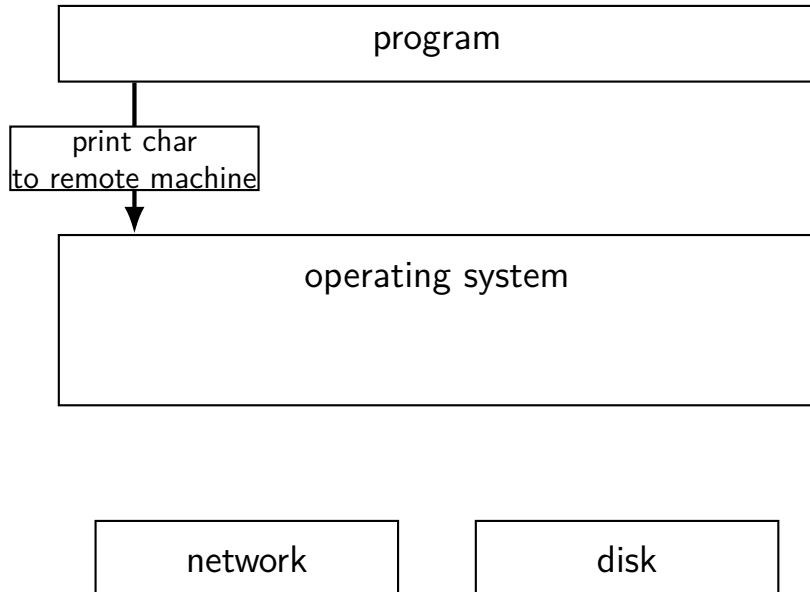





# kernel buffering (writes)

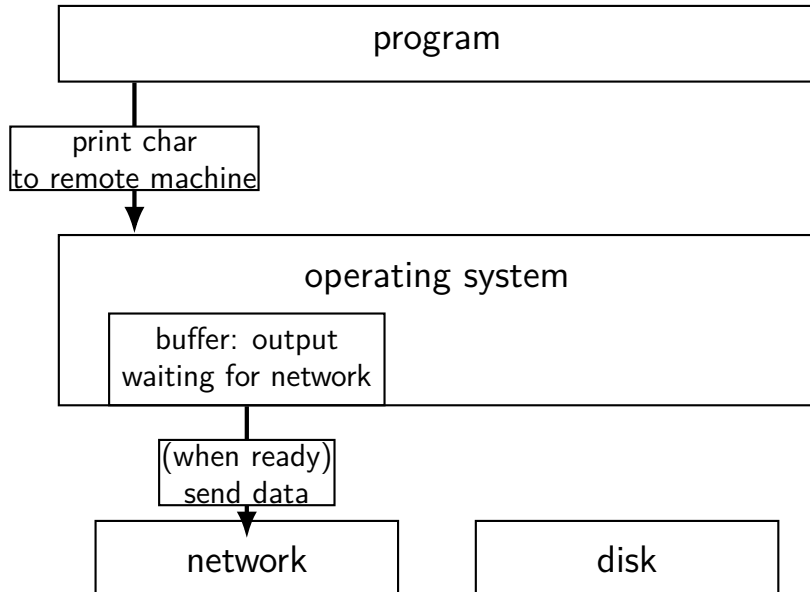

# kernel buffering (writes)

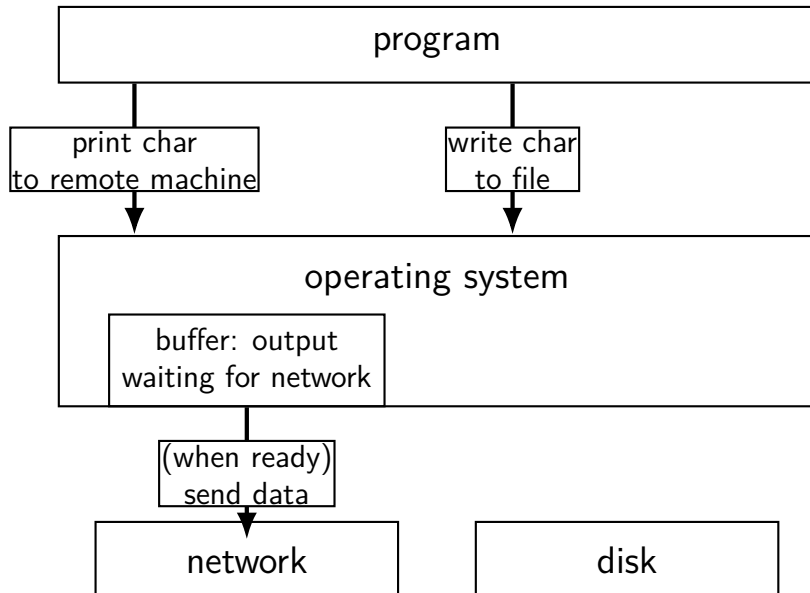

# kernel buffering (writes)

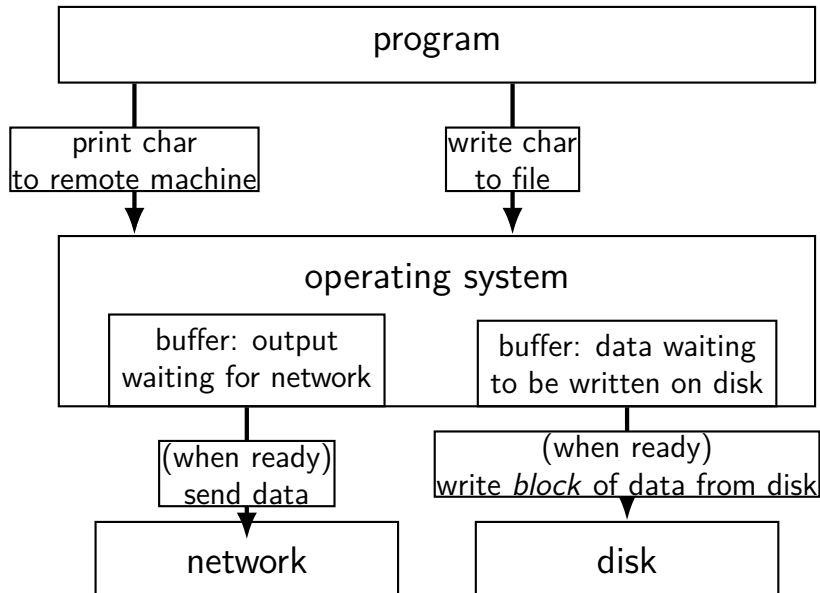

# read/write operations

`read()/write()`: move data into/out of buffer

possibly wait if buffer is empty (read)/full (write)

actual I/O operations — wait for device to be ready  
trigger process to stop waiting if needed

# filesystem abstraction

regular files — named collection of bytes

also: size, modification time, owner, access control info, ...

directories — folders containing files and directories

hierarchical naming: `/net/zf14/cr4bd/fall2018/cs4414`

*mostly* contains regular files or directories

## open

```
int open(const char *path, int flags);  
int open(const char *path, int flags, int mode);  
...
```

```
int read_fd = open("dir/file1", O_RDONLY);  
int write_fd = open("/other/file2",  
                    O_WRONLY | O_CREAT | O_TRUNC, 0666);  
int rdwr_fd = open("file3", O_RDWR);
```

# open

```
int open(const char *path, int flags);  
int open(const char *path, int flags, int mode);
```

path = filename

e.g. `"/foo/bar/file.txt"`

file.txt in

directory bar in

directory foo in

"the root directory"

e.g. `"quux/other.txt"`

other.txt in

directory quux in

"the current working directory" (set with `chdir()`)

## open: file descriptors

```
int open(const char *path, int flags);  
int open(const char *path, int flags, int mode);
```

return value = **file descriptor** (or -1 on error)

index into table of *open file descriptions* for each process

used by system calls that deal with open files



# POSIX: everything is a file

the file: one interface for

- devices (terminals, printers, ...)

- regular files on disk

- networking (sockets)

- local interprocess communication (pipes, sockets)

basic operations: `open()`, `read()`, `write()`, `close()`

## exercise

```
int pipe_fds[2]; pipe(pipe_fds);
pid_t p = fork();
if (p == 0) {
    close(pipe_fds[0]);
    for (int i = 0; i < 10; ++i) {
        char c = '0' + i;
        write(pipe_fds[1], &c, 1);
    }
    exit(0);
}
close(pipe_fds[1]);
char buffer[10];
ssize_t count = read(pipe_fds[0], buffer, 10);
for (int i = 0; i < count; ++i) {
    printf("%c", buffer[i]);
}
```

Which of these are possible outputs (if pipe, read, write, fork don't fail)?

- A. 0123456789    B. 0    C. (nothing)  
D. A and B    E. A and C    F. A, B, and C

## exercise

```
int pipe_fds[2]; pipe(pipe_fds);
pid_t p = fork();
if (p == 0) {
    close(pipe_fds[0]);
    for (int i = 0; i < 10; ++i) {
        char c = '0' + i;
        write(pipe_fds[1], &c, 1);
    }
    exit(0);
}
close(pipe_fds[1]);
char buffer[10];
ssize_t count = read(pipe_fds[0], buffer, 10);
for (int i = 0; i < count; ++i) {
    printf("%c", buffer[i]);
}
```

Which of these are possible outputs (if pipe, read, write, fork don't fail)?

- A. 0123456789    B. 0    C. (nothing)  
**D.** A and B    E. A and C    F. A, B, and C

# empirical evidence

8	0
374	01
210	012
30	0123
12	01234
3	012345
1	0123456
2	01234567
1	012345678
359	0123456789

## partial reads

read returning 0 always means end-of-file

by default, read always waits *if no input available yet*  
but can set read to return *error* instead of waiting

read can return less than requested if not available

e.g. child hasn't gotten far enough

## pipe: closing?

if all write ends of pipe are closed

can get end-of-file (`read()` returning 0) on read end  
`exit()`ing closes them

→ close write end when not using

generally: limited number of file descriptors per process

→ good habit to close file descriptors not being used

(but probably didn't matter for read end of pipes in example)

## dup2 exercise

recall: `dup2(old_fd, new_fd)`

```
int fd = open("output.txt", O_WRONLY | O_CREAT, 0666);
write(STDOUT_FILENO, "A", 1);
dup2(fd, STDOUT_FILENO);
pid_t pid = fork();
if (pid == 0) { /* child: */
    dup2(STDOUT_FILENO, fd); write(fd, "B", 1);
} else {
    write(STDOUT_FILENO, "C", 1);
}
```

Which outputs are possible?

- |                                    |                               |
|------------------------------------|-------------------------------|
| A. stdout: ABC ; output.txt: empty | D. stdout: A ; output.txt: BC |
| B. stdout: AC ; output.txt: B      | E. more?                      |
| C. stdout: A ; output.txt: CB      |                               |