

GIT COMMANDS

Git is a Local repository in our system

GIT stands for "Global Information Tracker"

In practical terms, Git is a "distributed version control system" used to track changes in source code

during software development. It helps multiple developers collaborate, keeps a history of changes, and allows you to revert to previous versions if needed.

Git :-

- It is a tool in its vcs:- version control system
- It will track app version

GitHub:-

- Where we are going to store all our app src
- It is service
- We can able to access through web only
- Repo URL

NOTE

create a file .gitignore in the server folder. Place in it all sensitive information like (.env), so that it will not push sensitive information in to the github repository.

Install the Git :

Download the Git for Windows installer from the official site:

🔗 <https://git-scm.com/download/win>

Run the downloaded .exe file.

Follow the installation steps: (Keep other options as default)

Click Next through the setup.

Click Install and wait for the process to complete.

=====

```
D:\>git --version
```

```
git version 2.48.1.windows.1
```

If above not output coming, then verify


```
C:\Program Files\Git\bin
```

(If Git exists there, it means it's installed but not added to the PATH.)

Add following two paths in the Environment variables:

```
C:\Program Files\Git\bin
```

```
C:\Program Files\Git\cmd
```

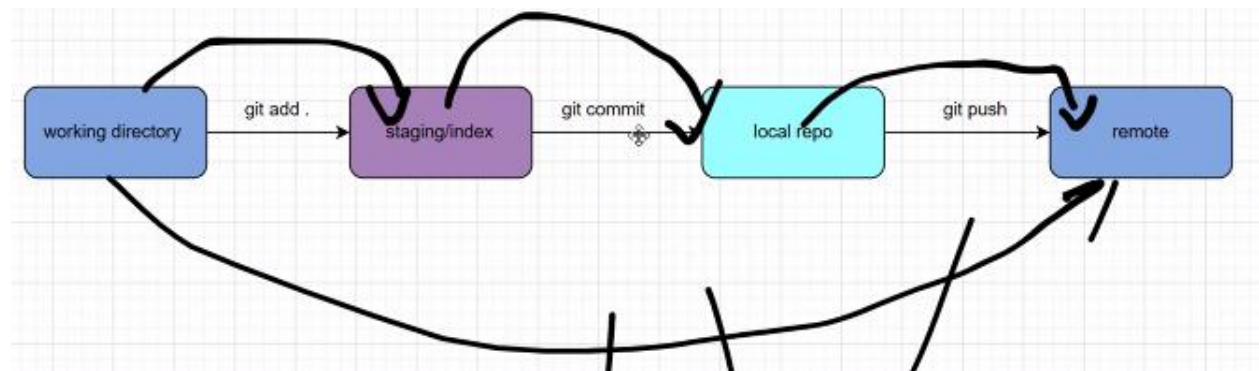

Git Commands:

=====

Git (Distributed VCS)

1. Github account (username, email)
2. install git in the local system

Configuration (One time enough)

\$git config --list (github account, origin)

To logout github from local system

```
$git config --global --unset user.name  
$git config --global --unset user.email  
$git config --list
```

To Login GitHub/GitLab from Local System

```
$git config --global user.name "abc"  
$git config --global user.email " abc@gmail.com"
```

1. Push

step1: create repository in github (my-first-repo)

1 version history. Have a project elsewhere? [Import a repository](#).
isk (*).

Repository name *

/ MongoDB Simple Project

✓ Your new repository will be created as MongoDB-Simple-Project.
The repository name can only contain ASCII letters, digits, and the characters ., -, and _.


2 Configuration

Choose visibility *
Choose who can see and commit to this repository

Public ▼

Click on “Create Repository”

step2: In your laptop create or [goto the folder](#) which you want to push into the github.

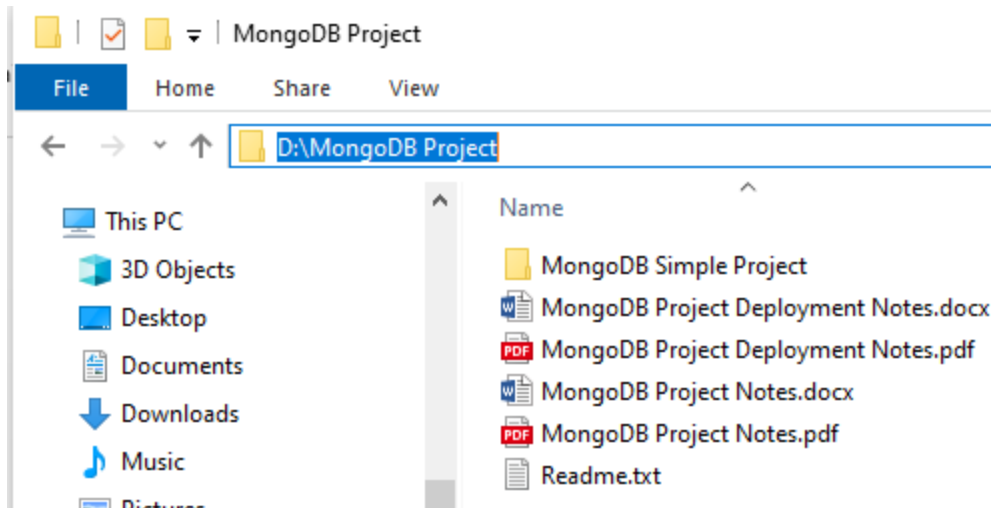

Select the **path** and type **cmd**, and press **enter** to open the **command prompt**

```
D:\MongoDB Project>
```

Execute the following commands (following commands will show by default in the github when you created a new repository), to push into the github.

```
git init
git add .
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/username/MongoDB-
Simple-Project.git
git push -u origin main
```

```
D:\MongoDB Project>git push -u origin main
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 4 threads
Compressing objects: 100% (8/8), done.
Writing objects: 100% (8/8), 2.66 MiB | 36.00 KiB/s, done.
Total 8 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/lakshminarayana-kodavali/MongoDB-Simple-Project.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
D:\MongoDB Project>
```

If you get any error like “origin already exist”

Execute the following two commands:

```
git remote remove origin
git remote add origin https://github.com/username/MongoDB-
Simple-Project.git
```

Issues Pull requests Actions Projects Wiki Security Insights Settings

MongoDB-Simple-Project Public Pin Watch 0

main 1 Branch 0 Tags Add file Code

lakshminarayana-kodavali first commit		9a23ce6 · 1 minute ago	1 Commit
MongoDB Simple Project	first commit	1 minute ago	
MongoDB Project Deployment Notes.docx	first commit	1 minute ago	
MongoDB Project Deployment Notes.pdf	first commit	1 minute ago	
MongoDB Project Notes.docx	first commit	1 minute ago	
MongoDB Project Notes.pdf	first commit	1 minute ago	
Readme.txt	first commit	1 minute ago	

2. branch

git branch //Lists all local branches in your repo
 git branch -a //It displays the current branch
 git branch v1 //Creates a new branch v1
 git checkout v1 //to redirect to the corresponding branch v1
 echo "<h1>updated file</h2>" >> index.html
 git add .
 git status
 git commit -m "file updated"
 git push -u origin v1

```
D:\MongoDB Project>git branch
* main

D:\MongoDB Project>git branch -a
* main
remotes/origin/main

D:\MongoDB Project>git branch B1


D:\MongoDB Project>git checkout B1
D
~$ngoDB Project Notes.docx
Switched to branch 'B1'

D:\MongoDB Project>echo "<h1>updated file</h2>" >> index.html

D:\MongoDB Project>git add .

D:\MongoDB Project>git status
On branch B1
Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    new file:   index.html
```

```
D:\MongoDB Project>git push -u origin B1
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
```

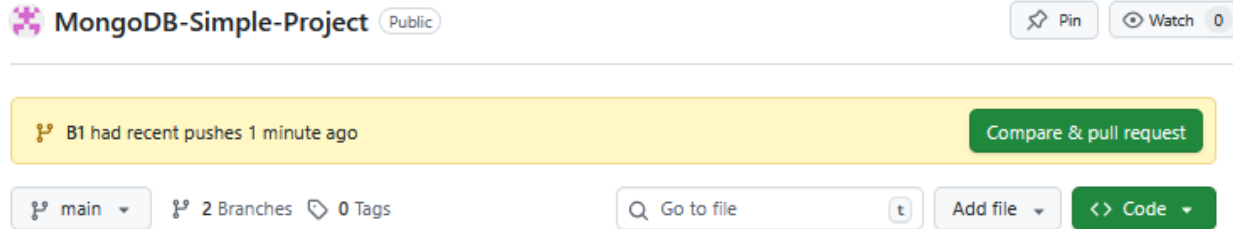

3. To **Merge** B1 branch into the Main, do as follows:

```
git checkout main
```


```
git pull
```

```
git merge B1
```

```
git push origin main
```

Note: Refresh the browser and verify the content in the main branch.

Alternative method is click on the “Comare & Pull Request” Button in the Github as shown in the below screenshot.

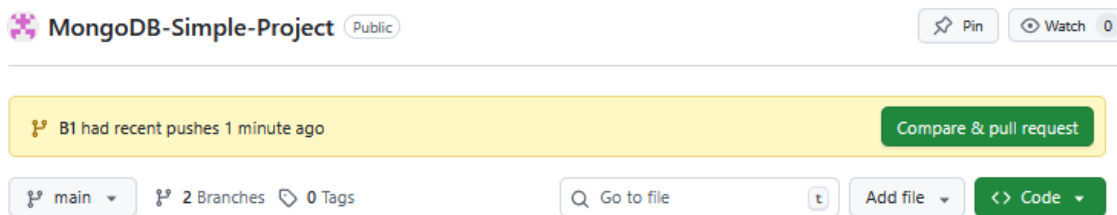

4. delete branch (git branch -D branch_name)

To remove the branch B1

```
$git checkout main
```

```
$git branch -D B1
```

```
D:\MongoDB Project>git checkout main
Already on 'main'
Your branch is up to date with 'origin/main'.

D:\MongoDB Project>git branch -D B1
Deleted branch B1 (was 3d4cea4).
```

5. pull (Applicable when work with collaborative repositories)

Fetches changes from a remote repository and merges them into your local branch.

Use case: To update your local repository with the latest changes from the remote repo (e.g., changes made by teammates).

Direction: Remote → Local

`$git pull origin main`

6. clone (To download the project from the Github)

`git clone repo_url`

7. log (TO get the log information)

`git log`

8. rm (To delete a files from the repo)

`git rm "temp.js"`

`git commit -m "Delete temp.js from main branch"`

[How to delete entire Repository:](#)

Open the Repository

Go to “Settings”

Scroll to the Bottom – “Danger Zone”

Click “Delete this repository”

Danger Zone

Change repository visibility This repository is currently public.	Change visibility
Disable branch protection rules Disable branch protection rules enforcement and APIs	Disable branch protection rules
Transfer ownership Transfer this repository to another user or to an organization where you have the ability to create repositories.	Transfer
Archive this repository Mark this repository as archived and read-only.	Archive this repository
Delete this repository Once you delete a repository, there is no going back. Please be certain.	Delete this repository